

CL4SE: Benchmarking Context Learning on Software Engineering

Haichuan Hu · Quanjun Zhang · Ye Shang ·
Guoqing Xie · Chunrong Fang · Zhenyu
Chen · Liang Xiao ·

Received: date / Accepted: date

Abstract Context engineering has emerged as a pivotal paradigm for unlocking the potential of Large Language Models (LLMs) in Software Engineering (SE) tasks, enabling performance gains at test time without model fine-tuning. Despite its success, existing research lacks a systematic taxonomy of SE-specific context types and a dedicated benchmark to quantify the heterogeneous effects of different contexts across core SE workflows. To address this gap, we propose CL4SE (Context Learning for Software Engineering), a comprehensive benchmark featuring a fine-grained taxonomy of four SE-oriented context types (interpretable examples, project-specific context, procedural decision-making context, and positive & negative context), each mapped to a representative task (code generation, code

Haichuan Hu
School of Computer Science and Engineering, Nanjing University of Science and Technology,
China
E-mail: huhaiquan2024@gmail.com

Quanjun Zhang
School of Computer Science and Engineering, Nanjing University of Science and Technology,
China
E-mail: quanjunzhang@njust.edu.cn

Ye Shang
State Key Laboratory for Novel Software Technology, Nanjing University, China
E-mail: yeshang@smail.nju.edu.cn

Guoqing Xie
State Key Laboratory for Novel Software Technology, Nanjing University, China
E-mail: 522025320181@smail.nju.edu.cn

Chunrong Fang
State Key Laboratory for Novel Software Technology, Nanjing University, China
E-mail: fangchunrong@nju.edu.cn

Zhenyu Chen
State Key Laboratory for Novel Software Technology, Nanjing University, China
E-mail: zyichen@nju.edu.cn

Liang Xiao
School of Computer Science and Engineering, Nanjing University of Science and Technology,
China
E-mail: xiaoliang@mail.njust.edu.cn

summarization, code review, and patch correctness assessment). We construct high-quality datasets comprising over 13,000 samples from more than 30 open-source projects and evaluate five mainstream LLMs across nine metrics. Extensive experiments demonstrate that context learning yields an average performance improvement of 24.7% across all tasks. Specifically, procedural context boosts code review performance by up to 33% (Qwen3-Max), mixed positive-negative context improves patch assessment by 30% (DeepSeek-V3), project-specific context increases code summarization BLEU by 14.78% (GPT-Oss-120B), and interpretable examples enhance code generation PASS@1 by 5.72% (DeepSeek-V3). Beyond these task-level gains, our results show that the effectiveness of context depends strongly on its alignment with task-specific cognitive demands, that more context does not necessarily lead to better performance, and that reasoning-intensive SE tasks benefit most from well-structured contextual support. CL4SE establishes the first standardized evaluation framework for SE context learning, provides actionable empirical insights into task-specific context design, and releases a large-scale dataset to facilitate reproducible research in this domain.

Keywords Context Learning, Large Language Models, Software Engineering, Benchmark

1 Introduction

With the rapid advancement of Large Language Models (LLMs), context engineering (Mei et al., 2025; Zhang et al., 2025) has emerged as a pivotal paradigm for unlocking their potential in downstream tasks. Unlike pre-training or fine-tuning, which encode knowledge via model weight updates, context engineering improves LLM performance at inference time through the construction of effective contextual inputs, without modifying the model parameters. In Software Engineering (SE), researchers have increasingly leveraged this paradigm together with models’ In-Context Learning (ICL) capabilities to improve performance across a wide range of development tasks (Li et al., 2025; Gao et al., 2025; Wu et al., 2025; Tang et al., 2024; Xu et al., 2024; Yun et al., 2024; Geng et al., 2024; Shao et al., 2026). For example, (Li et al., 2025) trains a model-aware retriever to select more effective exemplars for code generation, while (Shao et al., 2026) incorporates relevant repair patterns as context to guide models toward more effective vulnerability repair.

Despite the demonstrated effectiveness of ICL and context engineering in SE tasks, existing research still lacks a systematic understanding of how different context types affect different tasks, and of the mechanisms through which such contexts take effect. Early work (Gao et al., 2023) explored how to construct in-context demonstrations more effectively, but did not establish a systematic taxonomy of SE-specific contexts or analyze how models learn from them. More recently, CL-Bench (Dou et al., 2026) extended traditional ICL research by investigating the patterns and effectiveness of context learning for complex tasks, particularly in settings where prior knowledge is limited. Inspired by this line of work, we aim to fill the critical gap in context learning for software engineering by proposing CL4SE, a dedicated benchmark tailored to SE tasks. Figure 1 illustrates the relationship between CL4SE and related concepts, including prompt engineering,

context engineering, in-context learning, and context learning. As an SE-oriented extension of CL-Bench, CL4SE goes beyond generic context learning benchmarks for general NLP or broad reasoning tasks. Instead, it systematically characterizes heterogeneous SE-specific context types and examines how they guide LLMs’ in-context learning across core SE workflows.

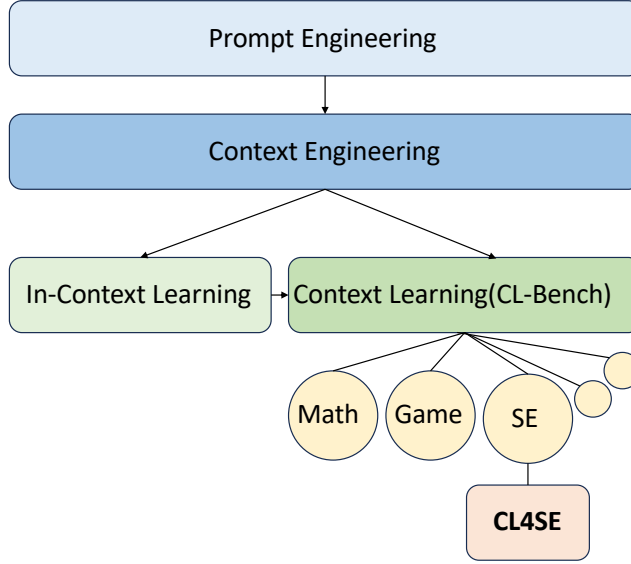


Fig. 1: The relationship between CL4SE, prompt engineering, context engineering, in-context learning and context learning.

To this end, we define a fine-grained taxonomy of four SE-oriented context types, namely interpretable examples, project-specific context, procedural decision-making context, and positive & negative context, each aligned with a representative SE task: code generation, code summarization, code review, and patch correctness assessment. We further construct high-quality real-world datasets with over 13,000 samples collected from more than 30 open-source projects, and evaluate five mainstream LLMs using nine metrics. Extensive experiments show that each context type exhibits a distinct efficacy profile aligned with the cognitive demands of its target task. Interpretable reasoning context is most effective for complex code generation, project-specific context substantially improves stylistic alignment in code summarization, procedural decision context yields strong gains in code review, and dual positive-negative context improves the precision-recall balance in patch correctness assessment. Overall, the results confirm that context learning is not a one-size-fits-all strategy, with our benchmark revealing an average performance improvement of 24.7% across tasks and gains of up to 33% in decision-centric workflows.

In addition, our study leads to the following key findings:

- **The effectiveness of context depends on task-context alignment.** Context becomes most useful when its structure matches the cognitive demands of the

target task, suggesting that context learning in SE should be designed in a task-aware rather than task-agnostic manner.

- **More context does not necessarily lead to better performance.** In many cases, such as code summarization, a small amount of well-targeted context is more effective than a large amount of redundant context. This suggests that the quality and relevance of context matter more than its volume.
- **Context learning is especially valuable for reasoning-intensive tasks.** The strongest benefits arise in tasks involving judgment, comparison, and multi-step reasoning, indicating that context can shape not only what models output, but also how they reason.
- **Effective context teaches both solutions and reasoning processes.** The most informative contexts do not merely provide correct outputs; they also expose reasoning paths, decision procedures, and contrasts between valid and invalid cases, enabling models to learn both what to do and how to do it.
- **Context learning should be recognized as a core capability for SE intelligence.** Our findings suggest that context is not merely an auxiliary prompt component, but a central medium through which LLMs acquire and apply task-relevant knowledge at inference time. In SE settings, the ability to learn effectively from context may be as important as the model’s parametric knowledge itself.

Our work not only establishes a standardized evaluation framework for future research on SE-focused context learning, but also provides actionable empirical insights into how to construct effective contextual inputs, enabling researchers and practitioners to better unlock LLMs’ potential in real-world software development through principled context design rather than ad-hoc prompt crafting.

2 Related Work

2.1 Prompt/Context Engineering

Prompt Engineering. Traditional prompt engineering (Giray, 2023; Marvin et al., 2023; Chen et al., 2025; Liu et al., 2023; Sahoo et al., 2024) is the process of designing and refining input queries to elicit desired responses from LLMs. This paradigm aims to guide models to better leverage parameterized knowledge, rather than introducing new content that requires learning into the prompt. Subsequent works (Wang et al., 2024a; Syahputri et al., 2025; Ronanki et al., 2025; Rodriguez et al., 2023; Liu et al., 2024d; Wang et al., 2024b) have discussed the application of Prompt Engineering in the context of Software Engineering. However, with the emergence of the latest reasoning models (e.g., GPT-o1 (Hu et al., 2025b)), researchers (Wang et al., 2024a) have found that earlier prompt techniques may no longer yield significant effects and may even lead to negative returns.

Context Engineering. Nowadays, a growing body of researchers is moving away from prompt engineering and towards context engineering (Mei et al., 2025; Zhang et al., 2025; Dai et al., 2025). Unlike prompt engineering that prioritizes prompt structure and crafting tricks, context engineering shifts the focus to the full lifecycle of prompt content. It revolves around retrieving (Singh et al., 2025), organizing, managing (Xu et al., 2025a,b), and optimizing task-relevant context sourced from heterogeneous repositories including private documents, databases,

and knowledge bases. For example, in complex code repair tasks that require long contexts, researchers (Xia et al., 2024) use hierarchical positioning techniques to compress the context. Code repository analysis based on knowledge graphs (Ouyang et al., 2024) facilitates the rapid acquisition of context in various SE tasks. With the rise of agent technologies, context engineering has become increasingly important. Agents require continuous, multi-turn context understanding and management, which imposes higher requirements on the effectiveness and efficiency of context. Recent studies (Liu et al., 2026; Cheng et al., 2026) show that in long multi-turn dialogues, early context errors can trigger a butterfly effect, where minor initial mistakes gradually propagate, accumulate, and eventually lead to severe degradation in reasoning accuracy and task performance. This further motivates the need for dedicated research into effective context engineering principles tailored for advanced LLMs and agentic workflows.

In-Context Learning and Context Learning. ICL (Dong et al., 2024a; Akyürek et al., 2022) serves as the fundamental paradigm that underpins both prompt engineering and context engineering, acting as the core mechanism through which LLMs generalize to unseen tasks without parameter updates. Traditional prompt engineering primarily leverages ICL by manually crafting a small set of exemplars within the prompt to guide the model’s output (Brown et al., 2020), treating context as a static input component. In contrast, context engineering elevates the role of ICL by systematically curating, structuring, and maintaining high-quality contextual information, thereby enabling more robust and scalable ICL performance in complex scenarios such as long-horizon code repair and multi-turn agent interactions. Building upon the advancements in context engineering, the concept of *Context Learning (CL)* (Dou et al., 2026) has emerged as a broader and more principled framework that transcends the limitations of traditional ICL. Rather than merely relying on ad-hoc exemplar selection as in ICL, CL emphasizes the ability of models to learn and apply new knowledge from scarce or complex data.

Accordingly, our work deepens and refines the study of context learning in the field of software engineering. We move beyond generic context learning benchmarks by constructing a specialized evaluation framework that captures the unique scarcity and complexity of data in real-world SE workflows. This refined focus enables us to provide empirical insights into the practical application and effectiveness of context engineering for advanced LLMs and agent systems in the SE domain.

2.2 LLM-based Software Engineering

The integration of LLMs has profoundly reshaped the landscape of SE. Modern SE encompasses a systematic lifecycle primarily including requirement and design (Wang et al., 2024c), development (Mathews and Nagappan, 2024; Joel et al., 2024), testing (Chen et al., 2024b; Nan et al., 2025), maintenance (Patil, 2025; Bouzenia et al., 2024; Hu et al., 2025a), and management (Zhang et al., 2023b; He et al., 2025; Hu et al., 2025c; Zhang et al., 2026). LLMs have demonstrated remarkable capabilities across SE lifecycle, particularly in software development and software maintenance, which heavily rely on code understanding, reasoning, and generation. In this paper, we focus on four representative SE tasks that span

these critical phases: code generation, code summarization, code review, and patch correctness assessment.

During the software development phase, code generation and code summarization are two fundamental tasks. For code generation (Crupi et al., 2025; Joel et al., 2024), recent advancements have shifted from direct sequence-to-sequence translation to more sophisticated requirement-guided and execution-guided paradigms (Jiang et al., 2024; Dong et al., 2024b). Researchers increasingly rely on prompt engineering and in-context learning to help LLMs understand complex intents, which naturally necessitates highly interpretable contextual examples (Gao et al., 2023). Similarly, code summarization (Sukkasem et al., 2025; Crupi et al., 2025) aims to generate high-level natural language descriptions for source code. Existing studies emphasize that providing LLMs with specific semantic contexts or employing few-shot learning can significantly align the generated text with human intent (Geng et al., 2024; Ahmed et al., 2024). However, generating summaries that strictly adhere to specific coding conventions requires project-specific context, an area that has not been systematically benchmarked.

During the software maintenance phase, LLMs are increasingly deployed for code review (Zeng et al., 2025; Rasheed et al., 2024) and patch correctness assessment (Zhang et al., 2026; Yang et al., 2025b; Zhou et al., 2024). Code review is a critical yet labor-intensive process. While early learning-based approaches automated review comment generation (Li et al., 2022), recent empirical studies on LLMs (e.g., ChatGPT) reveal that effective code review requires complex reasoning and is heavily influenced by prompt designs and conversational contexts (Guo et al., 2024). This highlights the necessity of modeling code review as a procedural decision-making process rather than a static classification task. Furthermore, Automated Program Repair (APR) often suffers from the patch overfitting issue. To assess patch correctness, researchers have explored utilizing LLMs for syntactic and semantic reasoning, transitioning from feature extractors to zero-shot or few-shot evaluators (Zhou et al., 2023; Le-Cong et al., 2023). Distinguishing between valid and overfitting patches inherently demands comparative reasoning, making the exploration of positive and negative contexts highly relevant.

Despite the proliferation of LLM applications across these SE tasks, existing literature predominantly treats context selection as an ad-hoc component of prompt engineering. There remains a critical gap in systematically categorizing SE-specific context types and benchmarking their heterogeneous impacts on different SE tasks. This motivates the design of CL4SE, bridging the gap between general in-context learning and domain-specific SE practices.

3 Benchmark

Before presenting the details of CL4SE, we compare it with representative existing benchmarks in Table 1. Most prior SE benchmarks are task-specific, focusing on only one scenario. Moreover, they are typically limited to a single granularity level. Although several benchmarks have considered the role of context and demonstrated that contextual information can improve model performance, they do not provide a fine-grained analysis of how different categories of context influence different software engineering tasks. In contrast, CL4SE unifies four representative

SE tasks, spans multiple granularity levels, and supports systematic analysis of the relationship between context types and task-specific learning behavior.

Table 1: Comparison between CL4SE and current benchmarks.

Benchmark	Time	Language	Task	Granularity	Context
ClassEval (Du et al., 2023)	2023	Python	Code Generation	Class	No
HumanEval	2023	Python	Code Generation	Function	No
MBPP	2021	Python	Code Generation	Function	No
Code Contests	2022	Multilingual	Code Generation	File	No
SWEBench (Jimenez et al., 2024)	2024	Python	Code Generation	Commit	Yes
ProjectEval (Liu et al., 2025)	2025	Python	Code Generation	Project	Yes
P-CodeSum (Yun et al., 2024)	2024	Multilingual	Code Summarization	Project	Yes
ProConSuL (Lomshakov et al., 2024)	2024	C/C++	Code Summarization	Project	Yes
ContextCRBench (Hu et al., 2025d)	2025	Multilingual	Code Review	Commit	Yes
AUGER (Li et al., 2022)	2022	Java	Code Review	Commit	Yes
Defects4J (Just et al., 2014)	2014	Java	Code Repair & PCA	Project	Yes
Bugs.jar (Saha et al., 2018)	2018	Java	Code Repair & PCA	Project	Yes
Bears (Madeiral et al., 2019)	2019	Java	Code Repair & PCA	Project	Yes
CL-bench Dou et al. (2026)	2026	NL	Multiple	-	Yes
CL4SE (Ours)	2026	Multilingual	Multiple	Multiple	Yes

3.1 Overview

CL4SE is designed to evaluate the learning ability and learning style of LLMs across different software engineering tasks and contexts. Unlike typical few-shot learning, which simply guides the model to better adapt to tasks by including examples in the prompt, CL4SE focuses more on the types and organizational structures of contexts and their impact on the effectiveness of in-context learning for LLMs. Additionally, CL4SE examines scenarios where the model may struggle to gain guidance from parameterized knowledge, particularly in niche or specialized contexts. This approach allows for a deeper understanding of how various contextual factors influence a model’s performance and adaptability, ultimately leading to improved strategies for leveraging LLMs in diverse and complex software engineering tasks.

Table 2: Statistics of CL4SE, including tasks, contexts, data and evaluation.

Task	Context	Data	Evaluation
Code Generation	Interpretable examples	636	Pass Rate
Code Summarization	Project-specific	8225	ROUGE/BLEU/METEOR/BERTScore
Code Review	Procedural decision-making	1916	ACC/PRE/REC/F1
Patch Correctness Assessment	Positive & negative	2274	ACC/PRE/REC/F1

In CL4SE, we select a total of four different software engineering tasks, including Code Generation (CG), Code Summarization (CS), Code Review (CR), and Patch Correctness Assessment (PCA). These tasks span various stages of software engineering and are both typical and representative. For each task, we collect a substantial amount of up-to-date data from real software projects and carefully

design and select the contexts. In addition, CL4SE is not limited to specific programming languages or types of LLMs. We select several mainstream programming languages, including Python, JavaScript, SQL, among others, and conduct evaluations across various LLMs, demonstrating the broad applicability of CL4SE. As shown in Table 2, we present a summary of the data utilized in CL4SE, including the volume of data for each task category, the contexts used by different tasks and the evaluation metrics employed.

3.2 Context Taxonomy

We conduct an extensive investigation of diverse scenarios in software engineering and identify four representative categories of contexts. In what follows, we present the classification and semantics of each context type in turn.

Project-specific context. Software engineering often operates at the project level, and the software lifecycle consistently revolves around specific projects. In most SE tasks, contexts are generally shared across projects, such as code search (Chen et al., 2024a; Oskooei et al., 2025), where semantic similarity is used to match code snippets. However, in certain tasks (e.g., code summarization (Liu et al., 2024b; Yun et al., 2024), repository-level code completion (Zhang et al., 2023a; Liu et al., 2024c)), the context exhibits project-specific characteristics.

The contexts of different projects can vary significantly; for instance, the style of code summarization may differ based on each project’s objectives, coding standards, and team practices. This project-specificity greatly influences how effectively a model can generate relevant and coherent summaries that align with the unique coding conventions and terminologies of a particular project. However, modern LLMs do not differentiate between project affiliations in the code corpora during the pre-training phase. Instead, they typically mix all the code together for training. Consequently, the programming output from these models tends to lack project-specific characteristics, making it challenging to identify and leverage unique distinctions between projects. Therefore, it is essential to tailor contextual inputs for each project in order to enhance model performance in these specialized tasks. In this paper, we specifically distinguish this type of context to emphasize its importance and to examine the learning capabilities of LLMs in relation to it.

Context based on interpretable examples. Current few-shot learning methods mostly provide LLMs with superficial examples, such as output format examples and similar cases. For straightforward instruction-following tasks, such as requiring the model to output in JSON format, such examples can be quite effective. However, more complex tasks often require deeper explanations. LLMs may not be able to directly derive guidance from simple examples to apply to the current task. On one hand, for traditional non-reasoning models, it is very difficult to derive intermediate processes of a problem directly from the input-output pairs; if the examples are too dissimilar to the target problem, the model will lose meaningful guidance. On the other hand, for reasoning models, even if the model attempts to reason through the intermediate steps, it may fail or deviate from the expected path due to insufficient reasoning capabilities, thus introducing noise that interferes with solving the current task. In this paper, we aim to investigate the impact of the interpretable aspects of examples within the context on the model’s ability to solve new problems. Therefore, we specifically distinguish this type of context

to evaluate its effectiveness in enhancing the model’s performance. By examining how interpretable examples influence problem-solving capabilities, we aim to provide insights that can guide the development of more effective learning strategies for complex tasks.

Context based on positive & negative examples. Existing work typically uses positive examples to guide LLMs in learning the correct way to handle tasks (Luo et al., 2023; Rubin et al., 2022), or negative examples to help the model avoid incorrect trajectories (Liang et al., 2025; Hamdan and Yuret, 2025). However, there is limited research investigating the combined effects of these two different types of contexts, and even fewer studies compare the applicability and effectiveness of positive and negative examples across different tasks and models. Intuitively, positive and negative examples act like two distinct reference frames, and providing only one type may lead the model to focus excessively on that aspect. For instance, supplying only positive samples might lead the model to merely replicate the limited patterns within those examples, overlooking a broader range of possible solutions. Conversely, offering solely negative samples can teach the model how to avoid mistakes but does not guide it toward learning the correct approaches. This highlights the importance of a balanced approach that incorporates both types of examples, enabling the model to learn effectively by understanding both what to do and what to avoid. In this paper, we specifically distinguish between positive and negative contexts to compare their roles in specific software engineering tasks and the effects of their combination.

Context based on procedural decision-making. In addition to the three types of contexts mentioned above, we also distinguish a fourth type. We find that in some software tasks (e.g., code review), the determination of decisions (approve/disapprove) is not completed through a single interaction. Often, this interaction is a continuous and multi-turn process, during which the inclination of the decision can change. Previous relevant works (Li et al., 2022; Tufano et al., 2024; Frömmgen et al., 2024) have simplified the modeling by omitting the interactions and retaining only the final decision, neglecting the explainability and transparency of decision-making in software engineering tasks. This incomplete context can also lead to misjudgments by LLMs. In this paper, we focus on studying how to utilize procedural decision-making contexts to help LLMs understand and anticipate the perspectives and turning points that may arise throughout the decision-making process, ultimately leading to a well-reasoned decision.

3.3 Task Selection

Against the four types of contexts proposed in the previous section, we further select four representative software engineering scenarios to examine the role and effectiveness of each context type in a task-specific setting. As shown in Figure 2, we present the mapping relationship between context types and downstream tasks, so as to provide a clearer view of how different forms of contextual information support different kinds of reasoning and decision-making.

For project-specific context, we choose code summarization, because this task strongly depends on project-level domain knowledge, implementation patterns, naming conventions, and coding styles that are often unique to a particular code-base. For context based on interpretable examples, we select code generation, since

high-quality generation usually benefits from explicit reasoning demonstrations and transparent step-by-step guidance that can help the model better understand how to construct correct solutions. For context based on positive and negative examples, we adopt patch correctness assessment, as the core challenge of this task is to distinguish genuinely correct patches from overfitting or misleading ones, which naturally requires learning from both successful and unsuccessful cases. Finally, for context based on procedural decision, we apply it to code review, because code review often involves iterative analysis, multi-turn interaction, and progressive judgment before reaching a final conclusion. Through this one-to-one mapping between context types and tasks, we are able to systematically investigate how each type of context contributes to model performance in its most relevant software engineering scenario.

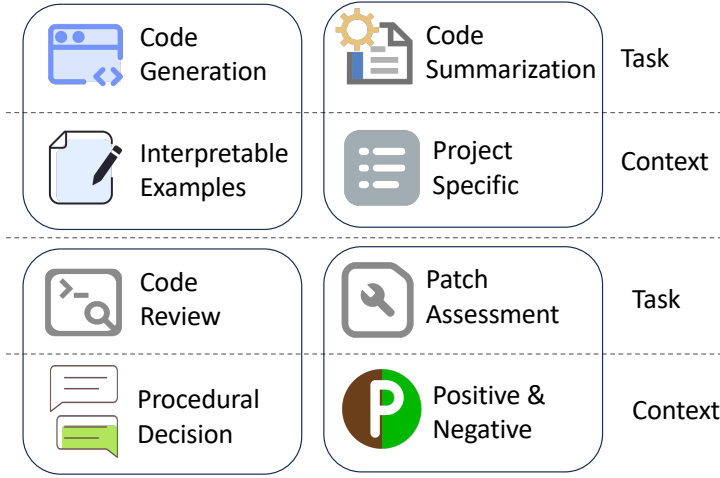


Fig. 2: The mapping between context and task.

3.4 Data Collection

3.4.1 Code Generation


We collected various types of problems from the well-known programming contest platform LeetCode. These problems cover a wide range of categories, including algorithm problems (e.g., two pointers, quicksort), data structure problems (e.g., linked lists, binary trees), real-world problem modeling, optimization, and so on. First, we crawled the problem descriptions and the official solution sets. Next, we collected various user discussions about solution approaches from the comment sections. Because these discussions contained noise, we further used Qwen3-Max to extract valuable and correct solution ideas from them. Because each problem description contains only up to three simple example cases, these examples alone are insufficient to judge the correctness of solutions. Therefore, we used the

code model Qwen3-Coder-Plus to generate test cases. The requirements for model-generated cases were: (1) inputs and outputs should be diverse and non-redundant; (2) include boundary cases whenever possible; (3) generate more than 10 cases per problem; and (4) the canonical solution must pass the generated cases. Through iterative generation, we first obtained a sufficient number of test cases, and then we manually evaluated and corrected the quality of the test cases. After filtering all valid samples (2,083 problems), we also rated problem difficulty. Using Qwen3-32B as the baseline model, we ran repeated tests on the full dataset 10 times and used the average pass rate across the 10 runs as the metric to rank problems from lowest to highest. Finally, we selected the top 30% as the test set (636 problems), the rest as the train set (1,447 problems).

Table 3: Difficulty distribution of code generation benchmark.

	Hard	Medium	Easy	Total
Train	111	777	559	1447
Test	101	401	134	636
All	212	1178	693	2083

The difficulty distributions for the train and test sets are shown in Table 10. One surprising finding is that the model’s notion of difficulty does not always match the human labels in the LeetCode database: some problems labeled ”hard” are easily solved by the model, while some ”easy” problems are not. We believe this discrepancy is because classic problems that frequently appear in exams and technical interviews also occur often in various real-world corpora; consequently, these problems were likely included in the model’s pretraining data and are therefore better mastered by the model. Therefore, by excluding problems with high pass rates from the test set, we can evaluate the model’s performance more objectively.

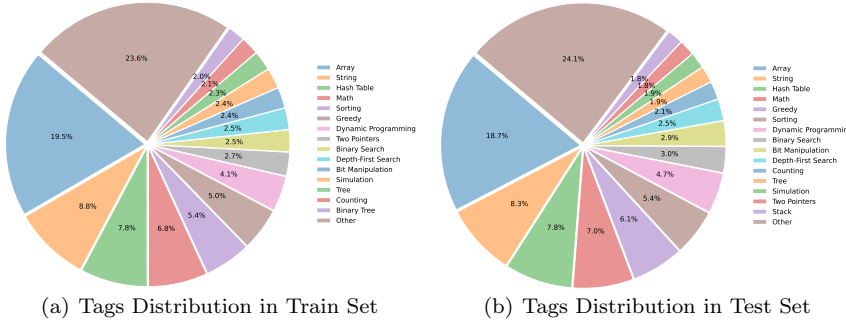

As shown in Figure 3(a) and Figure 3(b), we also visualize the problem categories in the form of pie chart. The filtered test set does not concentrate on a few types of problems despite the reduced sample size; like the training set, it contains

more than 15 categories. This demonstrates the richness and diversity of problem types in both sets of the code generation benchmark.

3.4.2 Code Summarization

To collect realistic code-summary samples from real-world software development, we aggregated the top ten large Python open-source projects on GitHub by star count. We cloned these repositories to our computing server and parsed each project at the function granularity using the general-purpose static analysis tool TreeSitter. For each extracted function we recorded metadata including project, file path, enclosing class (if any), function name, function body, and associated comments or docstrings. To improve the quality and relevance of the samples for summary tasks, we applied a set of conservative filtering rules: (1) exclude functions whose name or relative file path contains the substring "test" or "Test" to avoid test-only code; (2) exclude Python dunder methods (names that both start and end with "_") since they typically represent language- or framework-level hooks rather than domain logic; (3) exclude functions that have no comments or docstrings, because our task requires a natural-language summary associated with executable code; and (4) exclude functions whose comment/docstring length exceeds 500 words to remove noisy or multi-paragraph documentation that does not reflect a concise summary. Any function that met one or more of these criteria was removed from the candidate pool.

After applying these filters and performing manual spot checks to verify filter correctness, we retained 8,225 high-quality samples (see Table 4). These samples originate from 2,495 distinct source files and cover 1,197 unique classes, yielding approximately 3.3 samples per file and about 6.9 samples per class on average. The retained set includes a mixture of short utility functions and longer behavior-rich methods. The wide spread of files and classes indicates that the dataset is not dominated by a few modules or types, but rather provides broad coverage across repositories and object hierarchies. This diversity and the conservative filtering strategy together ensure that the dataset is both representative of real development code and well-suited for training and evaluating code-summary models.

3.4.3 Code Review

To obtain realistic, high-quality code review data, we followed prior work such as SWE-bench-verified (Jimenez et al., 2024), SWE-bench-lite (Jimenez et al., 2024), and Multi-lingual SWE (Zan et al., 2025), and preselected 32 well-known, high-star GitHub repositories. As shown in Table 5, these repositories span multiple languages—including Python, JavaScript, and SQL—and cover diverse functionalities, ranging from component libraries to machine learning frameworks.

Second, we cloned the preselected GitHub repositories to our server. We then used the GitHub CLI to extract recent pull requests for each project. In terms of PR counts, we observed a large imbalance between Accepted and Rejected PRs: most projects have a majority of PRs approved by reviewers, while only a few projects (e.g., PyTorch) exhibit a comparatively high number of rejections. To ensure label balance in the dataset, we therefore sampled from each project’s recent PRs by selecting up to 5,000 accepted PRs and up to 5,000 rejected PRs.

Table 4: Repo distribution of the code summarization benchmark.

Repo	# Files	# Class	# Summary
AutoGPT	201	102	824
LlamaFactory	17	7	47
OpenHands	165	70	333
django	257	175	1060
fastapi	14	5	35
flask	18	13	73
langchain	120	56	283
pytorch	621	325	2445
transformers	649	235	1903
vllm	433	209	1222
Total	2495	1197	8225

Table 5: Candidate repos of the code review benchmark.

Candidate Project
astropy/astropy, django/django, matplotlib/matplotlib, mwaskom/seaborn, pallets/flask, psf/requests, pydata/xarray, pylint-dev/pylint, pytest-dev/pytest, scikit-learn/scikit-learn, sphinx-doc/sphinx, sympy/sympy, sqlfluff/sqlfluff, marshmallow-code/marshmallow, pvlb/pvlib-python, pylint-dev/astroid, pyvista/pyvista, pydicom/pydicom, chartjs/Chart.js, grommet/grommet, openlayers/openlayers, eslint/eslint, scratchfoundation/scratch-gui, prettier/prettier, PrismJS/prism, highlightjs/highlight.js, GoogleChrome/lighthouse, bpmn-io/bpmn-js, alibaba-fusion/next, carbon-design-system/carbon, quarto-dev/quarto-cli, pytorch/pytorch, langchain/langchain

We applied the following filtering criteria. First, we removed samples whose review conversation count is zero. Unlike prior code-review benchmarks that retain only a single review message, we found that reviews in real-world settings typically consist of multi-turn conversations involving multiple reviewers and the PR author. Because any single message cannot fully capture reviewers’ intentions, we preserve the entire review conversation. Second, we excluded PRs that modify more than three files to keep the dataset concise. Finally, we inspected the files changed by each PR and removed PRs that only modify test cases or that contain large, unrelated configuration-file changes (≥ 10000 chars).

After applying the above filtering steps, as shown in Table 6, we obtained 1,916 valid code-review samples from the 32 candidate repositories, comprising 1,191 positive samples and 725 negative samples. To our knowledge, this is the benchmark with the largest number of projects and the closest alignment to real-world code review scenarios.

3.4.4 Patch Correctness Assessment

Following prior work (Tian et al., 2020; Lin et al., 2022), we build our patch correctness assessment benchmark on Defects4J v2.0 (Just et al., 2014), which contains 835 bugs across 17 open-source projects and remains the standard evaluation suite in APR and APCA research (Zhang et al., 2023b). We aggregate plausible patches produced by recent APR tools and reported in the literature, including results from Liu et al. (2020), Xiong et al. (2018),

Table 6: Repo distribution of the code review benchmark.

Project	# Accept	#Reject	# Review
lighthouse	4	2	6
astropy	148	44	192
bpmn-js	1	1	2
carbon	2	2	4
django	239	9	248
eslint	161	0	161
highlight.js	3	1	4
matplotlib	67	63	130
openlayers	70	6	76
prettier	23	8	31
requests	51	4	55
xarray	1	3	4
pydicom	14	0	14
astroid	41	12	53
pylint	28	21	49
pytest	43	33	76
pytorch	9	476	485
pyvista	19	14	33
quarto-cli	47	1	48
scikit-learn	112	19	131
sqlfluff	108	6	114
Total	1191	725	1916

Ghanbari et al. [Ghanbari and Marcus \(2022\)](#), Tian et al. [Tian et al. \(2020, 2022, 2023\)](#), and Lin et al. ([Lin et al., 2022](#)), and we further mine released artifacts to locate additional plausible patches from current tools.

To mitigate label imbalance we also incorporate developer patches previously identified as correct ([Tian et al., 2020](#)). We then deduplicate the collected patches by reconstructing the original buggy and patched snippets, stripping whitespace and comments, and marking patches as duplicates when the normalized snippets are identical. Table 7 summarizes the resulting dataset statistics.

The outcome is a publicly shareable patch-assessment benchmark for Defects4J that, to our knowledge, is the largest of its kind: 2,274 plausible patches in total, of which 1,169 are overfitting patches and 1,105 are correct patches. This benchmark is intended to facilitate reproducible evaluation and comparison of patch-ranking and patch-classification techniques.

3.5 Evaluation and Metrics

In code generation tasks, we use PASS@1 to measure the correctness of the generated code. For code summarization tasks, we employ common text summarization and translation metrics (e.g., ROUGE ([Lin, 2004](#)), BLEU ([Papineni et al., 2002](#)),

Table 7: Statistics of patches in the patch correctness assessment benchmark.

ID	APR Tool	# Correct	# Overfitting	# Total
1	3sFix	1	65	66
2	ACS	32	13	45
3	AVATAR	6	25	31
4	Arja	16	187	203
5	Arja-e	0	48	48
6	CapGen	9	39	48
7	Cardumen	0	8	8
8	ConFix	4	58	62
9	DeepRepair	4	8	12
10	Developer	965	0	965
11	DynaMoth	1	21	22
12	Elixir	7	14	21
13	FixMiner	3	26	29
14	GenProg	1	26	27
15	GenProgA	0	29	29
16	HDRRepair	7	2	9
17	Hercules	0	4	4
18	JGenProg2015	1	6	7
19	Jaid	32	38	70
20	Kali	0	15	15
21	KaliA	3	40	43
22	LSRepair	2	11	13
23	Nopol	1	27	28
24	Nopol2015	7	29	36
25	Nopol2017	0	70	70
26	PraPR	1	13	14
27	RSRepair	0	8	8
28	RSRepairA	4	34	38
29	SOFix	2	1	3
30	SequenceR	8	46	54
31	SimFix	21	34	55
32	SketchFix	3	8	11
33	TBar	14	50	64
34	genPat	0	1	1
35	jGenProg	5	34	39
36	jKali	3	20	23
37	jMutRepair	0	12	12
38	kPAR	3	30	33
39	ssFix	3	5	8
Our Dataset		1169	1105	2274

BERTScore (Zhang et al., 2019), METEOR (Banerjee and Lavie, 2005)) to assess the quality of the generated summaries. In code review and patch correctness assessment tasks, we utilize Accuracy, Precision, Recall, and F1-score to evaluate the consistency between the model’s generated answers and the ground truth. We provide a brief overview of the definitions of these metrics as follows.

PASS@1 evaluates whether the model’s first output is successful in meeting the expected functionality, rather than requiring an exact match with the correct code. Let N be the total number of code generation attempts and K be the number of attempts where the code passes the test cases on the first try. The *PASS@1* success

rate can be expressed as:

$$\text{PASS@1} = \frac{K}{N} \quad (1)$$

Where K is the count of successful first attempts that pass the test cases, N is the total number of code generation attempts.

BLEU (Papineni et al., 2002) primarily measures the precision of n -grams (sequences of words) in the generated text compared with reference text.

$$P_n = \frac{\text{Count of } n\text{-grams in generated text}}{\text{Count of } n\text{-grams in reference text}} \quad (2)$$

$$\text{BP} = \begin{cases} 1 & \text{if length of generated} > \text{length of reference} \\ e^{(1 - \frac{\text{length of reference}}{\text{length of generated}})} & \text{otherwise} \end{cases} \quad (3)$$

$$\text{BLEU} = \text{BP} \cdot \exp \left(\sum_{n=1}^N w_n \cdot \log(P_n) \right) \quad (4)$$

Where w_n is a weight for each n -gram.

ROUGE (Lin, 2004) measures the overlap between the generated summary and reference summaries.

$$\text{ROUGE-P} = \frac{\text{Number of overlapping } n\text{-grams}}{\text{Total } n\text{-grams in generated summary}} \quad (5)$$

$$\text{ROUGE-R} = \frac{\text{Number of overlapping } n\text{-grams}}{\text{Total } n\text{-grams in reference summary}} \quad (6)$$

$$\text{ROUGE-F} = \frac{2 \cdot \text{ROUGE-P} \cdot \text{ROUGE-R}}{\text{ROUGE-P} + \text{ROUGE-R}} \quad (7)$$

METEOR (Banerjee and Lavie, 2005) compares generated text against reference text by considering precision and recall, while also accounting for factors such as stemming, synonymy, and fragmentation penalties.

$$F_{\text{mean}} = \frac{2 \cdot P \cdot R}{P + R} \quad (8)$$

$$\text{METEOR} = F_{\text{mean}} \cdot (1 - \text{Penalty}) \quad (9)$$

Where P is the precision (correct matches divided by the total generated words), R is the recall (correct matches divided by the total reference words), Penalty accounts for fragmentation, reducing the score based on non-contiguous matches.

BERTScore (Zhang et al., 2019) evaluates the quality of generated text compared to reference text using embeddings derived from a pre-trained BERT model. By calculating precision, recall, and F1-score based on the similarity between the embeddings, it provides a comprehensive measure of textual similarity.

$$P_{\text{BERT}} = \frac{1}{|x|} \sum_{r_j \in x} \max_{\hat{y}_i \in \hat{x}} \text{sim}(r_j, \hat{y}_i) \quad (10)$$

$$R_{BERT} = \frac{1}{|\hat{x}|} \sum_{\hat{y}_i \in \hat{x}} \max_{r_j \in x} \text{sim}(r_j, \hat{y}_i) \quad (11)$$

$$F_{BERT} = 2 \cdot \frac{P_{BERT} \cdot R_{BERT}}{P_{BERT} + R_{BERT}} \quad (12)$$

Where x is the embedding for the reference text, $\hat{x}$ is the embeddings for the text generated by the model, and $\text{sim}(r_j, \hat{y}_i)$ represents the similarity score, typically computed using cosine similarity.

Accuracy measures the proportion of correctly reported samples.

$$\text{Accuracy} = \frac{TP + TN}{TP + TN + FP + FN} \quad (13)$$

Recall measures the ratio of reported positive samples over all the real positive samples.

$$\text{Recall} = \frac{TP}{TP + FN} \quad (14)$$

Precision measures the proportion of real positive samples over the reported positive samples.

$$\text{Precision} = \frac{TP}{TP + FP} \quad (15)$$

F1 measures twice the multiplication of precision and recall divided by the sum of them.

$$F1 = 2 * \frac{\text{Precision} * \text{Recall}}{\text{Precision} + \text{Recall}} \quad (16)$$

4 Experiment

4.1 Research Questions

In this paper, we study the effectiveness of context learning for software engineering tasks through the following research questions.

RQ1: What is the overall impact of context learning on different LLMs across various software engineering tasks?

RQ2: How does context learning influence the performance of LLMs on code generation with interpretable examples?

RQ3: To what extent does project-specific context learning affect code summarization quality?

RQ4: What is the effect of procedural decision context on code review judgment?

RQ5: How do positive and negative examples contribute to patch correctness assessment?

4.2 Model Selection

To evaluate context learning on software engineering tasks, we select 5 representative LLMs from diverse global manufacturers for comprehensiveness: Qwen3-Max (Yang et al., 2025a) and Qwen-Coder-Plus (Bai et al., 2023) (Alibaba Cloud, China), DeepSeek-V3 (Liu et al., 2024a) (DeepSeek, China), GPT-Oss-120B (Agarwal et al., 2025) (OpenAI, US), and Claude-3.5-Haiku-20241022 (Anthropic, US). Covering both general and SE-specialized, closed-source and open-source models, these models ensure objective, generalizable evaluation, laying a foundation for our research questions.

4.3 Implementation

We present the implementation details of our experiments as follows, including model deployment, parameter configuration, search framework, and technical stack, ensuring reproducibility. For model deployment, all experiments are conducted on an 8-card RTX 5880 GPU cluster. Closed-source models (Qwen3-Max, Qwen-Coder-Plus, DeepSeek-V3, Claude-3.5-Haiku-20241022) are accessed via their official APIs, with a concurrency request number set to 32 to balance efficiency and stability. The open-source model (GPT-Oss-120B) is deployed on 4 of the 8 RTX 5880 GPUs, using bfloat16 precision to optimize inference speed while maintaining output accuracy. All models are set with a temperature of 0 to ensure deterministic outputs without randomness. The search framework is built using Langchain combined with the Chroma vector database, where the embedding model adopts Qwen3-Embedding-4B¹ to convert text and code samples into high-quality vector representations. During the search process, the target sample itself and samples with timestamps later than the target are excluded to avoid data leakage and ensure the fairness of experimental evaluations. The entire experimental system is implemented based on the PyTorch and Transformer frameworks, ensuring efficient model inference, stable experimental operation, and convenient reproduction of experimental results by researchers.

5 Main Results


5.1 RQ1: Overall Performances

Experiment design. In RQ1, we focus on comparing the performance of LLMs under zero-shot and context learning settings across various software engineering tasks. For each task, we compute the average score across all evaluation metrics as the overall performance of a model on that task, and normalize it to the range [0, 1].


Overall Performance. As shown in Figure 3(c) to Figure 3(f), we use radar charts to compare the performance differences between context learning and zero-shot across the four tasks. Results show that context learning demonstrates a consistent superiority over zero-shot across nearly all models and tasks, confirming its general effectiveness in enhancing LLM performance for software engineering.

¹ <https://huggingface.co/Qwen/Qwen3-Embedding-4B>


Task and Model Specific Analysis. Across tasks, the magnitude of improvement varies significantly. Code Review sees the most substantial gains (e.g., Qwen3-Max improves by 33%), followed by PCA (e.g., DeepSeek-V3 improves by 30%). Code Generation and Code Summarization yield moderate but reliable improvements, with GPT-Oss-120B achieving the most notable lift in both tasks (20% and 34% respectively). In terms of models, GPT-Oss-120B and Claude-3.5 exhibit the highest elasticity to context learning, leveraging contextual examples to narrow the gap with stronger baselines. Qwen3-Max, despite its already strong Zero-Shot performance, still benefits significantly from context learning in reasoning-intensive tasks (Code Review/PCA), with only a negligible drop in Code Generation due to a potential ceiling effect.

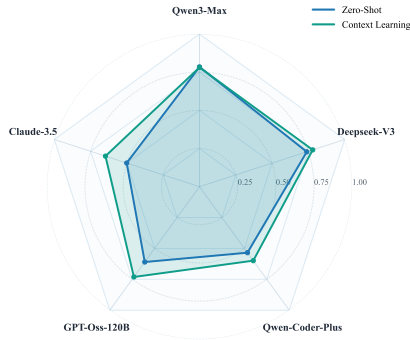


(c) Code Generation

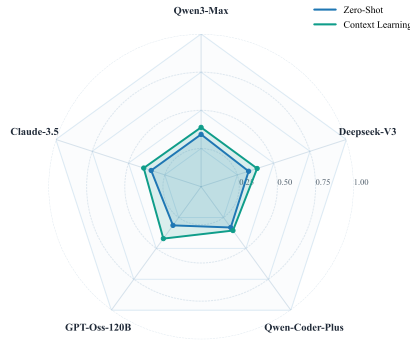

(d) Code Summarization

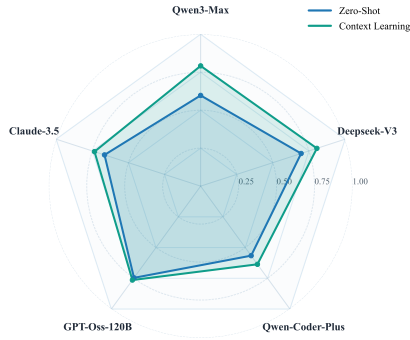

(e) Code Review

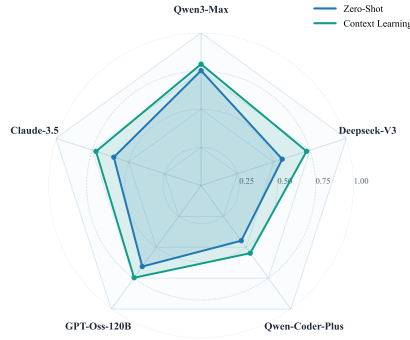

(f) Patch Correctness Assessment

Answer to RQ1:

1. General Effectiveness: Context Learning is a robust paradigm that consistently improves LLM performance across diverse SE tasks, including CG, CS, CR and PCA.
2. Reasoning Sensitivity: Tasks demanding complex logical reasoning and decision-making (Code Review, PCA) benefit far more from context learning than tasks dominated by pattern matching.

3. Heterogeneous Adaptation: Models with lower Zero-Shot baselines (e.g., GPT-Oss-120B) achieve larger proportional gains from context learning compared to SOTA models like Qwen3-Max.

5.2 RQ2: Context Learning on Code Generation

Experimental Design. RQ2 aims to systematically investigate the impact of context learning with interpretable examples. We select code generation as the evaluation scenario and task. We first use examples without interpretations as context, allowing the model to directly learn the problem-solving logic of the current task from the problem description, target input-output pairs, and solutions. We then employ the same examples but add interpretations to illustrate the reasoning process and problem-solving strategies. By comparing the results under these two setups, we analyze the impact of interpretable examples on the model’s code generation capability. In addition, we further explore how the number of shots affects model performance across different levels of problem difficulty.

Results and Analysis. From the ablation results of interpretable examples in Table 8, it can be clearly observed that the introduction of interpretability in contextual examples consistently yields positive improvements in the code generation PASS@1 rate for all models compared with the non-interpretation setting, which verifies the effectiveness of interpretable examples in enhancing the context learning ability of LLMs for code generation tasks. Specifically, there are significant heterogeneous differences in the magnitude of performance improvement across different models: DeepSeek-V3 achieves the most remarkable lift with an increase of 5.72%, followed by Claude-3.5 (3.31%) and GPT-Oss-120B (3%), while Qwen-Coder-Plus and Qwen3-Max obtain relatively marginal gains of only 0.63% and 0.15% respectively. This result reveals a notable heterogeneity in model sensitivity to example interpretability: code-specialized models and general models with lower zero-shot baselines show significantly higher responsiveness to interpretable contexts, with their performance improved by 3% to 5.72% after adding interpretive reasoning. By contrast, Qwen3-Max, which already achieves a high zero-shot PASS@1 rate of 78.46%, only gains a marginal 0.15% improvement from interpretable examples, and even underperforms in the non-interpretation setting. This indicates that high-performance models have encoded sufficient code generation logic in their parameterized knowledge, making simple input-output examples unable to provide effective guidance and even likely to introduce noise, while interpretable contexts can effectively make up for the reasoning and task adaptation limitations of low-baseline models.

Table 8: Effectiveness of interpretable examples on code generation task.

	Qwen3-Max	DeepSeek-V3	Qwen-Coder-Plus	GPT-Oss-120B	Claude-3.5
0-shot	78.46%	73.90%	53.46%	61.01%	50.16%
w/o interpretation	77.99%	72.27%	59.28%	70.12%	61.47%
w/ interpretation	78.14%(↑0.15%)	77.99%(↑5.72%)	59.91%(↑0.63%)	73.12%(↑3%)	64.78%(↑3.31%)

Table 9 further explores the impact of shot number (1–5 shot) on code generation performance across difficulty levels, using interpretable examples as the con-

textual setting. The results clearly demonstrate that performance does not scale linearly with the number of shots; instead, it exhibits a task-dependent optimal point and significant cross-difficulty heterogeneity. First, across all models, 1-shot and 2-shot settings yield the peak performance on the overall dataset, with performance gradually declining as the shot number increases to 3–5 shot. DeepSeek-V3 achieves its highest overall PASS@1 rate at 1-shot (77.99%), while GPT-Oss-120B is an exception, peaking at 4-shot (73.11%) with a steady upward trend. In contrast, Qwen3-Max, Qwen-Coder-Plus, and Claude-3.5 all reach their maximum performance at 1-shot or 2-shot, followed by a noticeable drop in 3–5 shot settings, indicating that excessive demonstrations introduce redundant information and lead to performance degradation. Second, the effectiveness of shot number is strongly tied to problem difficulty.

On Easy problems, most models show a ceiling effect: Qwen3-Max maintains about 83% performance across all shots, and Qwen-Coder-Plus only marginally improves from 58.96% (0-shot) to 72.39% (5-shot). On Medium problems, 1–2 shot settings consistently outperform higher shots: DeepSeek-V3 (77.81% at 1-shot), GPT-Oss-120B (74.06% at 4-shot), and Claude-3.5 (63.59% at 1-shot) all achieve their best results in the low-shot range, confirming that interpretable examples are most impactful on practical, medium-difficulty tasks. On Hard problems, performance is unstable across shots with no clear optimal value: GPT-Oss-120B peaks at 5-shot (65.35%), while Qwen3-Max and Claude-3.5 show erratic fluctuations, reflecting that even interpretable few-shot learning cannot fully mitigate the complexity of hard code generation problems.

Table 9: Evaluating LLMs on code generation task.

Model	0-shot	1-shot	2-shot	3-shot	4-shot	5-shot
Qwen3-Max	78.46%	76.73%	78.14%	75.47%	75.00%	76.10%
Easy (134)	83.58%	81.34%	83.58%	81.34%	83.58%	83.58%
Medium (401)	78.80%	76.81%	78.30%	74.56%	73.32%	76.00%
Hard (101)	70.30%	70.30%	70.30%	71.29%	70.30%	67.33%
DeepSeek-V3	73.90%	77.99%	77.04%	75.94%	75.79%	75.16%
Easy (134)	75.37%	79.10%	78.36%	79.85%	74.63%	76.87%
Medium (401)	72.32%	77.81%	77.06%	74.56%	75.56%	74.31%
Hard (101)	78.22%	77.23%	75.25%	76.24%	78.22%	76.24%
Qwen-Coder-Plus	53.46%	59.91%	59.91%	58.65%	58.96%	59.91%
Easy (134)	58.96%	69.40%	68.66%	69.40%	67.16%	72.39%
Medium (401)	51.12%	56.86%	58.10%	56.11%	56.11%	57.36%
Hard (101)	55.45%	59.41%	55.45%	54.46%	59.41%	53.47%
GPT-Oss-120B	61.01%	69.34%	71.70%	71.23%	73.11%	72.80%
Easy (134)	57.46%	73.88%	76.87%	78.36%	79.10%	77.61%
Medium (401)	64.09%	70.07%	72.32%	71.82%	74.06%	73.07%
Hard (101)	53.47%	60.40%	62.38%	59.41%	61.39%	65.35%
Claude-3.5	50.16%	64.78%	64.78%	62.89%	61.79%	61.16%
Easy (134)	58.96%	73.13%	73.88%	74.63%	74.63%	72.39%
Medium (401)	48.88%	63.59%	62.59%	59.35%	58.60%	57.86%
Hard (101)	43.56%	58.42%	61.39%	61.39%	57.43%	59.41%

Answer to RQ2:

1. Interpretable examples outperform non-interpretation settings for all models, with code-specialized and low zero-shot baseline models gaining far more significantly.
2. Interpretable shot number has a non-linear effect, with 1–2 shot being optimal for most models and excess shots causing performance degradation.
3. Problem difficulty shapes interpretability efficacy, with medium-difficulty tasks as the primary beneficiaries and easy/hard tasks showing limited gains.
4. Interpretable contexts compensate for reasoning limitations of low-baseline models, while high-performance models see marginal gains due to pre-encoded knowledge.

5.3 RQ3: Context Learning on Code Summarization

Experimental Design. RQ3 explores how project-specific context impacts LLMs’ code summarization performance, which requires strict adherence to a project’s unique terminology, documentation style, and naming conventions. Using a within-subjects design, we leverage 8,225 code-summary pairs from 10 Python open-source projects (e.g., PyTorch, Transformers). For each target code snippet, demonstration examples are strictly sourced from the same repository to ensure project-aligned domain knowledge and linguistic style. We evaluate performance across 0-shot to 5-shot settings, using 15 metrics (ROUGE-1/2/L, BLEU, METEOR, BERTScore) to comprehensively assess lexical similarity, semantic adequacy, and contextual alignment of generated summaries.

Results and Analysis. Table 10 demonstrates a clear and consistent pattern in how LLMs utilize project-specific context: 1-shot is the definitive optimal setting across all models and metrics, followed by a monotonic performance decline as the number of project-specific shots increases. All models achieve their peak scores at 1-shot, with striking differences in metric improvements: Lexical metrics (ROUGE-1/2/L, BLEU) see dramatic surges, while semantic alignment (BERTScore) shows only modest gains. For instance, GPT-Oss-120B’s BLEU score jumps from 5.57% (0-shot) to 20.35% (1-shot) (+14.78%), and its Rouge-L F1 surges by 13.71% (18.96% → 32.67%), indicating that project-specific context effectively guides the model to adopt the target project’s unique terminology, phrasing, and documentation format. In contrast, its BERTScore F1 only increases by 2.05% (85.97% → 88.02%), which confirms that LLMs already generate semantically accurate summaries in the 0-shot setting, project-specific context primarily optimizes format and linguistic consistency rather than core meaning. This aligns with the key observation that summaries remain functionally correct without project-specific context, but lack alignment with the project’s internal documentation norms. Notably, performance degrades sharply and consistently as shot number exceeds 1-shot: all models show steady declines in ROUGE, BLEU, METEOR, and BERTScore metrics from 2-shot to 5-shot. For example, GPT-Oss-120B’s Rouge-L F1 plummets to 20.75% at 5-shot, and Qwen3-Max’s falls to 20.85%, both dropping below their respective 0-shot baselines. This trend is mirrored in lexical metrics (e.g., Qwen3-Max’s BLEU drops from 9.75% at 1-shot to 10.46% at 5-shot, failing to retain initial gains) and BERTScore (e.g., Claude-3.5’s BERTScore F1 falls from 86.86% to 85.95%), indicating that excessive project-specific examples introduce harmful redundancy that erodes both linguistic alignment and semantic stability. Model

heterogeneity is also observed: general-purpose models (GPT-Oss-120B, Claude-3.5) show a more pronounced "peak-and-decline" pattern in lexical metrics, as they rely heavily on the 1-shot context to adapt to project-specific formatting and terminology. Code-specialized models like Qwen-Coder-Plus, while also peaking at 1-shot, exhibit more modest lexical gains (+4.19% BLEU, 7.12% $\rightarrow$ 11.31%) and smaller BERTScore improvements (+0.18%), suggesting they have partial built-in familiarity with common code documentation patterns but remain susceptible to noise from excessive context.

Table 10: Evaluating LLMs on code summarization task.

	Rouge-1			Rouge-2			Rouge-L			Bleu	Meteor	BERTScore		
Model	r	p	f	r	p	f	r	p	f	s		p	r	f
Qwen3-Max														
0-shot	31.67%	24.52%	25.32%	10.92%	7.73%	8.20%	28.58%	21.96%	22.75%	8.09%	29.07%	86.83%	86.92%	86.80%
1-shot	33.52%	32.14%	30.74%	18.33%	16.98%	16.66%	31.83%	30.43%	29.17%	9.75%	31.73%	88.01%	87.10%	87.49%
2-shot	29.60%	28.57%	27.17%	15.79%	14.21%	14.13%	28.25%	27.11%	25.88%	13.65%	28.11%	87.53%	86.60%	87.01%
3-shot	26.61%	26.19%	24.71%	13.22%	12.41%	12.21%	25.31%	24.83%	23.50%	12.08%	25.08%	87.22%	86.21%	86.66%
4-shot	24.61%	24.34%	22.92%	11.89%	11.21%	11.10%	23.42%	23.06%	21.79%	11.05%	23.28%	86.91%	85.92%	86.36%
5-shot	23.39%	23.49%	21.96%	11.15%	10.73%	10.53%	22.21%	22.25%	20.85%	10.46%	22.15%	86.80%	85.80%	86.24%
DeepSeek-V3														
0-shot	30.00%	21.96%	23.18%	9.56%	6.26%	6.82%	26.95%	19.54%	20.70%	6.68%	27.45%	86.24%	86.64%	86.37%
1-shot	32.07%	31.69%	29.95%	17.29%	16.31%	15.91%	30.45%	29.99%	28.41%	15.40%	30.42%	88.11%	86.93%	87.45%
2-shot	28.31%	29.38%	27.26%	15.01%	14.86%	14.38%	27.00%	27.87%	25.97%	14.23%	27.24%	87.87%	86.45%	87.10%
3-shot	25.83%	27.39%	25.14%	13.26%	13.56%	12.96%	24.63%	26.05%	23.98%	13.03%	24.80%	87.64%	86.15%	86.84%
4-shot	23.82%	25.39%	23.24%	12.02%	12.13%	11.72%	22.72%	24.14%	22.16%	11.78%	23.03%	87.34%	85.85%	86.54%
5-shot	22.69%	24.41%	22.20%	11.20%	11.51%	11.02%	21.61%	23.19%	21.15%	11.06%	21.88%	87.18%	85.67%	86.37%
Qwen-Coder-Plus														
0-shot	25.30%	26.69%	23.82%	8.24%	8.20%	7.46%	23.20%	24.37%	21.78%	7.12%	25.88%	87.52%	86.27%	86.82%
1-shot	27.98%	28.38%	26.33%	12.99%	12.27%	11.85%	26.43%	26.64%	24.81%	11.31%	27.34%	87.64%	86.50%	87.00%
2-shot	27.07%	27.80%	25.71%	13.72%	12.89%	12.60%	25.81%	26.31%	24.45%	12.15%	26.17%	87.59%	86.26%	86.86%
3-shot	24.71%	25.48%	23.45%	11.89%	11.20%	10.92%	23.58%	24.18%	22.34%	10.53%	23.63%	87.26%	85.88%	86.51%
4-shot	22.80%	23.43%	21.56%	10.85%	9.86%	9.80%	21.77%	22.22%	20.53%	9.37%	21.81%	86.93%	85.58%	86.19%
5-shot	21.63%	22.42%	20.51%	10.05%	9.16%	9.07%	20.65%	21.25%	19.53%	8.62%	20.79%	86.79%	85.44%	86.06%
GPT-Oss-120B														
0-shot	28.24%	20.10%	21.52%	7.45%	4.86%	5.33%	25.01%	17.68%	18.96%	5.57%	25.99%	85.53%	86.55%	85.97%
1-shot	35.72%	36.07%	34.06%	21.08%	21.21%	20.42%	34.21%	34.56%	32.67%	20.35%	34.14%	88.65%	87.52%	88.02%
2-shot	29.50%	30.08%	28.10%	15.84%	15.82%	15.28%	28.14%	28.66%	26.84%	15.24%	28.30%	87.74%	86.63%	87.13%
3-shot	26.45%	27.31%	25.27%	13.55%	13.73%	13.15%	25.27%	26.05%	24.16%	13.17%	25.44%	87.36%	86.22%	86.73%
4-shot	24.21%	24.77%	22.98%	11.75%	11.71%	11.35%	23.05%	23.59%	21.92%	11.35%	23.31%	86.93%	85.85%	86.34%
5-shot	22.76%	23.60%	21.72%	10.82%	10.93%	10.52%	21.71%	22.50%	20.75%	10.47%	21.77%	86.79%	85.65%	86.16%
Claude-3.5														
0-shot	43.77%	17.70%	22.76%	15.63%	5.31%	6.99%	40.50%	16.17%	20.86%	6.57%	29.24%	83.55%	87.26%	85.29%
1-shot	40.23%	27.61%	22.23%	15.10%	16.36%	38.17%	26.27%	28.35%	15.15%	33.27%	86.47%	87.42%	86.86%	86.90%
2-shot	33.21%	28.09%	28.00%	17.61%	14.71%	14.96%	31.57%	26.74%	26.68%	14.72%	29.68%	87.01%	86.92%	86.90%
3-shot	28.83%	25.44%	24.93%	13.98%	12.38%	12.37%	27.45%	24.25%	23.78%	12.38%	25.99%	86.68%	86.38%	86.48%
4-shot	26.57%	23.60%	23.01%	12.39%	10.95%	11.01%	25.23%	22.43%	21.90%	11.09%	24.05%	86.37%	86.05%	86.15%
5-shot	24.76%	22.61%	21.72%	11.26%	10.25%	10.17%	23.53%	21.51%	20.68%	10.19%	22.60%	86.23%	85.79%	85.95%

Answer to RQ3:

1. Project-specific context yields optimal code summarization performance at the 1-shot setting, with lexical metrics (ROUGE, BLEU) showing dramatic gains and BERTScore improving modestly.
2. The gap between lexical and semantic metric improvements confirms that LLMs generate semantically correct summaries in zero-shot setting, while project-specific context primarily optimizes alignment with a project's internal documentation format and terminology.
3. Increasing project-specific shots leads to monotonic performance degradation due to contextual redundancy.
4. General-purpose models benefit more from project-specific context in linguistic alignment than code-specialized models, which show more resilience but smaller relative gains.
5. The 1-shot optimal point highlights that "less is more" when leveraging project-specific context, which is sufficient to align with internal norms without introducing redundant noise.

5.4 RQ4: Context Learning on Code Review

Experimental Design. RQ4 focuses on exploring the impact of procedural decision-making context on LLMs’ code review judgment, which is an inherently multi-turn task where decisions (approve/reject) emerge through progressive discussions rather than single-step evaluations. We adopt a controlled within-subjects design, leveraging 1,916 high-quality code review samples from 32 GitHub repositories (covering Python, JavaScript, SQL). Each sample retains the full multi-turn conversation history (reviewer comments, author responses, decision turning points) as procedural context, rather than only the final decision. We evaluate model performance across 0-shot to 5-shot settings. In each shot, the prompt includes complete procedural decision examples from the same repository to ensure consistency in review norms and discussion styles.

Results and Analysis. Table 11 reveals that procedural decision-making context consistently enhances code review performance, with distinct trends in model behavior and metric improvements that stand in sharp contrast to previous tasks. First, all models exhibit a steady, monotonic upward trend in core metrics (Accuracy, F1) as the shot number increases from 0 to 5, with no evidence of performance degradation from excessive context. Qwen3-Max demonstrates the most dramatic growth, with Accuracy rising by 18.69% (58.19% $\rightarrow$ 76.88%) and F1-score surging by 22.80% (56.39% $\rightarrow$ 79.19%). DeepSeek-V3 and Claude-3.5 also show substantial gains, confirming that procedural context provides cumulative, additive value for decision-making tasks, where learning from more examples refines the model’s understanding of nuanced review criteria. Second, metric heterogeneity highlights how context refines the precision-recall balance. For Qwen3-Max and Claude-3.5, the primary gain comes from a massive increase in Recall (Qwen3-Max: 43.21% $\rightarrow$ 70.78%; Claude-3.5: 56.02% $\rightarrow$ 66.05%), with Precision remaining stable or slightly improved. This indicates that procedural examples teach models to identify more true positive issues (flawed PRs) that they would otherwise miss in a 0-shot setting. DeepSeek-V3 shows a similar focus on Recall (65.41% $\rightarrow$ 90.12%), while GPT-Oss-120B uses the context to marginally boost Precision (64.05% $\rightarrow$ 65.93%), reducing its initial rate of false positives. Notably, Qwen-Coder-Plus, despite steady improvement (Accuracy +12.04%), remains the lowest-performing model across all settings. This suggests that code specialization alone is insufficient for code review; the task demands understanding of social negotiation and procedural norms in collaborative development, which general-purpose models (Qwen3-Max, Claude-3.5) adapt to more effectively with additional context. Finally, 5-shot emerges as the optimal setting, as the complexity of procedural decision-making requires exposure to a diverse set of discussion patterns and edge cases to reach peak performance.

Answer to RQ4:

1. Procedural decision-making context steadily improves code review performance up to 5-shot, with no redundancy-induced degradation.
2. The context primarily boosts Recall (flawed PR detection) while stabilizing Precision, aligning with real-world review needs.
3. General-purpose models benefit more than code-specialized ones, as context learning both relies on procedural reasoning and code understanding.

Table 11: Evaluating LLMs on code review task.

Model	Metric	0-shot	1-shot	2-shot	3-shot	4-shot	5-shot
Qwen3-Max	Accuracy	58.19%	64.09%	71.09%	74.06%	75.52%	76.88%
	Precision	81.14%	86.29%	88.98%	89.52%	89.32%	89.87%
	Recall	43.21%	50.21%	61.04%	65.99%	68.85%	70.78%
	F1	56.39%	63.48%	72.41%	75.98%	77.76%	79.19%
DeepSeek-V3	Accuracy	65.97%	69.83%	71.56%	73.08%	73.92%	75.09%
	Precision	76.45%	72.39%	72.89%	73.73%	74.19%	74.93%
	Recall	65.41%	83.21%	86.38%	88.06%	88.98%	90.12%
	F1	70.50%	77.42%	79.06%	80.26%	80.92%	81.83%
Qwen-Coder-Plus	Accuracy	48.80%	54.02%	56.11%	58.35%	58.40%	60.84%
	Precision	77.19%	82.28%	81.26%	82.48%	86.20%	83.89%
	Recall	44.18%	46.51%	47.61%	47.81%	48.11%	48.68%
	F1	56.20%	59.42%	60.05%	60.53%	61.75%	61.61%
GPT-Oss-120B	Accuracy	63.62%	64.77%	66.34%	65.60%	66.07%	66.39%
	Precision	64.05%	64.44%	65.56%	65.09%	65.43%	65.93%
	Recall	94.54%	96.64%	96.55%	96.30%	96.30%	95.04%
	F1	76.36%	77.32%	78.10%	77.68%	77.92%	77.85%
Claude-3.5	Accuracy	59.53%	62.19%	65.22%	65.81%	64.29%	67.72%
	Precision	83.57%	83.36%	84.13%	83.39%	82.34%	85.61%
	Recall	56.02%	57.71%	63.69%	65.59%	63.71%	66.05%
	F1	67.08%	68.20%	72.50%	73.43%	71.84%	74.57%

5.5 RQ5: Context Learning on Patch Correctness Assessment

Experimental Design. RQ5 investigates how positive & negative context impacts LLMs’ ability to assess patch correctness, which is an essential task requiring differentiation between valid patches (positive examples) and overfitting patches (negative examples). We adopt a controlled within-subjects design, leveraging 2,274 patch samples from Defects4J v2.0 (1,105 correct patches, 1,169 overfitting patches) to ensure balanced labels. The experiment tests three context settings: (1) 1-shot negative (only overfitting patches), (2) 1-shot positive (only correct patches), and (3) 2-shot mixed (one correct + one overfitting patch). We use the same 5 LLMs as previous RQs and evaluate performance via Accuracy, Precision, Recall, and F1-score, focusing on how positive/negative examples independently and jointly guide patch classification.

Results and Analysis.

Table 12 reveals three core findings about positive & negative context. First, positive examples outperform negative examples alone across all models. For Qwen3-Max, 1-shot correct (Accuracy=79.36%, F1=76.50%) outperforms 1-shot overfit (74.48%, 68.27%); similarly, DeepSeek-V3’s 1-shot correct (70.93%, 62.98%) surpasses 1-shot overfit (69.30%, 60.31%). This indicates that learning “what a valid patch looks like” provides more direct guidance than only knowing “what to avoid.” Second, the 2-shot mixed setting (correct + overfit) yields the best overall performance for all models. DeepSeek-V3 achieves the largest gains (Accuracy=74.48%, F1=69.66%), a 12.95% F1 lift over the vanilla setting; Qwen3-Max (80.41%, 77.99%) and GPT-Oss-120B (76.19%, 71.98%) also reach peak performance in this setup. This confirms that combining positive and negative examples helps LLMs establish dual reference frames, thus understanding both valid patterns

Table 12: Evaluating LLMs on patch correctness assessment task.

Qwen3-Max	0-shot	1-shot(Overfit)	1-shot(Correct)	2-shot(Correct+Overfit)
Accuracy	76.72%	74.48%	79.36%	80.41%
Precision	94.19%	94.41%	92.06%	92.18%
Recall	58.25%	53.46%	65.44%	67.58%
F1	71.99%	68.27%	76.50%	77.99%
DeepSeek-V3	Vanilla	1-shot(Overfit)	1-shot(Correct)	2-shot(Correct+Overfit)
Accuracy	61.53%	69.30%	70.93%	74.48%
Precision	92.71%	89.70%	90.95%	89.41%
Recall	27.20%	45.42%	48.16%	57.06%
F1	42.06%	60.31%	62.98%	69.66%
Qwen-Coder-Plus	Vanilla	1-shot(Overfit)	1-shot(Correct)	2-shot(Correct+Overfit)
Accuracy	54.02%	55.16%	59.95%	60.74%
Precision	93.57%	92.05%	96.06%	93.10%
Recall	11.21%	13.86%	22.93%	25.41%
F1	20.02%	24.09%	37.02%	39.92%
GPT-Oss-120B	Vanilla	1-shot(Overfit)	1-shot(Correct)	2-shot(Correct+Overfit)
Accuracy	68.85%	72.93%	74.82%	76.19%
Precision	87.20%	91.69%	89.30%	90.86%
Recall	46.06%	51.97%	57.88%	59.59%
F1	60.28%	66.34%	70.23%	71.98%
Claude-3.5	Vanilla	1-shot(Overfit)	1-shot(Correct)	2-shot(Correct+Overfit)
Accuracy	64.51%	72.11%	71.94%	74.26%
Precision	94.57%	94.80%	94.17%	94.23%
Recall	32.76%	48.33%	48.33%	53.12%
F1	48.67%	64.02%	63.88%	67.94%

and invalid pitfalls. Third, model heterogeneity is pronounced: code-specialized models (Qwen-Coder-Plus) show the smallest absolute gains (F1 +19.90% from vanilla to 2-shot) but retain high Precision ($\geq 93\%$), while general-purpose models (DeepSeek-V3, Claude-3.5) achieve larger F1 improvements by balancing Precision and Recall. Notably, all models maintain high Precision ($\geq 89\%$) across settings, but Recall improves drastically with context, indicating that examples primarily help models identify more true valid/overfitting patches without sacrificing correctness.

Answer to RQ5:

1. Positive examples alone outperform negative examples in guiding patch correctness assessment.
2. The 2-shot mixed setting (correct + overfit) achieves optimal performance, confirming complementary value of dual reference frames.
3. Context primarily boosts Recall while preserving high Precision, with general-purpose models gaining more than code-specialized ones.

6 Discussion

While our work demonstrates the effectiveness of context learning for enhancing LLMs’ performance on mainstream SE tasks, several critical challenges remain unaddressed and warrant further investigation for real-world adoption of SE con-

text learning. Below we highlight two prominent challenges that pose significant barriers to practical deployment.

1). **Context Learning for Low-Resource Programming Languages.** Most existing SE context learning research focuses on high-resource languages (e.g., Python) with abundant open-source code, documentation, and task-specific data. However, low-resource programming languages (e.g., Rust, Julia, or domain-specific languages like Solidity for smart contracts, Verilog for hardware design) present unique challenges for context learning. Due to the scarcity of high-quality contextual examples, low-resource languages lack sufficient task-specific context, which limits the construction of effective in-context demonstrations. Their unique linguistic and syntactic characteristics require strict alignment with language-specific semantics, which generic context engineering strategies cannot satisfy. Moreover, LLMs pre-trained on high-resource languages suffer from inherent cross-language transfer gaps, making it difficult to generalize context learning capabilities across different programming languages. This challenge is especially critical for niche industrial domains that rely on low-resource languages, where context learning must adapt to specialized language constraints rather than generic SE patterns.

2). **Dynamic and Evolving Project Contexts.** SE context learning assumes static project contexts, where coding conventions, documentation styles, and decision norms are fixed during data collection. However, real-world software projects are dynamic and evolving, posing three key challenges:

- Context drift: Project contexts change over time, making static examples outdated or misleading.
- Long-tail context scarcity: Emerging edge cases lack corresponding historical contextual examples.
- Context scalability: Large projects contain fragmented sub-contexts, greatly increasing the difficulty of context construction and maintenance.

Above reveals a key limitation of current context learning methods: they perform well on static projects but cannot adapt to the evolving nature of software development. Future research should explore dynamic context engineering mechanisms to maintain alignment between contextual inputs and real-time project states.

7 Conclusion

This work addresses the lack of systematic evaluation for LLM context learning in software engineering by proposing CL4SE, the first dedicated context learning benchmark for the SE domain. We define a fine-grained taxonomy of four SE-specific context types and map each to a representative core SE task. We construct a high-quality real-world dataset with 13,000+ samples from over 30 open-source projects (636 code generation problems, 8,225 code summarization pairs, 1,916 code review PRs, 2,274 patch assessment samples) and conduct extensive evaluations on five mainstream LLMs using 9 metrics to dissect the efficacy of different context types.

Extensive experiments confirm that context learning is a robust paradigm for SE tasks, delivering an average 24.7% performance improvement across all tasks with clear task-specific optimal strategies: 1–2 shot interpretable examples boost

DeepSeek-V3’s code generation PASS@1 by 5.72%; 1-shot project-specific context raises GPT-Oss-120B’s code summarization BLEU by 14.78% (from 5.57% to 20.35%); 5-shot procedural context increases Qwen3-Max’s code review Accuracy and F1 by 18.69% and 22.80% respectively; and 2-shot mixed positive-negative context lifts DeepSeek-V3’s patch assessment F1 by 12.95%. General-purpose models benefit more from context learning than code-specialized ones in most decision-centric and linguistic alignment tasks.

We also identify key open challenges for real-world SE context learning deployment, including the scarcity of high-quality context examples for low-resource programming languages and the inability of static context design to adapt to the dynamic evolution of software projects (context drift, long-tail context scarcity, context scalability), as discussed in our analysis. These challenges point to critical future research directions in dynamic context engineering and cross-language context transfer for low-resource SE domains.

In summary, CL4SE makes three core contributions: first, it establishes a standardized evaluation framework for SE-focused context learning with a well-defined context taxonomy and task-context mapping; second, it releases a large-scale, rigorously constructed dataset to facilitate reproducible research and model comparison; third, it provides actionable empirical insights into task-specific context design, demonstrating that context engineering is not a one-size-fits-all solution and offering concrete optimal strategies for core SE workflows. Our findings enable researchers and practitioners to move beyond ad-hoc prompt crafting and leverage principled context design to fully unlock LLMs’ potential in real-world software development.

Declarations

Ethical approval: Not Applicable.

Informed consent: Not Applicable.

Author Contributions. Haichuan Hu: Conceptualization, Methodology, Writing - original draft, Investigation. Qianjun Zhang: Conceptualization, Writing review & editing, Validation. Ye Shang: Software, Data curation, Writing - review & editing. Guoqing Xie: Software, Formal analysis, Writing - review & editing. Chunrong Fang: Conceptualization, Writing review & editing, Validation. Zhenyu Chen: Conceptualization, Writing review & editing, Validation. Liang Xiao: Conceptualization, Writing review & editing, Validation.

Data Availability Statement. Our dataset is publicly available at [HuggingFace/-tomhu/codecl](https://huggingface.co/tomhu/codecl), and the related code is open-sourced at [GitHub/Tomsawyerhu/-CodeCL](https://github.com/Tomsawyerhu/CodeCL).

Conflict of Interest. The authors declared that they have no conflict of interest.

Clinical Trial Number: Not Applicable.

References

- Agarwal S, Ahmad L, Ai J, Altman S, Applebaum A, Arbus E, Arora RK, Bai Y, Baker B, Bao H, et al. (2025) gpt-oss-120b & gpt-oss-20b model card. arXiv preprint arXiv:250810925

- Ahmed T, Pai KS, Devanbu P, Barr E (2024) Automatic semantic augmentation of language model prompts (for code summarization). In: Proceedings of the IEEE/ACM 46th international conference on software engineering, pp 1–13
- Akyürek E, Schuurmans D, Andreas J, Ma T, Zhou D (2022) What learning algorithm is in-context learning? investigations with linear models. arXiv preprint arXiv:2211.15661
- Bai J, Bai S, Chu Y, Cui Z, Dang K, Deng X, Fan Y, Ge W, Han Y, Huang F, et al. (2023) Qwen technical report. arXiv preprint arXiv:2309.16609
- Banerjee S, Lavie A (2005) Meteor: An automatic metric for mt evaluation with improved correlation with human judgments. In: Proceedings of the acl workshop on intrinsic and extrinsic evaluation measures for machine translation and/or summarization, pp 65–72
- Bouzenia I, Devanbu P, Pradel M (2024) Repairagent: An autonomous, llm-based agent for program repair. arXiv preprint arXiv:2403.17134
- Brown T, Mann B, Ryder N, Subbiah M, Kaplan JD, Dhariwal P, Neelakantan A, Shyam P, Sastry G, Askell A, et al. (2020) Language models are few-shot learners. *Advances in neural information processing systems* 33:1877–1901
- Chen B, Zhang Z, Langrené N, Zhu S (2025) Unleashing the potential of prompt engineering for large language models. *Patterns* 6(6)
- Chen J, Hu X, Li Z, Gao C, Xia X, Lo D (2024a) Code search is all you need? improving code suggestions with code search. In: Proceedings of the IEEE/ACM 46th international conference on software engineering, pp 1–13
- Chen Y, Hu Z, Zhi C, Han J, Deng S, Yin J (2024b) Chatunitest: A framework for llm-based test generation. In: Companion Proceedings of the 32nd ACM International Conference on the Foundations of Software Engineering, pp 572–576
- Cheng Y, Zhu X, Zhao H, Arora S (2026) Contextual drag: How errors in the context affect llm reasoning. arXiv preprint arXiv:2602.04288
- Crupi G, Tufano R, Velasco A, Mastropaolo A, Poshyvanyk D, Bavota G (2025) On the effectiveness of llm-as-a-judge for code generation and summarization. *IEEE Transactions on Software Engineering*
- Dai S, Tang J, Wu J, Wang K, Zhu Y, Chen B, Hong B, Zhao Y, Fu C, Wu K, et al. (2025) Onepiece: Bringing context engineering and reasoning to industrial cascade ranking system. arXiv preprint arXiv:2509.18091
- Dong Q, Li L, Dai D, Zheng C, Ma J, Li R, Xia H, Xu J, Wu Z, Chang B, et al. (2024a) A survey on in-context learning. In: Proceedings of the 2024 conference on empirical methods in natural language processing, pp 1107–1128
- Dong Y, Jiang X, Jin Z, Li G (2024b) Self-collaboration code generation via chatgpt. *ACM Transactions on Software Engineering and Methodology* 33(7):1–38
- Dou S, Zhang M, Yin Z, Huang C, Shen Y, Wang J, Chen J, Ni Y, Ye J, Zhang C, et al. (2026) Cl-bench: A benchmark for context learning. arXiv preprint arXiv:2602.03587
- Du X, Liu M, Wang K, Wang H, Liu J, Chen Y, Feng J, Sha C, Peng X, Lou Y (2023) Classeval: A manually-crafted benchmark for evaluating llms on class-level code generation. arXiv preprint arXiv:2308.01861
- Frömmgen A, Austin J, Choy P, Ghelani N, Kharatyan L, Surita G, Khrapko E, Lamblin P, Manzagol PA, Revaj M, et al. (2024) Resolving code review comments with machine learning. In: Proceedings of the 46th international conference on software engineering: software engineering in practice, pp 204–215

- Gao C, Chen X, Zhang G (2025) Sva-icl: Improving llm-based software vulnerability assessment via in-context learning and information fusion. *Information and Software Technology* 186:107803
- Gao S, Wen XC, Gao C, Wang W, Zhang H, Lyu MR (2023) What makes good in-context demonstrations for code intelligence tasks with llms? In: 2023 38th IEEE/ACM International Conference on Automated Software Engineering (ASE), IEEE, pp 761–773
- Geng M, Wang S, Dong D, Wang H, Li G, Jin Z, Mao X, Liao X (2024) Large language models are few-shot summarizers: Multi-intent comment generation via in-context learning. In: *Proceedings of the 46th IEEE/ACM International Conference on Software Engineering*, pp 1–13
- Ghanbari A, Marcus A (2022) Patch correctness assessment in automated program repair based on the impact of patches on production and test code. In: *Proceedings of the 31st ACM SIGSOFT International Symposium on Software Testing and Analysis*, pp 654–665
- Giray L (2023) Prompt engineering with chatgpt: a guide for academic writers. *Annals of biomedical engineering* 51(12):2629–2633
- Guo Q, Cao J, Xie X, Liu S, Li X, Chen B, Peng X (2024) Exploring the potential of chatgpt in automated code refinement: An empirical study. In: *Proceedings of the 46th IEEE/ACM International Conference on Software Engineering*, pp 1–13
- Hamdan S, Yuret D (2025) How much do llms learn from negative examples? arXiv preprint arXiv:250314391
- He J, Treude C, Lo D (2025) Llm-based multi-agent systems for software engineering: Literature review, vision, and the road ahead. *ACM Transactions on Software Engineering and Methodology* 34(5):1–30
- Hu H, Shang Y, Sun W, Zhang Q (2025a) Tsapr: A tree search framework for automated program repair. arXiv preprint arXiv:250701827
- Hu H, Shang Y, Xu G, He C, Zhang Q (2025b) Can gpt-o1 kill all bugs? an evaluation of gpt-family llms on quixbugs. In: 2025 IEEE/ACM International Workshop on Automated Program Repair (APR), IEEE, pp 11–18
- Hu H, Xie X, Zhang Q (2025c) Repair-r1: Better test before repair. arXiv preprint arXiv:250722853
- Hu R, Wang X, Wen XC, Zhang Z, Jiang B, Gao P, Peng C, Gao C (2025d) Benchmarking llms for fine-grained code review with enriched context in practice. arXiv preprint arXiv:251107017
- Jiang X, Dong Y, Wang L, Fang Z, Shang Q, Li G, Jin Z, Jiao W (2024) Self-planning code generation with large language models. *ACM Transactions on Software Engineering and Methodology* 33(7):1–30
- Jimenez CE, Yang J, Wettig A, Yao S, Pei K, Press O, Narasimhan KR (2024) Swebench: Can language models resolve real-world github issues? In: *The Twelfth International Conference on Learning Representations, ICLR 2024, Vienna, Austria, May 7-11, 2024*, OpenReview.net, URL <https://openreview.net/forum?id=VTF8yNQM66>
- Joel S, Wu J, Fard F (2024) A survey on llm-based code generation for low-resource and domain-specific programming languages. *ACM Transactions on Software Engineering and Methodology*
- Just R, Jalali D, Ernst MD (2014) Defects4j: A database of existing faults to enable controlled testing studies for java programs. In: *Proceedings of the 23rd*

- International Symposium on Software Testing and Analysis, pp 437–440
- Le-Cong T, Luong DM, Le XBD, Lo D, Tran NH, Quang-Huy B, Huynh QT (2023) Invalidator: Automated patch correctness assessment via semantic and syntactic reasoning. *IEEE Transactions on Software Engineering* 49(6):3411–3429
- Li J, Tao C, Li^o J, Li G, Jin Z, Zhang H, Fang Z, Liu F (2025) Large language model-aware in-context learning for code generation. *ACM Transactions on Software Engineering and Methodology* 34(7):1–33
- Li L, Yang L, Jiang H, Yan J, Luo T, Hua Z, Liang G, Zuo C (2022) Auger: automatically generating review comments with pre-training models. In: *Proceedings of the 30th ACM Joint European Software Engineering Conference and Symposium on the Foundations of Software Engineering*, pp 1009–1021
- Liang Y, Ying R, Taniguchi T, Cui Z (2025) Failures are the stepping stones to success: Enhancing few-shot in-context learning by leveraging negative samples. *arXiv preprint arXiv:250723211*
- Lin B, Wang S, Wen M, Mao X (2022) Context-aware code change embedding for better patch correctness assessment. *ACM Transactions on Software Engineering and Methodology* 31(3):1–29
- Lin CY (2004) Rouge: A package for automatic evaluation of summaries. In: *Text summarization branches out*, pp 74–81
- Liu A, Feng B, Xue B, Wang B, Wu B, Lu C, Zhao C, Deng C, Zhang C, Ruan C, et al. (2024a) Deepseek-v3 technical report. *arXiv preprint arXiv:241219437*
- Liu G, Zhu F, Feng R, Ma C, Wang S, Meng G (2026) Intent mismatch causes llms to get lost in multi-turn conversation. *arXiv preprint arXiv:260207338*
- Liu K, Wang S, Koyuncu A, Kim K, Bissyandé TF, Kim D, Wu P, Klein J, Mao X, Traon YL (2020) On the efficiency of test suite based program repair: A systematic assessment of 16 automated repair systems for java programs. In: *Proceedings of the 42nd ACM/IEEE International Conference on Software Engineering*, pp 615–627
- Liu K, Pan Y, Xiang Y, He D, Li J, Du Y, Gao T (2025) Projecteval: A benchmark for programming agents automated evaluation on project-level code generation. In: *Findings of the Association for Computational Linguistics: ACL 2025*, pp 20205–20221
- Liu P, Yuan W, Fu J, Jiang Z, Hayashi H, Neubig G (2023) Pre-train, prompt, and predict: A systematic survey of prompting methods in natural language processing. *ACM computing surveys* 55(9):1–35
- Liu S, Wu J, Bao J, Wang W, Hovakimyan N, Healey CG (2024b) Towards a robust retrieval-based summarization system. *arXiv preprint arXiv:240319889*
- Liu W, Yu A, Zan D, Shen B, Zhang W, Zhao H, Jin Z, Wang Q (2024c) Graph-coder: Enhancing repository-level code completion via coarse-to-fine retrieval based on code context graph. In: *Proceedings of the 39th IEEE/ACM International Conference on Automated Software Engineering*, pp 570–581
- Liu Y, Tao S, Meng W, Yao F, Zhao X, Yang H (2024d) Logprompt: Prompt engineering towards zero-shot and interpretable log analysis. In: *Proceedings of the 2024 IEEE/ACM 46th international conference on software engineering: Companion proceedings*, pp 364–365
- Lomshakov V, Podivilov A, Savin S, Baryshnikov O, Lisevych A, Nikolenko S (2024) Proconsul: Project context for code summarization with llms. In: *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing: Industry Track*, pp 866–880

- Luo M, Xu X, Dai Z, Pasupat P, Kazemi M, Baral C, Imbrasaite V, Zhao VY (2023) Dr. icl: Demonstration-retrieved in-context learning. arXiv preprint arXiv:230514128
- Madeiral F, Urli S, Maia M, Monperrus M (2019) Bears: An Extensible Java Bug Benchmark for Automatic Program Repair Studies. In: Proceedings of the 26th IEEE International Conference on Software Analysis, Evolution and Reengineering (SANER '19), URL <https://arxiv.org/abs/1901.06024>
- Marvin G, Hellen N, Jjing D, Nakatumba-Nabende J (2023) Prompt engineering in large language models. In: International conference on data intelligence and cognitive informatics, Springer, pp 387–402
- Mathews NS, Nagappan M (2024) Test-driven development and llm-based code generation. In: Proceedings of the 39th IEEE/ACM International Conference on Automated Software Engineering, pp 1583–1594
- Mei L, Yao J, Ge Y, Wang Y, Bi B, Cai Y, Liu J, Li M, Li ZZ, Zhang D, et al. (2025) A survey of context engineering for large language models. arXiv preprint arXiv:250713334
- Nan Z, Guo Z, Liu K, Xia X (2025) Test intention guided llm-based unit test generation. In: 2025 IEEE/ACM 47th International Conference on Software Engineering (ICSE), IEEE Computer Society, pp 779–779
- Oskoei AR, Yukcu S, Bozoglan MC, Aktas MS (2025) Repository-level code understanding by llms via hierarchical summarization: Improving code search and bug localization. In: International Conference on Computational Science and Its Applications, Springer, pp 88–105
- Ouyang S, Yu W, Ma K, Xiao Z, Zhang Z, Jia M, Han J, Zhang H, Yu D (2024) Repograph: Enhancing ai software engineering with repository-level code graph. arXiv preprint arXiv:241014684
- Papineni K, Roukos S, Ward T, Zhu WJ (2002) Bleu: a method for automatic evaluation of machine translation. In: Proceedings of the 40th annual meeting of the Association for Computational Linguistics, pp 311–318
- Patil A (2025) Advancing software quality: A standards-focused review of llm-based assurance techniques. arXiv preprint arXiv:250513766
- Rasheed Z, Sami MA, Waseem M, Kemell KK, Wang X, Nguyen A, Systä K, Abrahamsson P (2024) Ai-powered code review with llms: Early results. arXiv preprint arXiv:240418496
- Rodriguez AD, Dearstyne KR, Cleland-Huang J (2023) Prompts matter: Insights and strategies for prompt engineering in automated software traceability. In: 2023 IEEE 31st International Requirements Engineering Conference Workshops (REW), IEEE, pp 455–464
- Ronanki K, Arvidsson S, Axell J (2025) Prompt engineering guidelines for using large language models in requirements engineering. In: Euromicro Conference on Software Engineering and Advanced Applications, Springer, pp 245–262
- Rubin O, Herzig J, Berant J (2022) Learning to retrieve prompts for in-context learning. In: Proceedings of the 2022 conference of the North American chapter of the association for computational linguistics: human language technologies, pp 2655–2671
- Saha RK, Lyu Y, Lam W, Yoshida H, Prasad MR (2018) Bugs. jar: A large-scale, diverse dataset of real-world java bugs. In: Proceedings of the 15th international conference on mining software repositories, pp 10–13

- Sahoo P, Singh AK, Saha S, Jain V, Mondal S, Chadha A (2024) A systematic survey of prompt engineering in large language models: Techniques and applications. arXiv preprint arXiv:240207927 1
- Shao M, Ding Y, Gao C, Wang J, Zhu G (2026) Fix pattern-aware vulnerability patch generation via in-context learning. *ACM Transactions on Software Engineering and Methodology*
- Singh A, Ehtesham A, Kumar S, Khoei TT (2025) Agentic retrieval-augmented generation: A survey on agentic rag. arXiv preprint arXiv:250109136
- Sukkasem P, Soomlek C, Dechsupa C (2025) Llm-based code comment summarization: Efficacy evaluation and challenges. In: 2025 17th International Conference on Knowledge and Smart Technology (KST), IEEE, pp 335–340
- Syahputri IW, Budiardjo EK, Putra POH (2025) Unlocking the potential of the prompt engineering paradigm in software engineering: A systematic literature review. *AI* 6(9):206
- Tang X, Wang L, Liu Y, Chai L, Yang J, Li Z, Tian H, Klein J, Bissyandé TF (2024) In-context code-text learning for bimodal software engineering. arXiv preprint arXiv:241018107
- Tian H, Liu K, Kaboré AK, Koyuncu A, Li L, Klein J, Bissyandé TF (2020) Evaluating representation learning of code changes for predicting patch correctness in program repair. In: *Proceedings of the 35th IEEE/ACM International Conference on Automated Software Engineering*, pp 981–992
- Tian H, Li Y, Pian W, Kabore AK, Liu K, Habib A, Klein J, Bissyandé TF (2022) Predicting patch correctness based on the similarity of failing test cases. *ACM Transactions on Software Engineering and Methodology* 31(4):1–30
- Tian H, Liu K, Li Y, Kaboré AK, Koyuncu A, Habib A, Li L, Wen J, Klein J, Bissyandé TF (2023) The best of both worlds: Combining learned embeddings with engineered features for accurate prediction of correct patches. *ACM Transactions on Software Engineering and Methodology* 32(4):1–34
- Tufano R, Dabić O, Mastropaolo A, Ciniselli M, Bavota G (2024) Code review automation: strengths and weaknesses of the state of the art. *IEEE Transactions on Software Engineering* 50(2):338–353
- Wang G, Sun Z, Ye S, Gong Z, Chen Y, Zhao Y, Liang Q, Hao D (2024a) Do advanced language models eliminate the need for prompt engineering in software engineering? *ACM Transactions on Software Engineering and Methodology*
- Wang T, Zhou N, Chen Z (2024b) Enhancing computer programming education with llms: A study on effective prompt engineering for python code generation. arXiv preprint arXiv:240705437
- Wang Z, Feng C, Liu L, Jiao G, Ye P (2024c) The application of llms in the analysis and modeling of software requirements. In: 2024 IEEE 24th International Conference on Software Quality, Reliability, and Security Companion (QRS-C), IEEE, pp 1143–1153
- Wu Y, Wang Y, Li Y, Tao W, Yu S, Yang H, Jiang W, Li J (2025) An empirical study on commit message generation using llms via in-context learning. arXiv preprint arXiv:250218904
- Xia CS, Deng Y, Dunn S, Zhang L (2024) Agentless: Demystifying llm-based software engineering agents. arXiv preprint arXiv:240701489
- Xiong Y, Liu X, Zeng M, Zhang L, Huang G (2018) Identifying patch correctness in test-based program repair. In: *Proceedings of the 40th IEEE/ACM International Conference on Software Engineering*, pp 789–799

- Xu J, Cui Z, Zhao Y, Zhang X, He S, He P, Li L, Kang Y, Lin Q, Dang Y, et al. (2024) Unilog: Automatic logging via llm and in-context learning. In: Proceedings of the 46th IEEE/ACM international conference on software engineering, pp 1–12
- Xu W, Liang Z, Mei K, Gao H, Tan J, Zhang Y (2025a) A-mem: Agentic memory for llm agents. arXiv preprint arXiv:250212110
- Xu X, Mao R, Bai Q, Gu X, Li Y, Zhu L (2025b) Everything is context: Agentic file system abstraction for context engineering. arXiv preprint arXiv:251205470
- Yang A, Li A, Yang B, Zhang B, Hui B, Zheng B, Yu B, Gao C, Huang C, Lv C, et al. (2025a) Qwen3 technical report. arXiv preprint arXiv:250509388
- Yang Z, Wu J, Yang Z, Yu Z (2025b) Parameter-efficient fine-tuning with attributed patch semantic graph for automated patch correctness assessment. arXiv preprint arXiv:250502629
- Yun S, Lin S, Gu X, Shen B (2024) Project-specific code summarization with in-context learning. *Journal of Systems and Software* 216:112149
- Zan D, Huang Z, Liu W, Chen H, Zhang L, Xin S, Chen L, Liu Q, Zhong X, Li A, Liu S, Xiao Y, Chen L, Zhang Y, Su J, Liu T, Long R, Shen K, Xiang L (2025) Multi-swe-bench: A multilingual benchmark for issue resolving. CoRR abs/2504.02605, DOI 10.48550/ARXIV.2504.02605, URL <https://doi.org/10.48550/arXiv.2504.02605>, 2504.02605
- Zeng Z, Shi R, Han K, Li Y, Sun K, Wang Y, Yu Z, Xie R, Ye W, Zhang S (2025) Benchmarking and studying the llm-based code review. arXiv preprint arXiv:250901494
- Zhang F, Chen B, Zhang Y, Keung J, Liu J, Zan D, Mao Y, Lou JG, Chen W (2023a) Repocoder: Repository-level code completion through iterative retrieval and generation. In: Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing, pp 2471–2484
- Zhang Q, Fang C, Ma Y, Sun W, Chen Z (2023b) A survey of learning-based automated program repair. *ACM Transactions on Software Engineering and Methodology* 33(2):1–69
- Zhang Q, Hu C, Upasani S, Ma B, Hong F, Kamanuru V, Rainton J, Wu C, Ji M, Li H, et al. (2025) Agentic context engineering: Evolving contexts for self-improving language models. arXiv preprint arXiv:251004618
- Zhang Q, Shang Y, Hu H, Fang C, Chen Z, Xiao L (2026) Compass: Contrastive learning for automated patch correctness assessment in program repair. arXiv preprint arXiv:260207561
- Zhang T, Kishore V, Wu F, Weinberger KQ, Artzi Y (2019) Bertscore: Evaluating text generation with bert. arXiv preprint arXiv:190409675
- Zhou X, Xu B, Kim K, Han D, Le-Cong T, He J, Le B, Lo D (2023) Patchzero: Zero-shot automatic patch correctness assessment. arXiv preprint arXiv:230300202
- Zhou X, Xu B, Kim K, Han D, Nguyen HH, Le-Cong T, He J, Le B, Lo D (2024) Leveraging large language model for automatic patch correctness assessment. *IEEE Transactions on Software Engineering* 50(11):2865–2883