# **Dash Components**



## **Objectives**

After completing the lab you will be able to:

Work with Dash Callbacks

Estimated time needed: 30 minutes

#### **Dataset Used**

<u>Airline Reporting Carrier On-Time Performance</u> dataset from <u>Data Asset eXchange</u>

## **About Skills Network Cloud IDE**

This Skills Network Labs Cloud IDE (Integrated Development Environment) provides a hands-on environment in your web browser for completing course and project related labs. It utilizes Theia, an open-source IDE platform, that can be run on desktop or on the cloud. So far in the course you have been using Jupyter notebooks to run your python code. This IDE provides an alternative for editing and running your Python code. In this lab you will be using this alternative Python runtime to create and launch your Dash applications.

### Important Notice about this lab environment

Please be aware that sessions for this lab environment are not persisted. When you launch the Cloud IDE, you are presented with a 'dedicated computer on the cloud' exclusively for you. This is available to you as long as you are actively working on the labs.

Once you close your session or it is timed out due to inactivity, you are logged off, and this 'dedicated computer on the cloud' is deleted along with any files you may have created, dowloaded or installed. The next time you launch this lab, a new environment is created for you.

If you finish only part of the lab and return later, you may have to start from the beginning. So, it is a good idea to plan to your time accordingly and finish your labs in a single session.

# Let's start creating dash application


#### **Theme**

Extract average monthly arrival delay time and see how it changes over the year. Year range is from 2010 to 2020.

## **Expected Output**

Below is the expected result from the lab. Our dashboard application consists of three components:

- Title of the application
- Component to enter input year
- Chart conveying the average monthly arrival delay

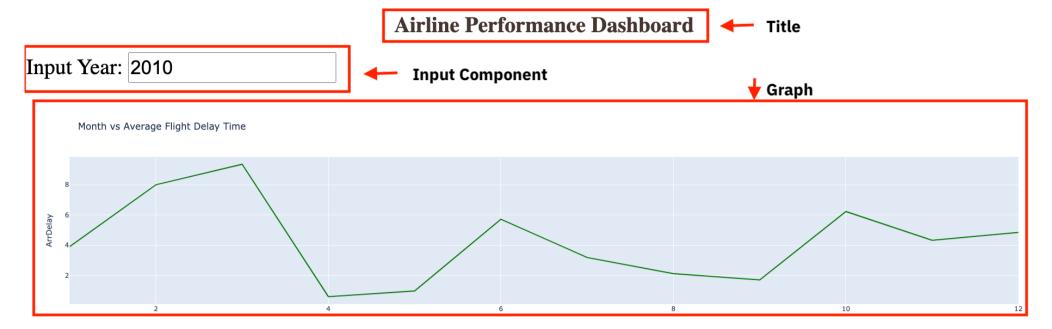

#### To do:

- 1. Import required libraries and read the dataset
- 2. Create an application layout
- 3. Add title to the dashboard application using HTML H1 component
- 4. Add an input text box using core input component
- 5. Add the line chart using core graph component
- 6. Run the app

# Get the tool ready

• Install python packages required to run the application. Copy and paste the below command to the terminal.

python3 -m pip install pandas dash

theia@theiadocker-malikas:/home/project x


theia@theiadocker-malikas:/home/project\$ python3 -m pip install pandas dash
Collecting pandas

```
theia@theiadocker-malikas:/home/project$ python3 -m pip install pandas dash
 Downloading https://files.pythonhosted.org/packages/c3/e2/00cacecafbab071c787019f00ad84ca3185952f6bb9bca9550ed83870d4d/pandas-1.1.5-cp36-cp36m-manylinux1_x8
hl (9.5MB)
    100%
                                            9.5MB 163kB/s
Collecting dash
 Downloading https://files.pythonhosted.org/packages/cc/42/e1692b2d34e4135569db680efe3438e809a6b3f0ae607ad41aeff7741672/dash-2.6.1-py3-none-any.whl (9.9MB)
                                              9.9MB 159kB/s
Collecting pytz>=2017.2 (from pandas)
 Cache entry deserialization failed, entry ignored
 Downloading https://files.pythonhosted.org/packages/d5/50/54451e88e3da4616286029a3a17fc377de817f66a0f50e1faaee90161724/pytz-2022.2.1-py2.py3-none-any.whl (5
    100%
                                             501kB 3.2MB/s
Collecting python-dateutil>=2.7.3 (from pandas)
 Cache entry descrialization failed, entry ignored Cache entry descrialization failed, entry ignored
  Downloading https://files.pythonhosted.org/packages/36/7a/87837f39d0296e723bb9b62bbb257d0355c7f6128853c78955f57342a56d/python_dateutil-2.8.2-py2.py3-none-an
(247kB)
    100%
                                            256kB 5.8MB/s
Collecting numpy>=1.15.4 (from pandas)
Downloading https://files.pythonhosted.org/packages/45/b2/6c7545bb7a38754d63048c7696804a0d947328125d81bf12beaa692c3ae3/numpy-1.19.5-cp36-cp36m-manylinux1_x8
hl (13.4MB<u>)</u>
    100% |
                                            | 13.4MB 111kB/s
Collecting contextvars==2.4; python_version < "3.7" (from dash)
 Downloading https://files.pythonhosted.org/packages/83/96/55b82d9f13763be9d672622e1b8106c85acb83edd7cc2fa5bc67cd9877e9/contextvars-2.4.tar.gz
Collecting dash-table==5.0.0 (from dash)
  Downloading https://files.pythonhosted.org/packages/da/ce/43f77dc8e7bbad02a9f88d07bf794eaf68359df756a28bb9f2f78e255bb1/dash_table-5.0.0-py3-none-any.whl
```


pip3 install httpx==0.20 dash plotly

```
theia@theiadocker-malikas: /home/project ×
theia@theiadocker-malikas:/home/project$ pip3 install httpx==0.20 dash plotly
/usr/lib/python3/dist-packages/secretstorage/ancrypto.py:15: cryptograpnyveprecationWarning: int_from
_bytes is deprecated, use int.from_bytes instead
 from cryptography.utils import int_from_bytes
/usr/lib/python3/dist-packages/secretstorage/util.py:19: CryptographyDeprecationWarning: int_from_byt
es is deprecated, use int.from_bytes instead
  from cryptography.utils import int_from_bytes
Defaulting to user installation because normal site-packages is not writeable
Collecting httpx==0.20
  Downloading httpx-0.20.0-py3-none-any.whl (82 kB)
                                      82 kB 779 kB/s
Collecting dash
 Downloading dash-2.6.1-py3-none-any.whl (9.9 MB)
                                      9.9 MB 40.7 MB/s
Collecting plotly
 Downloading plotly-5.10.0-py2.py3-none-any.whl (15.2 MB)
                                      15.2 MB 39.3 MB/s
Requirement already satisfied: sniffio in /home/theia/.local/lib/python3.6/site-packages (from httpx=
=0.20) (1.2.0)
Requirement already satisfied: httpcore<0.14.0,>=0.13.3 in /home/theia/.local/lib/python3.6/site-pack
ages (from httpx==0.20) (0.13.7)
Requirement already satisfied: async-generator in /home/theia/.local/lib/python3.6/site-packages (fro
m httpx==0.20) (1.10)
Requirement already satisfied: certifi in /home/theia/.local/lib/python3.6/site-packages (from httpx=
=0.20) (2020.12.5)
Requirement already satisfied: rfc3986[idna2008]<2,>=1.3 in /home/theia/.local/lib/python3.6/site-pac
kages (from httpx==0.20) (1.5.0)
Requirement already satisfied: charset-normalizer in /home/theia/.local/lib/python3.6/site-packages (
from httpx==0.20) (2.0.12)
Collecting dash-html-components==2.0.0
 Downloading dash html components-2.0.0-py3-none-any.whl (4.1 kB)
Collecting dash-table==5.0.0
 Downloading dash_table-5.0.0-py3-none-any.whl (3.9 kB)
```


• Create a new python script, by clicking on the menu bar and selecting **File**->**New File**, as in the image below.

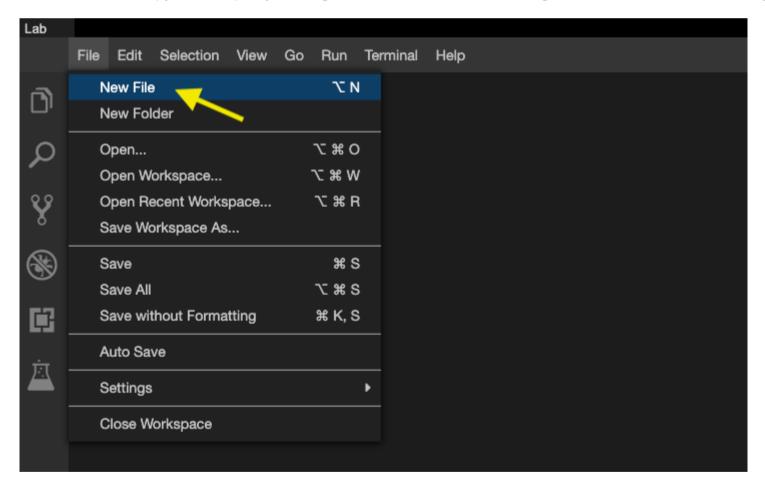


Provide the file name as dash\_interactivity.py

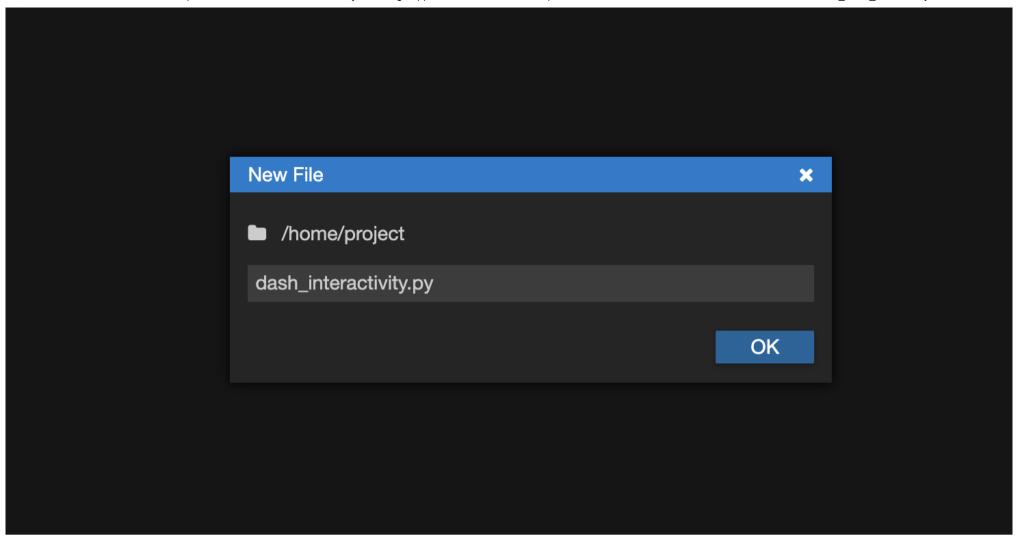

• Open a new terminal, by clicking on the menu bar and selecting **Terminal**->**New Terminal**, as in the image below.

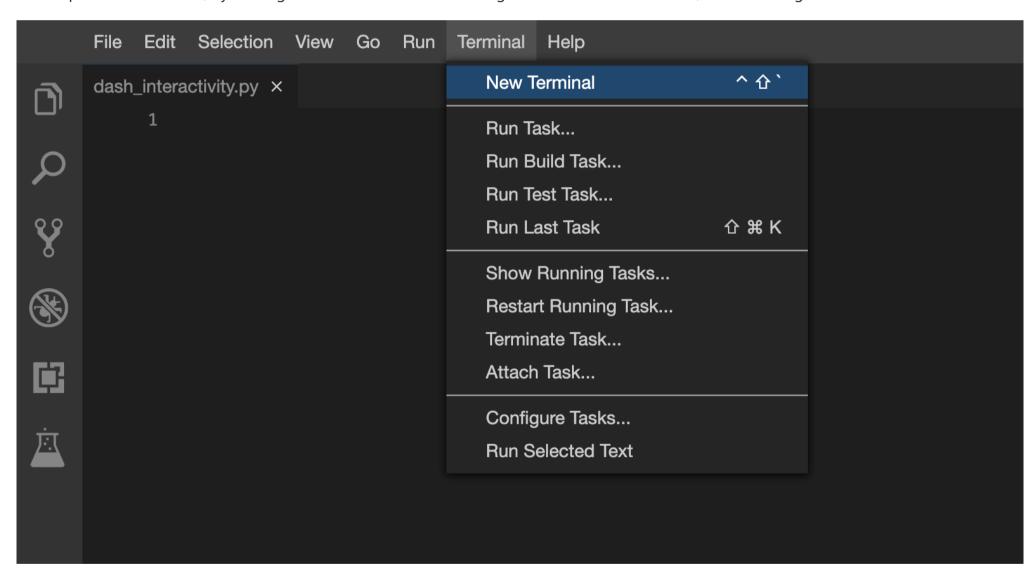

• Now, you have script and terminal ready to start the lab.

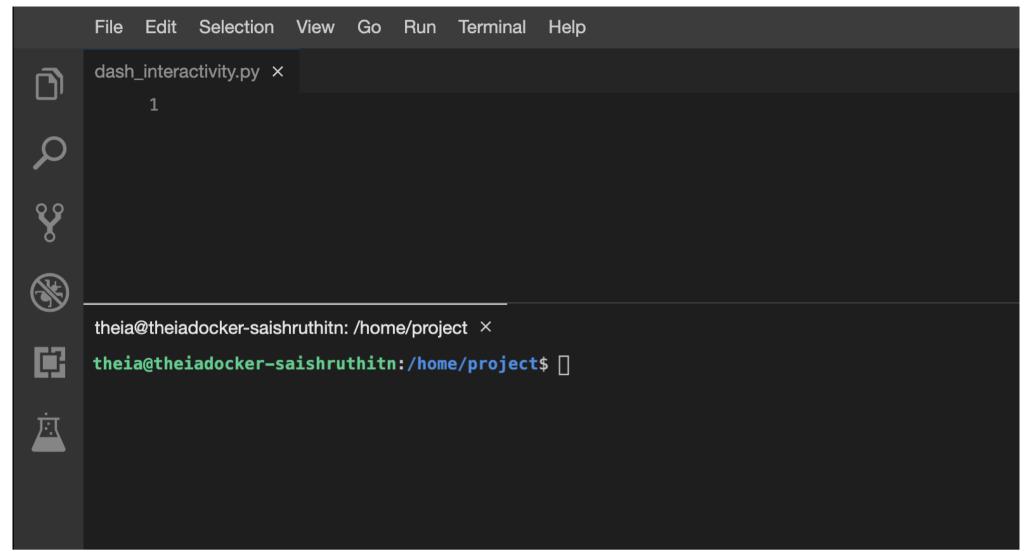

## TASK 1 - Read the data

Let's start with

- Importing necessary libraries
- Reading the data

Copy the below code to the dash\_interactivity.py script and review the code.

# TASK 2 - Create dash application and get the layout skeleton

Next, we create a skeleton for our dash application. Our dashboard application layout has three components as seen before:

- Title of the application
- Component to enter input year inside a layout division
- Chart conveying the average monthly arrival delay inside a layout division

Mapping to the respective Dash HTML tags:

- Title added using html.H1() tag
- Layout division added using html.Div() and input component added using dcc.Input() tag inside the layout division.
- Layout division added using html.Div() and chart added using dcc.Graph() tag inside the layout division.

Copy the below code to the dash\_interactivity.py script and review the structure.

NOTE: Copy below the current code

# **TASK 3 - Update layout components**

## Application title

- Heading reference: Plotly H1 HTML Component
- Title as Airline Performance Dashboard
- Use style parameter and make the title center aligned, with color code #503D36, and font-size as 40. Check More about HTML section here.

#### Input component

- Update <u>dcc.Input</u> component id as input-year, default value as 2010, and type as number. Use style parameter and assign height of the input box to be 50px and font-size to be 35.
- Use style parameter and assign font-size as 40 for the whole division.

#### Output component

- Add dcc.Graph() component to the second division.
- Update dcc.Graph component id as line-plot.

# TASK 4 - Add the application callback function

The core idea of this application is to get year as user input and update the dashboard in real-time. We will be using callback function for the same.

#### Steps:

- Define the callback decorator
- Define the callback function that uses the input provided to perform the computation
- Create graph and return it as an output
- Run the application

Copy the below code to the dash interactivity.py script and review the structure.

NOTE: Copy below the current code

# TASK 5 - Update the callback function

#### Callback decorator

- Refer examples provided <u>here</u>
- Update output component id parameter with the id provided in the dcc.Graph() component and component property as figure.
- Update input component id parameter with the id provided in the dcc.Input() component and component property as value.

#### Callback function

• Update data parameter of the go.Figure() with the scatter plot. Refer here. Sample syntax below:

```
go.Scatter(x='----', y='----', mode='----', marker='----)
```

- Update x as line\_data['Month'], y as line\_data['ArrDelay'], mode as lines, and marker as dict(color='green').
- Update fig.update\_layout with title, xaxis\_title, and yaxis\_title parameters.

```
Title as Month vs Average Flight Delay Timexaxis_title as Monthyaxis_title as ArrDelay
```

Refer the update layout function here.

Refer to the full python code of dash\_interactivity.py below:

```
# Import required libraries
import pandas as pd
import plotly.graph_objects as go
import dash
import dash_html_components as html
import dash core components as dcc
from dash.dependencies import Input, Output
# Read the airline data into pandas dataframe
airline_data = pd.read_csv('https://cf-courses-data.s3.us.cloud-object-storage.appdomain.cloud/IBMDeveloperSkillsNetwork-
DV0101EN-SkillsNetwork/Data%20Files/airline_data.csv',
                            encoding = "ISO-8859-1",
                            dtype={'Div1Airport': str, 'Div1TailNum': str,
                                   'Div2Airport': str, 'Div2TailNum': str})
# Create a dash application
app = dash.Dash(__name___)
app.layout = html.Div(children=[ html.H1('Airline Performance Dashboard', style={'textAlign': 'center', 'color': '#503D36', 'font-
size': 40}),
                                html.Div(["Input Year: ", dcc.Input(id='input-year', value='2010',
                                type='number', style={'height':'50px', 'font-size': 35}),],
                                style={'font-size': 40}),
                                html.Br(),
                                html.Br(),
                                html.Div(dcc.Graph(id='line-plot')),
                                1)
# add callback decorator
@app.callback( Output(component_id='line-plot', component_property='figure'),
               Input(component_id='input-year', component_property='value'))
# Add computation to callback function and return graph
def get_graph(entered_year):
    # Select 2019 data
    df = airline_data[airline_data['Year']==int(entered_year)]
    # Group the data by Month and compute average over arrival delay time.
    line_data = df.groupby('Month')['ArrDelay'].mean().reset_index()
    fig = go.Figure(data=go.Scatter(x=line_data['Month'], y=line_data['ArrDelay'], mode='lines', marker=dict(color='green')))
    fig.update_layout(title='Month vs Average Flight Delay Time', xaxis_title='Month', yaxis_title='ArrDelay')
    return fig
# Run the app
if __name__ == '__main__':
    app.run_server()
```

# TASK 6 - Run the application

• Firstly, install pandas and dash using the following command in the terminal

```
pip3 install pandas dash
```


• Copy and paste the below command in the terminal to run the application.

```
python3 dash_interactivity.py
```

• Observe the port number shown in the terminal.

```
Problems 5
               Python ×
theia@theiadocker-saishruthitn:/home/project$ python dash_basics.py
Dash is running on http://127.0.0.1:8050/
 * Serving Flask app "dash_basics" (lazy loading)
 * Environment: production
   Use a production WSGI server stead.
 ⋆ Debug mode: off
  Running or
             http://127.0.0.1:8050/ (Press CTRL+C to quit)
```

• Click on the Launch Application option from the side menu bar. Provide the port number and click OK

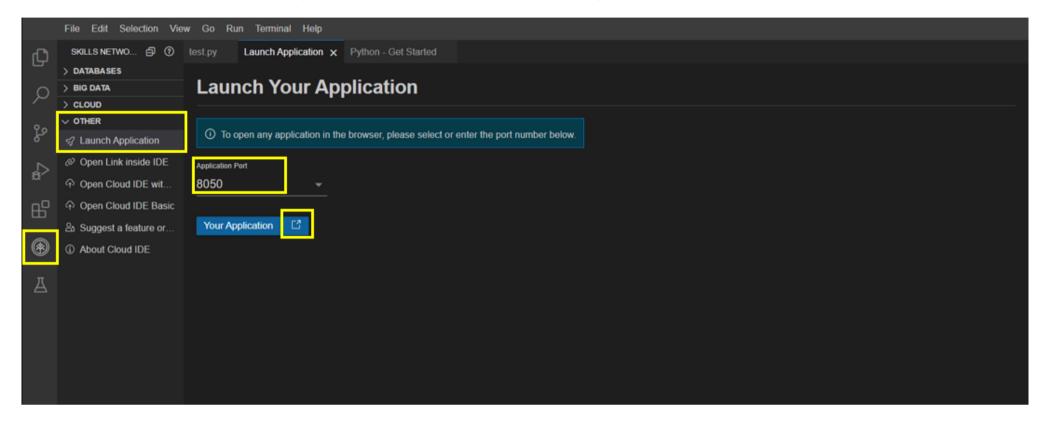

The app will open in a new browser tab like below:



Congratulations, you have successfully created your dash application!

## **Exercise: Practice Tasks**

You will practice some tasks to update the dashboard.

1. Change the title to the dashboard from "Airline Performance Dashboard" to "Airline Dash Interactivity" using HTML H1 component and font-size as 50.

Answer

- 2. Update dcc.Input component id as input-year, default value as 2015, and type as number. Use style parameter and assign height of the input box to be 40px and font-size to be 40. Use style parameter and assign font-size as 35 for the whole division.
  - ► Answer
- 3. Save the above changes and relaunch the dashboard application to see the updated dashboard title.
  - ► Answer
- 4. Write a command to stop the running app in the terminal
  - ► Answer

## **Author**

Saishruthi Swaminathan

## Changelog

| Date       | Version | Changed by      | Change Description      |
|------------|---------|-----------------|-------------------------|
| 05-07-2021 | 1.0     | Saishruthi      | Initial version created |
| 24-08-2022 | 1.1     | Pratiksha       | Instructions updated    |
| 29-08-2022 | 1.2     | Pratiksha Verma | Updated Screenshot      |

© IBM Corporation 2020. All rights reserved.