

# Cucumber Report

Apr 10, 2024, 10:03:35 PM

Start : Apr 10, 10:03:24.442 PM

End : Apr 10, 10:03:25.638 PM

Duration : 1.196 s

Features

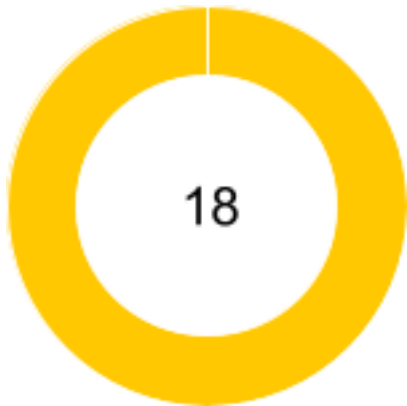
Scenarios

Steps

PASSED - 0  
FAILED - 3  
SKIPPED - 0

PASSED - 0  
FAILED - 5  
SKIPPED - 0

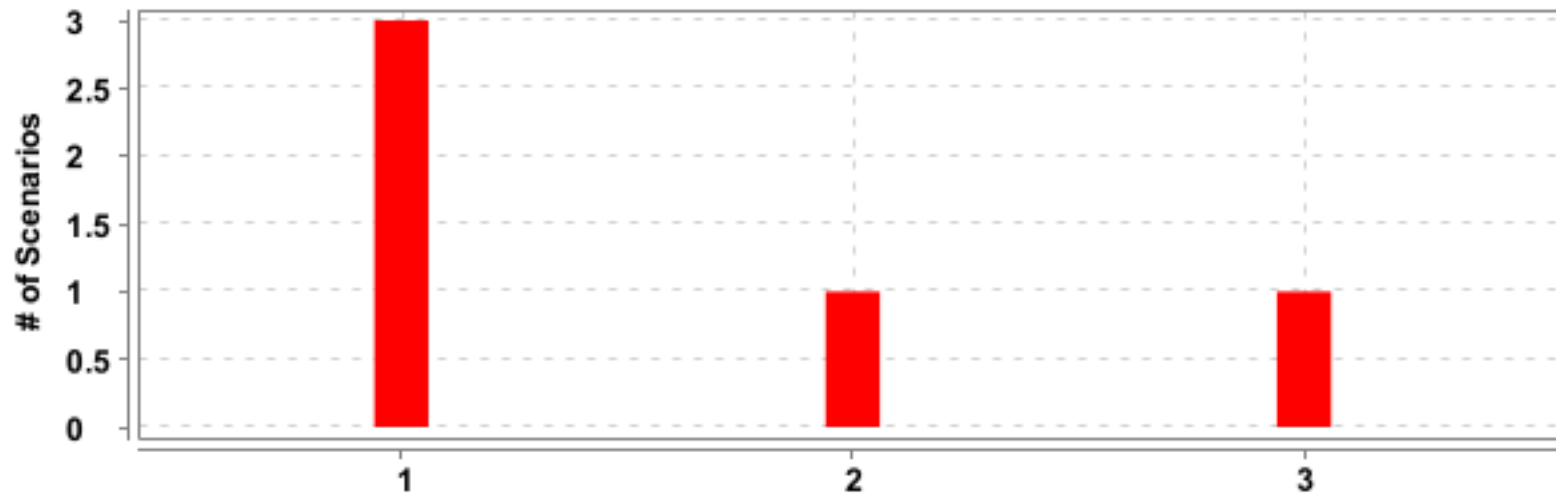
PASSED - 0  
FAILED - 0  
SKIPPED - 18



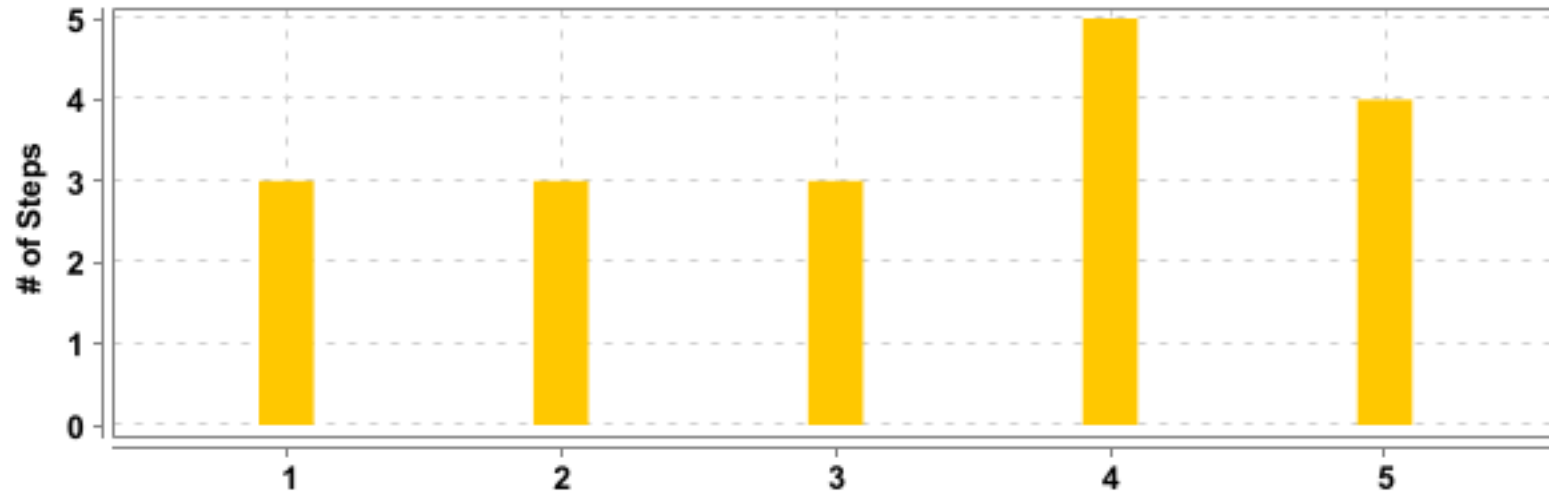
Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>Trying to login with google using invalid credentials</u>	1.102 s	3	0	3	0	9	0	0	9
<u>Getting list of all upcoming new bikes which are under 4 lakh</u>	0.037 s	1	0	1	0	5	0	0	5
<u>Getting list of Popular car modles in Chennai</u>	0.026 s	1	0	1	0	4	0	0	4

#	Feature Name	Scenario Name
1	<u>Trying to login with google using invalid credentials</u>	<u>Login Data Driven Excel</u>
2		<u>Login Data Driven Excel</u>
3		<u>Login Data Driven Excel</u>
4	<u>Getting list of all upcoming new bikes which are under 4 lakh</u>	<u>Successfully printing Bikes under 4 lakh</u>
5	<u>Getting list of Popular car modles in Chennai</u>	<u>Successfully printing car modles</u>

TAG	Scenario				Feature			
Name	T	P	F	S	T	P	F	S
@sanity	3	0	3	0	1	0	1	0





#	Feature Name	T	P	F	S	Duration
1	<u>Trying to login with google using invalid credentials</u>	3	0	3	0	1.102 s
2	<u>Getting list of all upcoming new bikes which are under 4 lakh</u>	1	0	1	0	0.037 s
3	<u>Getting list of Popular car modles in Chennai</u>	1	0	1	0	0.026 s

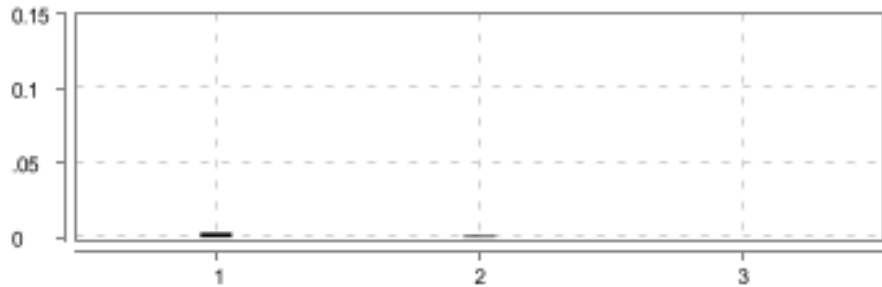



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Trying to login with google using invalid credentials</u>	<u>Login Data Driven Excel</u>	3	0	0	3	0.968 s
2		<u>Login Data Driven Excel</u>	3	0	0	3	0.028 s
3		<u>Login Data Driven Excel</u>	3	0	0	3	0.025 s
4	<u>Getting list of all upcoming new bikes which are under 4 lakh</u>	<u>Successfully printing Bikes under 4 lakh</u>	5	0	0	5	0.037 s
5	<u>Getting list of Popular car modles in Chennai</u>	<u>Successfully printing car modles</u>	4	0	0	4	0.026 s

## Trying to login with google using invalid credentials

<b>FAILED</b>	DURATION - 1.102 s	Scenarios		Steps	
/ 10:03:24.442 PM // 10:03:25.544 PM /		Total - 3		Total - 9	
		Pass - 0		Pass - 0	
		Fail - 3		Fail - 0	
		Skip - 0		Skip - 9	

## Login Data Driven Excel

<div>FAILED</div> <div>DURATION - 0.968 s</div>			<div>Steps</div> <div>Total - 3</div> <div>Pass - 0</div> <div>Fail - 0</div> <div>Skip - 3</div>	
/ 10:03:24.451 PM // 10:03:25.419 PM /				
Trying to login with google using invalid credentials				
@sanity				

#	Step / Hook Details	Status	Duration
	<b>BEFORE - stepDefinitions.Hooks.setup()</b> org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'LTIN485892', ip: '192.168.1.21' Build info: version: '4.15.0', revision: '1d14b5521b' System info: os: name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.2' Driver info: org.openqa.selenium.remote.RemoteWebDriver Command: [null, newSession {capabilities=[Capabilities {browserName: MicrosoftEdge, platformName: Windows 11}]}] Capabilities {browserName: MicrosoftEdge, platformName: Windows 11} at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:625) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:241) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:168) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:148) at factory.BaseClass.initializeBrowser(BaseClass.java:50) at stepDefinitions.Hooks.setup(Hooks.java:24) Caused by: java.io.UncheckedIOException: java.net.ConnectException at org.openqa.selenium.remote.http.jdk.JdkHttpClient.execute0(JdkHttpClient.java:450) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:55) at org.openqa.selenium.remote.http.jdk.JdkHttpClient.execute(JdkHttpClient.java:366) at org.openqa.selenium.remote.tracing.TracedHttpClient.execute(TracedHttpClient.java:54)	<b>FAILED</b>	0.921 s

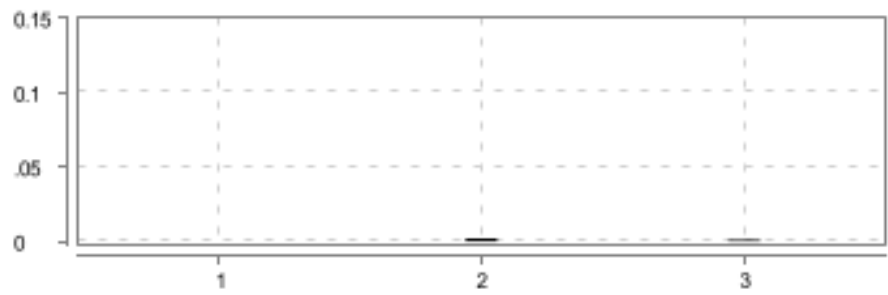

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:115) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163) at org.openqa.selenium.remote.TracedCommandExecutor.execute(TracedCommandExecutor.java:51) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:607) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:241) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:168) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:148) at factory.BaseClass.initializeBrowser(BaseClass.java:50) at stepDefinitions.Hooks.setup(Hooks.java:24) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invoke(Invoker.java:24) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137)		



#	Step / Hook Details	Status	Duration
	<p> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)  at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89)  at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)  at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)  at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)  at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)  at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)  at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148)  at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163)  at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146)  at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226)  at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)  at org.junit.runners.ParentRunner.run(ParentRunner.java:413)  at org.apache.maven.surefire.junit4.JUnit4Provider.execute(JUnit4Provider.java:316)  at org.apache.maven.surefire.junit4.JUnit4Provider.executeWithRerun(JUnit4Provider.java:240)  at org.apache.maven.surefire.junit4.JUnit4Provider.executeTestSet(JUnit4Provider.java:214)  at org.apache.maven.surefire.junit4.JUnit4Provider.invoke(JUnit4Provider.java:155)  at org.apache.maven.surefire.booter.ForkedBooter.runSuitesInProcess(ForkedBooter.java:385)  at org.apache.maven.surefire.booter.ForkedBooter.execute(ForkedBooter.java:162)  at org.apache.maven.surefire.booter.ForkedBooter.run(ForkedBooter.java:507)  at org.apache.maven.surefire.booter.ForkedBooter.main(ForkedBooter.java:495)  Caused by: java.net.ConnectException  at java.net.http/jdk.internal.net.http.common.Utils.toConnectException(Utils.java:1047)  at java.net.http/jdk.internal.net.http.PlainHttpConnection.connectAsync(PlainHttpConnection.java:198)  at java.net.http/jdk.internal.net.http.PlainHttpConnection.checkRetryConnect(PlainHttpConnection.java:230)  at java.net.http/jdk.internal.net.http.PlainHttpConnection.lambda\$connectAsync\$1(PlainHttpConnection.java:206)  at java.base/java.util.concurrent.CompletableFuture.uniHandle(CompletableFuture.java:934)  at java.base/java.util.concurrent.CompletableFuture\$UniHandle.tryFire(CompletableFuture.java:911)  at java.base/java.util.concurrent.CompletableFuture.postComplete(CompletableFuture.java:510)  at java.base/java.util.concurrent.CompletableFuture\$AsyncSupply.run(CompletableFuture.java:1773)  at java.base/java.util.concurrent.ThreadPoolExecutor.runWorker(ThreadPoolExecutor.java:1136)  at java.base/java.util.concurrent.ThreadPoolExecutor\$Worker.run(ThreadPoolExecutor.java:635)  at java.base/java.lang.Thread.run(Thread.java:833)  Caused by: java.nio.channels.ClosedChannelException  at java.base/sun.nio.ch.SocketChannelImpl.ensureOpen(SocketChannelImpl.java:195)  at java.base/sun.nio.ch.SocketChannelImpl.beginConnect(SocketChannelImpl.java:760)  at java.base/sun.nio.ch.SocketChannelImpl.connect(SocketChannelImpl.java:848)  at java.net.http/jdk.internal.net.http.PlainHttpConnection.lambda\$connectAsync\$0(PlainHttpConnection.java:183)  at java.base/java.security.AccessController.doPrivileged(AccessController.java:569)  at java.net.http/jdk.internal.net.http.PlainHttpConnection.connectAsync(PlainHttpConnection.java:185) </p>		

#	Step / Hook Details	Status	Duration
1	Given the user navigates to home page	SKIPPED	0.003 s
2	When clicking on Login button And clicking on google	SKIPPED	0.001 s
3	Then entering the invalid email "1"	SKIPPED	0.000 s
	AFTER - stepDefinitions.Hooks.tearDown(io.cucumber.java.Scenario)	FAILED	0.009 s
	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.quit()" because "this.driver" is null at stepDefinitions.Hooks.tearDown(Hooks.java:36)		

## Login Data Driven Excel

FAILED	DURATION - 0.028 s		<b>Steps</b> Total - 3 Pass - 0 Fail - 0 Skip - 3	
/ 10:03:25.477 PM // 10:03:25.505 PM /				
Trying to login with google using invalid credentials				
@sanity				

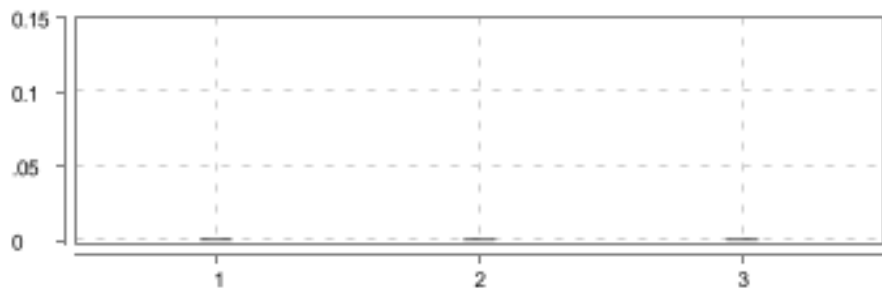

#	Step / Hook Details	Status	Duration
	BEFORE - stepDefinitions.Hooks.setup()	FAILED	0.019 s
	org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'LTIN485892', ip: '192.168.1.21' Build info: version: '4.15.0', revision: '1d14b5521b' System info: os: name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.2' Driver info: org.openqa.selenium.remote.RemoteWebDriver Command: [null, newSession {capabilities=[Capabilities {browserName: MicrosoftEdge, platformName: Windows 11}]] Capabilities {browserName: MicrosoftEdge, platformName: Windows 11} at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:625) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:241) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:168) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:148) at factory.BaseClass.initializeBrowser(BaseClass.java:50) at stepDefinitions.Hooks.setup(Hooks.java:24) Caused by: java.io.UncheckedIOException: java.net.ConnectException at org.openqa.selenium.remote.http.jdk.JdkHttpClient.execute0(JdkHttpClient.java:450) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:55) at org.openqa.selenium.remote.http.jdk.JdkHttpClient.execute(JdkHttpClient.java:366) at org.openqa.selenium.remote.tracing.TracedHttpClient.execute(TracedHttpClient.java:54) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:115)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163) at org.openqa.selenium.remote.TracedCommandExecutor.execute(TracedCommandExecutor.java:51) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:607) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:241) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:168) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:148) at factory.BaseClass.initializeBrowser(BaseClass.java:50) at stepDefinitions.Hooks.setup(Hooks.java:24) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invoke(Invoker.java:24) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)		

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.apache.maven.surefire.junit4.JUnit4Provider.execute(JUnit4Provider.java:316) at org.apache.maven.surefire.junit4.JUnit4Provider.executeWithRerun(JUnit4Provider.java:240) at org.apache.maven.surefire.junit4.JUnit4Provider.executeTestSet(JUnit4Provider.java:214) at org.apache.maven.surefire.junit4.JUnit4Provider.invoke(JUnit4Provider.java:155) at org.apache.maven.surefire.booter.ForkedBooter.runSuitesInProcess(ForkedBooter.java:385) at org.apache.maven.surefire.booter.ForkedBooter.execute(ForkedBooter.java:162) at org.apache.maven.surefire.booter.ForkedBooter.run(ForkedBooter.java:507) at org.apache.maven.surefire.booter.ForkedBooter.main(ForkedBooter.java:495) </pre> <p>Caused by: java.net.ConnectException</p> <pre> at java.net.http/jdk.internal.net.http.common.Utils.toConnectException(Utils.java:1047) at java.net.http/jdk.internal.net.http.PlainHttpConnection.connectAsync(PlainHttpConnection.java:198) at java.net.http/jdk.internal.net.http.PlainHttpConnection.checkRetryConnect(PlainHttpConnection.java:230) at java.net.http/jdk.internal.net.http.PlainHttpConnection.lambda\$connectAsync\$1(PlainHttpConnection.java:206) at java.base/java.util.concurrent.CompletableFuture.uniHandle(CompletableFuture.java:934) at java.base/java.util.concurrent.CompletableFuture\$UniHandle.tryFire(CompletableFuture.java:911) at java.base/java.util.concurrent.CompletableFuture.postComplete(CompletableFuture.java:510) at java.base/java.util.concurrent.CompletableFuture\$AsyncSupply.run(CompletableFuture.java:1773) at java.base/java.util.concurrent.ThreadPoolExecutor.runWorker(ThreadPoolExecutor.java:1136) at java.base/java.util.concurrent.ThreadPoolExecutor\$Worker.run(ThreadPoolExecutor.java:635) at java.base/java.lang.Thread.run(Thread.java:833) </pre> <p>Caused by: java.nio.channels.ClosedChannelException</p> <pre> at java.base/sun.nio.ch.SocketChannelImpl.ensureOpen(SocketChannelImpl.java:195) at java.base/sun.nio.ch.SocketChannelImpl.beginConnect(SocketChannelImpl.java:760) at java.base/sun.nio.ch.SocketChannelImpl.connect(SocketChannelImpl.java:848) at java.net.http/jdk.internal.net.http.PlainHttpConnection.lambda\$connectAsync\$0(PlainHttpConnection.java:183) at java.base/java.security.AccessController.doPrivileged(AccessController.java:569) at java.net.http/jdk.internal.net.http.PlainHttpConnection.connectAsync(PlainHttpConnection.java:185) </pre>		
1	Given the user navigates to home page	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
2	When clicking on Login button And clicking on google	SKIPPED	0.002 s
3	Then entering the invalid email "2"	SKIPPED	0.001 s
	AFTER - stepDefinitions.Hooks.tearDown(io.cucumber.java.Scenario)	FAILED	0.002 s
	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.quit()" because "this.driver" is null at stepDefinitions.Hooks.tearDown(Hooks.java:36)		

## Login Data Driven Excel

FAILED	DURATION - 0.025 s		Steps Total - 3 Pass - 0 Fail - 0 Skip - 3	
/ 10:03:25.519 PM // 10:03:25.544 PM /				
Trying to login with google using invalid credentials				
@sanity				



#	Step / Hook Details	Status	Duration
	BEFORE - stepDefinitions.Hooks.setup()	FAILED	0.018 s
	org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'LTIN485892', ip: '192.168.1.21' Build info: version: '4.15.0', revision: '1d14b5521b' System info: os: name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.2' Driver info: org.openqa.selenium.remote.RemoteWebDriver Command: [null, newSession {capabilities=[Capabilities {browserName: MicrosoftEdge, platformName: Windows 11}]] Capabilities {browserName: MicrosoftEdge, platformName: Windows 11} at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:625) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:241) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:168) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:148) at factory.BaseClass.initializeBrowser(BaseClass.java:50) at stepDefinitions.Hooks.setup(Hooks.java:24) Caused by: java.io.UncheckedIOException: java.net.ConnectException at org.openqa.selenium.remote.http.jdk.JdkHttpClient.execute0(JdkHttpClient.java:450) at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42) at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:55) at org.openqa.selenium.remote.http.jdk.JdkHttpClient.execute(JdkHttpClient.java:366) at org.openqa.selenium.remote.tracing.TracedHttpClient.execute(TracedHttpClient.java:54) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:115) at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163) at org.openqa.selenium.remote.TracedCommandExecutor.execute(TracedCommandExecutor.java:51) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:607) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:241) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:168) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:148) at factory.BaseClass.initializeBrowser(BaseClass.java:50) at stepDefinitions.Hooks.setup(Hooks.java:24) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invoke(Invoker.java:24) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64) at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46) at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89)		

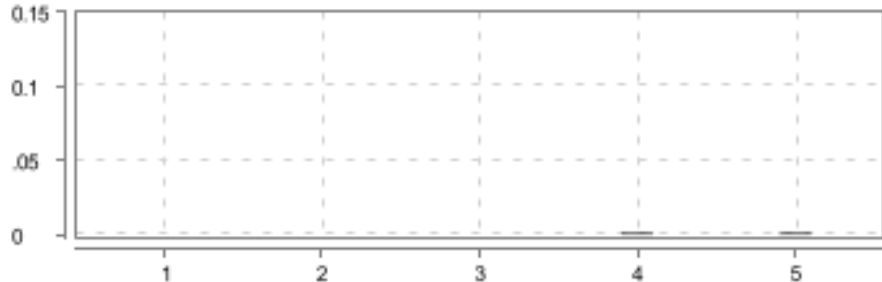

#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.apache.maven.surefire.junit4.JUnit4Provider.execute(JUnit4Provider.java:316) at org.apache.maven.surefire.junit4.JUnit4Provider.executeWithRerun(JUnit4Provider.java:240) at org.apache.maven.surefire.junit4.JUnit4Provider.executeTestSet(JUnit4Provider.java:214) at org.apache.maven.surefire.junit4.JUnit4Provider.invoke(JUnit4Provider.java:155) at org.apache.maven.surefire.booter.ForkedBooter.runSuitesInProcess(ForkedBooter.java:385) at org.apache.maven.surefire.booter.ForkedBooter.execute(ForkedBooter.java:162) at org.apache.maven.surefire.booter.ForkedBooter.run(ForkedBooter.java:507) at org.apache.maven.surefire.booter.ForkedBooter.main(ForkedBooter.java:495) </pre> <p>Caused by: java.net.ConnectException</p> <pre> at java.net.http/jdk.internal.net.http.common.Utils.toConnectException(Utils.java:1047) at java.net.http/jdk.internal.net.http.PlainHttpConnection.connectAsync(PlainHttpConnection.java:198) at java.net.http/jdk.internal.net.http.PlainHttpConnection.checkRetryConnect(PlainHttpConnection.java:230) at java.net.http/jdk.internal.net.http.PlainHttpConnection.lambda\$connectAsync\$1(PlainHttpConnection.java:206) at java.base/java.util.concurrent.CompletableFuture.uniHandle(CompletableFuture.java:934) at java.base/java.util.concurrent.CompletableFuture\$UniHandle.tryFire(CompletableFuture.java:911) at java.base/java.util.concurrent.CompletableFuture.postComplete(CompletableFuture.java:510) at java.base/java.util.concurrent.CompletableFuture\$AsyncSupply.run(CompletableFuture.java:1773) at java.base/java.util.concurrent.ThreadPoolExecutor.runWorker(ThreadPoolExecutor.java:1136) at java.base/java.util.concurrent.ThreadPoolExecutor\$Worker.run(ThreadPoolExecutor.java:635) at java.base/java.lang.Thread.run(Thread.java:833) </pre> <p>Caused by: java.nio.channels.ClosedChannelException</p> <pre> at java.base/sun.nio.ch.SocketChannelImpl.ensureOpen(SocketChannelImpl.java:195) at java.base/sun.nio.ch.SocketChannelImpl.beginConnect(SocketChannelImpl.java:760) at java.base/sun.nio.ch.SocketChannelImpl.connect(SocketChannelImpl.java:848) at java.net.http/jdk.internal.net.http.PlainHttpConnection.lambda\$connectAsync\$0(PlainHttpConnection.java:183) at java.base/java.security.AccessController.doPrivileged(AccessController.java:569) at java.net.http/jdk.internal.net.http.PlainHttpConnection.connectAsync(PlainHttpConnection.java:185) </pre>		
1	Given the user navigates to home page	SKIPPED	0.001 s
2	When clicking on Login button And clicking on google	SKIPPED	0.001 s

#	Step / Hook Details	Status	Duration
3	Then entering the invalid email "3"	SKIPPED	0.001 s
	AFTER - stepDefinitions.Hooks.tearDown(io.cucumber.java.Scenario)	FAILED	0.001 s
	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.quit()" because "this.driver" is null at stepDefinitions.Hooks.tearDown(Hooks.java:36)		

## Getting list of all upcoming new bikes which are under 4 lakh

FAILED	DURATION - 0.037 s	Scenarios		Steps	
/ 10:03:25.562 PM // 10:03:25.599 PM /		Total - 1		Total - 5	
		Pass - 0		Pass - 0	
		Fail - 1		Fail - 0	
		Skip - 0		Skip - 5	

## Successfully printing Bikes under 4 lakh

FAILED	DURATION - 0.037 s		Steps	
/ 10:03:25.562 PM // 10:03:25.599 PM /			Total - 5	
Getting list of all upcoming new bikes which are under 4 lakh			Pass - 0	
			Fail - 0	
			Skip - 5	

#	Step / Hook Details	Status	Duration
	BEFORE - stepDefinitions.Hooks.setup()	FAILED	0.024 s
	org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'LTIN485892', ip: '192.168.1.21' Build info: version: '4.15.0', revision: '1d14b5521b' System info: os: name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.2' Driver info: org.openqa.selenium.remote.RemoteWebDriver Command: [null, newSession {capabilities=[Capabilities {browserName: MicrosoftEdge, platformName: Windows 11}]] Capabilities {browserName: MicrosoftEdge, platformName: Windows 11} at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:625) at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:241) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:168) at org.openqa.selenium.remote.RemoteWebDriver.<init>(RemoteWebDriver.java:148) at factory.BaseClass.initializeBrowser(BaseClass.java:50) at stepDefinitions.Hooks.setup(Hooks.java:24)		





#	Step / Hook Details	Status	Duration
	<p>Caused by: java.io.UncheckedIOException: java.net.ConnectException</p> <p>at org.openqa.selenium.remote.http.jdk.JdkHttpClient.execute0(JdkHttpClient.java:450)</p> <p>at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42)</p> <p>at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:55)</p> <p>at org.openqa.selenium.remote.http.jdk.JdkHttpClient.execute(JdkHttpClient.java:366)</p> <p>at org.openqa.selenium.remote.tracing.TracedHttpClient.execute(TracedHttpClient.java:54)</p> <p>at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:115)</p> <p>at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96)</p> <p>at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68)</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163)</p> <p>at org.openqa.selenium.remote.TracedCommandExecutor.execute(TracedCommandExecutor.java:51)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:607)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:241)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.&lt;init&gt;(RemoteWebDriver.java:168)</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.&lt;init&gt;(RemoteWebDriver.java:148)</p> <p>at factory.BaseClass.initializeBrowser(BaseClass.java:50)</p> <p>at stepDefinitions.Hooks.setup(Hooks.java:24)</p> <p>at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method)</p> <p>at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77)</p> <p>at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)</p> <p>at java.base/java.lang.reflect.Method.invoke(Method.java:568)</p> <p>at io.cucumber.java.Invoker.doInvoke(Invoker.java:66)</p> <p>at io.cucumber.java.Invoker.invoke(Invoker.java:24)</p> <p>at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)</p> <p>at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64)</p> <p>at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46)</p> <p>at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21)</p> <p>at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)</p> <p>at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84)</p> <p>at io.cucumber.core.runner.TestStep.run(TestStep.java:56)</p> <p>at io.cucumber.core.runner.TestCase.run(TestCase.java:78)</p> <p>at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)</p> <p>at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137)</p> <p>at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)</p> <p>at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137)</p> <p>at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)</p> <p>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)</p> <p>at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)</p> <p>at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)</p> <p>at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)</p>		

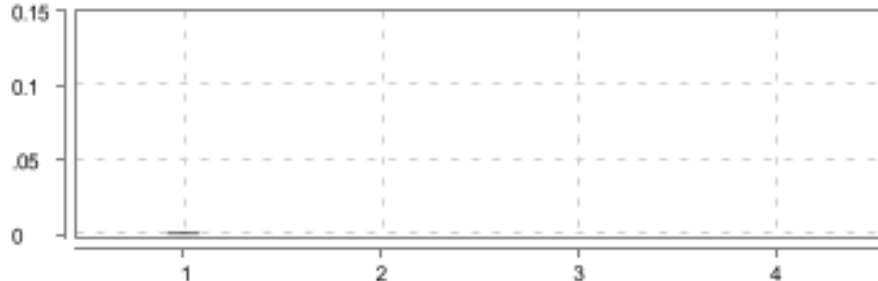

#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.apache.maven.surefire.junit4.JUnit4Provider.execute(JUnit4Provider.java:316) at org.apache.maven.surefire.junit4.JUnit4Provider.executeWithRerun(JUnit4Provider.java:240) at org.apache.maven.surefire.junit4.JUnit4Provider.executeTestSet(JUnit4Provider.java:214) at org.apache.maven.surefire.junit4.JUnit4Provider.invoke(JUnit4Provider.java:155) at org.apache.maven.surefire.booter.ForkedBooter.runSuitesInProcess(ForkedBooter.java:385) at org.apache.maven.surefire.booter.ForkedBooter.execute(ForkedBooter.java:162) at org.apache.maven.surefire.booter.ForkedBooter.run(ForkedBooter.java:507) at org.apache.maven.surefire.booter.ForkedBooter.main(ForkedBooter.java:495) </pre> <p>Caused by: java.net.ConnectException</p> <pre> at java.net.http/jdk.internal.net.http.common.Utils.toConnectException(Utils.java:1047) at java.net.http/jdk.internal.net.http.PlainHttpConnection.connectAsync(PlainHttpConnection.java:198) at java.net.http/jdk.internal.net.http.PlainHttpConnection.checkRetryConnect(PlainHttpConnection.java:230) at java.net.http/jdk.internal.net.http.PlainHttpConnection.lambda\$connectAsync\$1(PlainHttpConnection.java:206) at java.base/java.util.concurrent.CompletableFuture.uniHandle(CompletableFuture.java:934) at java.base/java.util.concurrent.CompletableFuture\$UniHandle.tryFire(CompletableFuture.java:911) at java.base/java.util.concurrent.CompletableFuture.postComplete(CompletableFuture.java:510) at java.base/java.util.concurrent.CompletableFuture\$AsyncSupply.run(CompletableFuture.java:1773) at java.base/java.util.concurrent.ThreadPoolExecutor.runWorker(ThreadPoolExecutor.java:1136) at java.base/java.util.concurrent.ThreadPoolExecutor\$Worker.run(ThreadPoolExecutor.java:635) at java.base/java.lang.Thread.run(Thread.java:833) </pre> <p>Caused by: java.nio.channels.ClosedChannelException</p> <pre> at java.base/sun.nio.ch.SocketChannelImpl.ensureOpen(SocketChannelImpl.java:195) </pre>		

#	Step / Hook Details	Status	Duration
	at java.base/sun.nio.ch.SocketChannelImpl.beginConnect(SocketChannelImpl.java:760) at java.base/sun.nio.ch.SocketChannelImpl.connect(SocketChannelImpl.java:848) at java.net.http/jdk.internal.net.http.PlainHttpConnection.lambda\$connectAsync\$0(PlainHttpConnection.java:183) at java.base/java.security.AccessController.doPrivileged(AccessController.java:569) at java.net.http/jdk.internal.net.http.PlainHttpConnection.connectAsync(PlainHttpConnection.java:185)		
1	Given user navigates to ZigWheels page	SKIPPED	0.000 s
2	When user hovers to Newbikes toggle	SKIPPED	0.000 s
3	And user clicks on Upcoming bikes	SKIPPED	0.000 s
4	And chooses manufacturer as Honda	SKIPPED	0.001 s
5	Then All the upcoming bikes of Honda manufacturer are displayed	SKIPPED	0.001 s
	AFTER - stepDefinitions.Hooks.tearDown(io.cucumber.java.Scenario)	FAILED	0.001 s
	java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.quit()" because "this.driver" is null at stepDefinitions.Hooks.tearDown(Hooks.java:36)		

### Getting list of Popular car modles in Chennai

FAILED	DURATION - 0.026 s	Scenarios		Steps	
/ 10:03:25.612 PM // 10:03:25.638 PM /		Total - 1		Total - 4	
		Pass - 0		Pass - 0	
		Fail - 1		Fail - 0	
		Skip - 0		Skip - 4	

### Successfully printing car modles

FAILED	DURATION - 0.026 s		Steps	
/ 10:03:25.612 PM // 10:03:25.638 PM /			Total - 4	
Getting list of Popular car modles in Chennai			Pass - 0	
			Fail - 0	
			Skip - 4	

#	Step / Hook Details	Status	Duration
	<p>BEFORE - stepDefinitions.Hooks.setup()</p> <p>org.openqa.selenium.SessionNotCreatedException: Could not start a new session. Possible causes are invalid address of the remote server or browser start-up failure. Host info: host: 'LTIN485892', ip: '192.168.1.21' Build info: version: '4.15.0', revision: '1d14b5521b' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.2' Driver info: org.openqa.selenium.remote.RemoteWebDriver Command: [null, newSession {capabilities=[Capabilities {browserName: MicrosoftEdge, platformName: Windows 11}]] Capabilities {browserName: MicrosoftEdge, platformName: Windows 11}</p> <p>at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:625)  at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:241)  at org.openqa.selenium.remote.RemoteWebDriver.&lt;init&gt;(RemoteWebDriver.java:168)  at org.openqa.selenium.remote.RemoteWebDriver.&lt;init&gt;(RemoteWebDriver.java:148)  at factory.BaseClass.initializeBrowser(BaseClass.java:50)  at stepDefinitions.Hooks.setup(Hooks.java:24)</p> <p>Caused by: java.io.UncheckedIOException: java.net.ConnectException  at org.openqa.selenium.remote.http.jdk.JdkHttpClient.execute0(JdkHttpClient.java:450)  at org.openqa.selenium.remote.http.AddSeleniumUserAgent.lambda\$apply\$0(AddSeleniumUserAgent.java:42)  at org.openqa.selenium.remote.http.Filter.lambda\$andFinally\$1(Filter.java:55)  at org.openqa.selenium.remote.http.jdk.JdkHttpClient.execute(JdkHttpClient.java:366)  at org.openqa.selenium.remote.tracing.TracedHttpClient.execute(TracedHttpClient.java:54)  at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:115)  at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:96)  at org.openqa.selenium.remote.ProtocolHandshake.createSession(ProtocolHandshake.java:68)  at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:163)  at org.openqa.selenium.remote.TracedCommandExecutor.execute(TracedCommandExecutor.java:51)  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:607)  at org.openqa.selenium.remote.RemoteWebDriver.startSession(RemoteWebDriver.java:241)  at org.openqa.selenium.remote.RemoteWebDriver.&lt;init&gt;(RemoteWebDriver.java:168)  at org.openqa.selenium.remote.RemoteWebDriver.&lt;init&gt;(RemoteWebDriver.java:148)  at factory.BaseClass.initializeBrowser(BaseClass.java:50)  at stepDefinitions.Hooks.setup(Hooks.java:24)  at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method)  at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77)  at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)  at java.base/java.lang.reflect.Method.invoke(Method.java:568)  at io.cucumber.java.Invoker.doInvoke(Invoker.java:66)  at io.cucumber.java.Invoker.invoke(Invoker.java:24)  at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)  at io.cucumber.java.JavaHookDefinition.execute(JavaHookDefinition.java:64)  at io.cucumber.core.runner.CoreHookDefinition.execute(CoreHookDefinition.java:46)  at io.cucumber.core.runner.HookDefinitionMatch.runStep(HookDefinitionMatch.java:21)  at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)  at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84)</p>	FAILED	0.017 s

#	Step / Hook Details	Status	Duration
	<pre> at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.TestCase.run(TestCase.java:78) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.apache.maven.surefire.junit4.JUnit4Provider.execute(JUnit4Provider.java:316) at org.apache.maven.surefire.junit4.JUnit4Provider.executeWithRerun(JUnit4Provider.java:240) at org.apache.maven.surefire.junit4.JUnit4Provider.executeTestSet(JUnit4Provider.java:214) at org.apache.maven.surefire.junit4.JUnit4Provider.invoke(JUnit4Provider.java:155) at org.apache.maven.surefire.booter.ForkedBooter.runSuitesInProcess(ForkedBooter.java:385) at org.apache.maven.surefire.booter.ForkedBooter.execute(ForkedBooter.java:162) at org.apache.maven.surefire.booter.ForkedBooter.run(ForkedBooter.java:507) at org.apache.maven.surefire.booter.ForkedBooter.main(ForkedBooter.java:495) Caused by: java.net.ConnectException at java.net.http/jdk.internal.net.http.common.Utils.toConnectException(Utils.java:1047) </pre>		

#	Step / Hook Details	Status	Duration
	<pre> at java.net.http/jdk.internal.net.http.PlainHttpConnection.connectAsync(PlainHttpConnection.java:198) at java.net.http/jdk.internal.net.http.PlainHttpConnection.checkRetryConnect(PlainHttpConnection.java:230) at java.net.http/jdk.internal.net.http.PlainHttpConnection.lambda\$connectAsync\$1(PlainHttpConnection.java:206) at java.base/java.util.concurrent.CompletableFuture.uniHandle(CompletableFuture.java:934) at java.base/java.util.concurrent.CompletableFuture\$UniHandle.tryFire(CompletableFuture.java:911) at java.base/java.util.concurrent.CompletableFuture.postComplete(CompletableFuture.java:510) at java.base/java.util.concurrent.CompletableFuture\$AsyncSupply.run(CompletableFuture.java:1773) at java.base/java.util.concurrent.ThreadPoolExecutor.runWorker(ThreadPoolExecutor.java:1136) at java.base/java.util.concurrent.ThreadPoolExecutor\$Worker.run(ThreadPoolExecutor.java:635) at java.base/java.lang.Thread.run(Thread.java:833) Caused by: java.nio.channels.ClosedChannelException at java.base/sun.nio.ch.SocketChannelImpl.ensureOpen(SocketChannelImpl.java:195) at java.base/sun.nio.ch.SocketChannelImpl.beginConnect(SocketChannelImpl.java:760) at java.base/sun.nio.ch.SocketChannelImpl.connect(SocketChannelImpl.java:848) at java.net.http/jdk.internal.net.http.PlainHttpConnection.lambda\$connectAsync\$0(PlainHttpConnection.java:183) at java.base/java.security.AccessController.doPrivileged(AccessController.java:569) at java.net.http/jdk.internal.net.http.PlainHttpConnection.connectAsync(PlainHttpConnection.java:185) </pre>		
1	Given user navigates to ZigWheels page	SKIPPED	0.001 s
2	When user hovers to Used cars toggle	SKIPPED	0.000 s
3	And user clicks on Chennai as preferd location	SKIPPED	0.000 s
4	Then All the popular car modles list will be diplayed	SKIPPED	0.000 s
	AFTER - stepDefinitions.Hooks.tearDown(io.cucumber.java.Scenario)	FAILED	0.002 s
	<pre> java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.quit()" because "this.driver" is null at stepDefinitions.Hooks.tearDown(Hooks.java:36) </pre>		