


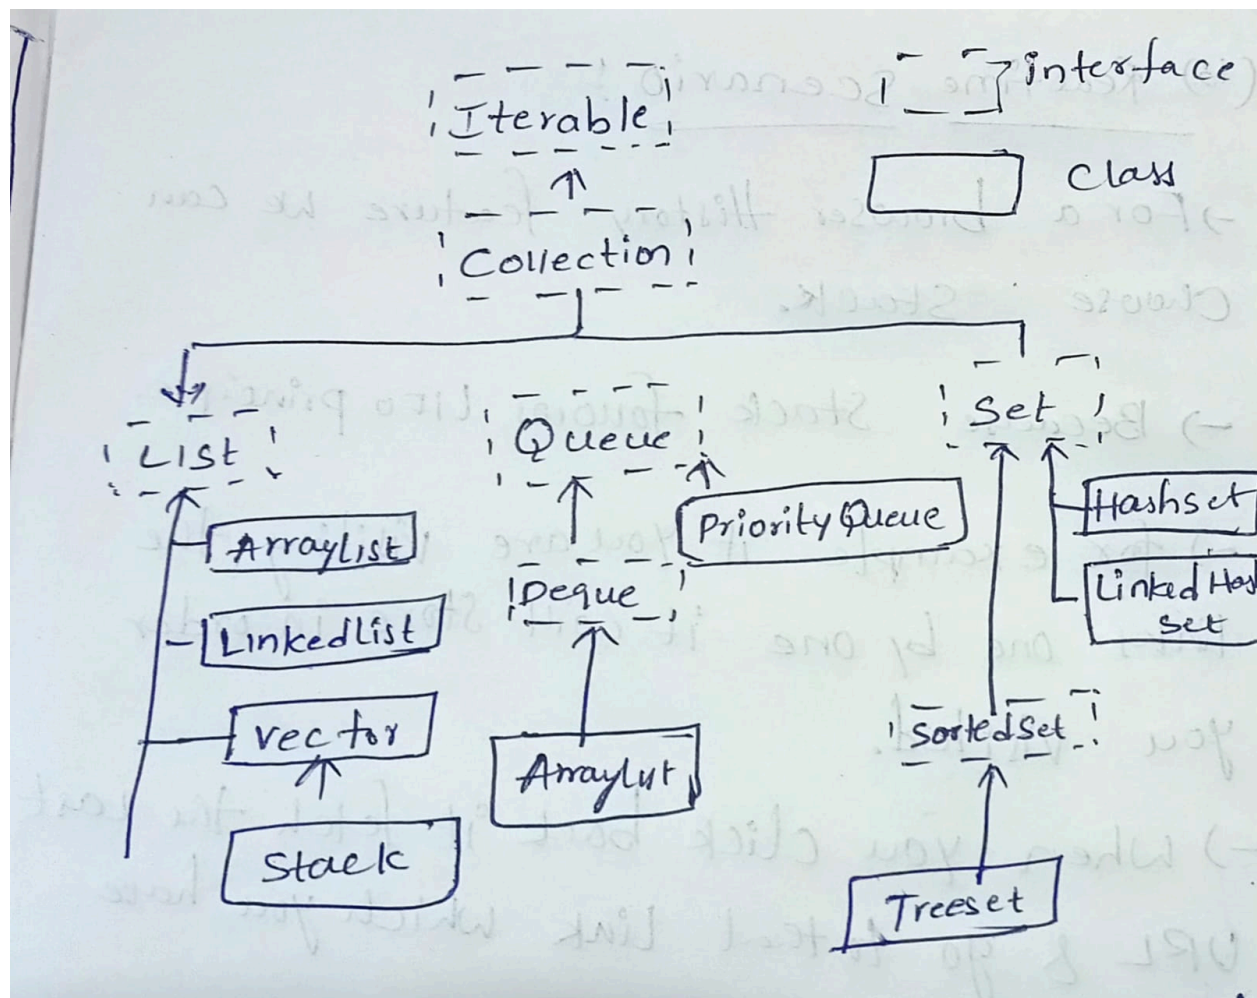

ArrayList	LinkedList
* ArrayList uses dynamic array to store elements * Less memory is used * it is used to store similar types of data. * it is used to access the elements very faster.	* it uses double LinkedList to store elements in it. * More memory is used. * it is used to store any types of data. * Deletion & insertions is very faster.

Stack	Vector
* it follows LIFO principle * Stack is Synchronized * Stack is used for browser history. * Insertion/Deletion can done at one end	* it is dynamically array that follows/grows automatic * Vector also synchronised * Vector is used for thread safe history. * Deletion/insertion can done at one end.

ArrayList	Vector
* When working at single threaded operations * not Synchronized * fast Access but not thread Safe * increased by size 50% when it's full	* When working at multi-threaded programs * Synchronized * thread-safe * increased double size when it is full.

(13) Realtime Scenario :-

- For a browser history feature we can choose stack.
- Because stack follows LIFO principle.
- for example if you are visiting the links one by one it will store in order you visited.
- When you click back it fetch the last URL & go to that link which you have entered previously.
- To Achieve browser history feature & we have to take forward & backstack.
- backward stack is used to store visited pages
- Forward stack is used to store pages when you press Back, to go forward later.

