Name:-Maheswar Ghosh Roll No :-134. Exam Roll:-11600223144

Assignment No : 12

Problem Statement: Deploy and run the project in AWS without using the port.

Solu on:

Step 1: Search EC2inthe search bar and click on it.

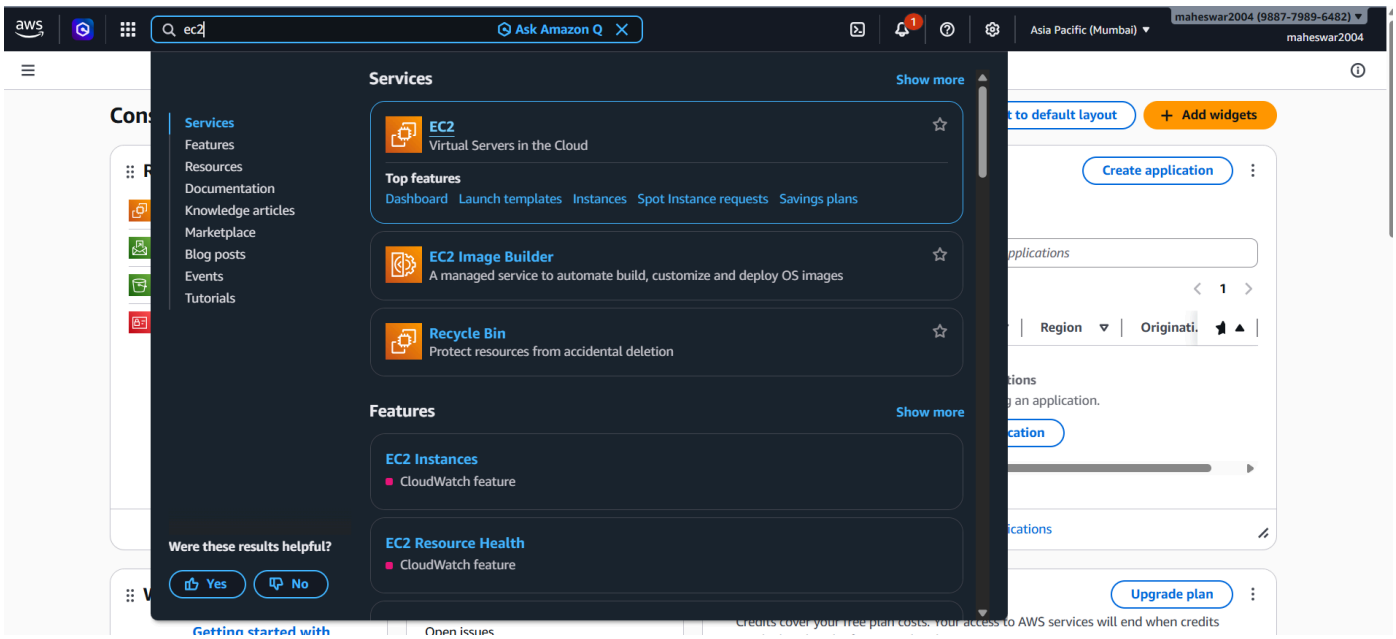

Step 2: In the EC2 page, click inLaunch Instance bu on.

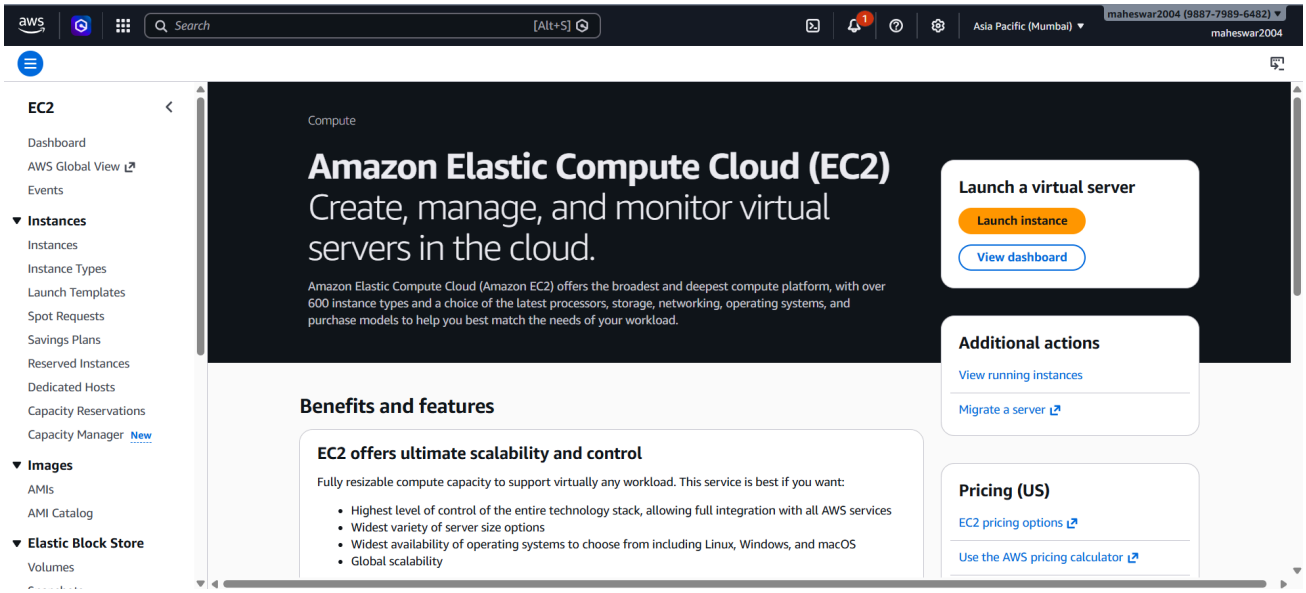

Name:-Maheswar Ghosh Roll No :-134. Exam Roll:-11600223144

Step 3: Enter the name (server-anoushka), choose ubuntu as Quick start.

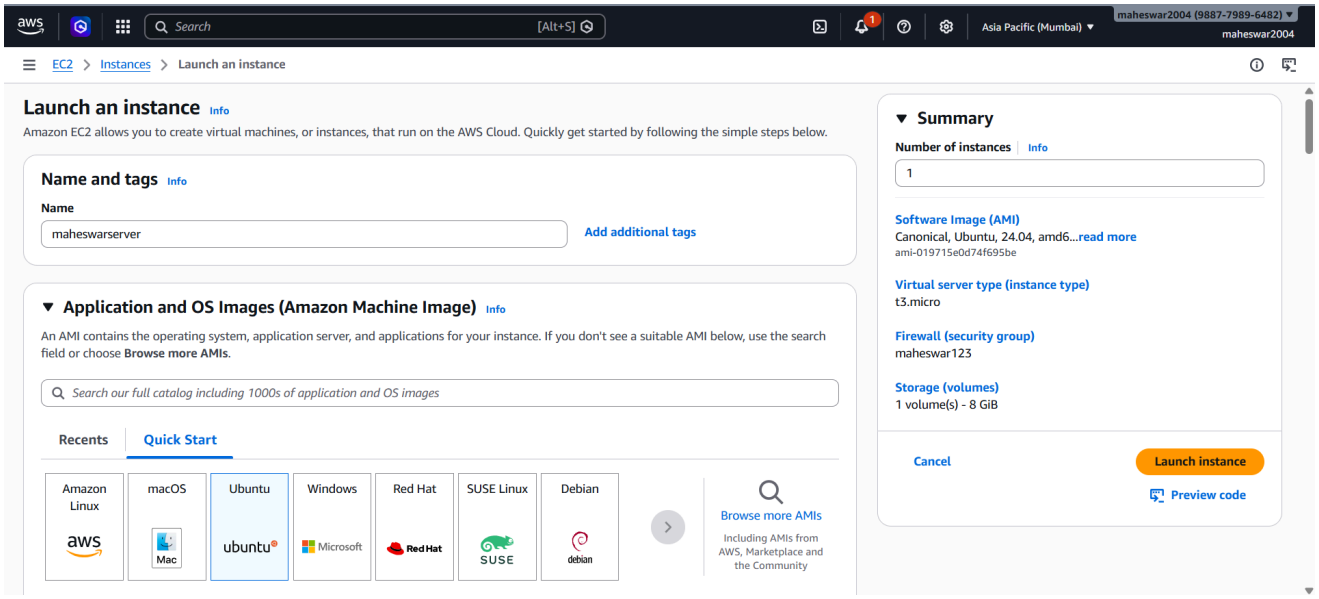

Step 4: Choose a key pair name from the exisng. Choose Selectexis ng security group and choose on of the exis ng groups in this case Anoushka-group.

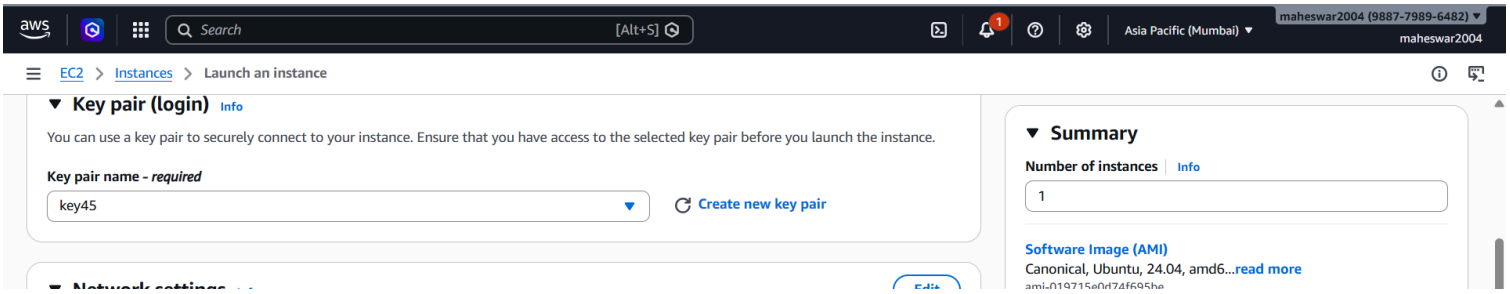

Name:-Maheswar Ghosh Roll No :-134. Exam Roll:-11600223144

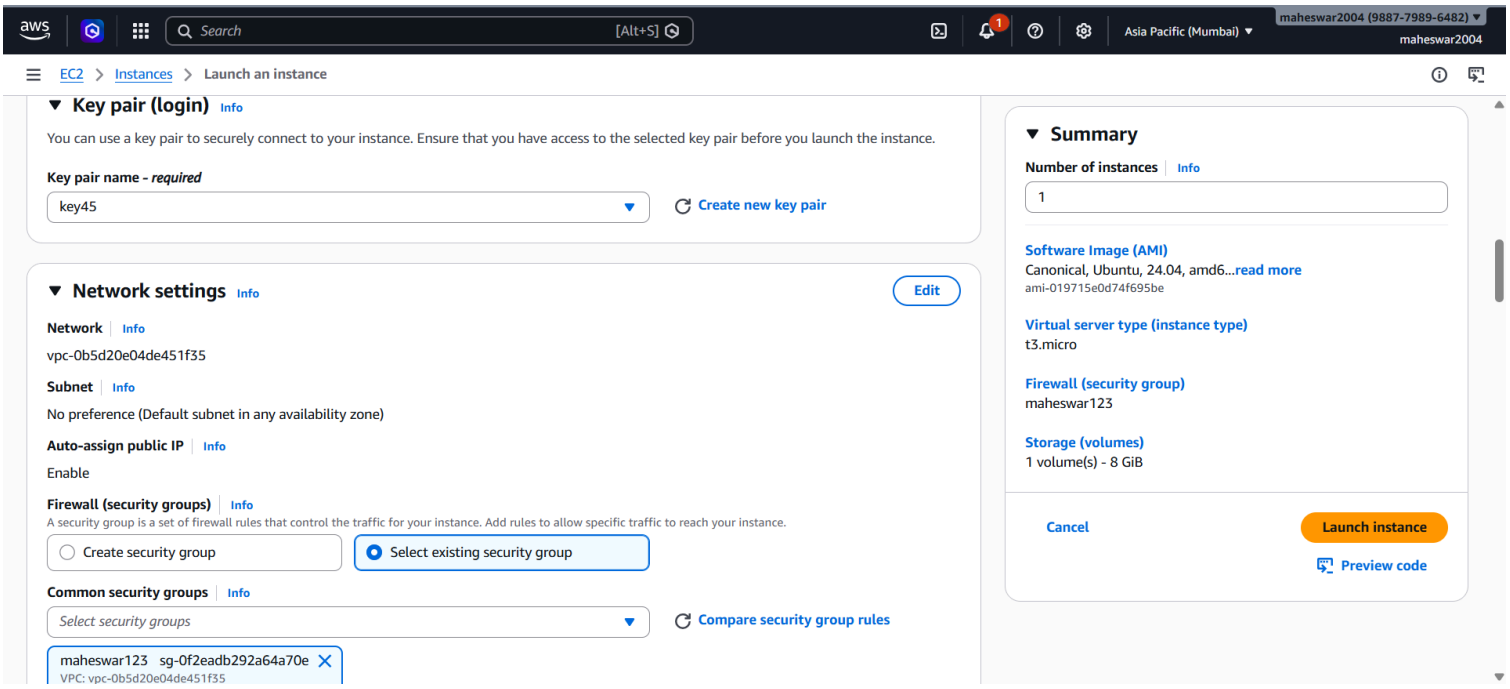

Step 5: In the user data field enter the following script and click on Launch Instance bu on.

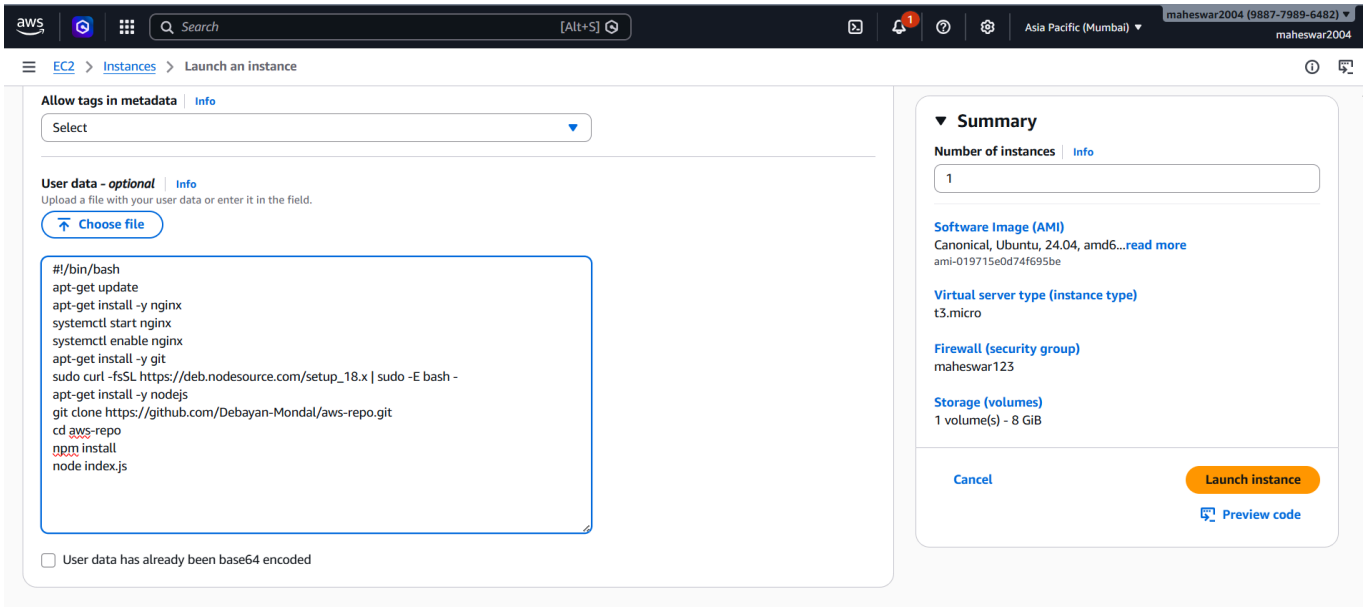

Name:-Maheswar Ghosh Roll No :-134. Exam Roll:-11600223144

Step 6: A new Instance will be successfully created.

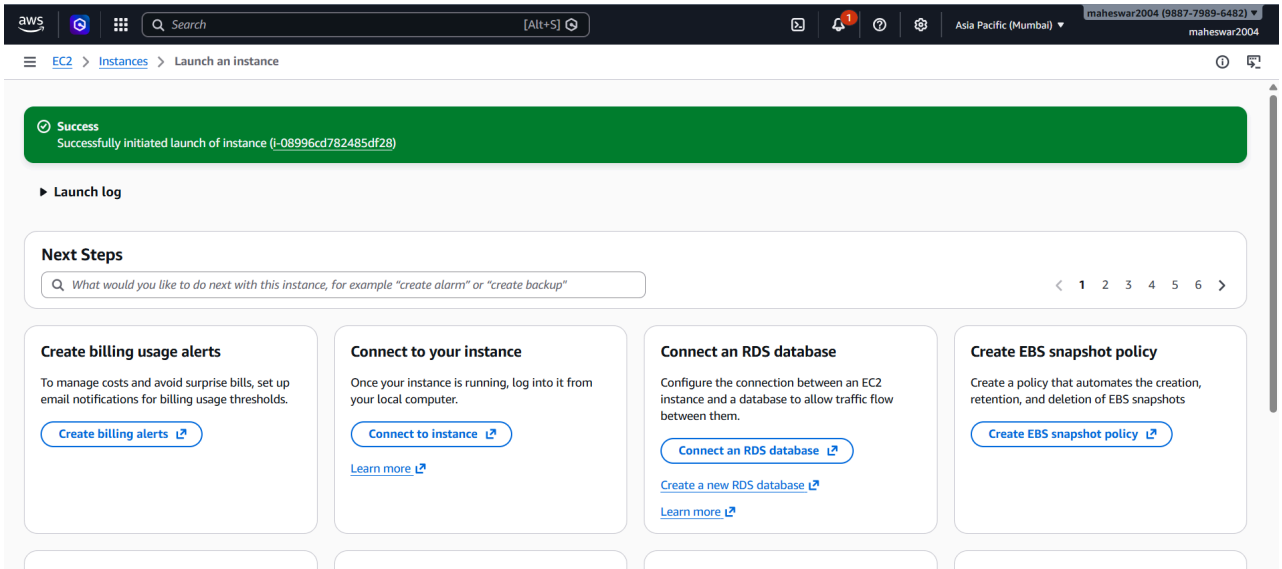

Step 7: We can see the instance is running by going to the IPv4 link and with :4000 port.

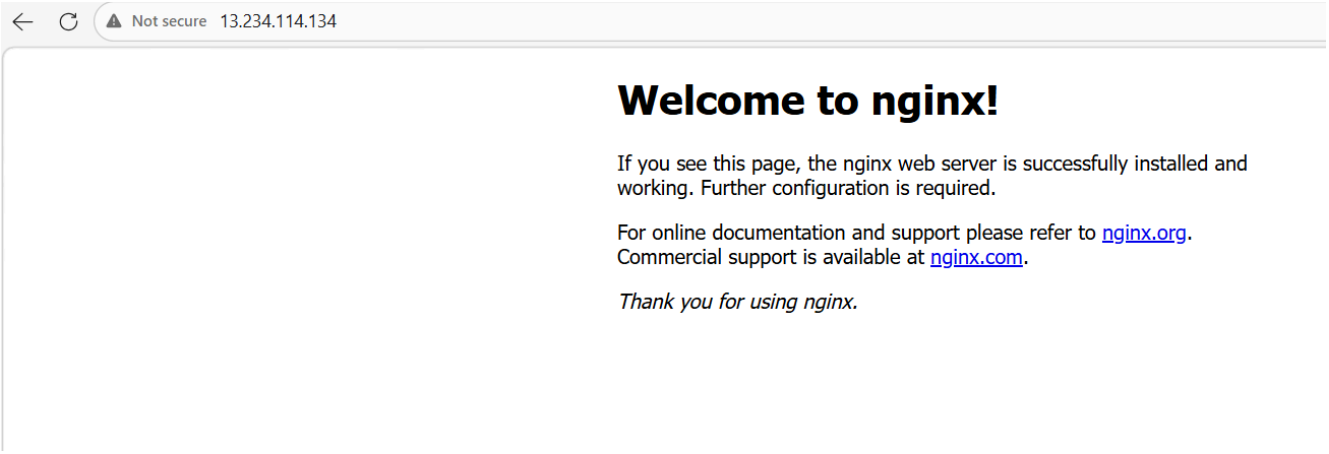

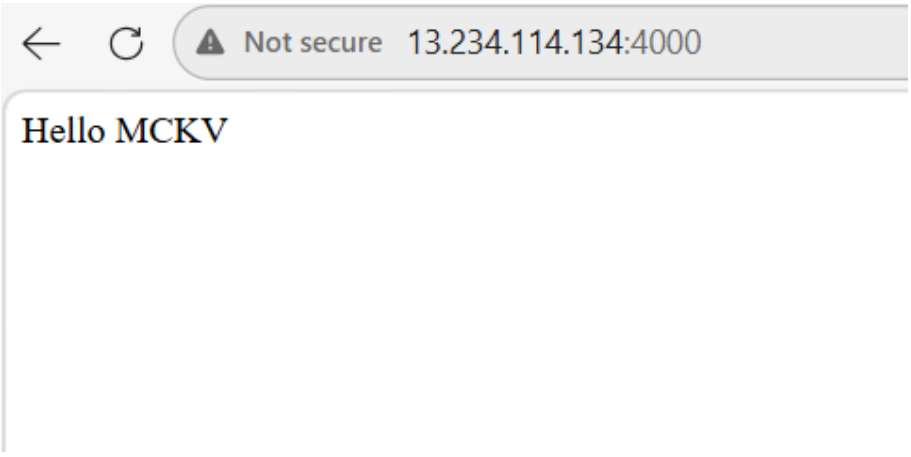

Name:-Maheswar Ghosh Roll No :-134. Exam Roll:-11600223144

Step 8: Open bitwise, and enter the Host, Username as ubuntu, inial method as public key and click on the Log in buon. It will be successfully connected. Click on the New terminal console buon to open a new console.

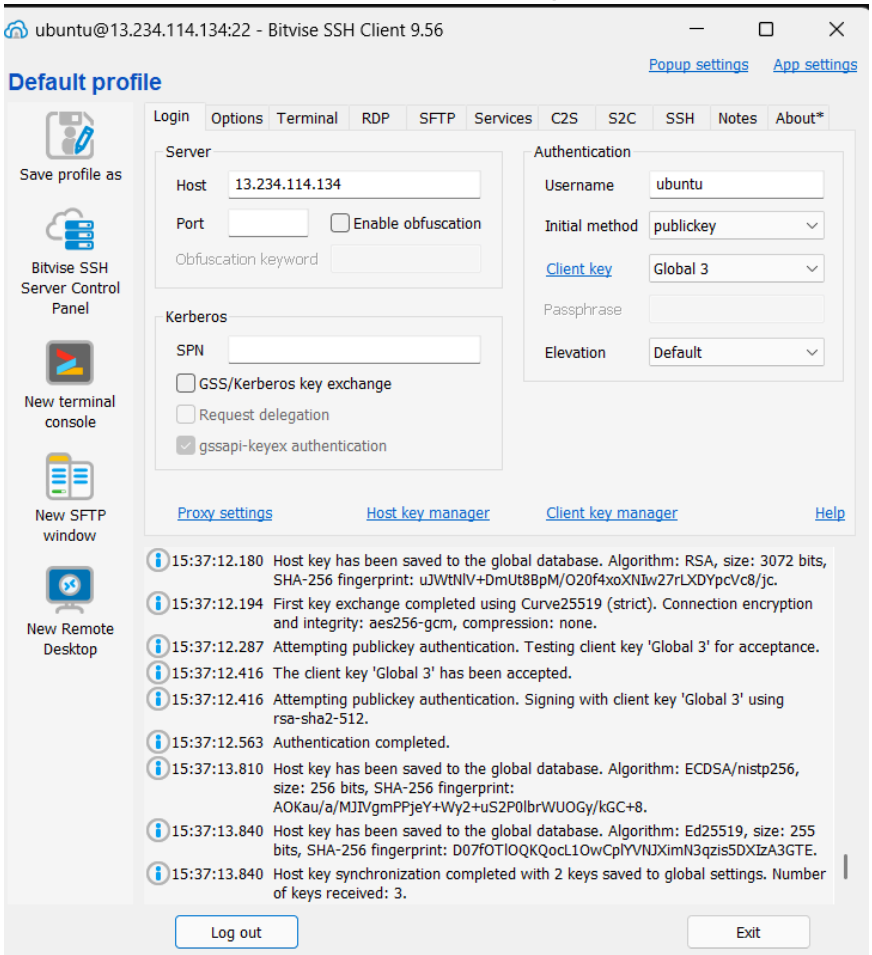

Step 9: In the terminal, enter the commands cd/to go to the root, ls to view the files, then cd etc, cdnginx/, cdsites-available/ to go to the required directory.

```
ubuntu@ip-172-31-40-184:~$ cd /
ubuntu@ip-172-31-40-184:/$ ls
aws-repo           dev   lib.usr-is-merged  mnt   run                srv  var
bin                etc   lib64              opt   sbin               sys
bin.usr-is-merged  home  lost+found         proc  sbin.usr-is-merged tmp
boot               lib   media              root  snap               usr
ubuntu@ip-172-31-40-184:/$ cd etc
ubuntu@ip-172-31-40-184:/etc$ cd nginx/
ubuntu@ip-172-31-40-184:/etc/nginx$ cd sites-available
ubuntu@ip-172-31-40-184:/etc/nginx/sites-available$ ls
default
ubuntu@ip-172-31-40-184:/etc/nginx/sites-available$
```

Step 10: Enter the command sudo nano default to edit the default file.

```
ubuntu@ip-172-31-41-177:/etc/nginx/sites-available$ ls
default
ubuntu@ip-172-31-41-177:/etc/nginx/sites-available$ sudo nano default
```

Name:-Maheswar Ghosh Roll No :-134. Exam Roll:-11600223144

Step 11: In the file edit the locaon / {} and write the following.

```
        server_name _;

        location / {
                # First attempt to serve request as file, then
                # as directory, then fall back to displaying a 404.
                #try_files $uri $uri/ =404;
                proxy_pass http://localhost:4000;
                proxy_http_version 1.1;
                proxy_set_header Upgrade $http_upgrade;
                proxy_set_header Connection 'Upgrade';
                proxy_set_header Host $host;
                proxy_cache_bypass $http_upgrade
        }
```

Step 12: Enter the command sudo chmod +x default to give the file the necessary permissions.

```
ubuntu@ip-172-31-41-177:/etc/nginx/sites-available$ sudo chmod +x default
```

Step 13: Enter the command cd .. to return to the etc/ folder and then enter the command sudo systemctl restart nginx. Then enter the command sudo systemctl enable nginx.

```
ubuntu@ip-172-31-41-177:/etc/nginx/sites-available$ cd ..
ubuntu@ip-172-31-41-177:/etc/nginx$ cd ..
ubuntu@ip-172-31-41-177:/etc$ sudo systemctl restart nginx
ubuntu@ip-172-31-41-177:/etc$ sudo systemctl enable nginx
Synchronizing state of nginx.service with SysV service script with /usr/lib/systemd/systemd-sysv-ins
tall.
Executing: /usr/lib/systemd/systemd-sysv-install enable nginx
ubuntu@ip-172-31-41-177:/etc$
```
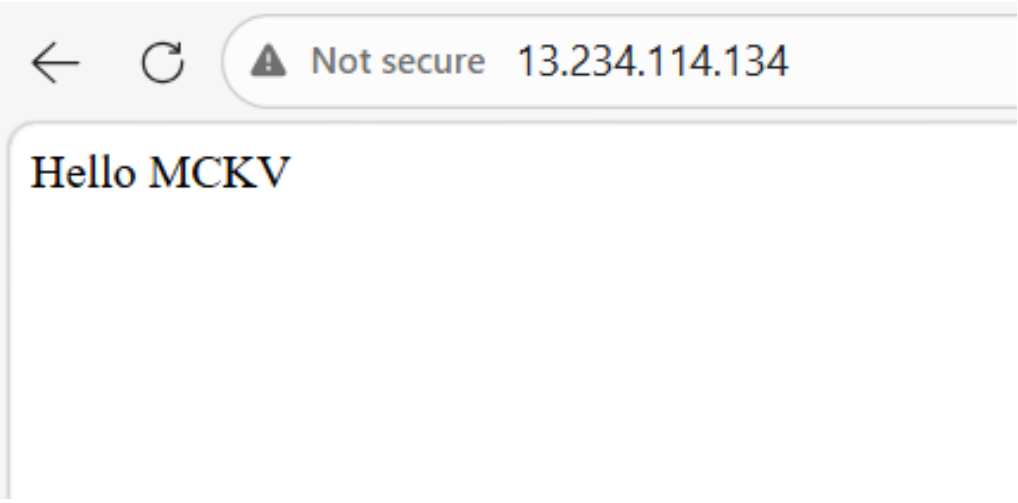
Step 14: The project will be deployed and run without a port.