# Cucumber Report

| Start : May 26, 10:45:16.145 AM | End : May 26, 10:45:19.213 AM | Duration : 3.068 s |
|---|---|---|
| Features | Scenarios | Steps |
| PASSED - 0<br>FAILED - 1<br>SKIPPED - 0 | PASSED - 0<br>FAILED - 1<br>SKIPPED - 0 | PASSED - 2<br>FAILED - 1<br>SKIPPED - 0 |

| Feature | | Scenario | | | | Step | | | |
|---|---|---|---|---|---|---|---|---|---|
| Name | Duration | T | P | F | S | T | P | F | S |
| *Validating User API* | *3.068 s* | *1* | *0* | *1* | *0* | *3* | *2* | *1* | *0* |

| # | Feature Name | Scenario Name |
|---|---|---|
| 1 | *Validating User API* | *Verify if user is being successfully created using CreateUserAPI* |

| # | Feature Name | T | P | F | S | Duration |
|---|---|---|---|---|---|---|
| 1 | *Validating User API* | 1 | 0 | 1 | 0 | 3.068 s |

| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|---|---|---|---|---|---|---|---|
| 1 | Validating User API | Verify if user is being successfully created using CreateUserAPI | 3 | 2 | 1 | 0 | 3.062 s |
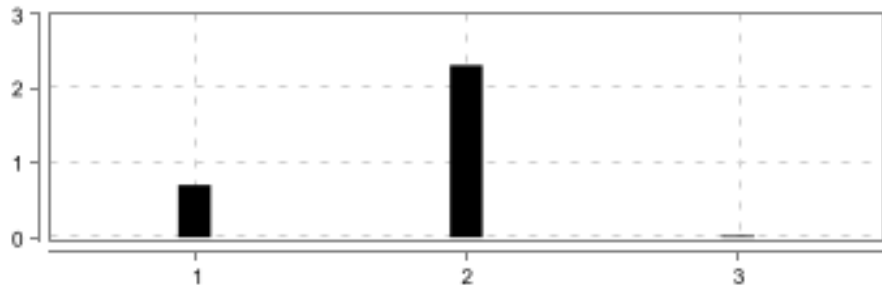
## Validating User API

| FAILED | DURATION - 3.068 s | Scenarios<br>Total - 1<br>Pass - 0<br>Fail - 1<br>Skip - 0 | | Steps<br>Total - 3<br>Pass - 2<br>Fail - 1<br>Skip - 0 | |
|---|---|---|---|---|---|
| / 10:45:16.145 AM // 10:45:19.213 AM / | | | | | |

## Verify if user is being successfully created using CreateUserAPI

| FAILED | DURATION - 3.062 s | | Steps<br>Total - 3<br>Pass - 2<br>Fail - 1<br>Skip - 0 | |
|---|---|---|---|---|
| / 10:45:16.151 AM // 10:45:19.213 AM / | | | | |
| Validating User API | | | | |

| # | Step / Hook Details | Status | Duration |
|---|---|---|---|
| 1 | Given Create user with valid payload | PASSED | 0.705 s |
| 2 | When user calls "CreateUserAPI" with "post" request | PASSED | 2.314 s |
| 3 | Then user created with status code 201 | FAILED | 0.022 s |
| | java.lang.IllegalArgumentException: Schema to use cannot be null<br>    at io.restassured.module.jsv.JsonSchemaValidator.validateSchemaIsNotNull(JsonSchemaValidator.java:270)<br>    at io.restassured.module.jsv.JsonSchemaValidator.access$300(JsonSchemaValidator.java:75)<br>    at io.restassured.module.jsv.JsonSchemaValidator$JsonSchemaValidatorFactory.create(JsonSchemaValidator.java:281)<br>    at io.restassured.module.jsv.JsonSchemaValidator.matchesJsonSchema(JsonSchemaValidator.java:166)<br>    at io.restassured.module.jsv.JsonSchemaValidator.matchesJsonSchemaInClasspath(JsonSchemaValidator.java:117)<br>    at stepDefinition.UserSteps.user_created_with_status_code(UserSteps.java:100)<br>    at ?.user created with status code 201(file:///C:/Users/rajas/git/repository/UserBDD_Bootcamp/src/test/resources/features/User.feature:7)<br>* Not displayable characters are replaced by '?'. | | |