

Cucumber Report

May 25, 2024, 7:16:39 PM

Start : May 25, 7:16:34.306 PM

End : May 25, 7:16:37.609 PM

Duration : 3.303 s

Features

Scenarios

Steps

PASSED - 0
FAILED - 1
SKIPPED - 0

PASSED - 0
FAILED - 1
SKIPPED - 0

PASSED - 1
FAILED - 1
SKIPPED - 1



Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>Validating User API</u>	3.303 s	1	0	1	0	3	1	1	1

#	Feature Name	Scenario Name
1	<u>Validating User API</u>	<u>Verify if user is being successfully created using CreateUserAPI</u>





#	Feature Name	T	P	F	S	Duration
1	<u>Validating User API</u>	1	0	1	0	3.303 s

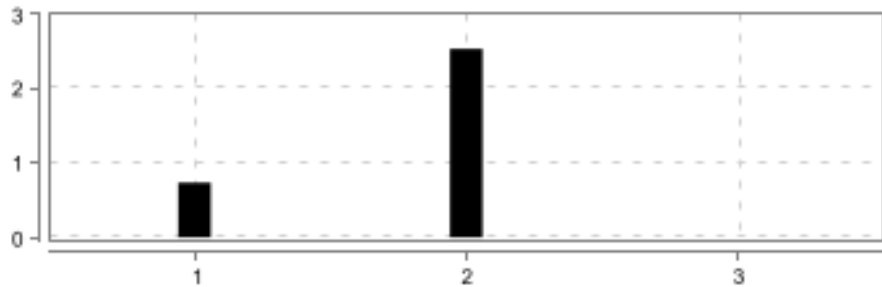



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Validating User API</u>	<u>Verify if user is being successfully created using CreateUserAPI</u>	3	1	1	1	3.297 s

Validating User API

FAILED	DURATION - 3.303 s	Scenarios Total - 1 Pass - 0 Fail - 1 Skip - 0		Steps Total - 3 Pass - 1 Fail - 1 Skip - 1	
/ 7:16:34.306 PM // 7:16:37.609 PM /					

Verify if user is being successfully created using CreateUserAPI

<div><div>FAILED</div><div>DURATION - 3.297 s</div></div>		<div></div>	<div>Steps Total - 3 Pass - 1 Fail - 1 Skip - 1</div>	<div></div>
/ 7:16:34.312 PM // 7:16:37.609 PM /				
Validating User API				

#	Step / Hook Details	Status	Duration
1	Given Create user with valid payload	PASSED	0.735 s
2	When user calls "CreateUserAPI" with "post" request java.lang.NullPointerException: Cannot invoke "pojos.UserPojo.getUserId()" because "pojo" is null at stepDefinition.UserSteps.user_calls_with_request(UserSteps.java:60) at ?.user calls "CreateUserAPI" with "post" request(file:///C:/Users/rajas/git/repository/UserBDD_Bootcamp/src/test/resources/features/User.feature:6) * Not displayable characters are replaced by '?'.	FAILED	2.532 s
3	Then user created with status code 201	SKIPPED	0.002 s