

# Cucumber Report

May 25, 2024, 10:24:01 PM

Start : May 25, 10:23:57.754 PM

End : May 25, 10:24:00.485 PM

Duration : 2.731 s

Features

Scenarios

Steps

PASSED - 0  
FAILED - 1  
SKIPPED - 0

PASSED - 0  
FAILED - 1  
SKIPPED - 0

PASSED - 1  
FAILED - 1  
SKIPPED - 1



Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>Validating User API</u>	2.731 s	1	0	1	0	3	1	1	1

#	Feature Name	Scenario Name
1	<u>Validating User API</u>	<u>Verify if user is being successfully created using CreateUserAPI</u>





#	Feature Name	T	P	F	S	Duration
1	<u>Validating User API</u>	1	0	1	0	2.731 s

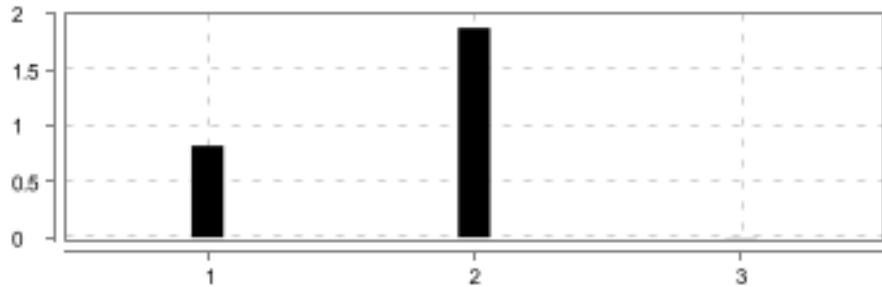



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Validating User API</u>	<u>Verify if user is being successfully created using CreateUserAPI</u>	3	1	1	1	2.727 s

## Validating User API

<b>FAILED</b>	DURATION - 2.731 s	Scenarios		Steps	
/ 10:23:57.754 PM // 10:24:00.485 PM /		Total - 1		Total - 3	
		Pass - 0		Pass - 1	
		Fail - 1		Fail - 1	
		Skip - 0		Skip - 1	

## Verify if user is being successfully created using CreateUserAPI

<div>FAILED</div> <div>DURATION - 2.727 s</div>		<div></div>	<div>Steps</div> <div>Total - 3</div> <div>Pass - 1</div> <div>Fail - 1</div> <div>Skip - 1</div>	<div></div>
<div>/ 10:23:57.758 PM // 10:24:00.485 PM /</div>				
<div>Validating User API</div>				

#	Step / Hook Details	Status	Duration
1	Given Create user with valid payload	PASSED	0.822 s
2	When user calls "CreateUserAPI" with "post" request java.lang.NullPointerException: Cannot invoke "pojos.UserPojo.getUserId()" because "pojo" is null at stepDefinition.UserSteps.user_calls_with_request(UserSteps.java:65) at ?.user calls "CreateUserAPI" with "post" request(file:///C:/Users/rajas/git/repository/UserBDD_Bootcamp/src/test/resources/features/User.feature:6) * Not displayable characters are replaced by '?'.	FAILED	1.878 s
3	Then user created with status code 201	SKIPPED	0.002 s