


Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
Validating User API	3.613 s	5	1	4	0	15	8	4	3

FAIL & SKIP SCENARIOS -- 3 --


#	Feature Name	Scenario Name
1	Validating User API	Verify if user is being successfully created using CreateUserAPI
2		Check if user able to update with already existing phonenumber
3		Check if user able to update with invalidrequestbody
4		Check if user able to update with missing values in the requestbody

FEATURES SUMMARY

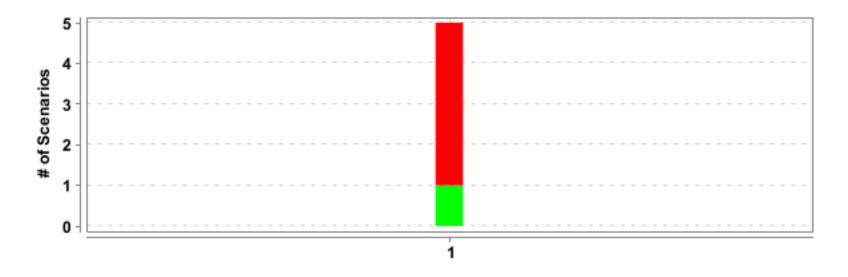

1 7	#	Feature Name	T	P	F	S	Duration
	1	Validating User API	5	1	4	0	3.613 s


SCENARIOS SUMMARY

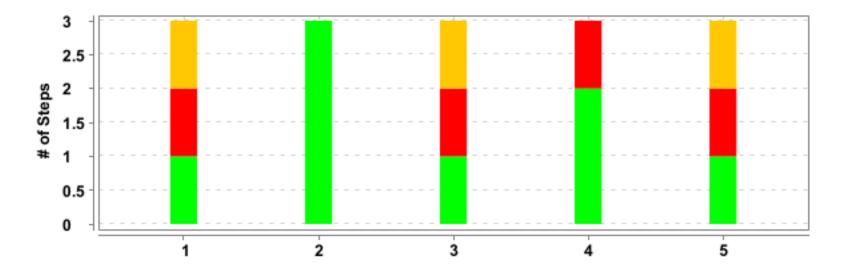


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Validating User API	Verify if user is being successfully created using CreateUserAPI	3	1	1	1	2.167 s
2		Check if user able to create with invalidrequestbody	3	3	0	0	0.440 s
3		Check if user able to update with already existing phonenumber	3	1	1	1	0.008 s
4		Check if user able to update with invalidrequestbody	3	2	1	0	0.455 s
5		Check if user able to update with missing values in the requestbody	3	1	1	1	0.420 s

DETAILED SECTION -- 6 --

Validating User API

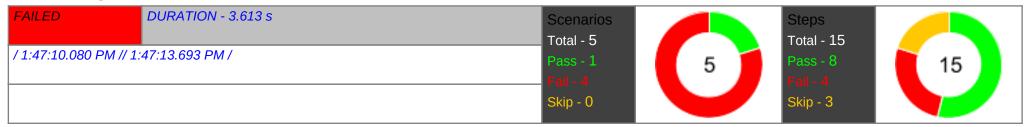


Verify if user is being successfully created using CreateUserAPI

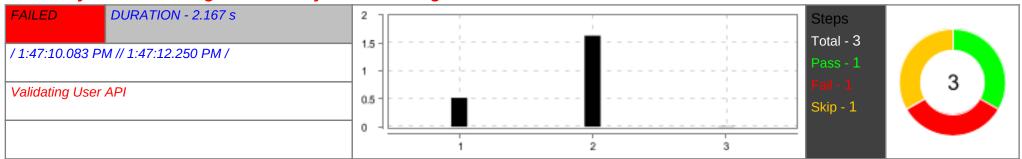

#	Step / Hook Details	Status	Duration
1	Given Create user with valid payload	PASSED	0.516 s
2	When user calls "CreateUserAPI" with "post" request	FAILED	1.630 s
	java.lang.NullPointerException: Cannot invoke "java.lang.Integer.intValue()" because the return value of "io.restassured.internal.common.path. ObjectConverter.convertObjectTo(Object, java.lang.Class)" is null at io.restassured.path.json.JsonPath.getInt(JsonPath.java:245) at stepDefinition.UserSteps.user_calls_with_request(UserSteps.java:52) at ?.user calls "CreateUserAPI" with "post" request(file:///C:/Users/rajas/git/repository/UserBDD_Bootcamp/src/test/resources/features/User. feature:6) * Not displayable characters are replaced by '?'.		
3	Then user created with status code 201	SKIPPED	0.005 s


Check if user able to create with invalidrequestbody

DETAILED SECTION -- 7 -

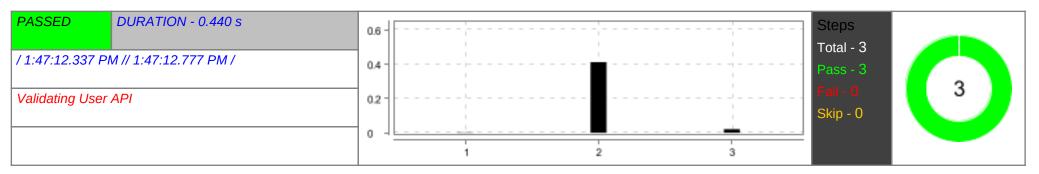

#	Step / Hook Details	Status	Duration
1	Given user with Invalid request body	PASSED	0.002 s
2	When user send post Request and request Body with invalid data	PASSED	0.413 s
3	Then user receives "409 CONFLICT" with message "User already exist with same email id"	PASSED	0.021 s


Check if user able to update with already existing phonenumber

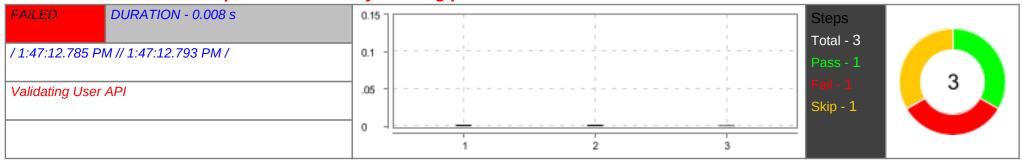

#	Step / Hook Details	Status	Duration
1	Given user update with existing phonenumber	PASSED	0.002 s
2	When user send HTTPS Request and request Body with existing phonenumber	FAILED	0.002 s
	java.lang.NullPointerException: Cannot invoke "String.trim()" because the return value of "java.util.Properties.getProperty(String)" is null at utilities.PropertiesFile.getProperty(PropertiesFile.java:34) at stepDefinition.UserSteps.user_send_https_request_and_request_body_with_existing_phonenumber(UserSteps.java:167) at ?.user send HTTPS Request and request Body with existing phonenumber(file:///C:/Users/rajas/git/repository/UserBDD_Bootcamp/src/test/resources/features/User.feature:88) * Not displayable characters are replaced by '?'.		
3	Then user receives "400 BAD_REQUEST" with message	SKIPPED	0.001 s


Check if user able to update with invalidrequestbody

DETAILED SECTION -- 8 --

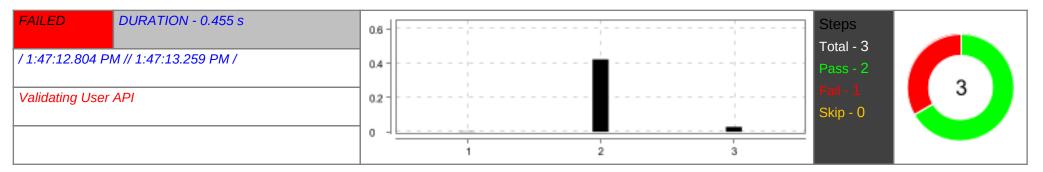

#	Step / Hook Details	Status	Duration
1	Given user with Invalid payload	PASSED	0.002 s
2	When user send HTTPS Request and request Body with invalid data	PASSED	0.423 s
3	Then user receives "404 NOT_FOUND" with message "User not found with id: 8174"	FAILED	0.029 s
	org.junit.ComparisonFailure: expected: <ot 81[81]="" found="" id:="" with=""> but was:<ot 81[74]="" found="" id:="" with=""> at org.junit.Assert.assertEquals(Assert.java:117) at org.junit.Assert.assertEquals(Assert.java:146) at stepDefinition.UserSteps.user_receives_with_message(UserSteps.java:197) at ?.user receives "404 NOT_FOUND" with message "User not found with id: 8174"(file:///C:/Users/rajas/git/repository/UserBDD_Bootcamp/src/test/resources/features/User.feature:99) * Not displayable characters are replaced by '?'.</ot></ot>		

Check if user able to update with missing values in the requestbody

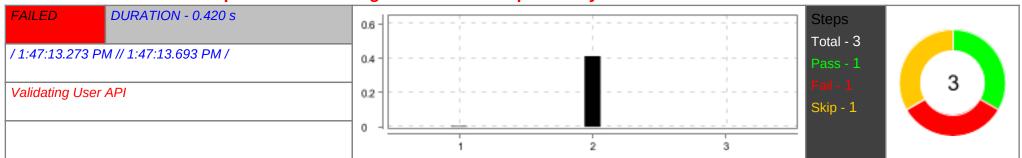

#	Step / Hook Details	Status	Duration
1	Given user with missing payload	PASSED	0.004 s
2	When user send HTTPS Request and request Body with missing data	FAILED	0.413 s
	org.junit.ComparisonFailure: expected:<40[4 NOT_FOUND]> but was:<40[0 BAD_REQUEST]> at org.junit.Assert.assertEquals(Assert.java:117) at org.junit.Assert.assertEquals(Assert.java:146)		

DETAILED SECTION -- 9 --

#	Step / Hook Details	Status	Duration
	at stepDefinition.UserSteps.user_send_https_request_and_request_body_with_missing_data(UserSteps.java:243) at ?.user send HTTPS Request and request Body with missing data(file:///C:/Users/rajas/git/repository/UserBDD_Bootcamp/src/test/ resources/features/User.feature:103) * Not displayable characters are replaced by '?'.		
3	Then user receives "404 NOT_FOUND" with message "User not found with id: 8174"	SKIPPED	0.000 s