


Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
Validating User API	3.808 s	4	1	3	0	12	8	3	1


FAIL & SKIP SCENARIOS -- 3 --

#	Feature Name	Scenario Name				
1	Validating User API	Check if user able to update with already existing phonenumber				
2		Check if user able to update with invalidrequestbody				
3		Check if user able to update with missing values in the requestbody				

FEATURES SUMMARY

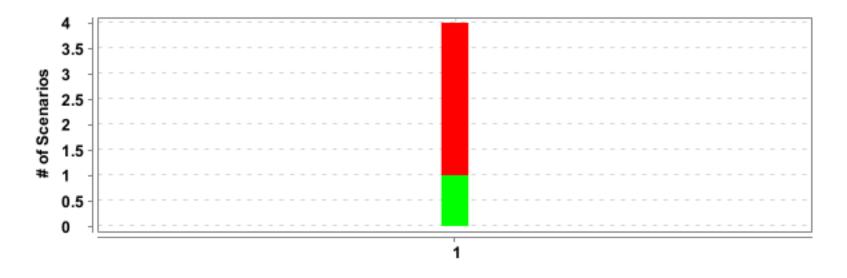


#	Feature Name	T	P	F	S	Duration
1	Validating User API	4	1	3	0	3.808 s

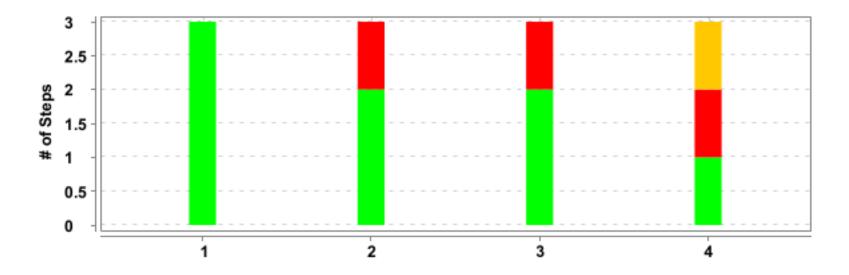


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Validating User API	Check if user able to create with invalidrequestbody	3	3	0	0	2.368 s
2		Check if user able to update with already existing phonenumber	3	2	1	0	0.464 s
3		Check if user able to update with invalidrequestbody	3	2	1	0	0.443 s
4		Check if user able to update with missing values in the requestbody	3	1	1	1	0.413 s

DETAILED SECTION

Validating User API

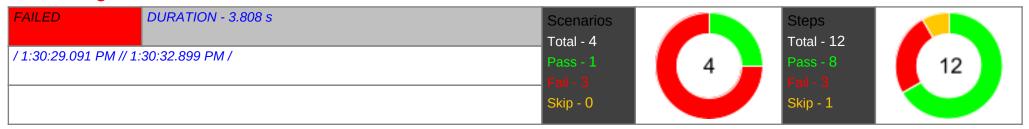


Check if user able to create with invalidrequestbody

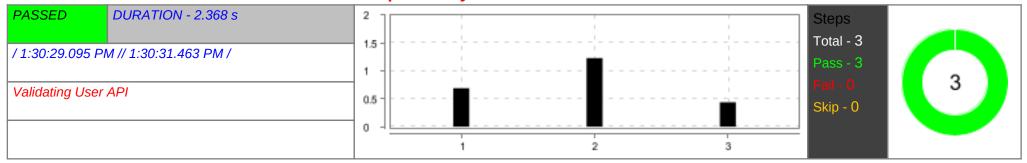

#	Step / Hook Details	Status	Duration
1	Given user with Invalid request body	PASSED	0.689 s
2	When user send post Request and request Body with invalid data	PASSED	1.230 s
3	Then user receives "409 CONFLICT" with message "User already exist with same email id"	PASSED	0.437 s


Check if user able to update with already existing phonenumber

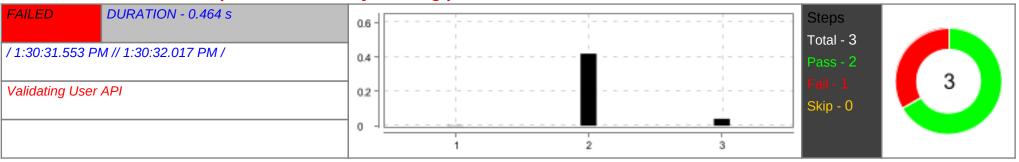

DETAILED SECTION -- 7 --

#	Step / Hook Details	Status	Duration
1	Given user update with existing phonenumber	PASSED	0.002 s
2	When user send HTTPS Request and request Body with existing phonenumber	PASSED	0.419 s
3	Then user receives "400 BAD_REQUEST" with message	FAILED	0.040 s
	org.junit.ComparisonFailure: expected:<40[4 NOT_FOUND]> but was:<40[0 BAD_REQUEST]> at org.junit.Assert.assertEquals(Assert.java:117) at org.junit.Assert.assertEquals(Assert.java:146) at stepDefinition.UserSteps.user_receives_with_message(UserSteps.java:295) at ?.user receives "400 BAD_REQUEST" with message(file:///C:/Users/rajas/git/repository/UserBDD_Bootcamp/src/test/resources/features/User.feature:89) * Not displayable characters are replaced by '?'.		


Check if user able to update with invalidrequestbody

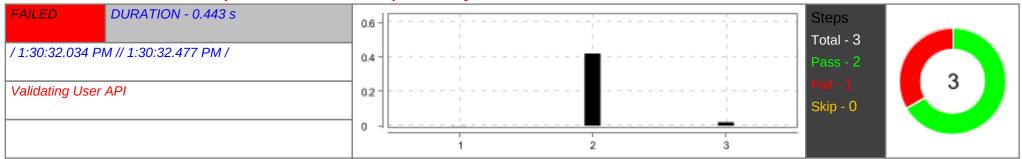

#	Step / Hook Details	Status	Duration
1	Given user with Invalid payload	PASSED	0.001 s
2	When user send HTTPS Request and request Body with invalid data	PASSED	0.420 s
3	Then user receives "404 NOT_FOUND" with message "User not found with id: 8174"	FAILED	0.020 s
	org.junit.ComparisonFailure: expected: <ot 81[81]="" found="" id:="" with=""> but was:<ot 81[74]="" found="" id:="" with=""> at org.junit.Assert.assertEquals(Assert.java:117) at org.junit.Assert.assertEquals(Assert.java:146) at stepDefinition.UserSteps.user_receives_with_message(UserSteps.java:196) at ?.user receives "404 NOT_FOUND" with message "User not found with id: 8174"(file:///C:/Users/rajas/git/repository/UserBDD_Bootcamp/src/test/resources/features/User.feature:99) * Not displayable characters are replaced by '?'.</ot></ot>		

Check if user able to update with missing values in the requestbody

DETAILED SECTION -- 8 --

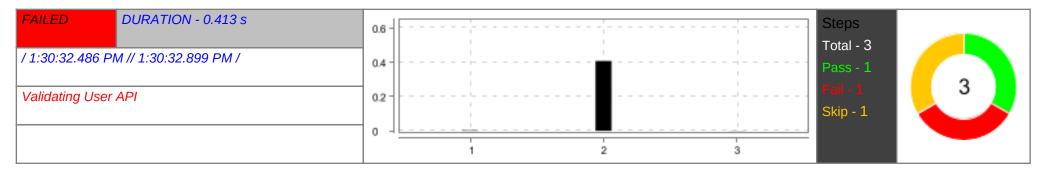

#	Step / Hook Details	Status	Duration
1	Given user with missing payload	PASSED	0.003 s
2	When user send HTTPS Request and request Body with missing data	FAILED	0.408 s
	org.junit.ComparisonFailure: expected:<40[4 NOT_FOUND]> but was:<40[0 BAD_REQUEST]> at org.junit.Assert.assertEquals(Assert.java:117) at org.junit.Assert.assertEquals(Assert.java:146) at stepDefinition.UserSteps.user_send_https_request_and_request_body_with_missing_data(UserSteps.java:242) at ?.user send HTTPS Request and request Body with missing data(file:///C:/Users/rajas/git/repository/UserBDD_Bootcamp/src/test/resources/features/User.feature:103) * Not displayable characters are replaced by '?'.		
3	Then user receives "404 NOT_FOUND" with message "User not found with id: 8174"	SKIPPED	0.001 s