


| Feature | | Scenario | | | | Step | | | |
|---------------------|----------|----------|---|---|---|------|----|---|---|
| Name | Duration | T | P | F | S | T | P | F | S |
| Validating User API | 5.539 s | 8 | 4 | 4 | 0 | 24 | 19 | 4 | 1 |

FAIL & SKIP SCENARIOS -- 3 --

| # | Feature Name | Scenario Name |
|---|---------------------|---|
| 1 | Validating User API | Check if user able to create without mandatory fields payload |
| 2 | | Check if user able to create with invalidrequestbody |
| 3 | | Check if user able to update with invalidrequestbody |
| 4 | | Check if user able to update with missing values in the requestbody |


FEATURES SUMMARY

-- 4 --

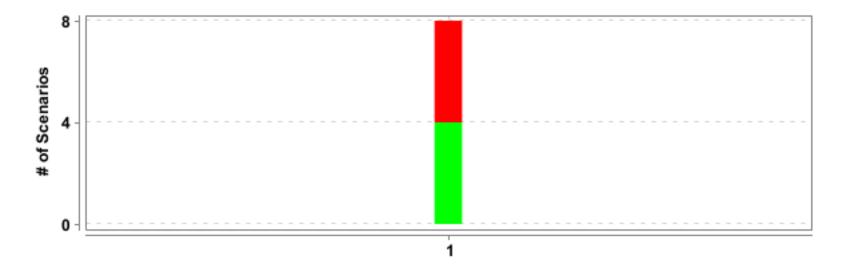

| # | Feature Name | T | P | F | S | Duration |
|---|---------------------|---|---|---|---|----------|
| 1 | Validating User API | 8 | 4 | 4 | 0 | 5.539 s |


SCENARIOS SUMMARY -- 5 --

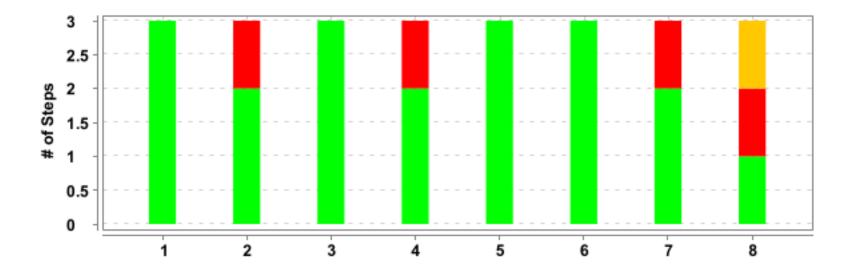


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|---|---------------------|---|---|---|---|---|----------|
| 1 | Validating User API | Check if user able to create with invalidendpoint | 3 | 3 | 0 | 0 | 2.170 s |
| 2 | | Check if user able to create without mandatory fields payload | 3 | 2 | 1 | 0 | 0.481 s |
| 3 | | Check if user able to create with invalidmethod | 3 | 3 | 0 | 0 | 0.450 s |
| 4 | | Check if user able to create with invalidrequestbody | 3 | 2 | 1 | 0 | 0.456 s |
| 5 | | Check if user able to update with invalidendpoint | 3 | 3 | 0 | 0 | 0.451 s |
| 6 | | Check if user able to update with invalidmethod | 3 | 3 | 0 | 0 | 0.464 s |
| 7 | | Check if user able to update with invalidrequestbody | 3 | 2 | 1 | 0 | 0.456 s |
| 8 | | Check if user able to update with missing values in the requestbody | 3 | 1 | 1 | 1 | 0.450 s |

DETAILED SECTION

Validating User API

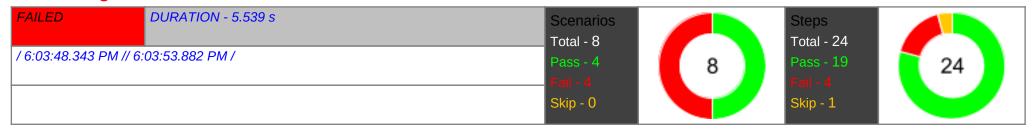


Check if user able to create with invalidendpoint

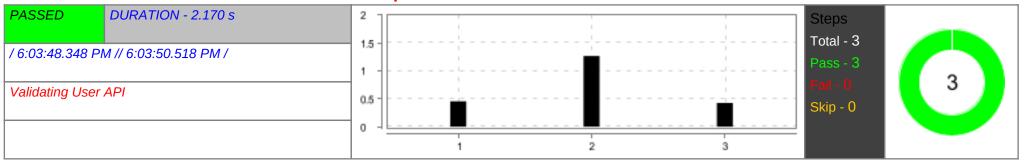


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given user with an invalid endpoint | PASSED | 0.455 s |
| 2 | When user send post Request and request Body with invalidendpoint | PASSED | 1.268 s |
| 3 | Then user receives "404" with error message "Not Found" | PASSED | 0.426 s |

Check if user able to create without mandatory fields payload

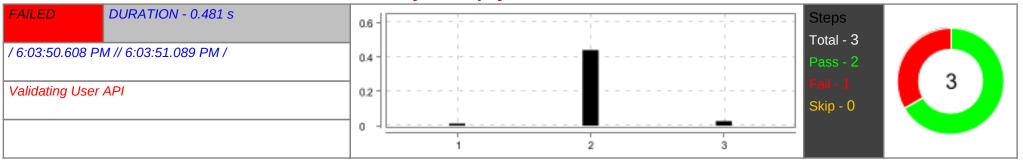


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given user without mandatory fields | PASSED | 0.012 s |
| 2 | When user send post Request and request Body without mandatory fields | PASSED | 0.440 s |
| 3 | Then user receive "400 BAD_REQUEST" with msg "user FirstName is mandatory and should contains alphabets only" | FAILED | 0.027 s |
| | org.junit.ComparisonFailure: expected:<40[9 CONFLIC]T> but was:<40[0 BAD_REQUES]T> at org.junit.Assert.assertEquals(Assert.java:117) at org.junit.Assert.assertEquals(Assert.java:146) at stepDefinition.UserSteps.user_receive_with_msg(UserSteps.java:296) at ?.user receive "400 BAD_REQUEST" with msg "user FirstName is mandatory and should contains alphabets only"(file:///C:/Users/rajas/git/repository/UserBDD_Bootcamp/src/test/resources/features/User.feature:61) * Not displayable characters are replaced by '?'. | | |

Check if user able to create with invalidmethod

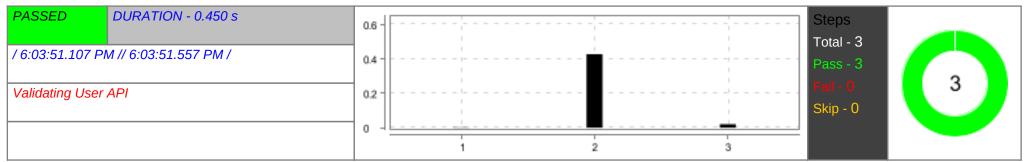


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given user with invalidmethod | PASSED | 0.002 s |
| 2 | When user send post Request and request Body with invalidmethod | PASSED | 0.428 s |
| 3 | Then user receives "405" with error message "Method Not Allowed" | PASSED | 0.020 s |

Check if user able to create with invalidrequestbody

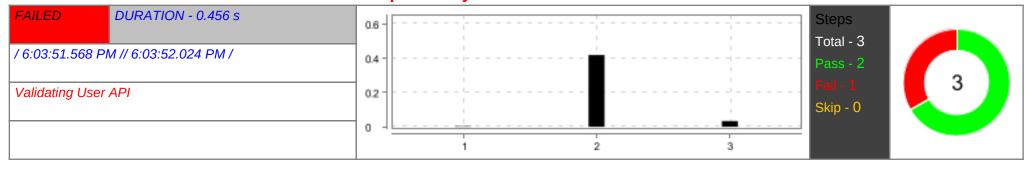


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given user with Invalid request body | PASSED | 0.003 s |
| 2 | When user send post Request and request Body with invalid data | PASSED | 0.419 s |
| 3 | Then user receives "409 CONFLICT" with message "User already exist with same email id" | FAILED | 0.033 s |
| | org.junit.ComparisonFailure: expected: <ady [contact="" exist="" number]="" same="" with=""> but was:<ady [email="" exist="" id]="" same="" with=""> at org.junit.Assert.assertEquals(Assert.java:117) at org.junit.Assert.assertEquals(Assert.java:146) at stepDefinition.UserSteps.user_receives_with_message(UserSteps.java:197) at ?.user receives "409 CONFLICT" with message "User already exist with same email id"(file:///C:/Users/rajas/git/repository/ UserBDD_Bootcamp/src/test/resources/features/User.feature:71) * Not displayable characters are replaced by '?'.</ady></ady> | | |

Check if user able to update with invalidendpoint

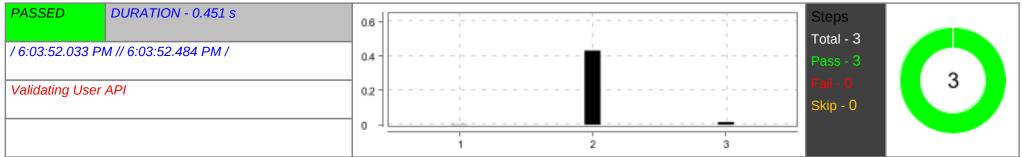


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given user with an invalid endpoint | PASSED | 0.002 s |
| 2 | When user send HTTPS Request and request Body with invalidendpoint | PASSED | 0.432 s |
| 3 | Then user receives "404" with error message "Not Found" | PASSED | 0.015 s |

Check if user able to update with invalidmethod

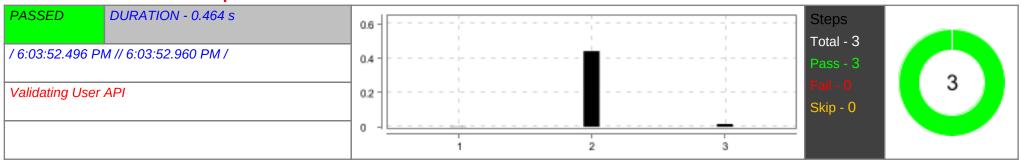


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given user with invalidmethod | PASSED | 0.002 s |
| 2 | When user send HTTPS Request and request Body with invalidmethod | PASSED | 0.442 s |
| 3 | Then user receives "405" with error message "Method Not Allowed" | PASSED | 0.016 s |

Check if user able to update with invalidrequestbody

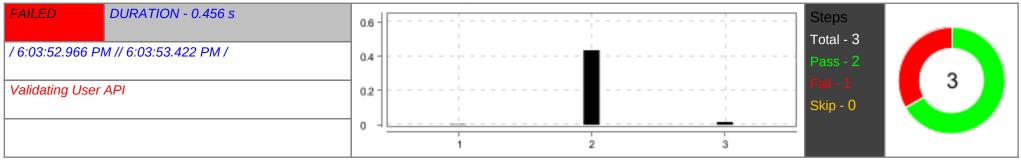

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given user with Invalid payload | PASSED | 0.003 s |
| 2 | When user send HTTPS Request and request Body with invalid data | PASSED | 0.436 s |
| 3 | Then user receives "400 BAD_REQUEST" with message "User email Id is required" | FAILED | 0.016 s |
| | org.junit.ComparisonFailure: expected:<40[4 NOT_FOUND]> but was:<40[0 BAD_REQUEST]> at org.junit.Assert.assertEquals(Assert.java:117) at org.junit.Assert.assertEquals(Assert.java:146) at stepDefinition.UserSteps.user_receives_with_message(UserSteps.java:196) at ?.user receives "400 BAD_REQUEST" with message "User email Id is required"(file:///C:/Users/rajas/git/repository/UserBDD_Bootcamp/src/test/resources/features/User.feature:99) * Not displayable characters are replaced by '?'. | | |

Check if user able to update with missing values in the requestbody

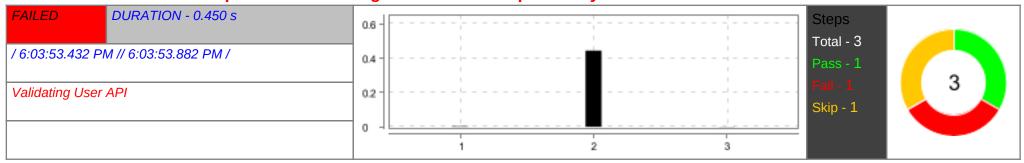

DETAILED SECTION -- 10 --

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| 1 | Given user with missing payload | PASSED | 0.003 s |
| 2 | When user send HTTPS Request and request Body with missing data | FAILED | 0.445 s |
| | org.junit.ComparisonFailure: expected:<40[4 NOT_FOUND]> but was:<40[0 BAD_REQUEST]> at org.junit.Assert.assertEquals(Assert.java:117) at org.junit.Assert.assertEquals(Assert.java:146) at stepDefinition.UserSteps.user_send_https_request_and_request_body_with_missing_data(UserSteps.java:243) at ?.user send HTTPS Request and request Body with missing data(file:///C:/Users/rajas/git/repository/UserBDD_Bootcamp/src/test/resources/features/User.feature:103) * Not displayable characters are replaced by '?'. | | |
| 3 | Then user receives "400 BAD_REQUEST" with message "User First Name is mandatory and should contains alphabets only" | SKIPPED | 0.001 s |