

# Cucumber Report

May 23, 2024, 1:53:41 PM

Start : May 23, 1:53:37.441 PM

End : May 23, 1:53:40.611 PM

Duration : 3.170 s

Features


Scenarios

Steps

PASSED - 0  
FAILED - 1  
SKIPPED - 0

PASSED - 0  
FAILED - 3  
SKIPPED - 0

PASSED - 5  
FAILED - 3  
SKIPPED - 1

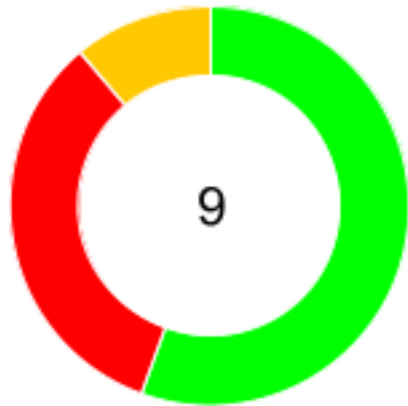


Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>Validating User API</u>	3.170 s	3	0	3	0	9	5	3	1

#	Feature Name	Scenario Name
1	<u>Validating User API</u>	<u>Check if user able to update with already existing phonenumber</u>
2		<u>Check if user able to update with invalidrequestbody</u>
3		<u>Check if user able to update with missing values in the requestbody</u>



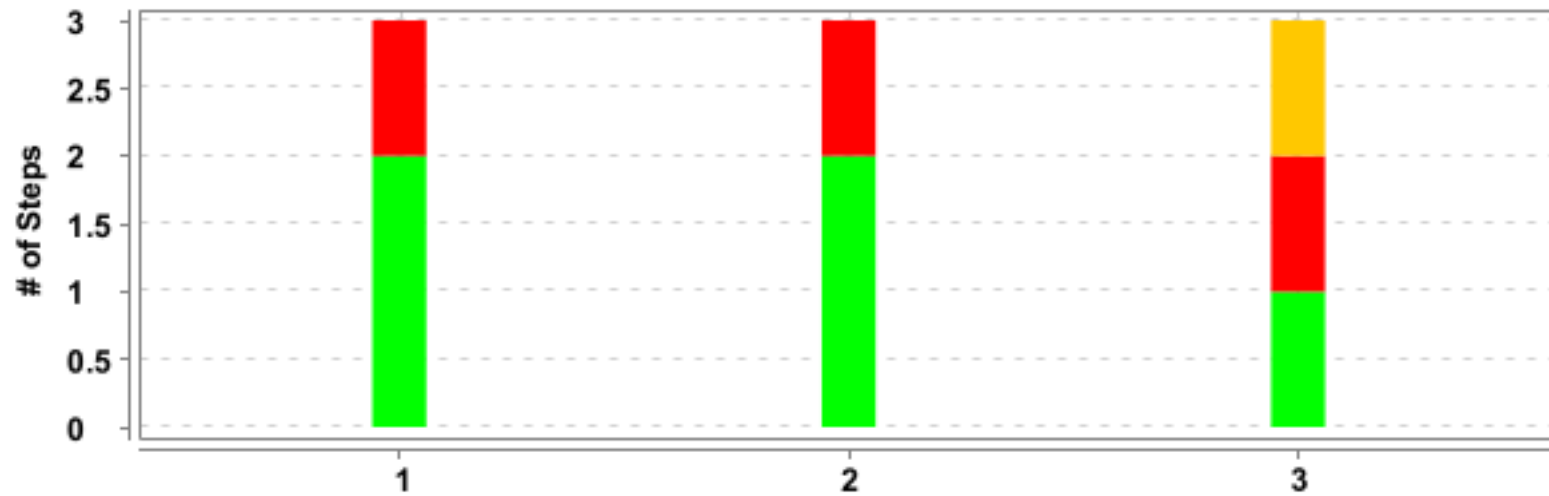

#	Feature Name	T	P	F	S	Duration
1	<u>Validating User API</u>	3	0	3	0	3.170 s





#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Validating User API</u>	<u>Check if user able to update with already existing phonenumber</u>	3	2	1	0	2.158 s
2		<u>Check if user able to update with invalidrequestbody</u>	3	2	1	0	0.460 s
3		<u>Check if user able to update with missing values in the requestbody</u>	3	1	1	1	0.447 s

## Validating User API

<b>FAILED</b>	DURATION - 3.170 s	Scenarios		Steps	
/ 1:53:37.441 PM // 1:53:40.611 PM /		Total - 3		Total - 9	
		Pass - 0		Pass - 5	
		Fail - 3		Fail - 3	
		Skip - 0		Skip - 1	

## Check if user able to update with already existing phonenummer
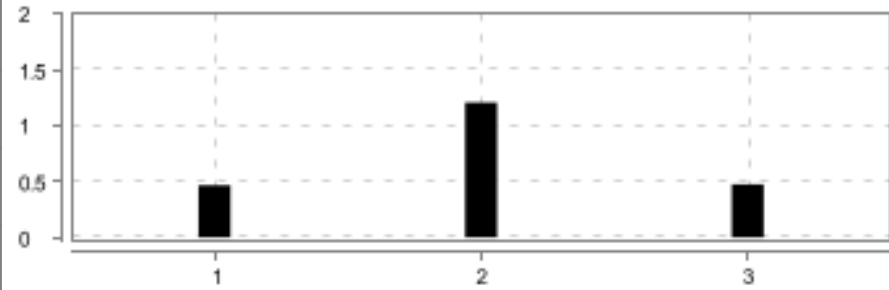
<div>FAILED</div> <div>DURATION - 2.158 s</div>		<div></div>	<div>Steps</div> <div>Total - 3</div> <div>Pass - 2</div> <div>Fail - 1</div> <div>Skip - 0</div>	<div></div>
<div>/ 1:53:37.445 PM // 1:53:39.603 PM /</div>				
<div>Validating User API</div>				

#	Step / Hook Details	Status	Duration
1	Given user update with existing phonenummer	PASSED	0.465 s
2	When user send HTTPS Request and request Body with existing phonenummer	PASSED	1.207 s
3	Then user receives "400 BAD_REQUEST" with message <pre>java.lang.AssertionError: expected:&lt;null&gt; but was:&lt;400 BAD_REQUEST&gt;     at org.junit.Assert.fail(Assert.java:89)     at org.junit.Assert.failNotEquals(Assert.java:835)     at org.junit.Assert.assertEquals(Assert.java:120)     at org.junit.Assert.assertEquals(Assert.java:146)     at stepDefinition.UserSteps.user_receives_with_message(UserSteps.java:296)     at ?.user receives "400 BAD_REQUEST" with message(file:///C:/Users/rajas/git/repository/UserBDD_Bootcamp/src/test/resources/features/User.feature:89)     * Not displayable characters are replaced by '?'. </pre>	FAILED	0.474 s

## Check if user able to update with invalidrequestbody

<b>FAILED</b>	DURATION - 0.460 s		<b>Steps</b> Total - 3 Pass - 2 Fail - 1 Skip - 0	
/ 1:53:39.691 PM // 1:53:40.151 PM /				
Validating User API				

#	Step / Hook Details	Status	Duration
1	Given user with Invalid payload	PASSED	0.005 s
2	When user send HTTPS Request and request Body with invalid data	PASSED	0.429 s
3	Then user receives "404 NOT_FOUND" with message "User not found with id: 8174"	FAILED	0.022 s
	org.junit.ComparisonFailure: expected:<...ot found with id: 81[81]> but was:<...ot found with id: 81[74]> at org.junit.Assert.assertEquals(Assert.java:117) at org.junit.Assert.assertEquals(Assert.java:146) at stepDefinition.UserSteps.user_receives_with_message(UserSteps.java:197) at ?.user receives "404 NOT_FOUND" with message "User not found with id: 8174"(file:///C:/Users/rajas/git/repository/UserBDD_Bootcamp/src/test/resources/features/User.feature:99) * Not displayable characters are replaced by '?'.		

### Check if user able to update with missing values in the requestbody

<b>FAILED</b>	DURATION - 0.447 s		<b>Steps</b> Total - 3 Pass - 1 Fail - 1 Skip - 1	
/ 1:53:40.164 PM // 1:53:40.611 PM /				
Validating User API				

#	Step / Hook Details	Status	Duration
1	Given user with missing payload	PASSED	0.003 s
2	When user send HTTPS Request and request Body with missing data	FAILED	0.438 s
	org.junit.ComparisonFailure: expected:<40[4 NOT_FOUND]> but was:<40[0 BAD_REQUEST]> at org.junit.Assert.assertEquals(Assert.java:117) at org.junit.Assert.assertEquals(Assert.java:146)		

#	Step / Hook Details	Status	Duration
	at stepDefinition.UserSteps.user_send_https_request_and_request_body_with_missing_data(UserSteps.java:243) at ?.user send HTTPS Request and request Body with missing data(file:///C:/Users/rajas/git/repository/UserBDD_Bootcamp/src/test/resources/features/User.feature:103) * Not displayable characters are replaced by '?'. ?		
3	Then user receives "404 NOT_FOUND" with message "User not found with id: 8174"	SKIPPED	0.001 s