

Cucumber Report

May 23, 2024, 2:39:35 PM

Start : May 23, 2:39:32.121 PM

End : May 23, 2:39:34.746 PM

Duration : 2.625 s

Features

Scenarios

Steps

PASSED - 0
FAILED - 1
SKIPPED - 0


PASSED - 0
FAILED - 2
SKIPPED - 0

PASSED - 4
FAILED - 2
SKIPPED - 0




Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>Validating User API</u>	2.625 s	2	0	2	0	6	4	2	0

#	Feature Name	Scenario Name
1	<u>Validating User API</u>	<u>Check if user able to update with invalidrequestbody</u>
2		<u>Check if user able to update with missing values in the requestbody</u>

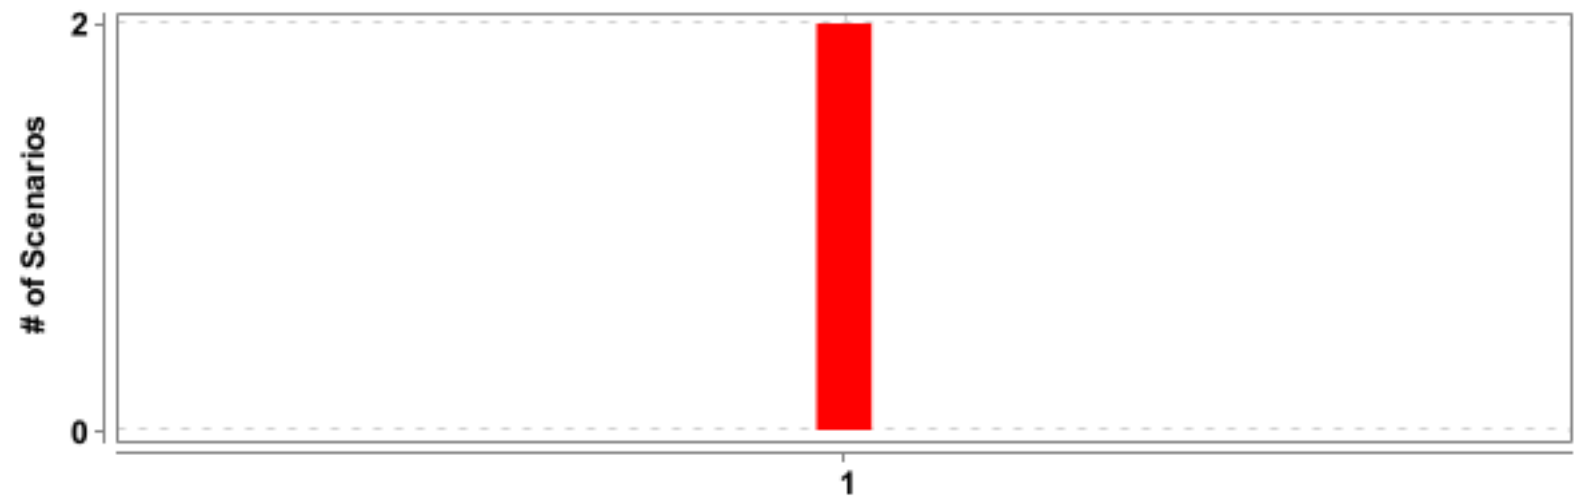

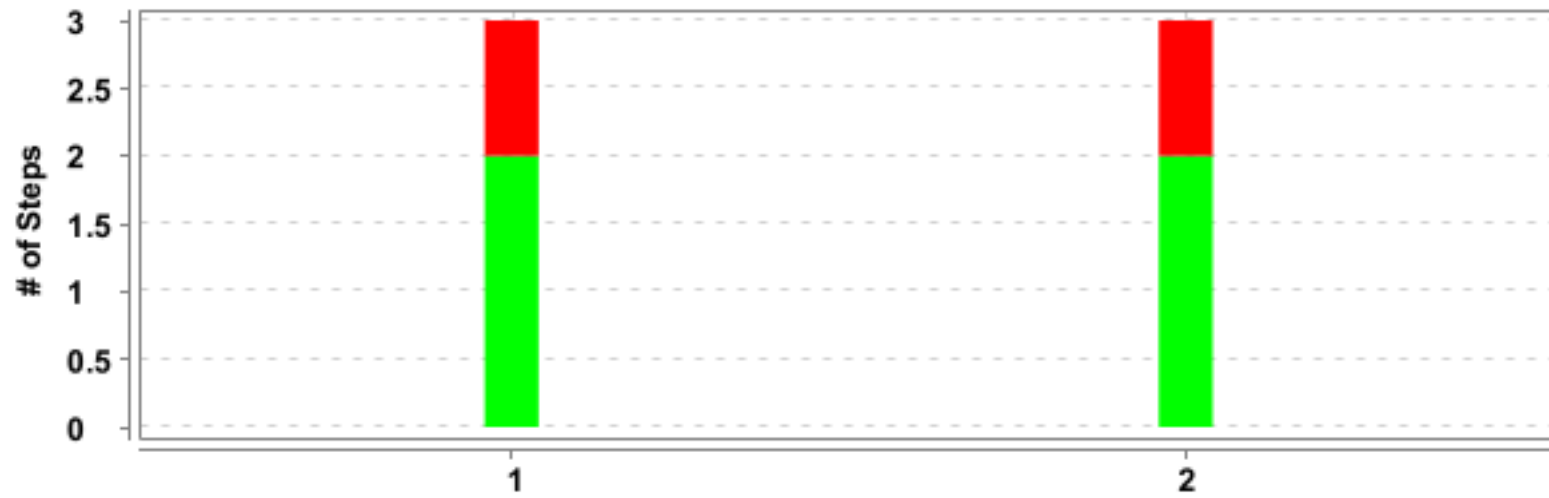

#	Feature Name	T	P	F	S	Duration
1	<u>Validating User API</u>	2	0	2	0	2.625 s





#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Validating User API</u>	<u>Check if user able to update with invalidrequestbody</u>	3	2	1	0	2.077 s
2		<u>Check if user able to update with missing values in the requestbody</u>	3	2	1	0	0.456 s

Validating User API


FAILED	DURATION - 2.625 s	Scenarios		Steps	
/ 2:39:32.121 PM // 2:39:34.746 PM /		Total - 2		Total - 6	
		Pass - 0		Pass - 4	
		Fail - 2		Fail - 2	
		Skip - 0		Skip - 0	

Check if user able to update with invalidrequestbody
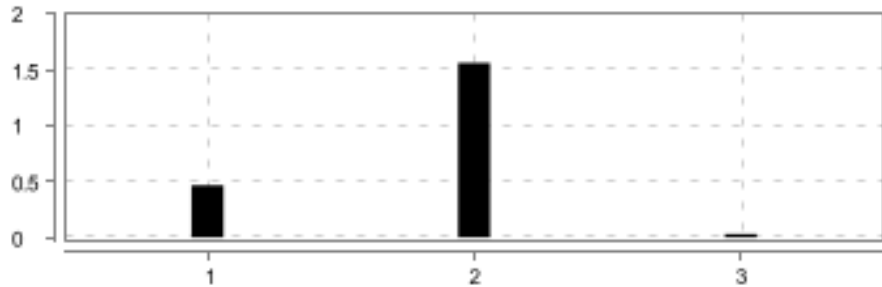
<div>FAILED</div> <div>DURATION - 2.077 s</div>		<div></div>	<div>Steps</div> <div>Total - 3</div> <div>Pass - 2</div> <div>Fail - 1</div> <div>Skip - 0</div>	<div></div>
<div>/ 2:39:32.126 PM // 2:39:34.203 PM /</div>				
<div>Validating User API</div>				

#	Step / Hook Details	Status	Duration
1	Given user with Invalid payload	PASSED	0.466 s
2	When user send HTTPS Request and request Body with invalid data	PASSED	1.564 s
3	Then user receives "404 NOT_FOUND" with message "User not found with id: 8174"	FAILED	0.030 s
	org.junit.ComparisonFailure: expected:<40[0 BAD_REQUEST]> but was:<40[4 NOT_FOUND]> at org.junit.Assert.assertEquals(Assert.java:117) at org.junit.Assert.assertEquals(Assert.java:146) at stepDefinition.UserSteps.user_receives_with_message(UserSteps.java:196) at ?.user receives "404 NOT_FOUND" with message "User not found with id: 8174"(file:///C:/Users/rajas/git/repository/UserBDD_Bootcamp/src/test/resources/features/User.feature:99) * Not displayable characters are replaced by '?'.		

Check if user able to update with missing values in the requestbody

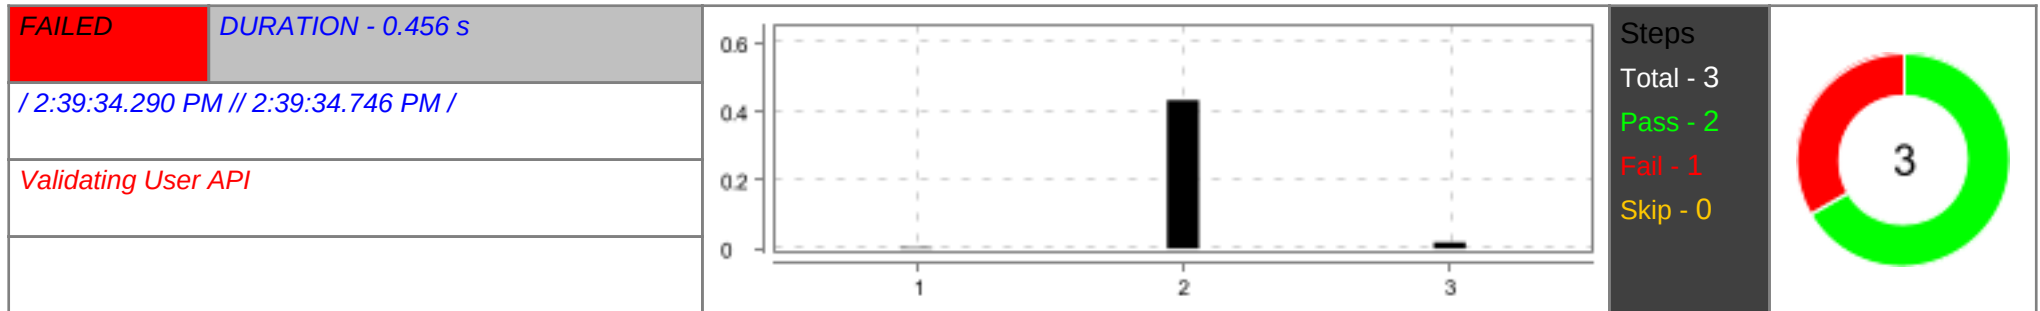

#	Step / Hook Details	Status	Duration
1	Given user with missing payload	PASSED	0.003 s
2	When user send HTTPS Request and request Body with missing data	PASSED	0.434 s
3	Then user receives "404 NOT_FOUND" with message "User not found with id: 8174"	FAILED	0.018 s
	org.junit.ComparisonFailure: expected:<40[0 BAD_REQUEST]> but was:<40[4 NOT_FOUND]> at org.junit.Assert.assertEquals(Assert.java:117) at org.junit.Assert.assertEquals(Assert.java:146) at stepDefinition.UserSteps.user_receives_with_message(UserSteps.java:196) at ?.user receives "404 NOT_FOUND" with message "User not found with id: 8174"(file:///C:/Users/rajas/git/repository/UserBDD_Bootcamp/src/test/resources/features/User.feature:104) * Not displayable characters are replaced by '?'. 		