

W O R K S H O P

HTML

PHP

MySQL

Java Script

Ajax

jQuery

Joomla

Md.Tasfin Hasan Tareque
(**Software Engineer**)
STOCK BANGLADESH LIMITED
Email: tareque20@stockbangladesh.com

WORKSHOP





HTLM

- Learn about HTML TAG.
- Create a template.
- CSS Design.

HTLM_(CONT...)

- The basic building block of any web page is HTML:

Hypertext Mark-up Language

- Hypertext:
 - A system of linking between documents – click the link and the required document is selected and displayed.
- Markup:
 - A system for indicating the formatting of the page – headings, paragraphs, italics and the like.

HTML

- HTML documents **describe web pages**
- HTML documents **contain HTML tags** and plain text
- HTML documents are also **called web pages**



HTML DOCUMENT SKELETON

```
<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"  
"http://www.w3.org/TR/html4/loose.dtd">
```

```
<html>
```

```
  <head>
```

```
    <title>Untitled Document</title>
```

```
    <meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1">  
  </head>
```

```
  <body>
```

Write here something that will display on the page.

```
</body>
```

```
</html>
```

DOCUMENT TYPES

- **DocTypes**

- **Strict:**

- `<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01//EN" "http://www.w3.org/TR/html4/strict.dtd">`

- **Transitional:**

- `<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN" "http://www.w3.org/TR/html4/loose.dtd">`

- **Frameset:**

- `<!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Frameset//EN" "http://www.w3.org/TR/html4/frameset.dtd">`

- **By Default:**

- “quirks mode” means “good luck”

HEAD ELEMENTS

- **The HEAD element**
 - The TITLE element
 - The STYLE element
 - The SCRIPT element
 - The ISINDEX element
 - The BASE element
 - The META element
 - The LINK element

HEAD ELEMENT

- **TITLE**
 - defines the document title, and is always needed.
- **ISINDEX**
 - for simple keyword searches, see PROMPT attribute.
- **BASE**
 - defines base URL for resolving relative URLs.
- **SCRIPT**
 - reserved for future use with scripting languages.
- **STYLE**
 - reserved for future use with style sheets.
- **META**
 - used to supply meta info as name/value pairs.
- **LINK**
 - used to define relationships with other documents.

BODY ELEMENTS

- The BODY element
 - Headings (H1 - H6)
 - The ADDRESS element
 - Block level Elements
 - Text level elements

TEXT OBJECTS

- Font
- Bold
- Italic
- Strong
- Em
- Paragraph
- Block Quote
- Heading
- Definition List
- Abbreviation
- Acronym
- List
 - Order List
 - Unorder List

FONT

Input:

```
<font color="red" size="+5" face="Verdana, Arial" title="my title">
```

This is for test

```
</font>
```

Output:

This is for test



my title

BOLD, ITALIC, UNDERLINE

Input:

`<b>This is for test</b>`

Output:

This is for test

Input:

`<u>This is for test</u>`

Output:

This is for test

Input:

`<i>This is for test</i>`

Output:

This is for test

Input:

`<b><i><u>This is for test</u></i></b>`

Output:

This is for test

TEXT TAGS

Tag	Description
	Renders as emphasized text
	Renders as strong emphasized text
<dfn>	Defines a definition term
<code>	Defines computer code text
<samp>	Defines sample computer code
<kbd>	Defines keyboard text
<var>	Defines a variable part of a text
<cite>	Defines a citation

TEXT TAGS

- `<em>Emphasized text</em>` —————> *Emphasized text*
- `<strong>Strong text</strong>` —————> **Strong text**
- `<dfn>Definition term</dfn>` —————> *Definition term*
- `<code>Computer code text</code>` —————> Computer code text
- `<samp>Sample computer code text</samp>` —————> Sample computer code text
- `<kbd>Keyboard text</kbd>` —————> Keyboard text
- `<var>Variable</var>` —————> *Variable*
- `<cite>Citation</cite>` —————> *Citation*

HEADING

- `<h1>This is heading 1</h1>`

This is heading 1

- `<h2>This is heading 2</h2>`

This is heading 2

- `<h3>This is heading 3</h3>`

This is heading 3

- `<h4>This is heading 4</h4>`

This is heading 4

- `<h5>This is heading 5</h5>`

This is heading 5

- `<h6>This is heading 6</h6>`

This is heading 6

BLOCK ELEMENTS

- **Block elements**
 - **P** *paragraphs*
 - **UL** *unordered lists*
 - **OL** *ordered (i.e. numbered) lists*
 - **DL** *definition lists*
 - **PRE** *preformatted text*
 - **DIV** *document divisions*
 - **CENTER** *text alignment*
 - **BLOCKQUOTE** *quoted passage*
 - **FORM** *fill-out forms*
 - **ISINDEX** *primitive HTML forms*
 - **HR** *horizontal rules*
 - **TABLE** *can be nested*

PARAGRAPH

<p>

[illegible]

<p>

This is for 2nd test... This is for 2nd test... This is for 2nd test... This is for 2nd test...
This is for 2nd test... This is for 2nd test... This is for 2nd test... This is for 2nd test...
This is for 2nd test... This is for 2nd test... This is for 2nd test... This is for 2nd test...
This is for 2nd test... This is for 2nd test... This is for 2nd test... This is for 2nd test...
This is for 2nd test... This is for 2nd test... This is for 2nd test... This is for 2nd test...
This is for 2nd test... This is for 2nd test... This is for 2nd test... This is for 2nd test...
This is for 2nd test... This is for 2nd test... This is for 2nd test... This is for 2nd test...
This is for 2nd test... This is for 2nd test...



OUT
PUT:

[illegible][illegible]

BLOCK QUOTE

- A browser inserts *white space*
before and after
a blockquote element.
- It also insert
margins
for the blockquote element.

BLOCK QUOTE

Here comes a long quotation:

`<blockquote>`


This is a long quotation. This is a long quotation. This is a long quotation. This is a long quotation. This is a long quotation.

`</blockquote>`

Notice that a browser inserts white space before and after a blockquote element. It also insert margins for the blockquote element.

OUTPUT:

Here comes a long quotation:

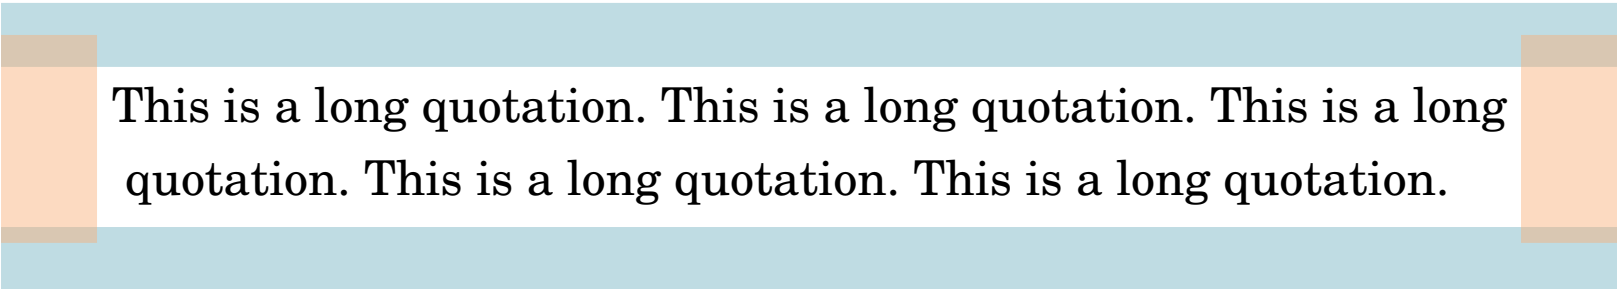

This is a long quotation. This is a long quotation. This is a long quotation. This is a long quotation. This is a long quotation.

Notice that a browser inserts white space before and after a blockquote element. It also insert margins for the blockquote element.

DEFINITION LIST

<dl>

<dt>CSE</dt>

<dd>- we are student of CSE department</dd>

<dt>Microbiology</dt>

<dd>- we are student of Microbiology department </dd>

</dl>

OUTPUT:

CSE

- we are student of CSE department

Microbiology

- we are student of Microbiology department

ABBREVIATION

Input:

We are student of **<abbr title="Computer Science Engineering">CSE</abbr>** department.

Output:

We are student of CSE department.



Computer Science Engineering

ACRONYM

Input:

Can I get this <acronym title="as soon as possible">ASAP</acronym>?

Output:

Can I get this ASAP?



as soon as possible

LISTS

<p>An ordered list:</p>

Coffee

Tea

Milk

An ordered list:

1. Coffee
2. Tea
3. Milk

<p>An unordered list:</p>

Coffee

Tea

Milk

An unordered list:

- Coffee
- Tea
- Milk

ANCHOR

- To create a *link* to another document, by using the *href* attribute
- To create a *bookmark* inside a document, by using the name attribute

```
<a href="www.cse.univdhaka.edu">CSE</a>
```

CSE

- By default, links will appear as follows in all browsers:
 - An unvisited link is underlined and blue
 - A visited link is underlined and purple
 - An active link is underlined and red

TABLE

```
<table width="200" border="0" cellspacing="0" cellpadding="0">
```

```
<tr>
```

```
<td>&nbsp;</td>
```

```
<td>&nbsp;</td>
```

```
</tr>
```

```
<tr>
```

```
<td>&nbsp;</td>
```

```
<td>&nbsp;</td>
```

```
</tr>
```


```
<tr>
```

```
<td>&nbsp;</td>
```

```
<td>&nbsp;</td>
```

```
</tr>
```

```
</table>
```

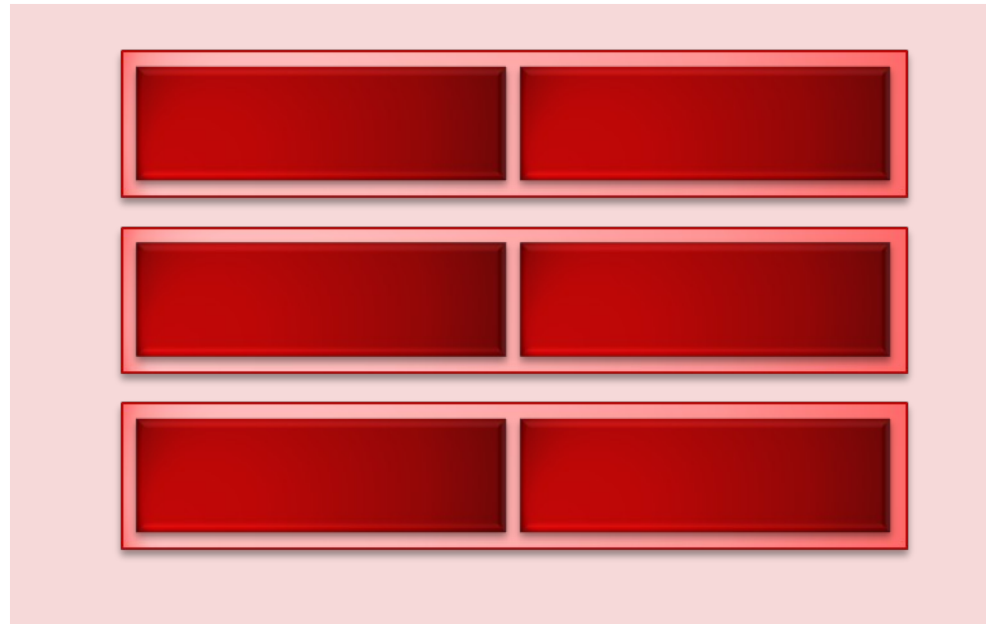

NESTED TABLE

```
<table width="200" border="0" cellspacing="0" cellpadding="0">
  <tr>
    <td>&nbsp;</td>
  </tr>
  <tr>
    <td>&nbsp;</td>
    <table width="144" border="0" align="right" cellpadding="0"
      cellspacing="0">
        <tr>
          <td>&nbsp;</td>
          <td>&nbsp;</td>
        </tr>
        <tr>
          <td>&nbsp;</td>
          <td>&nbsp;</td>
        </tr>
      </table>
    </td>
  </tr>
</table>
```



TABLE HEAD & FOOT

```
<table border="1">
```

```
<thead>
```

```
<tr>
```

```
<th>Month</th>
```

```
<th>Savings</th>
```

```
</tr>
```

```
</thead>
```

```
<tfoot>
```

```
<tr>
```

```
<td>Sum</td>
```

```
<td>$180</td>
```

```
</tr>
```

```
</tfoot>
```

```
</table>
```

```
<tbody>
```

```
<tr>
```

```
<td>January</td>
```

```
<td>$100</td>
```

```
</tr>
```

```
<tr>
```

```
<td>February</td>
```

```
<td>$80</td>
```

```
</tr>
```

```
</tbody>
```


TABLE HEAD & FOOT

Month	Savings
January	\$100
February	\$80
Sum	\$180

IMAGE

```

```

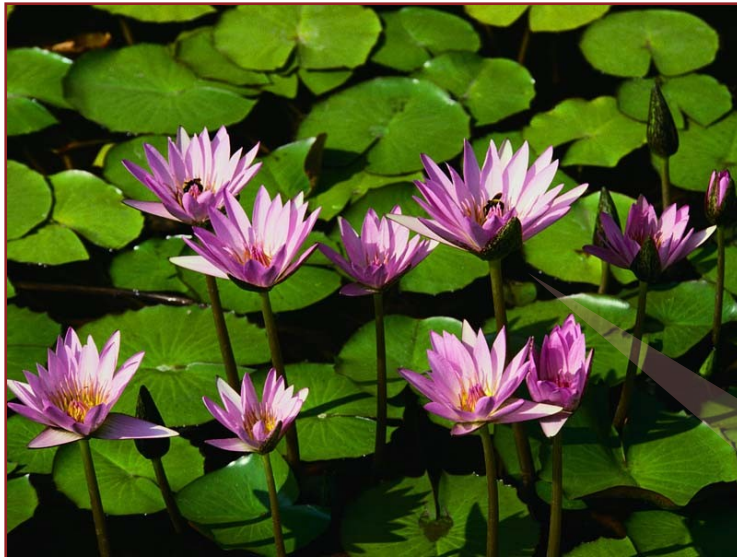

My Image

FORM

- The <form> tag is used to create an HTML form for user input.
- A form can contain input elements like
 - Text fields
 - Textarea
 - Checkboxes
 - Radio-buttons
 - Submit buttons
 - Select menus
 - Field set
 - Jump Menu
 - Legend
 - Label elements.

FORM

Tag	Description
<form>	Defines a form for user input
<input>	Defines an input field
<textarea>	Defines a text-area (a multi-line text input control)
<label>	Defines a label to a control
<fieldset>	Defines a fieldset
<legend>	Defines a caption for a fieldset
<select>	Defines a selectable list (a drop-down box)
<optgroup>	Defines an option group
<option>	Defines an option in the drop-down box
<button>	Defines a push button
<isindex>	Deprecated. Use <input> instead

FORM

```
<form name="form1" action="action.php" method="post" enctype="multipart/form-data">
```

```
<input name="textfield" type="text" size="40" maxlength="100">
```



```
<textarea name="textarea" cols="40" rows="4"></textarea>
```



```
<input type="submit" name="Submit" value=" Submit ">
```



```
<input type="reset" name="Reset" value=" Reset">
```



```
<input type="checkbox" name="checkbox" value="checkbox">
```



```
<input name="radiobutton" type="radio" value="radiobutton">
```



```
</form>
```

FORM

```
<form name="form1" action="action.php" method="post" enctype="multipart/form-data">
```

```
<select name="Department">
```

```
<option>CSE</option>
```


```
<option>ISRT</option>
```

```
</select>
```

```
<input type="file" name="file" >
```

```
</form>
```

FRAMESET

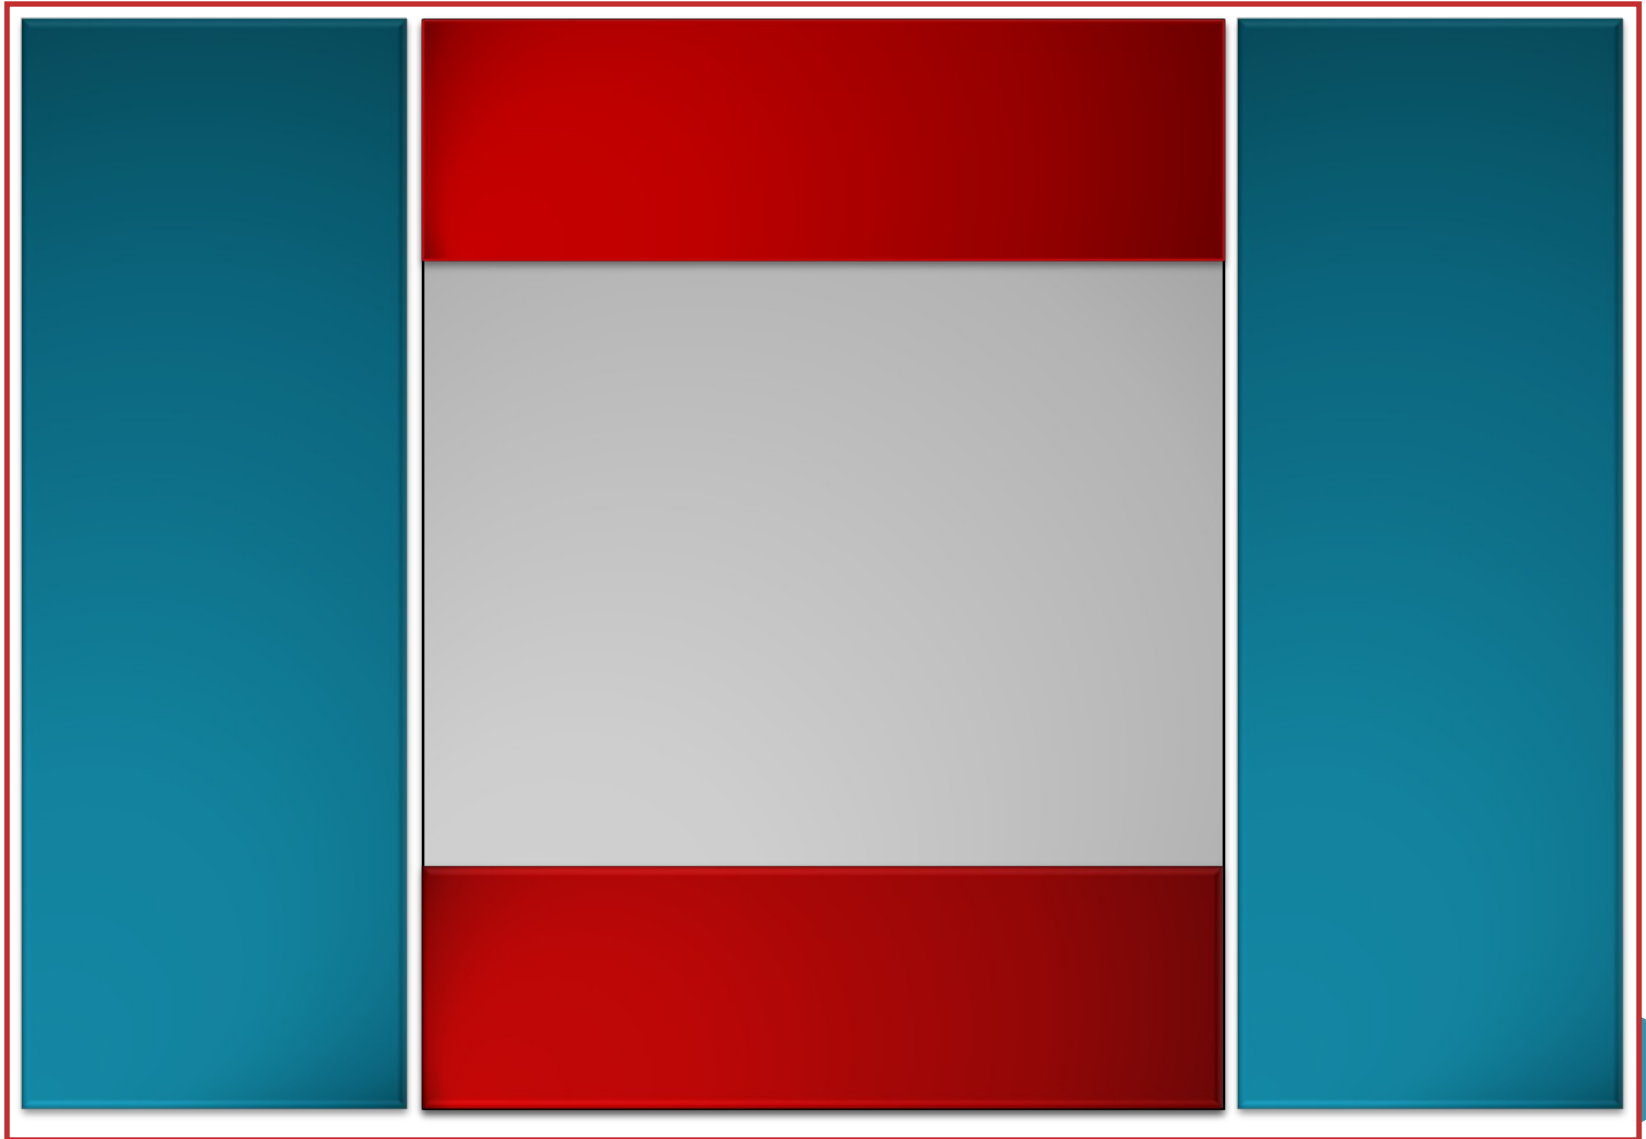

FRAMESET

```
<frameset cols="20%,*,20%">
```

```
  <frame name="Left" src="Left.html"/>
```

```
    <frameset rows="20%,*,20%">
```

```
      <frame name="Top" src="Top.html"/>
```

```
      <frame name="Body" src="Body.html"/>
```

```
      <frame name="Bottom" src="Bottom.html"/>
```

```
    </frameset>
```

```
  <frame name="Right" src="Right.html"/>
```

```
</frameset>
```

HIDING TEXT

- **Hiding text content and markup:**

<! --

<p>The content of this paragraph will not appear within the body so long as it's within a comment.</p>--><p>The content of this paragraph will be displayed, because it's outside of the comment field.</p>

-- >

OTHERS TAGS

- Break
- Hr
- Div
- No Frame
-

QUESTIONs
???

