



M.S.P. Mandal's

Deogiri College, Chhatrapati Sambhajinagar.

Affiliated to

Dr. Babasaheb Ambedkar Marathwada University

Chhatrapati Sambhajinagar.

Project Report

On

“Face Detection System”

Submitted for partial fulfilment of the degree of

B.Sc.(Computer Science) VI Semester

By

Mr. Mahesh A. Ugale -191

Mr. Omkar A. Tejinkar -200

Mr. Gaurav R. Warkul - 196

Mr. Aditya S. Shinde - 176

Academic Year 2025-2026

Project Guide

Ms. A.V. Jawale

In-charge

Ms. R. B. Thatte

HOD

Dr. R. Magre

DEOGIRI COLLEGE, CHHATRAPATI SAMBHAJINAGAR

DEPARTMENT OF COMPUTER SCIENCE, IT AND ANIMATION



CERTIFICATE

This is to certify that the candidates for the **B.Sc. (Computer Science) VI Semester** has satisfactorily completed the project entitled " **Face Detection System**" for the Partial Fulfilment of the Undergraduate Degree of **Dr. Babasaheb Ambedkar Marathwada University, Chhatrapati Sambhajinagar** for the academic year 2025-26.

Submitted By

Mr. Mahesh A. Ugale
Mr. Omkar A. Tejinkar
Mr. Gaurav R. Warkad
Mr. Aditya S. Shinde

Project Guide

Ms. A. V. Jawale

In-charge

Ms. R. B. Thatte

HOD

Dr. R. A. Magre

External Examiner

❖ ACKNOWLEDGMENT

Thankful to our principal, Prof. R. P. Patil, and the head of our department of computer science, Dr. R. A. Magre, for giving me a well-equipped lab and for their encouragement and guidance.

Completion of the project would not be accomplished without cooperation and help from a teacher guide. I wish to express my deep sense of gratitude to guide Ms. A. V. Jawale Department of Computer Science, Deogiri College, Chhatrapati Sambhaji Nagar who has supported me throughout the project work in the form of comments, corrections, and excellent suggestions.

I am also very thankful to my friends, whose presence always inspires me to do better. I am also thankful to all who helped me a lot in developing this project.

Yours Faithfully,
Mr. Mahesh A. Ugale
Mr. Omkar A. Tejinkar
Mr. Gaurav R. Warkad
Mr. Aditya S. Shinde
(B.Sc. CS-SY)

,

❖ INDEX

Sr. No.	Content	Pg. No.
1.	Introduction to project	5 to 6
2.	Objective of Project	7
3.	Introduction to Frontend	8
4.	Introduction to Backend	9
5.	Hardware and Software Requirement Of project	10
6.	Database Design	11
7.	DFD	12
8.	Form Layouts	13
9.	Source Code	14
10.	Limitations Of project	15
11.	Conclusion	16
12.	References	17

❖ Introduction of Project

Face detection is a rapidly evolving area of computer vision and artificial intelligence that focuses on identifying and locating human faces in digital images or video streams. In today's technology-driven world, face detection has become a fundamental component of many modern applications such as security systems, surveillance, attendance management, mobile authentication, social media platforms, and smart devices. Unlike traditional identification methods that depend on physical documents, passwords, or manual verification, face-based systems offer a more natural, contactless, and automated approach to identification. In traditional systems, identification and verification of individuals are often carried out using ID cards, usernames and passwords, or manual record maintenance. These methods are not only time-consuming but also prone to errors, duplication, misuse, and security threats. Passwords can be forgotten or stolen, ID cards can be lost or duplicated, and manual systems require significant human effort and supervision. With the increasing demand for secure and efficient systems, there is a strong need for automated solutions that reduce human involvement while increasing accuracy and reliability. Face detection technology addresses many of these challenges by using a person's facial features as a means of identification. Every human face has unique characteristics such as the shape of the eyes, nose, mouth, jawline, and the relative distance between facial features. Face detection systems analyze these features to detect the presence of a face in an image or video frame. This process serves as the foundation for more advanced applications such as face recognition, tracking, and behavioral analysis.

As a result, face detection plays a crucial role in enhancing security and automation in various domains. The Face Detection System developed in this project is a web-based application designed to demonstrate the practical implementation of face detection using modern web technologies. The system is developed using PHP for backend processing, MySQL for database management, and JavaScript with face-api.js for detecting faces through images and live camera feeds. The use of face-api.js, which is built on top of TensorFlow.js, allows the system to perform face detection directly in the browser without requiring high-end hardware or complex installations. This project provides a structured system where an administrator can manage users and facial data efficiently. The admin can add new persons, upload their facial images, store relevant information in the database, and monitor the system through a secure dashboard. The system supports both image-based detection and real-time face detection using a webcam. When a live camera is activated, the system continuously scans the video feed and detects faces in real time, demonstrating the effectiveness of browser-based face detection technology.

One of the major advantages of this Face Detection System is its simplicity and usability. The application is designed with a user-friendly interface that allows even non-technical users to operate it easily. Separate login roles for Admin and Users ensure proper access control and data security. The system also maintains structured records in the database, making data retrieval, updating, and deletion simple and efficient. By integrating face detection with database management, the project highlights the practical use of full-stack web development

concepts. From an academic perspective, this project is highly relevant for students studying computer science and information technology. It provides hands-on experience with realworld technologies such as computer vision, machine learning libraries, frontend-backend integration, and database connectivity. Students gain practical knowledge of how facial data is processed, how APIs and libraries are integrated into web applications, and how security and performance considerations are handled in real-time systems. Furthermore, the Face Detection System has significant scope for future enhancement. While the current system focuses on detecting faces and managing facial records, it can be extended to include advanced features such as face recognition, emotion detection, age and gender prediction, attendance automation, and integration with Internet of Things (IoT) devices. The system can also be deployed in educational institutions, offices, hospitals, and public places to improve security and monitoring. In conclusion, the Face Detection System represents an effective solution to the growing demand for automated, secure, and contactless identification systems. By leveraging modern web technologies and face detection algorithms, this project demonstrates how theoretical concepts of computer vision can be transformed into a practical and functional application. The system not only reduces dependency on traditional identification methods but also lays a strong foundation for future advancements in intelligent and smart security systems.

❖ Objective Of Project

The primary objective of this project is to design and implement an intelligent Face Detection and Recognition System that can automatically detect human faces from images or live camera input and accurately identify or match them with previously stored facial data. The system focuses on improving security, automation, accuracy, and ease of management using modern computer vision techniques.

- To develop an automated face detection mechanism
- The system aims to automatically detect human faces from live camera feed or uploaded images without manual intervention, reducing human effort and error.
- To implement face recognition using facial descriptors
- The project generates unique facial descriptors for each person and stores them in a database, enabling reliable and efficient face recognition and matching.
- To provide secure user and admin authentication
- The system ensures that only authorized users (admin) can access sensitive functionalities such as adding, deleting, or managing facial records through role-based access control.
- To maintain a centralized facial data repository
- All facial images, descriptors, and personal information are securely stored in a database, allowing easy retrieval, updating, and management of records.
- To enable real-time face matching
- The system compares detected faces with stored facial descriptors in real time and identifies whether the face already exists in the system.
- To record and manage face match history
- Every successful or unsuccessful face match attempt is logged, allowing administrators to track activity for monitoring, auditing, and verification purposes.
- To provide an intuitive and user-friendly interface
- The project emphasizes a clean and interactive UI that allows administrators to easily navigate features such as adding persons, viewing records, and matching faces.
- To reduce manual identification effort
- By automating face recognition, the system minimizes dependency on traditional identification methods such as ID cards or manual verification.
- To ensure scalability and extensibility
- The system is designed in a modular way so that additional features such as multi-camera support, attendance systems, or security surveillance can be integrated in the future.
- To demonstrate practical application of computer vision and AI concepts
- The project serves as a real-world implementation of face detection, machine learning, and database integration, enhancing practical understanding of modern AI-based systems.

❖ Introduction of Frontend

1. HTML (HyperText Markup Language)

HTML is used to create the basic structure of the web application. It defines the layout of pages such as forms, buttons, image upload fields, video containers, and result sections. HTML provides the skeleton that allows users to interact with the face matching system through a web browser.

2. CSS (Cascading Style Sheets)

CSS is used to design and style the user interface of the application. It controls colors, fonts, layouts, spacing, responsiveness, and visual effects. In this project, CSS is used to create a modern dashboard layout with sidebars, cards, buttons, and preview panels, ensuring an attractive and user-friendly experience for both admin and user panels.

3. JavaScript

JavaScript is used to add dynamic behavior and interactivity to the frontend. It handles image upload previews, button actions, form validation, live camera access, and real-time updates without reloading the page. JavaScript also manages communication with the backend using asynchronous requests (AJAX/fetch).

4. Face-API.js (JavaScript Library)

Face-API.js is a JavaScript library used for face detection and face recognition in the browser. It utilizes pre-trained deep learning models to detect faces, extract facial features (descriptors), and compare faces using distance metrics. This library enables both image-based and live camera face matching directly on the client side.

5. Browser Media APIs (Webcam Access)

Browser media APIs are used to access the device camera for live face matching. They allow real-time video streaming inside the web application, enabling users to perform live face detection and matching securely through the browser without external software.

6. Responsive Design Techniques

Responsive design techniques are applied to ensure the application works smoothly across different screen sizes and devices. Flexible layouts, media queries, and scalable components allow the interface to adapt to desktops, laptops, and tablets.

❖ Introduction of Backend

1. PHP (Hypertext Preprocessor)

PHP is used as the primary backend programming language in this project. It handles server-side logic such as user authentication, role-based access control (admin and user), data processing, and interaction with the database. PHP receives data from the frontend, processes face matching results, and stores match history securely.

2. MySQL Database

MySQL is used as the relational database management system for storing application data. It stores user accounts, person records (name, age, photo, facial descriptors), and face match history. MySQL ensures structured data storage, efficient querying, and reliable data management.

3. SQL (Structured Query Language)

SQL is used to perform database operations such as inserting, retrieving, updating, and deleting records. SQL queries are used to manage user details, face descriptors, and match history data in the MySQL database.

4. Server-Side Session Management

PHP sessions are used to manage user login states and access control. Sessions ensure that only authenticated users can access specific pages and that admin and user functionalities remain separated. This enhances security and maintains user identity throughout the application.

5. REST-like Request Handling (POST / JSON / Form Data)

The backend processes data sent from the frontend using HTTP POST requests. Both JSON and URL-encoded form data are handled to support image-based and live face matching. This allows smooth communication between frontend JavaScript and backend PHP scripts.

6. Match History Processing Module

A dedicated backend module is used to store face matching results. It records details such as username, matched person, match distance, match status, match source (LIVE or UPLOAD), and timestamp. This data is used for monitoring, auditing, and review by both users and administrators.

7. File Handling (Image Storage)

PHP is used to manage uploaded image files and stored face images. Images of registered persons are saved on the server and linked with their corresponding facial descriptors stored in the database.

❖ **Hardware And Software Requirements of Project**

1.Hardware Requirement :


- Computer or Laptop
- Intel Core i3 Processor or higher
- Minimum 4 GB RAM
- Webcam or Camera
- Keyboard and Mouse

2.Software Requirement :


- Operating System: Windows 10 / Windows 11
- Backend Language: PHP
- Database: MySQL
- Server: XAMPP (Apache & MySQL)
- Frontend Technologies: HTML, CSS, JavaScript
- Face Detection Library : face-api.js
- Web Browser : Google Chrome
- Code Editor : Visual Studio Code

Database Design

Face detection sy :

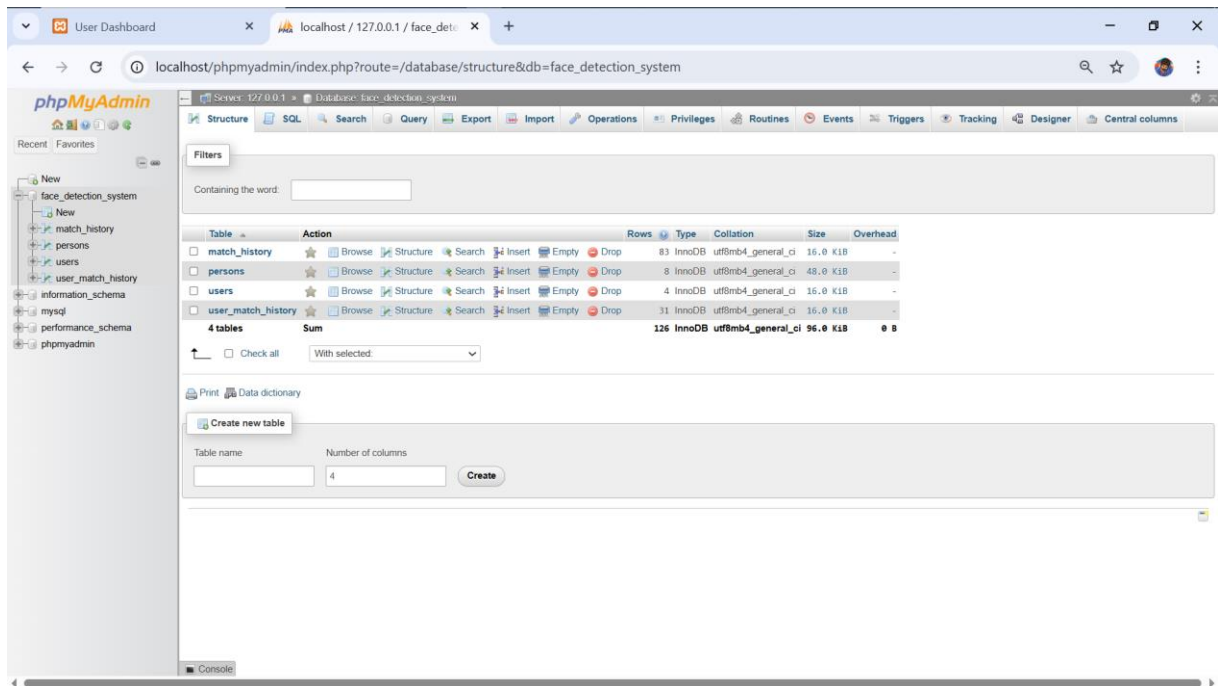

Match_history :

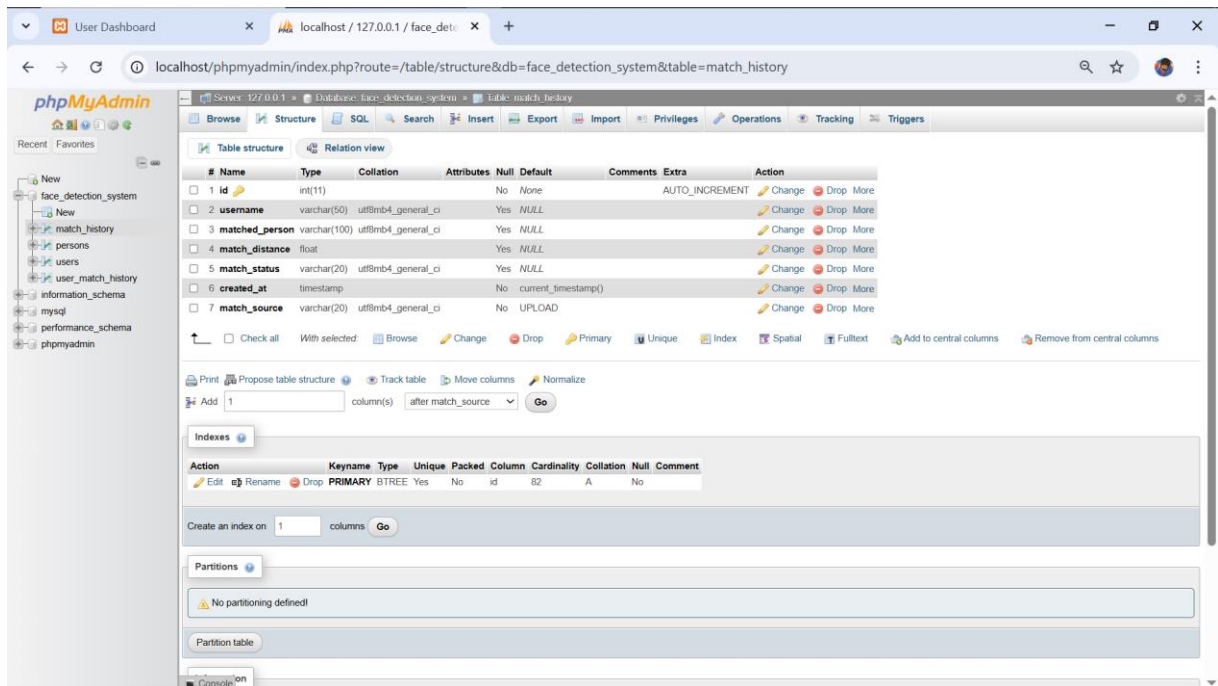

Persons :

The screenshot shows the phpMyAdmin interface for the 'face_detection_system' database. The 'persons' table structure is displayed in the 'Table structure' tab. The table has the following columns:

#	Name	Type	Collation	Attributes	Null	Default	Comments	Extra	Action
1	id	int(11)			No			AUTO_INCREMENT	Change Drop More
2	name	varchar(100)	utf8mb4_general_ci		Yes	NULL			Change Drop More
3	age	int(11)			Yes	NULL			Change Drop More
4	photo	varchar(255)	utf8mb4_general_ci		Yes	NULL			Change Drop More
5	descriptor	text	utf8mb4_general_ci		No				Change Drop More

Below the table structure, there are sections for 'Indexes', 'Partitions', and 'Information'. The 'Indexes' section shows a primary index on the 'id' column. The 'Partitions' section indicates that no partitioning is defined. The 'Information' section shows the table's space usage and row statistics.

Users :

The screenshot shows the phpMyAdmin interface for the 'face_detection_system' database. The 'users' table structure is displayed in the 'Table structure' tab. The table has the following columns:

#	Name	Type	Collation	Attributes	Null	Default	Comments	Extra	Action
1	id	int(11)			No			AUTO_INCREMENT	Change Drop More
2	username	varchar(50)	utf8mb4_general_ci		Yes	NULL			Change Drop More
3	password	varchar(255)	utf8mb4_general_ci		Yes	NULL			Change Drop More
4	role	varchar(10)	utf8mb4_general_ci		No	user			Change Drop More
5	email	varchar(100)	utf8mb4_general_ci		Yes	NULL			Change Drop More
6	photo	varchar(255)	utf8mb4_general_ci		Yes	NULL			Change Drop More

Below the table structure, there are sections for 'Indexes', 'Partitions', and 'Information'. The 'Indexes' section shows a primary index on the 'id' column. The 'Partitions' section indicates that no partitioning is defined. The 'Information' section shows the table's space usage and row statistics.

User_match_history :

The screenshot displays the phpMyAdmin interface for the 'face_detection_system' database. The 'Table structure' tab is active for the 'user_match_history' table. The table structure is as follows:

#	Name	Type	Collation	Attributes	Null	Default	Comments	Extra	Action
1	id	int(11)			No	None		AUTO_INCREMENT	Change Drop More
2	username	varchar(50)	utf8mb4_general_ci		Yes	NULL			Change Drop More
3	matched_person	varchar(100)	utf8mb4_general_ci		Yes	NULL			Change Drop More
4	distance	float			Yes	NULL			Change Drop More
5	result	varchar(20)	utf8mb4_general_ci		Yes	NULL			Change Drop More
6	match_time	datetime			Yes	current_timestamp()			Change Drop More
7	created_at	datetime			Yes	current_timestamp()			Change Drop More


Below the table structure, the 'Indexes' section shows a primary index on the 'id' column:

Action	Keyname	Type	Unique	Packed	Column	Cardinality	Collation	Null	Comment
Edit Rename Drop	PRIMARY	BTREE	Yes	No	id	28	A	No	

The 'Partitions' section indicates that no partitioning is defined for this table.


❖ DFD Level-1

DFD Level 1 – Face Detection System

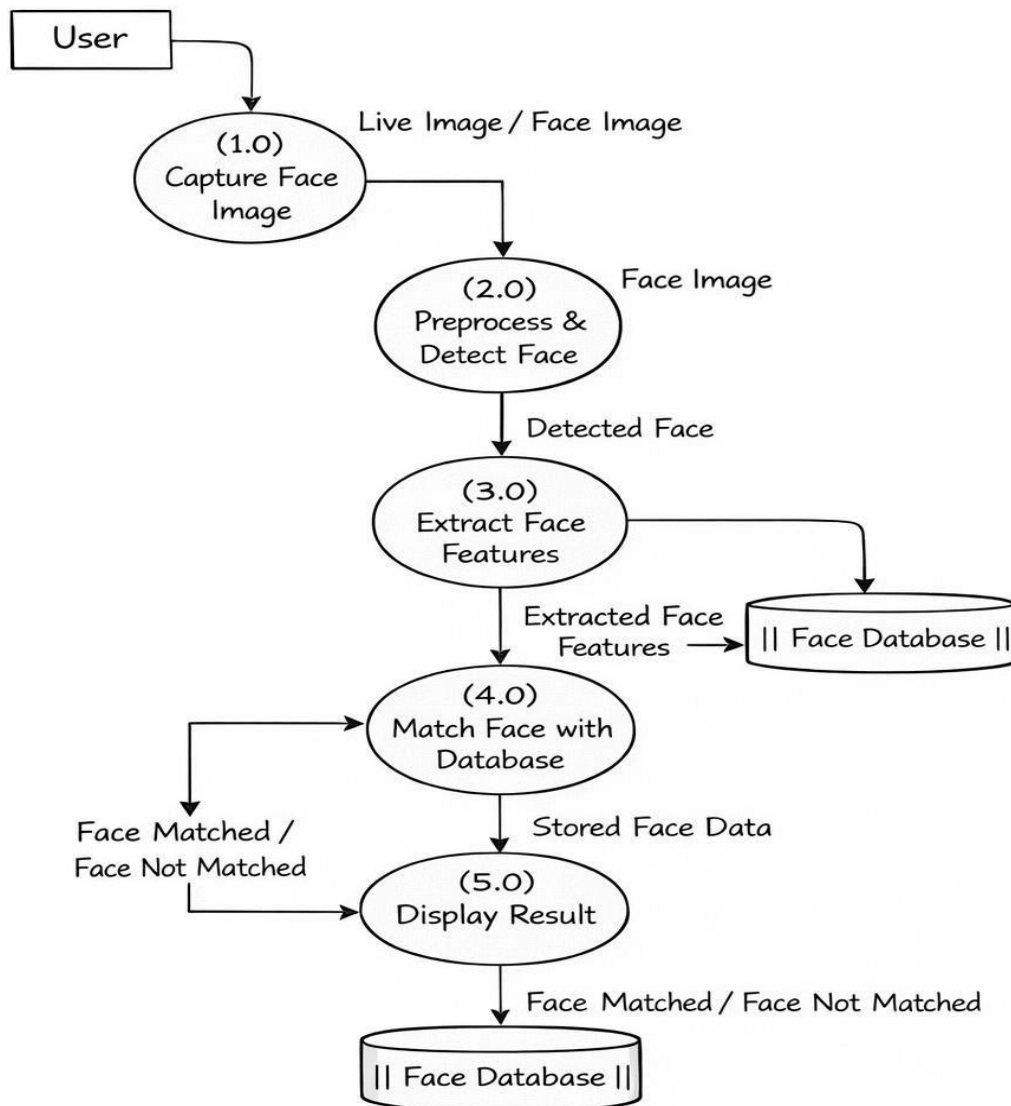


❖ Form Layouts

Login Page :

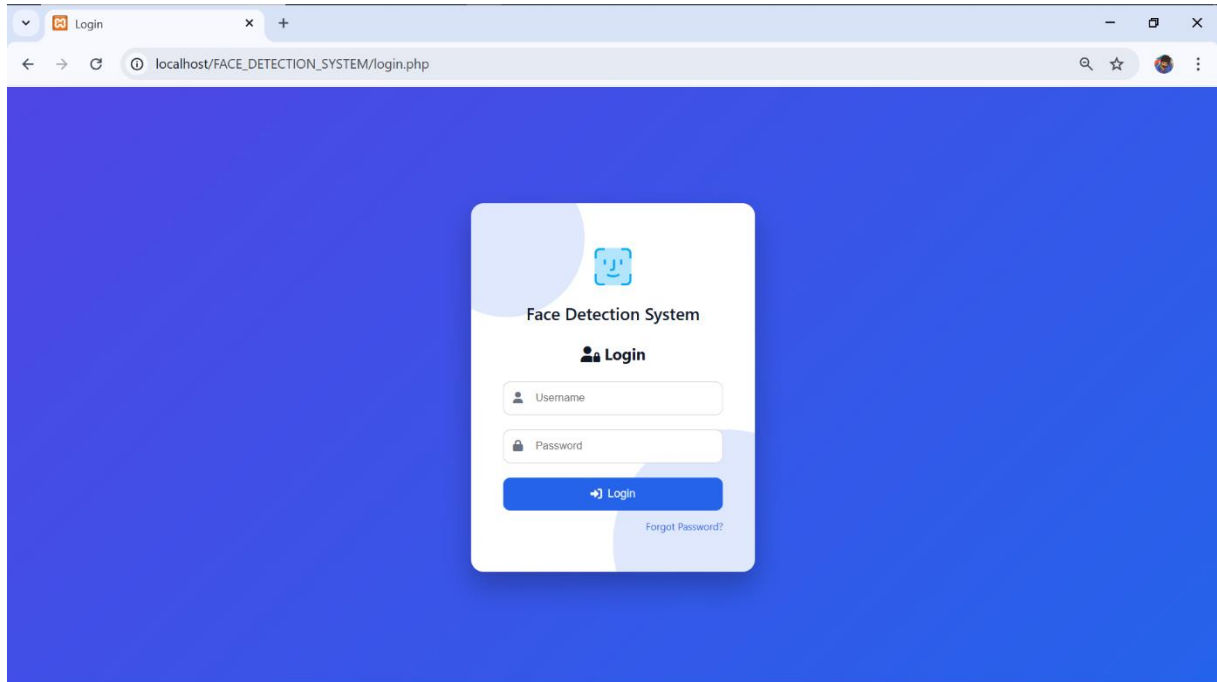

The screenshot shows a web browser window with the address bar displaying 'localhost/FACE_DETECTION_SYSTEM/login.php'. The page has a solid blue background. In the center, there is a white login card with a blue header area. The card contains a blue face icon, the text 'Face Detection System', and a 'Login' section with a user icon. Below this are two input fields: 'Username' and 'Password'. A blue 'Login' button is positioned below the password field, and a 'Forgot Password?' link is at the bottom right of the card.

Admin Dashboard:

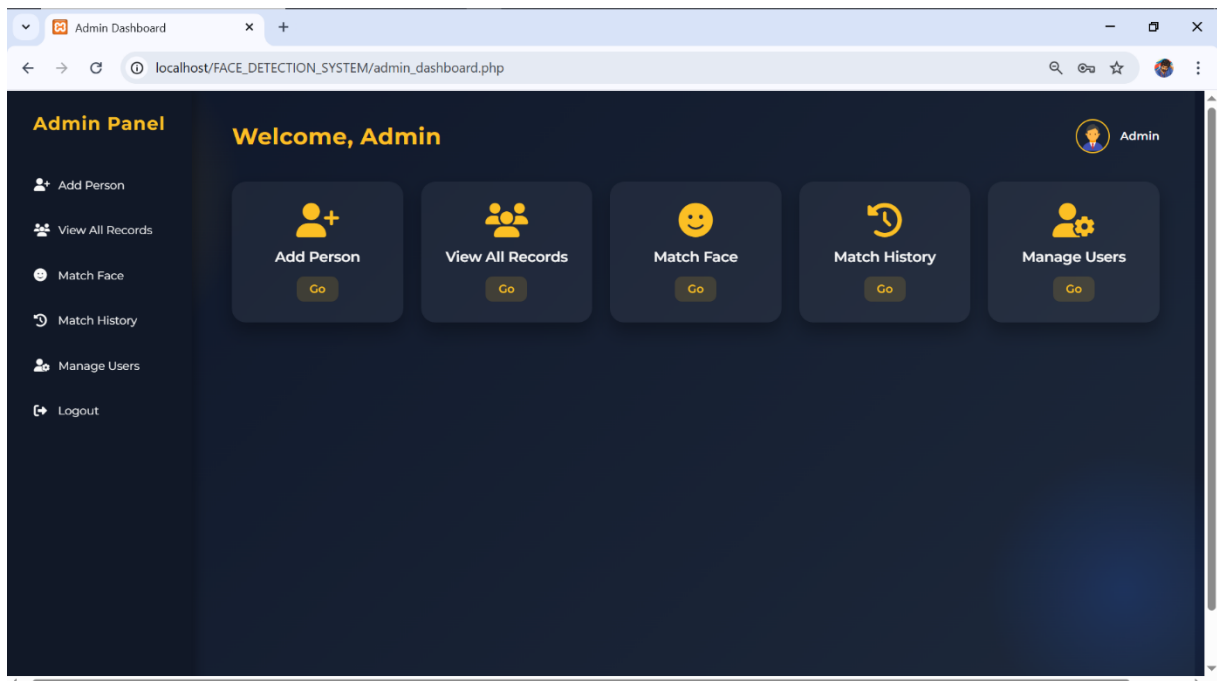

The screenshot shows a web browser window with the address bar displaying 'localhost/FACE_DETECTION_SYSTEM/admin_dashboard.php'. The dashboard has a dark blue background. On the left is a sidebar titled 'Admin Panel' with a list of links: 'Add Person', 'View All Records', 'Match Face', 'Match History', 'Manage Users', and 'Logout'. The main content area features a 'Welcome, Admin' message and a row of five cards: 'Add Person', 'View All Records', 'Match Face', 'Match History', and 'Manage Users'. Each card has a yellow icon, a title, and a 'Go' button. The user 'Admin' is logged in, as indicated by a profile icon in the top right corner.

Add Person Page :


The screenshot shows a web browser window with the address bar displaying 'localhost/FACE_DETECTION_SYSTEM/add_person.php'. The page has a dark blue theme. On the left is an 'Admin Panel' sidebar with links: Home, Add Person (highlighted), View All Records, Match Face, Match History, Manage Users, and Logout. The main content area is titled 'Welcome, mahi' and contains a form titled 'Add Person'. The form has input fields for 'Name' and 'Age', a file upload section with 'Choose file' and 'No file chosen' text, and three buttons: 'Start Camera', 'Capture', and 'Generate Descriptor'. At the bottom of the form is a 'Save Person' button.

View All Records Page :

The screenshot shows a web browser window with the address bar displaying 'localhost/FACE_DETECTION_SYSTEM/view_persons.php'. The page has a dark blue theme. On the left is an 'Admin Panel' sidebar with links: Home, Add Person, View All Records (highlighted), Match Face, Match History, Manage Users, and Logout. The main content area is titled 'Welcome, mahi' and contains a table with a search bar 'Search by ID, Name or Age'. The table has columns: ID, Name, Age, Photo, and Actions. The table contains five rows of data, each with a photo and 'Edit' and 'Delete' buttons in the Actions column.

ID	Name	Age	Photo	Actions
18	Yogesh Kharote	19		<button>Edit</button> <button>Delete</button>
17	Sneha Unawane	20		<button>Edit</button> <button>Delete</button>
16	Anshuman Thombre	20		<button>Edit</button> <button>Delete</button>
15	Gaurav Warkad Patil	20		<button>Edit</button> <button>Delete</button>
14	Adarsh Chindale	20		<button>Edit</button> <button>Delete</button>

Match Face Page :

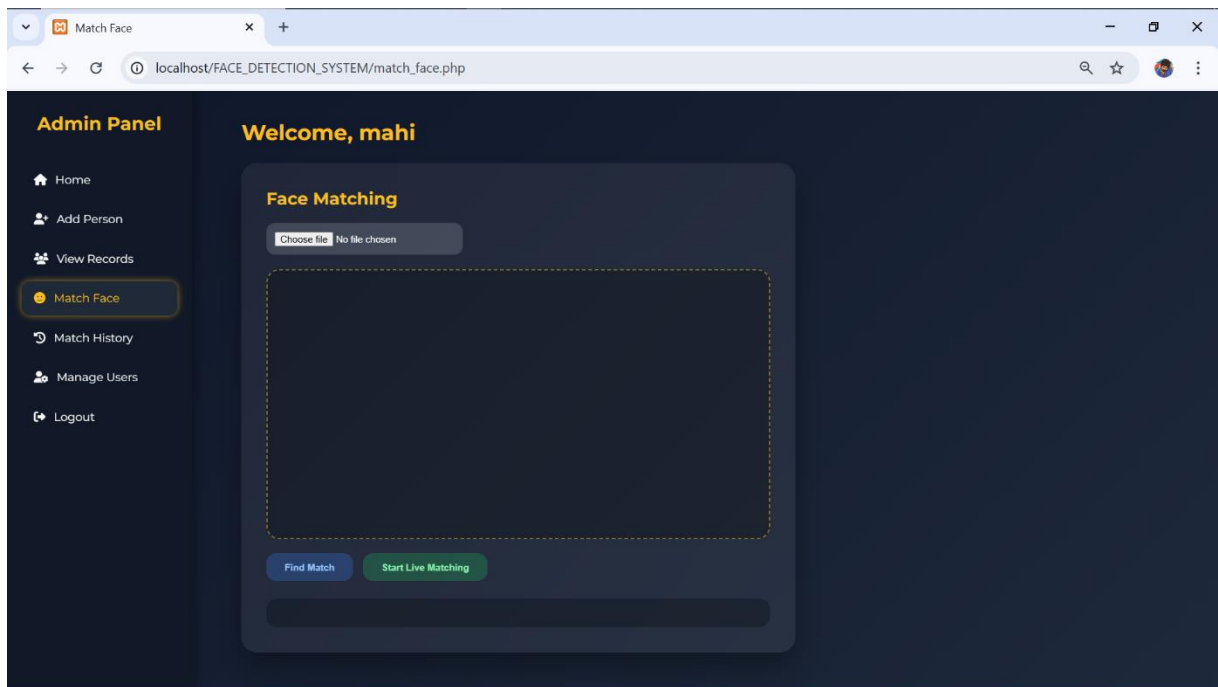


Match History Page :


The screenshot shows the 'Match History' page of the web application. The browser address bar indicates the URL is `localhost/FACE_DETECTION_SYSTEM/admin_match_history.php`. The sidebar on the left has the 'Admin Panel' header and the following menu items: Home, Add Person, View All Records, Match Face, Match History (highlighted with a yellow border), Manage Users, and Logout. The main content area displays 'Welcome, mahi' and a table titled 'All Users Match History'. The table has 7 columns: ID, USERNAME, MATCHED PERSON, DISTANCE, STATUS, SOURCE, and DATE & TIME. It contains 15 rows of match data.

ID	USERNAME	MATCHED PERSON	DISTANCE	STATUS	SOURCE	DATE & TIME
75	mahi	MAHI PATIL	0.483	MATCH	LIVE	2026-02-02 11:49:26
74	mahi	Sneha Unawane	0.000	MATCH	UPLOAD	2026-02-02 11:49:04
73	mahi	Anshuman Thombre	0.000	MATCH	LIVE	2026-02-02 11:40:32
72	mahi	Sneha Unawane	0.000	MATCH	LIVE	2026-02-02 11:39:36
71	mahi	MAHI PATIL	0.449	MATCH	UPLOAD	2026-02-02 11:21:42
70	mahi	Anshuman Thombre	0.000	MATCH	UPLOAD	2026-02-02 11:21:11
69	mahi	Anshuman Thombre	0.068	MATCH	UPLOAD	2026-02-02 11:09:46
68	mahi	MAHI PATIL	0.449	MATCH	UPLOAD	2026-02-02 10:42:33
67	mahi	Yogesh Kharote	0.000	MATCH	UPLOAD	2026-02-02 10:42:02
66	mahi	Anshuman Thombre	0.000	MATCH		2026-02-02 10:09:16
65	mahi	MAHI PATIL	0.377	MATCH		2026-02-02 10:08:26
64	mahi		0.600	NO MATCH		2026-02-02 10:07:07
63	mahi		0.600	NO MATCH		2026-02-02 10:07:06
62	mahi		0.600	NO MATCH		2026-02-02 10:07:04


Manage Users Page :

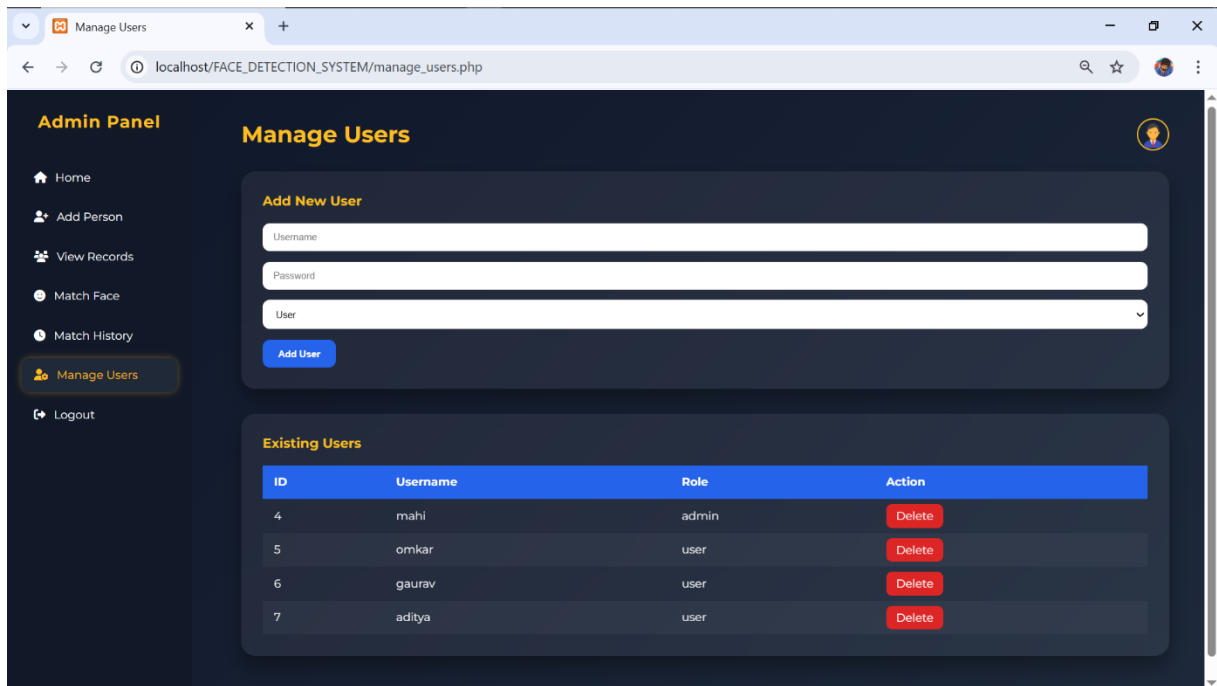


User Dashboard Page :

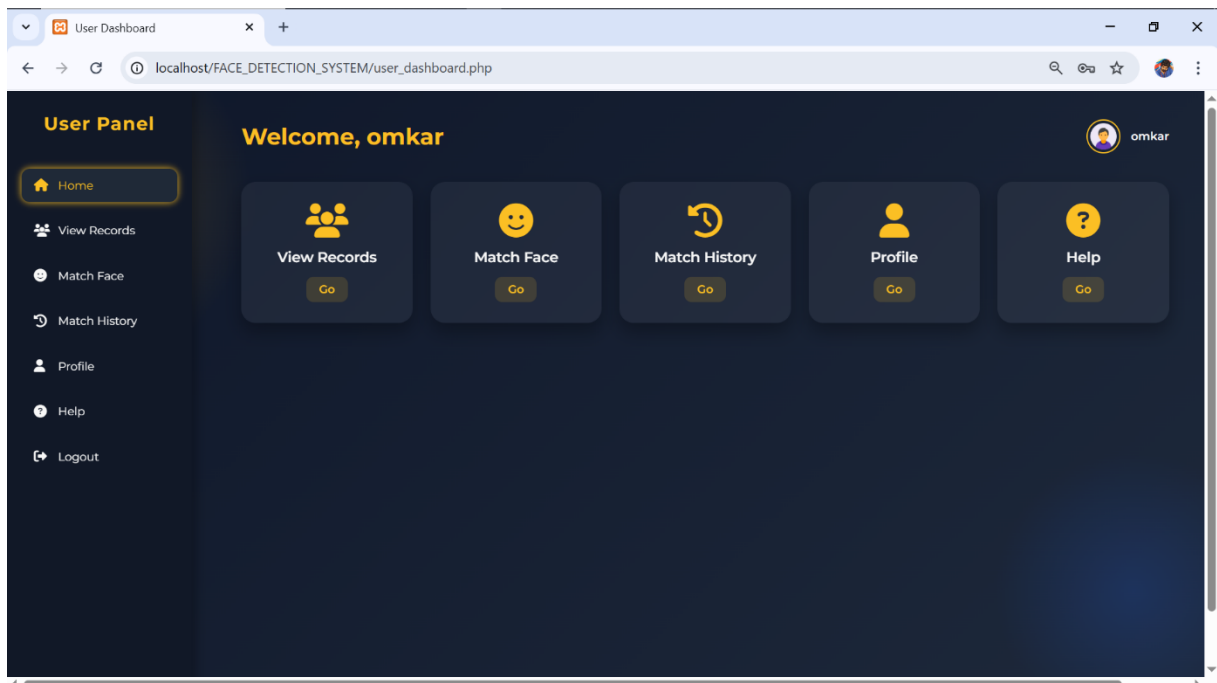

Match Face Page :

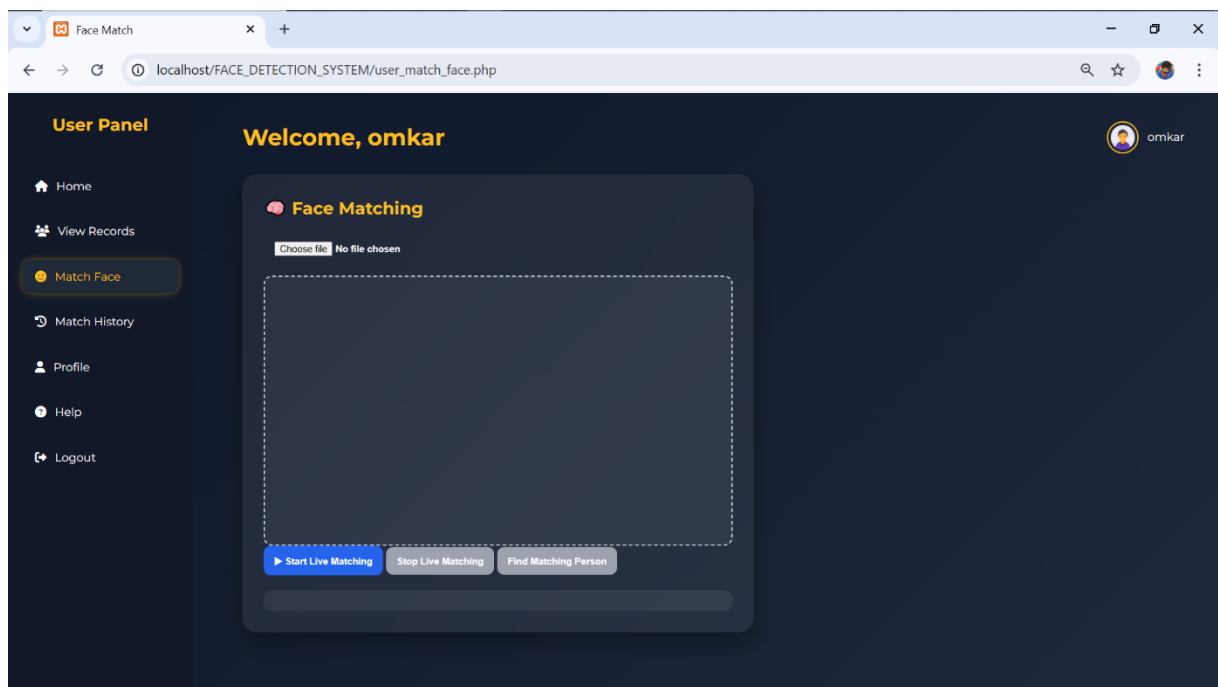

Match History Page :

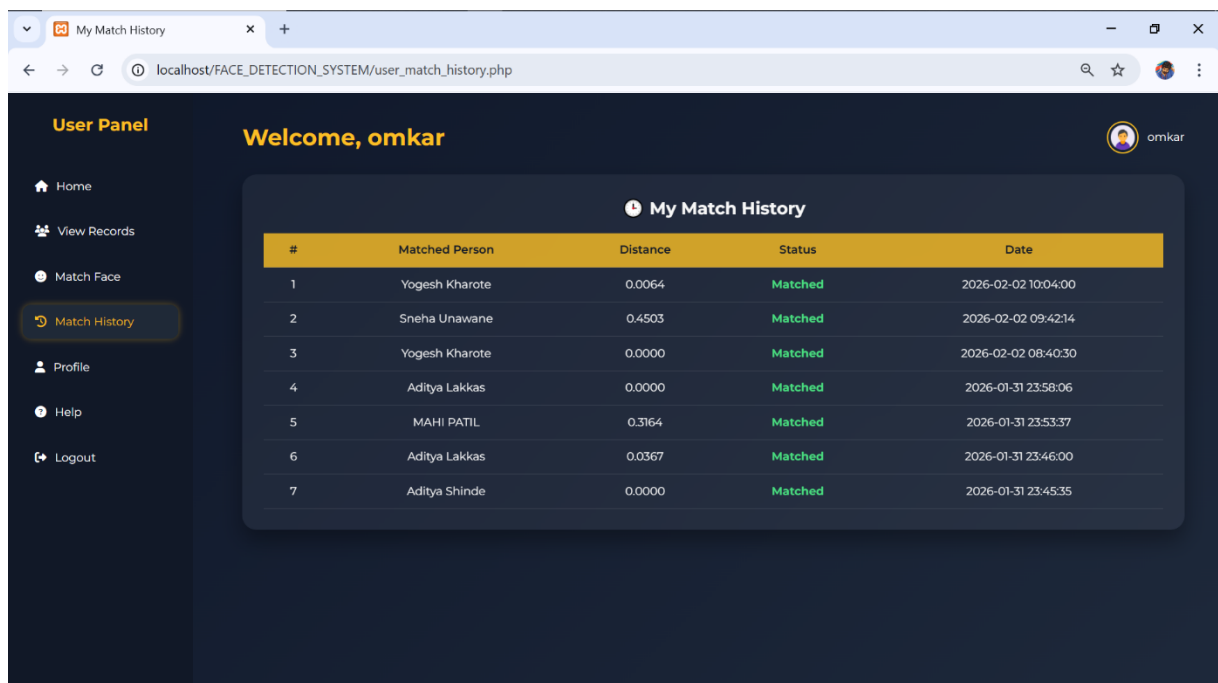

User Profile Page :

The screenshot shows a web browser window with the address bar displaying 'localhost/FACE_DETECTION_SYSTEM/profile.php'. The page has a dark blue theme. On the left is a 'User Panel' sidebar with links: Home, View Records, Match Face, Match History, Profile (highlighted), Help, and Logout. The main content area is titled 'My Profile' and features a circular profile picture of a man. Below the photo, the 'Username: omkar' is displayed. The page includes three form sections: 1. 'Email' with a text input containing 'omkarjinkar9922@gmail.com'. 2. 'Profile Photo' with a 'Choose file' button and the text 'No file chosen'. 3. 'Change Password' with 'New password' and 'Confirm password' text inputs. Each section has a yellow 'Save Changes' or 'Update Password' button at the bottom.

Help Page :

The screenshot shows a web browser window with the address bar displaying 'localhost/FACE_DETECTION_SYSTEM/help.php'. The page has a dark blue theme. On the left is a 'User Panel' sidebar with links: Home, View Records, Match Face, Match History, Profile, Help (highlighted), and Logout. The main content area is titled 'Welcome, omkar' and 'Help & User Guide'. It contains three sections of help text: 1. 'How Face Matching Works' with bullet points: 'Allow camera permission when prompted', 'Keep your face straight and clearly visible', and 'Good lighting improves recognition accuracy'. 2. 'If Face Is Not Matching' with bullet points: 'Ensure proper lighting', 'Do not cover your face (mask, cap, sunglasses)', and 'Stay still for a few seconds'. 3. 'Match History' with bullet points: 'All successful and failed attempts are saved' and 'Date, time, and match result are recorded automatically'. A fourth section, 'Account & Security', has bullet points: 'You can change your password from the Profile page' and 'Your facial data is stored securely'. At the bottom, there is a 'Need more help?' section with the text 'Contact the system administrator or project supervisor.'

❖ Source Code

Login.php :

```
<?php
session_start();
include "config/db.php";
$error = "";
if (isset($_POST['login'])) {
    $username = $_POST['username'];
    $password = $_POST['password'];
    $query = $conn->prepare("SELECT * FROM users WHERE username=?");
    $query->bind_param("s", $username);
    $query->execute();
    $result = $query->get_result();
    if ($result->num_rows > 0) {
        $row = $result->fetch_assoc();
        $dbPass = $row['password'];
        if (password_verify($password, $dbPass)) {
            $_SESSION['username'] = $row['username'];
            $_SESSION['role'] = $row['role'];

            if ($row['role'] == 'admin') {
                header("Location: admin_dashboard.php");
            } else {
                header("Location: user_dashboard.php");
            }
        }
    }
}
```

```

        exit();
    }
    elseif (md5($password) === $dbPass) {
        $newHash = password_hash($password, PASSWORD_DEFAULT);
        $update = $conn->prepare("UPDATE users SET password=? WHERE
username=?");
        $update->bind_param("ss", $newHash, $username);
        $update->execute();
        $_SESSION['username'] = $row['username'];
        $_SESSION['role'] = $row['role'];
        if ($row['role'] == 'admin') {
            header("Location: admin_dashboard.php");
        } else {
            header("Location: user_dashboard.php");
        }
        exit();
    }
    else {
        $error = "Invalid username or password!";
    }
} else {
    $error = "Invalid username or password!";
}
}
?>

```

```
<!DOCTYPE html>

<html lang="en">

<head>

<meta charset="UTF-8">

<title>Login</title>

<meta name="viewport" content="width=device-width, initial-scale=1.0">

<link href="https://cdnjs.cloudflare.com/ajax/libs/font-
awesome/6.5.0/css/all.min.css" rel="stylesheet">

<style>

* { box-sizing: border-box; margin: 0; padding: 0; }

body {

    font-family: 'Segoe UI', Tahoma, Geneva, Verdana, sans-serif;

    background: linear-gradient(135deg, #4f46e5, #2563eb);

    height: 100vh;

    display: flex;

    align-items: center;

    justify-content: center;

    overflow: hidden;

}

.login-box {

    background: #fff;

    padding: 55px 45px;

    width: 400px;

    border-radius: 18px;

    box-shadow: 0 20px 40px rgba(0,0,0,0.25);

    position: relative;
```

```
    overflow: hidden;
    text-align: center;
}
.login-box::before,
.login-box::after {
    content: "";
    position: absolute;
    border-radius: 50%;
    background: rgba(37, 99, 235, 0.15);
    z-index: 0;
}
.login-box::before {
    width: 220px; height: 220px;
    top: -60px; left: -60px;
}
.login-box::after {
    width: 320px; height: 320px;
    bottom: -120px; right: -120px;
}
.logo {
    margin-bottom: 25px;
    position: relative;
    z-index: 1;
}
.logo img {
    width: 70px;
```



```
    margin-bottom: 10px;
}
.logo h1 {
    font-size: 24px;
    color: #111827;
    font-weight: 600;
}
.login-box h2 {
    text-align: center;
    color: #111827;
    margin-bottom: 25px;
    position: relative;
    z-index: 1;
    font-size: 22px;
}
.input-group {
    position: relative;
    margin-bottom: 20px;
    z-index: 1;
}
.input-group i {
    position: absolute;
    top: 50%;
    left: 14px;
    transform: translateY(-50%);
    color: #6b7280;
```

```
    font-size: 16px;
}
.input-group input {
    width: 100%;
    padding: 14px 14px 14px 45px;
    border-radius: 10px;
    border: 1px solid #d1d5db;
    outline: none;
    font-size: 15px;
    transition: all 0.3s;
}
.input-group input:focus {
    border-color: #2563eb;
    box-shadow: 0 0 10px rgba(37, 99, 235, 0.3);
}
button {
    width: 100%;
    padding: 14px;
    border: none;
    border-radius: 10px;
    background: #2563eb;
    color: #fff;
    font-size: 16px;
    cursor: pointer;
    font-weight: 500;
    transition: 0.3s;
```

```
display: flex;
align-items: center;
justify-content: center;
}
button i {
margin-right: 8px;
}
button:hover {
background: #1e40af;
}
.forgot {
margin-top: 12px;
text-align: right;
font-size: 14px;
position: relative;
z-index: 1;
}
.forgot a {
color: #2563eb;
text-decoration: none;
transition: 0.3s;
}
.forgot a:hover {
text-decoration: underline;
}
.error {
```

```

margin-top: 18px;
text-align: center;
color: #ef4444;
font-weight: 500;
z-index: 1;
position: relative;
}
@media(max-width: 420px) {
    .login-box { width: 90%; padding: 40px 25px; }
}
</style>
</head>
<body>
<div class="login-box">
    <div class="logo">
        
        <h1>Face Detection System</h1>
    </div>

    <h2><i class="fa fa-user-lock"></i> Login</h2>

    <form method="post">
        <div class="input-group">
            <i class="fa fa-user"></i>

```

```

        <input type="text" name="username" placeholder="Username"
required>
    </div>
    <div class="input-group">
        <i class="fa fa-lock"></i>
        <input type="password" name="password" placeholder="Password"
required>
    </div>
    <button type="submit" name="login">
        <i class="fa fa-right-to-bracket"></i> Login
    </button>
</form>
<div class="forgot">
    <a href="#">Forgot Password?</a>
</div>
<?php if ($error): ?>
    <div class="error"><?php echo $error; ?></div>
<?php endif; ?>
</div>
</body>
</html>

```

➤ Admin Pannel

Admin_dashboard.php :

```
<?php
session_start();

include "config/db.php";

$admin_name = "Admin"; // You can fetch from session

?>

<!DOCTYPE html>

<html lang="en">

<head>

<meta charset="UTF-8">

<meta name="viewport" content="width=device-width, initial-scale=1.0">

<title>Admin Dashboard</title>

<link href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/6.5.0/css/all.min.css"
rel="stylesheet">

<link
href="https://fonts.googleapis.com/css2?family=Montserrat:wght@400;600;700&display=sw
ap" rel="stylesheet">

<style>

/*Base*/

* { box-sizing: border-box; margin: 0; padding: 0; }

body { font-family: 'Montserrat', sans-serif; background: linear-gradient(135deg, #0f172a,
#1e293b); color: #f8f8f8; }

/*Sidebar*/

.sidebar {

    position: fixed;

    left: 0; top: 0;

    width: 260px;

    height: 100vh;

    background: #111827;
```

```

display: flex;
flex-direction: column;
padding: 30px 20px;
box-shadow: 5px 0 15px rgba(0,0,0,0.3);
transition: all 0.3s;
}

.sidebar h2 {
text-align: center;
font-size: 26px;
margin-bottom: 40px;
font-weight: 700;
letter-spacing: 1px;
color: #fbbf24;
}

.sidebar a {
color: #f8f8f8;
text-decoration: none;
padding: 14px 18px;
margin: 8px 0;
border-radius: 12px;
display: flex;
align-items: center;
gap: 12px;
font-weight: 500;
transition: 0.3s;
}

.sidebar a i { font-size: 18px; min-width: 22px; }

.sidebar a:hover, .sidebar a.active {

```

```
background: #1f2937;
box-shadow: 0 0 10px #fbbf24;
color: #fbbf24;
}
```

```
/* Main Content*/
```

```
.main {
  margin-left: 280px;
  padding: 40px 50px;
  min-height: 100vh;
}

.header {
  display: flex;
  justify-content: space-between;
  align-items: center;
  margin-bottom: 40px;
}

.header h1 {
  font-size: 32px;
  font-weight: 700;
  color: #fbbf24;
  letter-spacing: 0.5px;
}

.header .profile {
  display: flex;
  align-items: center;
  gap: 15px;
}
```



```

.header .profile img {
    width: 48px;
    height: 48px;
    border-radius: 50%;
    border: 2px solid #fbbf24;
}
.header .profile span {
    font-weight: 600;
    color: #f8f8f8;
}
/*Glass Cards*/
.card-container {
    display: flex;
    flex-wrap: wrap;
    gap: 25px;
}
.card {
    flex: 1 1 220px;
    background: rgba(255,255,255,0.05);
    backdrop-filter: blur(12px);
    border-radius: 20px;
    padding: 30px 20px;
    text-align: center;
    position: relative;
    overflow: hidden;
    box-shadow: 0 12px 25px rgba(0,0,0,0.3);
    transition: all 0.4s;
}

```

```
.card:hover {  
    transform: translateY(-10px);  
    box-shadow: 0 20px 35px rgba(251,191,36,0.5);  
}  
.card i {  
    font-size: 3rem;  
    color: #fbbf24;  
    margin-bottom: 15px;  
}  
.card h3 {  
    font-size: 20px;  
    margin-bottom: 15px;  
    font-weight: 600;  
    color: #f8f8f8;  
}  
.card a {  
    display: inline-block;  
    padding: 8px 18px;  
    border-radius: 10px;  
    background: rgba(251,191,36,0.15);  
    color: #fbbf24;  
    font-weight: 600;  
    text-decoration: none;  
    transition: 0.3s;  
}  
.card a:hover {  
    background: rgba(251,191,36,0.35);  
}
```

```

/* Optional Floating Shapes */
body::before {
    content: "";
    position: absolute;
    width: 500px;
    height: 500px;
    background: radial-gradient(circle, rgba(251,191,36,0.2), transparent 70%);
    top: -100px; left: -150px;
    border-radius: 50%;
    z-index: 0;
}
body::after {
    content: "";
    position: absolute;
    width: 400px;
    height: 400px;
    background: radial-gradient(circle, rgba(37,99,235,0.2), transparent 70%);
    bottom: -80px; right: -100px;
    border-radius: 50%;
    z-index: 0;
}
@media(max-width: 1024px) {
    .main { margin-left: 0; padding: 25px; }
    .sidebar { width: 100%; height: auto; flex-direction: row; overflow-x: auto; }
    .sidebar a { flex: 1; text-align: center; margin: 0 5px; }
    .card-container { flex-direction: column; }
}
</style>

```

```

</head>

<body>

<!-- Sidebar -->

<div class="sidebar">

    <h2>Admin Panel</h2>

    <a href="add_person.php"><i class="fa fa-user-plus"></i> Add Person</a>

    <a href="view_persons.php"><i class="fa fa-users"></i> View All Records</a>

    <a href="match_face.php"><i class="fa fa-face-smile"></i> Match Face</a>

    <a href="admin_match_history.php"><i class="fa fa-history"></i> Match History</a>

    <a href="manage_users.php"><i class="fa fa-user-cog"></i> Manage Users</a>

    <a href="logout.php"><i class="fa fa-right-from-bracket"></i> Logout</a>

</div>

<!-- Main Content -->

<div class="main">

    <div class="header">

        <h1>Welcome, <?php echo $admin_name; ?></h1>

        <div class="profile">

            <span><?php echo $admin_name; ?></span>

        </div>

    </div>

    <div class="card-container">

        <div class="card">

            <i class="fa fa-user-plus"></i>

            <h3>Add Person</h3>

            <a href="add_person.php">Go</a>

        </div>

        <div class="card">

```

```
<i class="fa fa-users"></i>

<h3>View All Records</h3>

<a href="view_persons.php">Go</a>

</div>

<div class="card">

  <i class="fa fa-face-smile"></i>

  <h3>Match Face</h3>

  <a href="match_face.php">Go</a>

</div>

<div class="card">

  <i class="fa fa-history"></i>

  <h3>Match History</h3>

  <a href="admin_match_history.php">Go</a>

</div>

<div class="card">

  <i class="fa fa-user-cog"></i>

  <h3>Manage Users</h3>

  <a href="manage_users.php">Go</a>

</div>

</div>

</div>

</body>

</html>
```

Add_person.php :

```
<?php

session_start();

include "config/db.php";

if (!isset($_SESSION['username']) || $_SESSION['role'] != 'admin') {

    echo "Access denied!";

    exit();

}

$message = "";

$persons = [];

$q = mysqli_query($conn, "SELECT id, name, descriptor FROM persons WHERE descriptor
IS NOT NULL");

while ($row = mysqli_fetch_assoc($q)) {

    $row['descriptor'] = json_decode($row['descriptor'], true);

    if (is_array($row['descriptor'])) $persons[] = $row;

}

if (isset($_POST['save'])) {

    $name = $_POST['name'];

    $age = $_POST['age'];

    $photoName = "";

    $descriptorJson = $_POST['descriptor'];

    if (!empty($_FILES['photo']['name'])) {

        $photoName = time() . "_" . preg_replace("/[^a-zA-Z0-9\.\-_]/", "",
$_FILES['photo']['name']);

        if(!is_dir("uploads/persons/")) mkdir("uploads/persons/", 0777, true);

        move_uploaded_file($_FILES['photo']['tmp_name'], "uploads/persons/" . $photoName);

    } elseif (!empty($_POST['camera_image'])) {
```

```

        $data = base64_decode(str_replace('data:image/png;base64,', '',
$_POST['camera_image']));

        if(!is_dir("uploads/persons/")) mkdir("uploads/persons/", 0777, true);

        $photoName = time() . "_camera.png";

        file_put_contents("uploads/persons/" . $photoName, $data);
    }

    if ($photoName != "" && !empty($descriptorJson)) {

        $stmt = $conn->prepare("INSERT INTO persons (name, age, photo, descriptor)
VALUES (?, ?, ?, ?)");

        $stmt->bind_param("siss", $name, $age, $photoName, $descriptorJson);

        $stmt->execute();

        $message = "✓ Person added successfully!";
    } else {

        $message = "Please upload/capture an image AND generate descriptor.";
    }
}

$admin_name = $_SESSION['username'];

?>

<!DOCTYPE html>

<html lang="en">

<head>

<meta charset="UTF-8">

<title>Add Person</title>

<link href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/6.5.0/css/all.min.css"
rel="stylesheet">

<link
href="https://fonts.googleapis.com/css2?family=Montserrat:wght@400;600;700&display=sw
ap" rel="stylesheet">

<style>

*{box-sizing:border-box;margin:0;padding:0}

```

```
body{
  font-family:'Montserrat',sans-serif;
  background:linear-gradient(135deg,#0f172a,#1e293b);
  color:#f8fafc;
/*Sidebar*/
.sidebar{
  position:fixed;
  width:260px;
  height:100vh;
  background:#111827;
  padding:30px 20px;
}
.sidebar h2{
  color:#fbbf24;
  text-align:center;
  margin-bottom:35px;
}
.sidebar a{
  display:flex;
  align-items:center;
  gap:12px;
  padding:14px 18px;
  margin:8px 0;
  color:#e5e7eb;
  text-decoration:none;
  border-radius:12px;
  font-size:15px;
  transition:.3s;
```



```

}
.sidebar a:hover,
.sidebar a.active{
    background:#1f2937;
    color:#fbbf24;
    box-shadow:0 0 12px rgba(251,191,36,.6);
}
/*Main*/
.main{
    margin-left:280px;
    padding:40px 50px;
}
.main h1 {
    color:#fbbf24;
    margin-bottom:25px;
}
/*Card */
.card{
    max-width:620px;
    background:rgba(255,255,255,.05);
    padding:30px;
    border-radius:20px;
    box-shadow:0 15px 35px rgba(0,0,0,.35);
}
.card h2{
    color:#fbbf24;
    margin-bottom:20px;
}

```

```

/*Inputs*/
input[type=text],
input[type=number],
input[type=file]{
    width:100%;
    padding:14px;
    border-radius:10px;
    border:none;
    margin-bottom:15px;
}

/*Buttons*/
.btn{
    background:linear-gradient(135deg,#fbbf24,#f59e0b);
    color:#111827;
    border:none;
    padding:10px 18px;
    border-radius:10px;
    font-weight:600;
    cursor:pointer;
    margin:6px 6px 6px 0;
    transition:.3s;
}

.btn:hover{
    box-shadow:0 0 12px rgba(251,191,36,.7);
    transform:translateY(-2px);
}

/*Preview*/

```

```

video,img{
    border-radius:12px;
    margin-top:10px;
}
/*Message */
.message{
    margin-top:15px;
    color:#22c55e;
    font-weight:600;
}
</style>
</head>
<body>
<div class="sidebar">
    <h2>Admin Panel</h2>
    <a href="admin_dashboard.php"><i class="fa fa-house"></i> Home</a>
    <a href="add_person.php" class="active"><i class="fa fa-user-plus"></i> Add Person</a>
    <a href="view_persons.php"><i class="fa fa-users"></i> View All Records</a>
    <a href="match_face.php"><i class="fa fa-face-smile"></i> Match Face</a>
    <a href="admin_match_history.php"><i class="fa fa-history"></i> Match History</a>
    <a href="manage_users.php"><i class="fa fa-user-cog"></i> Manage Users</a>
    <a href="logout.php"><i class="fa fa-right-from-bracket"></i> Logout</a>
</div>
<div class="main">
    <h1>Welcome, <?php echo htmlspecialchars($admin_name); ?></h1>
    <div class="card">
        <h2>Add Person</h2>
        <form method="post" enctype="multipart/form-data">

```

```

<input type="text" name="name" placeholder="Name" required>
<input type="number" name="age" placeholder="Age" required>
<input type="file" name="photo" accept="image/*">
<button type="button" class="btn" onclick="startCamera()">Start Camera</button>
<button type="button" class="btn" onclick="captureImage()">Capture</button>
<button type="button" class="btn" onclick="generateDescriptor()">Generate
Descriptor</button>
<br><br>
<button type="submit" name="save" class="btn">Save Person</button>
<video id="video" width="320" style="display:none;"></video>
<canvas id="canvas" width="320" height="240" style="display:none;"></canvas>
<input type="hidden" name="camera_image" id="camera_image">
<img id="preview" width="320" style="display:none;">
<input type="hidden" name="descriptor" id="descriptor">
</form>
<?php if($message): ?>
    <div class="message"><?php echo $message; ?></div>
<?php endif; ?>
</div>
</div>
<script src="js/face-api.min.js"></script>
<script>
let video=document.getElementById("video");
let preview=document.getElementById("preview");
async function loadModels(){
    await Promise.all([
        faceapi.nets.ssdMobilenetv1.loadFromUri('models'),
        faceapi.nets.faceLandmark68Net.loadFromUri('models'),
        faceapi.nets.faceRecognitionNet.loadFromUri('models')
    ])
}

```

```

    });
}
loadModels();
function startCamera(){
    navigator.mediaDevices.getUserMedia({video:true}).then(s=>{
        video.srcObject=s;
        video.style.display="block";
    });
}
function captureImage(){
    let c=document.getElementById("canvas");
    c.getContext("2d").drawImage(video,0,0,c.width,c.height);
    let d=c.toDataURL("image/png");
    document.getElementById("camera_image").value=d;
    preview.src=d;
    preview.style.display="block";
}
async function generateDescriptor(){
    if(preview.style.display!="block") return alert("Select or capture image first.");
    const det=await faceapi.detectSingleFace(preview)
        .withFaceLandmarks()
        .withFaceDescriptor();
    if(!det) return alert("No face detected!");
    document.getElementById("descriptor").value=
        JSON.stringify(Array.from(det.descriptor));
    alert("Descriptor generated.");
}
</script>

```

</body>

</html>

View_persons.php :

```
<?php
```

```
session_start();
```

```
include "config/db.php";
```

```
if (!isset($_SESSION['username']) || $_SESSION['role'] != 'admin') {
```

```
    echo "Access denied!";
```

```
    exit();
```

```
}
```

```
$admin_name = $_SESSION['username'];
```

```
$result = $conn->query("SELECT * FROM persons ORDER BY id DESC");
```

```
?>
```

```
<!DOCTYPE html>
```

```
<html lang="en">
```

```
<head>
```

```
<meta charset="UTF-8">
```

```
<title>View Persons</title>
```

```
<link href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/6.5.0/css/all.min.css"
rel="stylesheet">
```

```
<link
href="https://fonts.googleapis.com/css2?family=Montserrat:wght@400;600;700&display=swap" rel="stylesheet">
```

```
<script src="https://cdn.jsdelivr.net/npm/sweetalert2@11"></script>
```

```
<style>
```

```
*{box-sizing:border-box;margin:0;padding:0}
```

```
body{
```

```
    font-family:'Montserrat',sans-serif;
```

```
background:linear-gradient(135deg,#0f172a,#1e293b);
color:#f8f8f8;
}
.sidebar{
  position:fixed;
  left:0;top:0;
  width:260px;
  height:100vh;
  background:#111827;
  padding:30px 20px;
  box-shadow:5px 0 15px rgba(0,0,0,0.35);
}
.sidebar h2{
  text-align:center;
  color:#fbbf24;
  font-size:26px;
  margin-bottom:40px;
  font-weight:700;
}
.sidebar a{
  display:flex;
  align-items:center;
  gap:12px;
  color:#f8f8f8;
  text-decoration:none;
  padding:14px 18px;
  margin:8px 0;
  border-radius:12px;
```

```

    transition:.3s;
}
.sidebar a:hover,
.sidebar a.active{
    background:#1f2937;
    box-shadow:0 0 10px rgba(251,191,36,.6);
    color:#fbbf24;
}
.main{
    margin-left:280px;
    padding:40px 50px;
    min-height:100vh;
}
.main h2{
    font-size:30px;
    color:#fbbf24;
    margin-bottom:25px;
}
.table-container{
    background:rgba(255,255,255,0.06);
    backdrop-filter:blur(12px);
    border-radius:20px;
    padding:30px;
    box-shadow:0 15px 35px rgba(0,0,0,.35);
}
.search-box{
    width:320px;
    padding:12px 15px;

```



```

border-radius:12px;
border:none;
outline:none;
margin-bottom:20px;
background:rgba(255,255,255,0.15);
color:#fff;
}
.search-box::placeholder{color:#cbd5e1}
table{
width:100%;
border-collapse:collapse;
}
th,td{
padding:14px;
text-align:left;
}
th{
background:rgba(251,191,36,.2);
color:#fbbf24;
font-weight:600;
}
tr{
border-bottom:1px solid rgba(255,255,255,.1);
}
tr:hover{
background:rgba(255,255,255,.05);
}
img.person-photo{

```

```
width:80px;
border-radius:12px;
box-shadow:0 5px 15px rgba(0,0,0,.4);
}
.action-btn{
padding:8px 14px;
border-radius:10px;
background:rgba(251,191,36,.2);
color:#fbbf24;
text-decoration:none;
font-weight:600;
margin-right:6px;
transition:.3s;
}
.action-btn:hover{
background:rgba(251,191,36,.45);
color:#111827;
}
.pagination{
margin-top:20px;
text-align:center;
}
.pagination button{
padding:8px 14px;
margin:4px;
border:none;
border-radius:10px;
background:rgba(251,191,36,.2);
```

```

        color:#fbbf24;

        cursor:pointer;

        font-weight:600;
    }

    .pagination button.active,
    .pagination button:hover{

        background:#fbbf24;

        color:#111827;
    }

    @media(max-width:1024px){

        .main{margin-left:0;padding:25px}

        .sidebar{width:100%;height:auto;position:relative}
    }
</style>
</head>
<body>
<div class="sidebar">

    <h2>Admin Panel</h2>

    <a href="admin_dashboard.php"><i class="fa fa-house"></i> Home</a>

    <a href="add_person.php"><i class="fa fa-user-plus"></i> Add Person</a>

    <a href="view_persons.php" class="active"><i class="fa fa-users"></i> View All
Records</a>

    <a href="match_face.php"><i class="fa fa-face-smile"></i> Match Face</a>

    <a href="admin_match_history.php"><i class="fa fa-history"></i> Match History</a>

    <a href="manage_users.php"><i class="fa fa-user-cog"></i> Manage Users</a>

    <a href="logout.php"><i class="fa fa-right-from-bracket"></i> Logout</a>
</div>

<div class="main">

    <h2>Welcome, <?php echo htmlspecialchars($admin_name); ?></h2>

```

```

<div class="table-container">

    <input type="text" id="searchInput" class="search-box" placeholder="Search by ID,
    Name or Age">

    <table id="personsTable">

        <thead>

            <tr>

                <th>ID</th>

                <th>Name</th>

                <th>Age</th>

                <th>Photo</th>

                <th>Actions</th>

            </tr>

        </thead>

        <tbody>

            <?php while($row = $result->fetch_assoc()): ?>

                <tr>

                    <td><?php echo $row['id']; ?></td>

                    <td><?php echo htmlspecialchars($row['name']); ?></td>

                    <td><?php echo $row['age']; ?></td>

                    <td>

                        <?php if($row['photo']): ?>

                                <?php endif; ?>

                        </td>

                        <td>

                            <a href="edit_person.php?id=<?php echo $row['id']; ?>" class="action-
                            btn">Edit</a>

                            <a href="#" class="action-btn" onclick="confirmDelete(<?php echo
                            $row['id']; ?>)">Delete</a>

```

```

        </td>
    </tr>
<?php endwhile; ?>
</tbody>
</table>
<div class="pagination" id="pagination"></div>
</div>
</div>
<script>
function confirmDelete(id){
    Swal.fire({
        title:"Are you sure?",
        text:"This record will be permanently deleted!",
        icon:"warning",
        showCancelButton:true,
        confirmButtonColor:"#d33",
        confirmButtonText:"Yes, delete"
    }).then((res)=>{
        if(res.isConfirmed){
            window.location.href="delete_person.php?id="+id;
        }
    });
}
const rowsPerPage=5;
let currentPage=1;
const table=document.getElementById("personsTable");
const rows=Array.from(table.querySelectorAll("tbody tr"));
const pagination=document.getElementById("pagination");

```

```

function displayTable(){
    let start=(currentPage-1)*rowsPerPage;
    let end=start+rowsPerPage;
    rows.forEach((row,i)=>{
        row.style.display=(i>=start&&i<end)?"":"none";
    });
}

function setupPagination(){
    pagination.innerHTML="";
    let pageCount=Math.ceil(rows.length/rowsPerPage);
    for(let i=1;i<=pageCount;i++){
        let btn=document.createElement("button");
        btn.innerText=i;
        btn.onclick=()=>{currentPage=i;displayTable();setupPagination();}
        if(i===currentPage)btn.classList.add("active");
        pagination.appendChild(btn);
    }
}

document.getElementById("searchInput").addEventListener("keyup",function(){
    let val=this.value.toLowerCase();
    rows.forEach(row=>{
        row.style.display=row.innerText.toLowerCase().includes(val)?"":"none";
    });
});

displayTable();
setupPagination();
</script>
</body>

```

</html>

Match_face.php :

<?php

session_start();

include "config/db.php";

if (!isset(\$_SESSION['username']) || \$_SESSION['role'] !== 'admin') {

 die("Access Denied");

}

\$persons = [];

\$q = mysqli_query(\$conn, "SELECT id, name, age, photo, descriptor FROM persons
WHERE descriptor IS NOT NULL");

while (\$row = mysqli_fetch_assoc(\$q)) {

 \$row['descriptor'] = json_decode(\$row['descriptor'], true);

 if (is_array(\$row['descriptor'])) {

 \$persons[] = \$row;

 }

}

\$admin_name = \$_SESSION['username'];

?>

<!DOCTYPE html>

<html>

<head>

<meta charset="UTF-8">

<title>Match Face</title>

<link href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/6.5.0/css/all.min.css"
rel="stylesheet">

<link
href="https://fonts.googleapis.com/css2?family=Montserrat:wght@400;600;700&display=swap" rel="stylesheet">

<style>

```

*{box-sizing:border-box;margin:0;padding:0}

body{
  font-family:'Montserrat',sans-serif;
  background:linear-gradient(135deg,#0f172a,#1e293b);
  color:#f8f8f8;
}

.sidebar{
  position:fixed;
  left:0;top:0;
  width:260px;
  height:100vh;
  background:#111827;
  padding:30px 20px;
  box-shadow:5px 0 15px rgba(0,0,0,.35);
}

.sidebar h2{
  text-align:center;
  color:#fbbf24;
  font-size:26px;
  margin-bottom:40px;
  font-weight:700;
}

.sidebar a{
  display:flex;
  align-items:center;
  gap:12px;
  color:#f8f8f8;
  text-decoration:none;

```



```
padding:14px 18px;
margin:8px 0;
border-radius:12px;
transition:.3s;
}
.sidebar a:hover,
.sidebar a.active{
    background:#1f2937;
    box-shadow:0 0 10px rgba(251,191,36,.6);
    color:#fbbf24;
}
.main{
    margin-left:280px;
    padding:40px 50px;
    min-height:100vh;
}
.main h1 {
    font-size:30px;
    color:#fbbf24;
    margin-bottom:25px;
}
.card{
    background:rgba(255,255,255,0.06);
    backdrop-filter:blur(14px);
    border-radius:22px;
    padding:35px;
    max-width:780px;
    box-shadow:0 20px 40px rgba(0,0,0,.35);
```

```

}
.card h2{
    margin-bottom:20px;
    color:#fbbf24;
}
input[type=file]{
    background:rgba(255,255,255,.15);
    border:none;
    padding:12px;
    border-radius:12px;
    color:#fff;
    margin-bottom:20px;
}
.preview-box{
    height:380px;
    border:2px dashed rgba(251,191,36,.5);
    border-radius:18px;
    display:flex;
    align-items:center;
    justify-content:center;
    background:rgba(0,0,0,.25);
}
.preview-box img,
.preview-box video{
    width:100%;
    height:100%;
    object-fit:contain;
    border-radius:16px;

```

```
}  
.btn{  
    padding:12px 26px;  
    border:none;  
    border-radius:14px;  
    font-weight:600;  
    cursor:pointer;  
    margin-right:10px;  
    transition:.3s;  
}  
.btn-blue{  
    background:rgba(59,130,246,.25);  
    color:#93c5fd;  
}  
.btn-green{  
    background:rgba(34,197,94,.25);  
    color:#86efac;  
}  
.btn-red{  
    background:rgba(239,68,68,.25);  
    color:#fca5a5;  
}  
.btn:hover{  
    transform:translateY(-2px);  
    box-shadow:0 8px 20px rgba(0,0,0,.4);  
}  
.result{  
    margin-top:25px;
```

```

padding:20px;
border-radius:16px;
background:rgba(0,0,0,.25);
}
.match{
color:#22c55e;
font-weight:700;
font-size:18px;
}
.nomatch{
color:#ef4444;
font-weight:700;
font-size:18px;
}
.result img{
margin-top:10px;
border-radius:14px;
box-shadow:0 10px 20px rgba(0,0,0,.4);
}
/*Responsive*/
@media(max-width:1024px){
.main{margin-left:0;padding:25px}
.sidebar{width:100%;height:auto;position:relative}
}
</style>
</head>
<body>
<div class="sidebar">

```

```

<h2>Admin Panel</h2>

<a href="admin_dashboard.php"><i class="fa fa-house"></i> Home</a>

<a href="add_person.php"><i class="fa fa-user-plus"></i> Add Person</a>

<a href="view_persons.php"><i class="fa fa-users"></i> View Records</a>

<a href="match_face.php" class="active"><i class="fa fa-face-smile"></i> Match
Face</a>

<a href="admin_match_history.php"><i class="fa fa-clock-rotate-left"></i> Match
History</a>

<a href="manage_users.php"><i class="fa fa-user-cog"></i> Manage Users</a>

<a href="logout.php"><i class="fa fa-right-from-bracket"></i> Logout</a>

</div>

<div class="main">

<h1>Welcome, <?=htmlspecialchars($admin_name)?></h1>

<div class="card">

<h2>Face Matching</h2>

<input type="file" id="imageUpload" accept="image/*">

<div class="preview-box">

<img id="previewImg" style="display:none">

<video id="video" autoplay muted style="display:none"></video>

</div>

<br>

<button class="btn btn-blue" id="findBtn" disabled>Find Match</button>

<button class="btn btn-green" id="liveBtn">Start Live Matching</button>

<button class="btn btn-red" id="stopBtn" style="display:none">Stop Live
Matching</button>

<div id="result" class="result"></div>

</div>

</div>

<script src="js/face-api.min.js"></script>

<script>

```

```

const persons = <?=json_encode($persons)?>.map(p=>({...p,descriptor:new
Float32Array(p.descriptor)}));

let uploadedDesc=null, stream=null, lastFrame=null;

Promise.all([

faceapi.nets.ssdMobilenetv1.loadFromUri('models'),

faceapi.nets.faceLandmark68Net.loadFromUri('models'),

faceapi.nets.faceRecognitionNet.loadFromUri('models')

]);

imageUpload.onChange=async e=>{

const img=previewImg;

img.src=URL.createObjectURL(e.target.files[0]);

img.style.display='block';

video.style.display='none';

img.onload=async()=>{

const det=await
faceapi.detectSingleFace(img).withFaceLandmarks().withFaceDescriptor();

if(!det){result.innerHTML="<span class='nomatch'>No face detected</span>";return;}

uploadedDesc=det.descriptor;

findBtn.disabled=false;

};

};

findBtn.onclick=()=>matchFace(uploadedDesc,false);

function matchFace(desc,isLive){

let best=null,min=0.6;

persons.forEach(p=>{

const d=faceapi.euclideanDistance(desc,p.descriptor);

if(d<min){min=d;best=p;}

});

let status=best?"MATCH":"NO MATCH";

```

```

fetch("save_match.php", {
  method: "POST",
  headers: { 'Content-Type': 'application/json' },
  body: JSON.stringify({
    username: "<?=" + htmlspecialchars($_SESSION['username']) + ">",
    matched_person: best ? best.name : null,
    distance: min,
    status: status,
    match_source: isLive ? 'LIVE' : 'UPLOAD'
  })
});

if(best){
  result.innerHTML=`
<div class="match">MATCH FOUND</div>
<p><b>Name:</b> ${best.name}</p>
<p><b>Age:</b> ${best.age}</p>
<p><b>Distance:</b> ${min.toFixed(3)}</p>
`;
}else{
  result.innerHTML=`<div class="nomatch">NO MATCH FOUND</div>`;
}
}

liveBtn.onclick=async()=>{
  stream=await navigator.mediaDevices.getUserMedia({video:true});
  video.srcObject=stream;
  video.style.display='block';
  previewImg.style.display='none';
  liveBtn.style.display='none';

```

```

stopBtn.style.display='inline-block';

const interval=setInterval(async()=>{

const det=await
faceapi.detectSingleFace(video).withFaceLandmarks().withFaceDescriptor();

if(det) lastFrame=det.descriptor;

},1500);

stopBtn.onclick=()=>{

clearInterval(interval);

stream.getTracks().forEach(t=>t.stop());

video.style.display='none';

stopBtn.style.display='none';

liveBtn.style.display='inline-block';

if(lastFrame) matchFace(lastFrame,true);

};

};

</script>

</body>

</html>

```

Admin_match_history.php :

```

<?php

session_start();

include "config/db.php";

if (!isset($_SESSION['username']) || $_SESSION['role'] != 'admin') {

    echo "Access denied!";

    exit();

}

$admin_name = $_SESSION['username'];

```



```

$history = [];

$q = mysqli_query($conn, "

    SELECT id, username, matched_person, match_distance, match_status, match_source,
    created_at

    FROM match_history

    ORDER BY created_at DESC

");

while ($row = mysqli_fetch_assoc($q)) {

    if (empty($row['username'])) {

        $row['username'] = $admin_name;

    }

    $history[] = $row;

}

?>

<!DOCTYPE html>

<html lang="en">

<head>

<meta charset="UTF-8">

<title>Admin Match History</title>

<link href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/6.5.0/css/all.min.css"
rel="stylesheet">

<link
href="https://fonts.googleapis.com/css2?family=Montserrat:wght@400;600;700&display=sw
ap" rel="stylesheet">

<style>

* { box-sizing: border-box; margin: 0; padding: 0; }

body { font-family: 'Montserrat', sans-serif; background: linear-gradient(135deg, #0f172a,
#1e293b); color: #f8f8f8; }

.sidebar {

```

```
position: fixed;
left: 0; top: 0;
width: 260px;
height: 100vh;
background: #111827;
display: flex;
flex-direction: column;
padding: 30px 20px;
box-shadow: 5px 0 15px rgba(0,0,0,0.3);
}

.sidebar h2 {
  text-align: center;
  font-size: 26px;
  margin-bottom: 40px;
  font-weight: 700;
  letter-spacing: 1px;
  color: #fbbf24;
}

.sidebar a {
  color: #f8f8f8;
  text-decoration: none;
  padding: 14px 18px;
  margin: 8px 0;
  border-radius: 12px;
  display: flex;
  align-items: center;
  gap: 12px;
```

```
    font-weight: 500;

    transition: 0.3s;
}

.sidebar a i { font-size: 18px; min-width: 22px; }

.sidebar a:hover, .sidebar a.active {

    background: #1f2937;

    box-shadow: 0 0 10px #fbbf24;

    color: #fbbf24;
}

.main {

    margin-left: 280px;

    padding: 40px 50px;

    min-height: 100vh;
}

.header {

    display: flex;

    justify-content: space-between;

    align-items: center;

    margin-bottom: 30px;
}

.header h1 {

    font-size: 32px;

    font-weight: 700;

    color: #fbbf24;
}

.header h2 {

    font-size: 24px;
```

```
margin-bottom: 20px;
color: #f8f8f8;
}
.header .profile {
display: flex;
align-items: center;
gap: 15px;
}
.header .profile img {
width: 48px;
height: 48px;
border-radius: 50%;
border: 2px solid #fbbf24;
}
.header .profile span {
font-weight: 600;
color: #f8f8f8;
}
.table-container {
background: rgba(255,255,255,0.05);
backdrop-filter: blur(12px);
border-radius: 20px;
padding: 25px;
box-shadow: 0 12px 25px rgba(0,0,0,0.3);
overflow-x: auto;
}
table {
```

```

width: 100%;

border-collapse: collapse;
}

table th, table td {
padding: 12px 15px;

text-align: left;
}

table th {
background: #2563eb;

color: #fff;

font-weight: 600;

text-transform: uppercase;
}

table tr:nth-child(even) { background: rgba(255,255,255,0.05); }
table tr:nth-child(odd) { background: rgba(255,255,255,0.1); }

.status-match { color: #4ade80; font-weight: bold; }
.status-no { color: #f87171; font-weight: bold; }

@media(max-width: 1024px) {
main { margin-left: 0; padding: 25px; }

.sidebar { width: 100%; height: auto; flex-direction: row; overflow-x: auto; }

.sidebar a { flex: 1; text-align: center; margin: 0 5px; }

.table-container { padding: 15px; }
}

</style>

</head>

<body>

<div class="sidebar">

```

```

<h2>Admin Panel</h2>

<a href="admin_dashboard.php"><i class="fa fa-house"></i> Home</a>

<a href="add_person.php"><i class="fa fa-user-plus"></i> Add Person</a>

<a href="view_persons.php"><i class="fa fa-users"></i> View All Records</a>

<a href="match_face.php"><i class="fa fa-face-smile"></i> Match Face</a>

<a href="admin_match_history.php" class="active"><i class="fa fa-clock"></i> Match
History</a>

<a href="manage_users.php"><i class="fa fa-user-cog"></i> Manage Users</a>

<a href="logout.php"><i class="fa fa-right-from-bracket"></i> Logout</a>

</div>

<div class="main">

<div class="header">

<h1>Welcome, <?php echo htmlspecialchars($admin_name); ?></h1>

<div class="profile">



<span><?php echo htmlspecialchars($admin_name); ?></span>

</div>

</div>

<h2>All Users Match History</h2>

<?php if(count($history) == 0): ?>

<p>No match history found.</p>

<?php else: ?>

<div class="table-container">

<table>

<thead>

<tr>

<th>ID</th>

```

```

        <th>Username</th>

        <th>Matched Person</th>

        <th>Distance</th>

        <th>Status</th>

        <th>Source</th>

        <th>Date & Time</th>

    </tr>

</thead>

<tbody>

<?php foreach($history as $h): ?>

    <tr>

        <td><?php echo $h['id']; ?></td>

        <td><?php echo htmlspecialchars($h['username']); ?></td>

        <td><?php echo htmlspecialchars($h['matched_person']); ?></td>

        <td><?php echo number_format($h['match_distance'], 3); ?></td>

        <td class="<?php echo ($h['match_status']=='Match Found') ? 'status-match' : 'status-
no'; ?>">

            <?php echo htmlspecialchars($h['match_status']); ?>

        </td>

        <td><?php echo htmlspecialchars($h['match_source']); ?></td>

        <td><?php echo $h['created_at']; ?></td>

    </tr>

<?php endforeach; ?>

</tbody>

</table>

</div>

<?php endif; ?>

```

```
</div>
</body>
</html>
```

Manage_users :

```
<?php
session_start();
include "config/db.php";
if (isset($_POST['add_user'])) {
    $username = $_POST['username'];
    $password = md5($_POST['password']);
    $role = $_POST['role'];
    $stmt = $conn->prepare("INSERT INTO users (username, password, role) VALUES (?, ?, ?)");
    $stmt->bind_param("sss", $username, $password, $role);
    $stmt->execute();
    header("Location: manage_users.php");
    exit();
}
if (isset($_GET['delete'])) {
    $id = $_GET['delete'];
    $conn->query("DELETE FROM users WHERE id=$id");
    header("Location: manage_users.php");
    exit();
}
$users = $conn->query("SELECT * FROM users");
?>
```



```

<!DOCTYPE html>

<html lang="en">

<head>

<meta charset="UTF-8">

<title>Manage Users</title>

<link href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/6.5.0/css/all.min.css"
rel="stylesheet">

<link
href="https://fonts.googleapis.com/css2?family=Montserrat:wght@400;600;700&display=sw
ap" rel="stylesheet">

<style>

*{box-sizing:border-box;margin:0;padding:0}

body{

    font-family:'Montserrat',sans-serif;

    background:linear-gradient(135deg,#0f172a,#1e293b);

    color:#f8f8f8;

}

.sidebar{

    position:fixed;

    width:260px;

    height:100vh;

    background:#111827;

    padding:30px 20px;

}

.sidebar h2{

    text-align:center;

    color:#fbbf24;

    margin-bottom:40px;

```

```
    letter-spacing: 1px;
}

.sidebar a{
    display: flex;
    align-items: center;
    gap: 12px;
    color: #fff;
    text-decoration: none;
    padding: 14px 18px;
    border-radius: 12px;
    margin: 8px 0;
    transition: .3s;
}

.sidebar a:hover,
.sidebar a.active{
    background: #1f2937;
    color: #fbbf24;
    box-shadow: 0 0 10px rgba(251,191,36,.4);
}

.main{
    margin-left: 280px;
    padding: 40px 50px;
}

.header{
    display: flex;
    justify-content: space-between;
    align-items: center;
```

```
    margin-bottom:30px;
}
.header h1 {
    color:#fbbf24;
    font-size:32px;
}
.profile{
    display:flex;
    align-items:center;
    gap:12px;
}
.profile img{
    width:45px;
    border-radius:50%;
    border:2px solid #fbbf24;
}
.card{
    background:rgba(255,255,255,.06);
    backdrop-filter:blur(12px);
    padding:30px;
    border-radius:20px;
    box-shadow:0 15px 30px rgba(0,0,0,.35);
    margin-bottom:35px;
}
.card h3 {
    margin-bottom:20px;
    color:#fbbf24;
```

```
}  
  
form input,form select{  
    width:100%;  
    padding:12px 15px;  
    margin-bottom:15px;  
    border-radius:10px;  
    border:none;  
    outline:none;  
}  
  
form button{  
    background:#2563eb;  
    border:none;  
    padding:12px 22px;  
    border-radius:10px;  
    color:#fff;  
    font-weight:600;  
    cursor:pointer;  
    transition:.3s;  
}  
  
form button:hover{  
    background:#1d4ed8;  
}  
  
.table-box{  
    overflow-x:auto;  
}  
  
table{  
    width:100%;
```

```
border-collapse:collapse;
}
table th,table td{
padding:14px 16px;
text-align:left;
}
table th{
background:#2563eb;
color:#fff;
}
table tr:nth-child(even){
background:rgba(255,255,255,.04);
}
table tr:hover{
background:rgba(255,255,255,.08);
}
.btn-delete{
background:#dc2626;
padding:7px 14px;
border-radius:8px;
color:#fff;
text-decoration:none;
transition:.3s;
}
.btn-delete:hover{
background:#b91c1c;
}
```

```

@media(max-width:1024px){
    .sidebar{position:relative;width:100%;height:auto}
    .main{margin-left:0;padding:25px}
}
</style>
</head>
<body>
<div class="sidebar">
    <h2>Admin Panel</h2>
    <a href="admin_dashboard.php"><i class="fa fa-house"></i> Home</a>
    <a href="add_person.php"><i class="fa fa-user-plus"></i> Add Person</a>
    <a href="view_persons.php"><i class="fa fa-users"></i> View Records</a>
    <a href="match_face.php"><i class="fa fa-face-smile"></i> Match Face</a>
    <a href="admin_match_history.php"><i class="fa fa-clock"></i> Match History</a>
    <a href="manage_users.php" class="active"><i class="fa fa-user-cog"></i> Manage
Users</a>
    <a href="logout.php"><i class="fa fa-right-from-bracket"></i> Logout</a>
</div>
<div class="main">
    <div class="header">
        <h1>Manage Users</h1>
        <div class="profile">
            
        </div>
    </div>
    <div class="card">
        <h3>Add New User</h3>

```

```

<form method="post">

    <input type="text" name="username" placeholder="Username" required>

    <input type="password" name="password" placeholder="Password" required>

    <select name="role" required>

        <option value="user">User</option>

        <option value="admin">Admin</option>

    </select>

    <button type="submit" name="add_user">Add User</button>

</form>

</div>

<div class="card">

    <h3>Existing Users</h3>

    <div class="table-box">

        <table>

            <thead>

                <tr>

                    <th>ID</th>

                    <th>Username</th>

                    <th>Role</th>

                    <th>Action</th>

                </tr>

            </thead>

            <tbody>

                <?php while($row = $users->fetch_assoc()): ?>

                    <tr>

                        <td><?= $row['id'] ?></td>

                        <td><?= htmlspecialchars($row['username']) ?></td>

```

```

        <td><?= htmlspecialchars($row['role']) ?></td>

        <td>

            <a class="btn-delete" href="?delete=<?= $row['id'] ?>">Delete</a>

        </td>

    </tr>

<?php endwhile; ?>

</tbody>

</table>

</div>

</div>

</div>

</body>

</html>

```

Logout.php :

```

<?php
session_start();
session_destroy();
header("Location: login.php");
exit();
?>

```


➤ User Pannel

User_dashboard.php :

```
<?php
session_start();
include "config/db.php";
if (!isset($_SESSION['username']) || $_SESSION['role'] !== 'user') {
    header("Location: login.php");
    exit();
}
$user_name = $_SESSION['username'] ?? 'User';
?>

<!DOCTYPE html>

<html lang="en">

<head>

<meta charset="UTF-8">

<meta name="viewport" content="width=device-width, initial-scale=1.0">

<title>User Dashboard</title>

<link href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/6.5.0/css/all.min.css"
rel="stylesheet">

<link
href="https://fonts.googleapis.com/css2?family=Montserrat:wght@400;600;700&display=sw
ap" rel="stylesheet">

<style>

* { box-sizing: border-box; margin: 0; padding: 0; }

body { font-family: 'Montserrat', sans-serif; background: linear-gradient(135deg, #0f172a,
#1e293b); color: #f8f8f8; }

*/
```

```
.sidebar {  
    position: fixed;  
    left: 0; top: 0;  
    width: 260px;  
    height: 100vh;  
    background: #111827;  
    display: flex;  
    flex-direction: column;  
    padding: 30px 20px;  
    box-shadow: 5px 0 15px rgba(0,0,0,0.3);  
}
```

```
.sidebar h2 {  
    text-align: center;  
    font-size: 26px;  
    margin-bottom: 40px;  
    font-weight: 700;  
    letter-spacing: 1px;  
    color: #fbbf24;  
}
```

```
.sidebar a {  
    color: #f8f8f8;  
    text-decoration: none;  
    padding: 14px 18px;  
    margin: 8px 0;  
    border-radius: 12px;  
    display: flex;  
    align-items: center;
```

```

    gap: 12px;

    font-weight: 500;

    transition: 0.3s;
}

.sidebar a i { font-size: 18px; min-width: 22px; }

.sidebar a:hover, .sidebar a.active {

    background: #1f2937;

    box-shadow: 0 0 10px #fbbf24;

    color: #fbbf24;
}

.main {

    margin-left: 280px;

    padding: 40px 50px;

    min-height: 100vh;
}

.header {

    display: flex;

    justify-content: space-between;

    align-items: center;

    margin-bottom: 40px;
}

.header h1 {

    font-size: 32px;

    font-weight: 700;

    color: #fbbf24;
}

.header .profile {

```

```
    display: flex;
    align-items: center;
    gap: 15px;
}

.header .profile img {
    width: 48px;
    height: 48px;
    border-radius: 50%;
    border: 2px solid #fbbf24;
}

.header .profile span {
    font-weight: 600;
    color: #f8f8f8;
}

.card-container {
    display: flex;
    flex-wrap: wrap;
    gap: 25px;
}

.card {
    flex: 1 1 220px;
    background: rgba(255,255,255,0.05);
    backdrop-filter: blur(12px);
    border-radius: 20px;
    padding: 30px 20px;
    text-align: center;
    position: relative;
```

```
    overflow: hidden;

    box-shadow: 0 12px 25px rgba(0,0,0,0.3);

    transition: all 0.4s;
}

.card:hover {

    transform: translateY(-10px);

    box-shadow: 0 20px 35px rgba(251,191,36,0.5);
}

.card i {

    font-size: 3rem;

    color: #fbbf24;

    margin-bottom: 15px;
}

.card h3 {

    font-size: 20px;

    margin-bottom: 15px;

    font-weight: 600;

    color: #f8f8f8;
}

.card a.card-btn {

    display: inline-block;

    padding: 8px 18px;

    border-radius: 10px;

    background: rgba(251,191,36,0.15);

    color: #fbbf24;

    font-weight: 600;

    text-decoration: none;
```

```

    transition: 0.3s;
}

.card a.card-btn:hover {
    background: rgba(251,191,36,0.35);
}

body::before {
    content: "";
    position: absolute;
    width: 500px;
    height: 500px;
    background: radial-gradient(circle, rgba(251,191,36,0.2), transparent 70%);
    top: -100px; left: -150px;
    border-radius: 50%;
    z-index: 0;
}

body::after {
    content: "";
    position: absolute;
    width: 400px;
    height: 400px;
    background: radial-gradient(circle, rgba(37,99,235,0.2), transparent 70%);
    bottom: -80px; right: -100px;
    border-radius: 50%;
    z-index: 0;
}

@media(max-width: 1024px) {
    .main { margin-left: 0; padding: 25px; }
}

```

```

.sidebar { width: 100%; height: auto; flex-direction: row; overflow-x: auto; }

.sidebar a { flex: 1; text-align: center; margin: 0 5px; }

.card-container { flex-direction: column; }
}

</style>

</head>

<body>

<div class="sidebar">

    <h2>User Panel</h2>

    <a href="user_dashboard.php" class="active"><i class="fa fa-house"></i> Home</a>

    <a href="view_persons.php"><i class="fa fa-users"></i> View Records</a>

    <a href="user_match_face.php"><i class="fa fa-face-smile"></i> Match Face</a>

    <a href="user_match_history.php"><i class="fa fa-clock-rotate-left"></i> Match
History</a>

    <a href="profile.php"><i class="fa fa-user"></i> Profile</a>

    <a href="help.php"><i class="fa fa-question-circle"></i> Help</a>

    <a href="logout.php"><i class="fa fa-right-from-bracket"></i> Logout</a>

</div>

<div class="main">

    <div class="header">

        <h1>Welcome, <?php echo htmlspecialchars($user_name); ?></h1>

        <div class="profile">

            <span><?php echo htmlspecialchars($user_name); ?></span>

        </div>

    </div>

    <!-- Dashboard Cards -->

```

```
<div class="card-container">

  <div class="card">

    <i class="fa fa-users"></i>

    <h3>View Records</h3>

    <a href="view_persons.php" class="card-btn">Go</a>

  </div>

  <div class="card">

    <i class="fa fa-face-smile"></i>

    <h3>Match Face</h3>

    <a href="user_match_face.php" class="card-btn">Go</a>

  </div>

  <div class="card">

    <i class="fa fa-clock-rotate-left"></i>

    <h3>Match History</h3>

    <a href="user_match_history.php" class="card-btn">Go</a>

  </div>

  <div class="card">

    <i class="fa fa-user"></i>

    <h3>Profile</h3>

    <a href="profile.php" class="card-btn">Go</a>

  </div>

  <div class="card">

    <i class="fa fa-question-circle"></i>

    <h3>Help</h3>

    <a href="help.php" class="card-btn">Go</a>

  </div>

</div>
```



```
</div>

</body>

</html>
```

User_match_face.php :

```
<?php

session_start();

include "config/db.php";

if (!isset($_SESSION['username']) || $_SESSION['role'] !== 'user') {

    die("Access Denied");

}

if ($_SERVER['REQUEST_METHOD'] === 'POST' && isset($_POST['match_status'])) {

    $username      = $_SESSION['username'];

    $matched_person = $_POST['matched_person'] ?? null;

    $match_distance = $_POST['match_distance'] ?? null;

    $match_status   = $_POST['match_status'];

    $match_source = $_POST['match_source'] ?? 'UPLOAD'; // default

    $stmt = $conn->prepare("

    INSERT INTO match_history

    (username, matched_person, match_distance, match_status, match_source)

    VALUES (?, ?, ?, ?, ?)

    ");

    $stmt->bind_param(

        "ssdss",

        $username,

        $matched_person,

        $match_distance,
```

```

        $match_status,
        $match_source
    );

    $stmt->execute();

    exit;
}

$persons = [];

$q = mysqli_query($conn, "
    SELECT id, name, age, photo, descriptor
    FROM persons
    WHERE descriptor IS NOT NULL
");

while ($row = mysqli_fetch_assoc($q)) {
    $row['descriptor'] = json_decode($row['descriptor'], true);

    if (is_array($row['descriptor'])) {
        $persons[] = $row;
    }
}

$username = $_SESSION['username'];

?>

<!DOCTYPE html>

<html lang="en">

<head>

<meta charset="UTF-8">

<title>Face Match</title>

<link href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/6.5.0/css/all.min.css"
rel="stylesheet">

```

```
<link
href="https://fonts.googleapis.com/css2?family=Montserrat:wght@400;600;700&display=sw
ap" rel="stylesheet">
```

```
<style>
```

```
* { box-sizing: border-box; margin: 0; padding: 0; }
```

```
body { font-family: 'Montserrat', sans-serif; background: linear-
gradient(135deg,#0f172a,#1e293b); color: #f8f8f8; }
```

```
.sidebar {
    position: fixed;
    width: 260px;
    height: 100vh;
    background: #111827;
    padding: 30px 20px;
    display: flex;
    flex-direction: column;
}
```

```
.sidebar h2 {
    text-align: center;
    color: #fbbf24;
    margin-bottom: 40px;
}
```

```
.sidebar a {
    color: #fff;
    text-decoration: none;
    padding: 14px 18px;
    margin: 8px 0;
    border-radius: 12px;
    display: flex;
```

```

    align-items: center;

    gap: 12px;

    transition: 0.3s;
}

.sidebar a:hover, .sidebar a.active {

    background: #1f2937;

    color: #fbbf24;

    box-shadow: 0 0 10px rgba(251,191,36,.4);
}

.main {

    margin-left: 280px;

    padding: 40px 50px;

    min-height: 100vh;
}

.header {

    display: flex;

    justify-content: space-between;

    align-items: center;

    margin-bottom: 30px;
}

.header h1 { color: #fbbf24; font-size: 32px; }

.header .profile { display: flex; align-items: center; gap: 12px; }

.header .profile img { width: 45px; border-radius: 50%; border: 2px solid #fbbf24; }

.card {

    background: rgba(255,255,255,0.06);

    backdrop-filter: blur(12px);

    border-radius: 20px;

```

```

padding: 30px;

box-shadow: 0 15px 30px rgba(0,0,0,.35);

max-width: 720px;

margin-bottom: 30px;
}

.card h2 { color: #fbbf24; margin-bottom: 20px; }

input[type=file], button {

padding: 12px 15px;

border-radius: 10px;

border: none;

font-weight: 600;

}

button { background: #2563eb; color: #fff; cursor: pointer; transition: 0.3s; }

button:disabled { background: #9ca3af; }

button:hover:not(:disabled) { background: #1d4ed8; }

.preview-box {

margin-top: 15px;

height: 380px;

border-radius: 12px;

display: flex;

align-items: center;

justify-content: center;

background: rgba(255,255,255,0.05);

border: 2px dashed #cfd8dc;

}

.preview-box img, .preview-box video { width: 100%; height: 100%; object-fit: contain;
border-radius: 12px; }

```

```

.result {
    margin-top: 20px;
    padding: 15px;
    background: rgba(255,255,255,0.06);
    border-radius: 12px;
}

.result img { width: 140px; border-radius: 10px; }

@media(max-width:1024px){
    .main { margin-left:0; padding:25px; }
    .sidebar{width:100%; height:auto; flex-direction:row; overflow-x:auto;}
    .sidebar a{flex:1;text-align:center;margin:0 5px;}
}

</style>

</head>

<body>

<!-- Sidebar -->

<div class="sidebar">

    <h2>User Panel</h2>

    <a href="user_dashboard.php"><i class="fa fa-house"></i> Home</a>

    <a href="view_persons.php"><i class="fa fa-users"></i> View Records</a>

    <a href="user_match_face.php" class="active"><i class="fa fa-face-smile"></i> Match
Face</a>

    <a href="user_match_history.php"><i class="fa fa-clock-rotate-left"></i> Match
History</a>

    <a href="profile.php"><i class="fa fa-user"></i> Profile</a>

    <a href="help.php"><i class="fa fa-question-circle"></i> Help</a>

    <a href="logout.php"><i class="fa fa-right-from-bracket"></i> Logout</a>

</div>

```

```

<!-- Main -->

<div class="main">

    <div class="header">

        <h1>Welcome, <?php echo htmlspecialchars($username); ?></h1>

        <div class="profile">

            <span><?php echo htmlspecialchars($username); ?></span>

        </div>

    </div>

<div class="card">

    <h2>□ Face Matching</h2>

    <!-- File Upload -->

    <input type="file" id="imageUpload" accept="image/*">

    <!-- Preview Box -->

    <div class="preview-box">

        <img id="previewImg" style="display:none">

        <video id="videoPreview" autoplay muted style="display:none"></video>

    </div>

    <!-- Live Camera Buttons -->

    <button type="button" id="startLiveBtn">▶ Start Live Matching</button>

    <button type="button" id="stopLiveBtn" disabled>Stop Live Matching</button>

    <button type="button" id="matchBtn" disabled>Find Matching Person</button>

    <!-- Result -->

    <div id="resultBox" class="result"></div>

</div>

</div>

```

```

<script src="js/face-api.min.js"></script>

<script>

const persons = <?php echo json_encode($persons); ?>.map(p => ( {...p, descriptor: new
Float32Array(p.descriptor)}));

const imageUpload = document.getElementById("imageUpload");

const previewImg = document.getElementById("previewImg");

const videoPreview = document.getElementById("videoPreview");

const resultBox = document.getElementById("resultBox");

const matchBtn = document.getElementById("matchBtn");

const startLiveBtn = document.getElementById("startLiveBtn");

const stopLiveBtn = document.getElementById("stopLiveBtn");

let uploadedDetections = [];

let stream = null;

let liveInterval = null;

let liveBestMatch = null;

let liveBestDistance = 0.6;

(async ()=>{

    await Promise.all([

        faceapi.nets.ssdMobilenetv1.loadFromUri('models'),

        faceapi.nets.faceLandmark68Net.loadFromUri('models'),

        faceapi.nets.faceRecognitionNet.loadFromUri('models')

    ]);

})();

imageUpload.addEventListener("change", async e=>{

    const file = e.target.files[0];

    if(!file) return;

    stopLiveMatching();

```



```

previewImg.src = URL.createObjectURL(file);

previewImg.style.display = "block";

videoPreview.style.display = "none";

resultBox.innerHTML = "Detecting faces...";

matchBtn.disabled = true;

previewImg.onload = async ()=>{

    uploadedDetections = await
faceapi.detectAllFaces(previewImg).withFaceLandmarks().withFaceDescriptors();

    if(!uploadedDetections.length){

        resultBox.innerHTML = "No face detected";

        return;

    }

    resultBox.innerHTML = `${uploadedDetections.length} face(s) detected. Click Find
Matching Person.`;

    matchBtn.disabled = false;

};

});

matchBtn.addEventListener("click", ()=>{

    if(!uploadedDetections.length) return;

    resultBox.innerHTML = "";

    let matched = false;

    uploadedDetections.forEach((det, i)=>{

        let best = null;

        let min = 0.6;

        persons.forEach(p=>{

            const d = faceapi.euclideanDistance(det.descriptor, p.descriptor);

            if(d < min){ min = d; best = p; }

        });

    });

```

```

if(best){
    matched = true;
    resultBox.innerHTML += `
        <hr>
        <h3 style="color:green">Match Found (Face ${i+1})</h3>
        <p><b>Name:</b> ${best.name}</p>
        <p><b>Age:</b> ${best.age}</p>
        <p><b>Distance:</b> ${min.toFixed(3)}</p>
        
    `;
    fetch("user_match_face.php", {
        method: "POST",
        headers: {"Content-Type":"application/x-www-form-urlencoded"},
        body: new URLSearchParams({
            matched_person: best.name,
            match_distance: min.toFixed(4),
            match_status: "Matched"
        })
    });
}

});

if(!matched){
    resultBox.innerHTML = `<h3 style="color:red">No Match Found</h3>`;
    fetch("user_match_face.php", {
        method: "POST",
        headers: {"Content-Type":"application/x-www-form-urlencoded"},
        body: new URLSearchParams({

```

```

        match_status: "Not Matched"

    })

});

}

});

startLiveBtn.addEventListener("click", async ()=>{

    stream = await navigator.mediaDevices.getUserMedia({video:true});

    videoPreview.srcObject = stream;

    videoPreview.style.display = "block";

    previewImg.style.display = "none";

    startLiveBtn.disabled = true;

    stopLiveBtn.disabled = false;

    liveInterval = setInterval(async ()=>{

        const detections = await
faceapi.detectAllFaces(videoPreview).withFaceLandmarks().withFaceDescriptors();

        if(!detections.length){ resultBox.innerHTML = "No face detected"; return; }

        detections.forEach(det=>{

            let best = null;

            let min = 0.6;

            persons.forEach(p=>{

                const d = faceapi.euclideanDistance(det.descriptor, p.descriptor);

                if(d < min){ min = d; best = p; }

            });

            if(best && min < liveBestDistance){

                liveBestDistance = min;

                liveBestMatch = best;

            }

        });

    });

});

```

```

    });
    }, 2000);
});
stopLiveBtn.addEventListener("click", stopLiveMatching);
function stopLiveMatching(){
    if(liveInterval) clearInterval(liveInterval);
    if(stream) stream.getTracks().forEach(t=>t.stop());
    if (liveBestMatch) {
        resultBox.innerHTML = `
            <hr>
            <h3 style="color:green">Live Match Found</h3>
            <p><b>Name:</b> ${liveBestMatch.name}</p>
            <p><b>Age:</b> ${liveBestMatch.age}</p>
            <p><b>Distance:</b> ${liveBestDistance.toFixed(3)}</p>
            
        `;
    } else {
        resultBox.innerHTML = "<h3 style='color:red'>No Match Found (Live)</h3>";
    }
    if(liveBestMatch){
        fetch("user_match_face.php", {
            method: "POST",
            headers: {"Content-Type":"application/x-www-form-urlencoded"},
            body: new URLSearchParams({
                matched_person: liveBestMatch.name,
                match_distance: liveBestDistance.toFixed(4),
                match_status: "Matched",
            })
        });
    }
}

```

```

        match_source: "LIVE"

    })

});

}

liveBestMatch = null;

liveBestDistance = 0.6;

liveInterval = null;

stream = null;

videoPreview.style.display = "none";

startLiveBtn.disabled = false;

stopLiveBtn.disabled = true;

}

</script>

</body>

</html>

```

User_match_history.php :

```

<?php

session_start();

include "config/db.php";

if (!isset($_SESSION['username']) || $_SESSION['role'] !== 'user') {

    die("Access Denied");

}

$username = $_SESSION['username'];

$stmt = $conn->prepare("

    SELECT *

    FROM match_history

```

```

WHERE username = ?

ORDER BY created_at DESC

");
$stmt->bind_param("s", $username);
$stmt->execute();
$result = $stmt->get_result();

?>

<!DOCTYPE html>

<html lang="en">

<head>

<meta charset="UTF-8">

<title>My Match History</title>

<link href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/6.5.0/css/all.min.css"
rel="stylesheet">

<link
href="https://fonts.googleapis.com/css2?family=Montserrat:wght@400;600;700&display=sw
ap" rel="stylesheet">

<style>

* { box-sizing: border-box; margin:0; padding:0; }

body { font-family:'Montserrat',sans-serif; background: linear-
gradient(135deg,#0f172a,#1e293b); color:#f8f8f8; }

.sidebar {

    position: fixed;

    width: 260px;

    height: 100vh;

    background: #111827;

    padding: 30px 20px;

    display: flex;

    flex-direction: column;

```

```

}

.sidebar h2 { text-align:center; color:#fbbf24; margin-bottom:40px; }

.sidebar a { color:#fff; text-decoration:none; padding:14px 18px; margin:8px 0; border-
radius:12px; display:flex; align-items:center; gap:12px; transition:.3s; }

.sidebar a:hover, .sidebar a.active { background:#1f2937; color:#fbbf24; box-shadow:0 0
10px rgba(251,191,36,.4); }

.main {

    margin-left: 280px;

    padding: 40px 50px;

    min-height: 100vh;

}

.header {

    display: flex;

    justify-content: space-between;

    align-items: center;

    margin-bottom: 30px;

}

.header h1 { color:#fbbf24; font-size:32px; }

.header .profile { display:flex; align-items:center; gap:12px; }

.header .profile img { width:45px; border-radius:50%; border:2px solid #fbbf24; }

.card {

    background: rgba(255,255,255,0.05);

    backdrop-filter: blur(12px);

    border-radius: 20px;

    padding: 30px;

    box-shadow: 0 15px 30px rgba(0,0,0,.35);

}

table {

```

```

width: 100%;

border-collapse: collapse;

margin-top: 20px;
}

th, td {

padding: 14px;

border-bottom: 1px solid rgba(255,255,255,0.15);

text-align: center;

color: #f8f8f8;

}

th {

background: rgba(251,191,36,0.8);

color: #111827;

font-weight: 600;

}

.match { color: #4ade80; font-weight: bold; }

.nomatch { color: #f87171; font-weight: bold; }

@media(max-width:1024px){

.main{margin-left:0;padding:25px;}

.sidebar{width:100%;height:auto;flex-direction:row;overflow-x:auto;}

.sidebar a{flex:1;text-align:center;margin:0 5px;}

}

</style>

</head>

<body>

<div class="sidebar">

<h2>User Panel</h2>

```



```

<a href="user_dashboard.php"><i class="fa fa-house"></i> Home</a>

<a href="view_persons.php"><i class="fa fa-users"></i> View Records</a>

<a href="user_match_face.php"><i class="fa fa-face-smile"></i> Match Face</a>

<a href="user_match_history.php" class="active"><i class="fa fa-clock-rotate-left"></i>
Match History</a>

<a href="profile.php"><i class="fa fa-user"></i> Profile</a>

<a href="help.php"><i class="fa fa-question-circle"></i> Help</a>

<a href="logout.php"><i class="fa fa-right-from-bracket"></i> Logout</a>

</div>

<div class="main">

    <div class="header">

        <h1>Welcome, <?php echo htmlspecialchars($username); ?></h1>

        <div class="profile">

            <span><?php echo htmlspecialchars($username); ?></span>

        </div>

    </div>

    <div class="card">

        <h2 style="text-align:center;">🕒 My Match History</h2>

        <table>

            <tr>

                <th>#</th>

                <th>Matched Person</th>

                <th>Distance</th>

                <th>Status</th>

                <th>Date</th>

            </tr>

```

```

<?php
$i = 1;
while ($row = $result->fetch_assoc()):
?>

<tr>

<td><? = $i++ ?></td>

<td><? = htmlspecialchars($row['matched_person'] ?? '-') ?></td>

<td><? = $row['match_distance'] !== null ? number_format($row['match_distance'],
4) : '-' ?></td>

<td class="<? = $row['match_status'] === 'Matched' ? 'match' : 'nomatch' ?>">

<? = htmlspecialchars($row['match_status']) ?>

</td>

<td><? = $row['created_at'] ?></td>

</tr>

<?php endwhile; ?>

</table>

</div>

</div>

</body>

</html>

```

Profile.php :

```

<?php
session_start();
include "config/db.php";
if (!isset($_SESSION['username']) || $_SESSION['role'] !== 'user') {
    header("Location: login.php");
}

```

```

        exit();
    }

    $username = $_SESSION['username'];

    $q = mysqli_query($conn, "SELECT email, photo FROM users WHERE
    username='$username'");

    $user = mysqli_fetch_assoc($q);

    $email = $user['email'] ?? "";

    $photo = $user['photo'] ?? 'uploads/default.png';

    ?>

    <!DOCTYPE html>

    <html lang="en">

    <head>

    <meta charset="UTF-8">

    <title>My Profile</title>

    <link href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/6.5.0/css/all.min.css"
    rel="stylesheet">

    <link
    href="https://fonts.googleapis.com/css2?family=Montserrat:wght@400;600;700&display=sw
    ap" rel="stylesheet">

    <style>

    * { box-sizing: border-box; margin:0; padding:0; }

    body {

        font-family: 'Montserrat', sans-serif;

        background: linear-gradient(135deg,#0f172a,#1e293b);

        color: #f8f8f8;

    }

    .main {

        margin-left: 280px;

        padding: 40px 50px;

```

```
    min-height: 100vh;
}

.card {
    max-width: 720px;
    margin: auto;
    background: rgba(255,255,255,0.06);
    backdrop-filter: blur(14px);
    border-radius: 22px;
    padding: 35px;
    box-shadow: 0 15px 35px rgba(0,0,0,.4);
}

.card h2 {
    text-align: center;
    color: #fbbf24;
    margin-bottom: 25px;
}

.profile-img {
    display: block;
    margin: 0 auto 20px;
    width: 150px;
    height: 150px;
    border-radius: 50%;
    border: 4px solid #fbbf24;
    object-fit: cover;
}

.username {
    text-align: center;
```

```
margin-bottom: 30px;

font-weight: 600;
}

label {

font-size: 14px;

color: #e5e7eb;

}

input[type="email"],
input[type="password"],
input[type="file"] {

width: 100%;

padding: 13px;

margin-top: 6px;

margin-bottom: 18px;

border-radius: 10px;

border: none;

background: rgba(255,255,255,0.12);

color: #fff;

}

input::placeholder {

color: #cbd5f5;

}

input:focus {

outline: 2px solid #fbbf24;

}

button {

width: 100%;
```

```

padding: 14px;

background: linear-gradient(135deg,#fbbf24,#f59e0b);

color: #111827;

border: none;

border-radius: 14px;

font-size: 15px;

font-weight: 600;

cursor: pointer;

transition: .3s;
}

button:hover {

    transform: translateY(-2px);

    box-shadow: 0 10px 25px rgba(251,191,36,.4);
}

hr {

    margin: 35px 0;

    border: none;

    border-top: 1px solid rgba(255,255,255,0.2);
}

@media(max-width:1024px){

    .main{margin-left:0;padding:25px;}
}

</style>

</head>

<body>

<?php include "user_sidebar.php"; ?>

<div class="main">

```

```

<div class="card">

    <h2><img alt="User icon" data-bbox="208 121 223 136"/> My Profile</h2>

    <div class="username">

        Username: <span style="color:#fbbf24;"><?php echo htmlspecialchars($username);
?></span>

    </div>

    <form method="post" enctype="multipart/form-data">

        <label>Email</label>

        <input type="email" name="email" value="<?php echo htmlspecialchars($email);
?>">

        <label>Profile Photo</label>

        <input type="file" name="photo">

        <button name="save">Save Changes</button>

    </form>

    <hr>

    <form method="post">

        <label>Change Password</label>

        <input type="password" name="newpass" placeholder="New password">

        <input type="password" name="confirmpass" placeholder="Confirm password">

        <button name="pass">Update Password</button>

    </form>

    <?php
    if (isset($_POST['save'])) {

        $email = $_POST['email'];

        $photoPath = $photo;

        if (!empty($_FILES['photo']['name'])) {

            $photoPath = "uploads/".time().$_FILES['photo']['name'];

```

```

        move_uploaded_file($_FILES['photo']['tmp_name'], $photoPath);
    }

    mysqli_query($conn, "UPDATE users SET email='$email', photo='$photoPath'
WHERE username='$username'");

    echo "<script>alert('Profile updated successfully');location.reload();</script>";
}

if (isset($_POST['pass'])) {
    $newpass = trim($_POST['newpass']);
    $confirmpass = trim($_POST['confirmpass']);
    if (empty($newpass) || empty($confirmpass)) {
        echo "<script>alert('Please fill both password fields');</script>";
    } elseif ($newpass !== $confirmpass) {
        echo "<script>alert('Passwords do not match');</script>";
    } else {
        $p = password_hash($newpass, PASSWORD_DEFAULT);
        $update = mysqli_query($conn, "UPDATE users SET password='$p' WHERE
username='$username'");
        if ($update) {
            echo "<script>alert('Password updated successfully');</script>";
        } else {
            echo "<script>alert('Password update failed');</script>";
        }
    }
}

?>
</div>
</div>
</body>

```


</html>

Help.php :

<?php

session_start();

if (!isset(\$_SESSION['username']) || \$_SESSION['role'] !== 'user') {

 header("Location: login.php");

 exit();

}

\$user_name = \$_SESSION['username'] ?? 'User';

?>

<!DOCTYPE html>

<html lang="en">

<head>

<meta charset="UTF-8">

<title>Help & Guide</title>

<link href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/6.5.0/css/all.min.css" rel="stylesheet">

<link

href="https://fonts.googleapis.com/css2?family=Montserrat:wght@400;600;700&display=swap" rel="stylesheet">

<style>

* { box-sizing: border-box; margin:0; padding:0; }

body {

 font-family: 'Montserrat', sans-serif;

 background: linear-gradient(135deg,#0f172a,#1e293b);

 color: #f8f8f8;

}

```
.main {  
  margin-left: 280px;  
  padding: 40px 50px;  
  min-height: 100vh;  
}  
  
.header {  
  display: flex;  
  justify-content: space-between;  
  align-items: center;  
  margin-bottom: 30px;  
}  
  
.header h1 {  
  color: #fbbf24;  
  font-size: 32px;  
}  
  
.card {  
  max-width: 900px;  
  background: rgba(255,255,255,0.06);  
  backdrop-filter: blur(14px);  
  border-radius: 22px;  
  padding: 35px 40px;  
  box-shadow: 0 15px 35px rgba(0,0,0,.4);  
}  
  
.section {  
  margin-bottom: 30px;  
}  
  
.section h3 {
```

```

        color: #fbbf24;

        margin-bottom: 10px;
    }

.section ul {

    margin-left: 20px;
}

.section li {

    margin: 8px 0;

    line-height: 1.6;
}

.section h3 i {

    margin-right: 8px;
}

.help-footer {

    margin-top: 30px;

    padding-top: 20px;

    border-top: 1px solid rgba(255,255,255,0.2);

    text-align: center;

    color: #e5e7eb;
}

@media(max-width:1024px){

    .main{margin-left:0;padding:25px;}
}

</style>

</head>

<body>

<?php include "user_sidebar.php"; ?>

```

```

<div class="main">

  <div class="header">

    <h1>Welcome, <?php echo htmlspecialchars($user_name); ?></h1>

  </div>

  <div class="card">

    <h2 style="text-align:center;color:#fbbf24;margin-bottom:30px;">
       Help & User Guide
    </h2>

    <div class="section">

      <h3><i class="fa fa-camera"></i> How Face Matching Works</h3>

      <ul>

        <li>Allow camera permission when prompted</li>

        <li>Keep your face straight and clearly visible</li>

        <li>Good lighting improves recognition accuracy</li>

      </ul>

    </div>

    <div class="section">

      <h3><i class="fa fa-circle-xmark"></i> If Face Is Not Matching</h3>

      <ul>

        <li>Ensure proper lighting</li>

        <li>Do not cover your face (mask, cap, sunglasses)</li>

        <li>Stay still for a few seconds</li>

      </ul>

    </div>

    <div class="section">

      <h3><i class="fa fa-clock-rotate-left"></i> Match History</h3>

      <ul>

```

```

        <li>All successful and failed attempts are saved</li>
        <li>Date, time, and match result are recorded automatically</li>
    </ul>
</div>
<div class="section">
    <h3><i class="fa fa-shield-halved"></i> Account & Security</h3>
    <ul>
        <li>You can change your password from the Profile page</li>
        <li>Your facial data is stored securely</li>
    </ul>
</div>
<div class="help-footer">
    <p><i class="fa fa-headset"></i> Need more help?</p>
    <p>Contact the system administrator or project supervisor.</p>
</div>
</div>
</div>
</body>
</html>

```

Logout.php :

```

<?php
session_start();
session_destroy();
header("Location: login.php");
exit();
?>

```

❖ Limitations Of Project

1.Accuracy Depends on Image Quality:

The system's performance is highly dependent on the quality of input images. Poor lighting, low resolution, motion blur, or camera noise can reduce face detection and recognition accuracy.

2. Multi-Face Detection Performance Degradation:

While the system supports detecting multiple faces in a single frame, recognition accuracy and processing speed may decrease as the number of faces increases, especially on devices with limited computational resources.

3. Environmental and Facial Variations:

Changes in facial expressions, head orientation, occlusions (masks, caps, glasses), and uneven lighting conditions may affect descriptor generation and matching accuracy.

4. Device and Browser Compatibility:

The system relies on browser-based camera access and JavaScript APIs. Older browsers, restricted permissions, or low-end devices may limit full functionality or cause performance issues.

5. Limited Dataset Size:

The system is trained on a limited dataset stored in the local database. As the number of registered users grows, advanced indexing or optimization techniques may be required to maintain fast matching.

6. Processing and Resource Constraints

Face detection and recognition are computationally intensive processes. Systems with low processing power or memory may experience slower response times, especially during multiface detection.

7. Security and Privacy Constraints

Although basic access control and authentication are implemented, advanced biometric encryption, anonymization, and compliance with data protection regulations are beyond the scope of this project.

8. No Continuous Real-Time Surveillance

The system performs face recognition only during user-initiated actions such as image upload or camera capture. Continuous real-time monitoring and tracking are not implemented.

❖ Conclusion

The Face Detection and Recognition System developed in this project successfully demonstrates the practical application of computer vision and web technologies to solve realworld identity recognition problems. The system efficiently integrates a user-friendly frontend with a robust backend to provide secure, accurate, and reliable face detection and matching functionality.

The project supports multi-face detection, allowing the system to identify and process multiple faces within a single image or camera frame. By utilizing modern face recognition techniques and descriptor-based matching, the system ensures accurate identification while maintaining acceptable performance levels. The use of camera capture and image upload features enhances flexibility and usability for different operational scenarios.

From a technical perspective, the project effectively combines frontend technologies such as HTML, CSS, and JavaScript with backend components including PHP and MySQL. The implementation of role-based access control for administrators and users improves system security and data integrity. All face records, descriptors, and match histories are systematically stored and managed within the database, ensuring traceability and consistency.

The system also emphasizes usability and interface consistency by maintaining a structured dashboard layout, intuitive navigation, and visually organized forms. This enhances the overall user experience and makes the system accessible even to non-technical users. The successful handling of descriptor generation, storage, and comparison demonstrates the reliability of the adopted face recognition approach.

Despite certain limitations related to environmental conditions, hardware capabilities, and scalability, the project achieves its intended objectives effectively. It serves as a strong foundation for future enhancements such as real-time surveillance, cloud-based processing, advanced security mechanisms, and large-scale deployment.

In conclusion, this project stands as a comprehensive and functional implementation of a Face Detection and Recognition System, showcasing both technical competence and practical applicability. It provides valuable insight into modern biometric systems and lays the groundwork for further research and development in the field of intelligent identification systems.

❖ Reference

1. face-api.js Documentation:

<https://justadudewhohacks.github.io/face-api.js/docs/index.html>

2. MySQL:

<https://dev.mysql.com/doc/>

3. OpenAI. (2023). ChatGPT

from: <https://chat.openai.com>