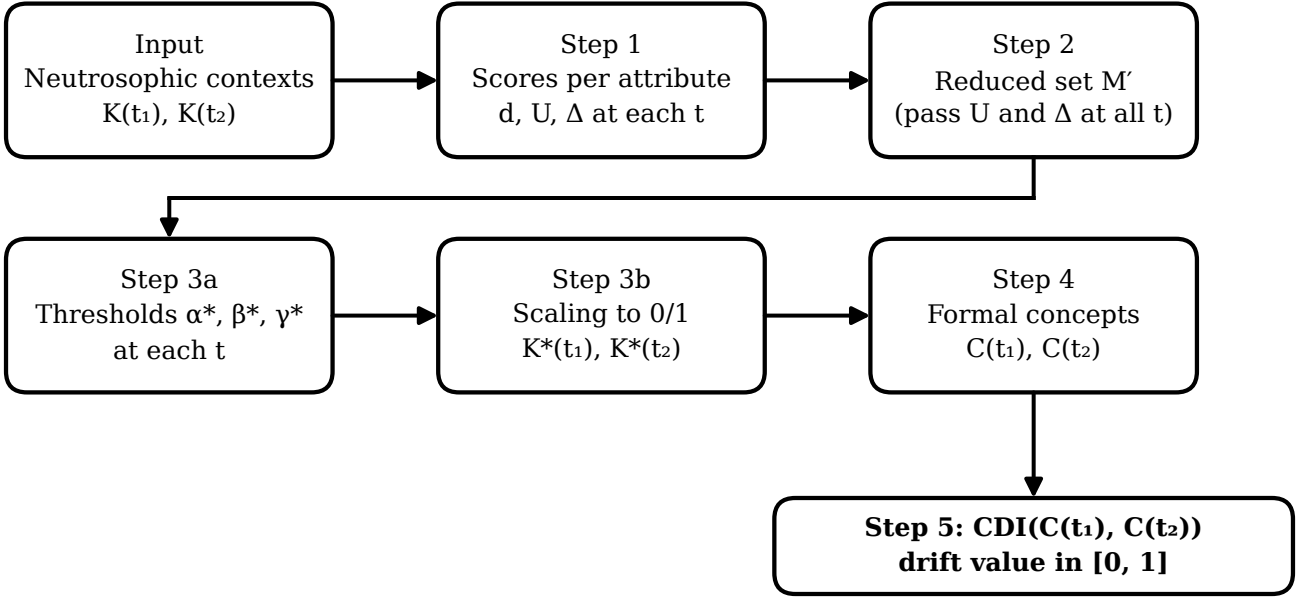
Input
Neutrosophic contexts
K(t1), K(t2)
Step 1
Scores per attribute
d, U, Δ at each t
Step 2
Reduced set M′
(pass U and Δ at all t)
Step 3a
Thresholds α*, β*, γ*
at each t
Step 3b
Scaling to 0/1
K*(t1), K*(t2)
Step 4
Formal concepts
C(t1), C(t2)
Step 5: CDI(C(t1), C(t2))
drift value in [0, 1]