


LAB1

Linux

cat: display all content of

using hypervisor.

1. Install CentOS / RHEL ✓
2. What is the difference between cat and more command?
 more: display content and i control it
3. What is the difference between rm and rmdir using man?
 remove file or directory
remove empty directory
4. Create the following hierarchy under your home directory:

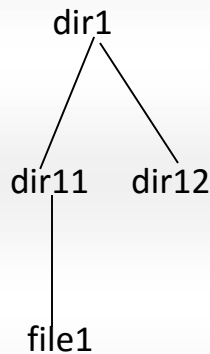

command used is: mkdir, touch, cd

`rm -rf /home/dir11`

- a. Remove dir11 in one-step. What did you notice? And how did you overcome that?
- b. Then remove dir12 using rmdir -p command. State what happened to the hierarchy (Note: you are in your home directory).
- c. The output of the command pwd was /home/user. Write the absolute and relative path for the file mycv

`cd /home/docs/mycv`
`cd ../docs/mycv/` → Ab → From /

5. Copy the /etc/passwd file to your home directory making its name is mypasswd.

6. Rename this new file to be oldpasswd.

`cp /etc/passwd/home/my Pa..`

7. You are in /usr/bin, list four ways to go to your home directory

8. List Linux commands in /usr/bin that start with letter w

`ls /usr/bin/ | grep "^w"`

9. Display the first 4 lines of /etc/passwd

`head -n /etc/passwd`

10. Display the last 7 lines of /etc/passwd

`tail -7 /etc/passwd`

11. Display the man pages of passwd the command and the file sequentially in one command.

`man passwd ; cat /etc/passwd`

12. Display the man page of the passwd file.

`man /etc/passwd` → know info about file

13. Display a list of all the commands that contain the keyword passwd in their man page.

`man -k passwd`

Man → commands

