



LECTURE 5

State management and super Global arrays

WEB DEVELOPMENT 2

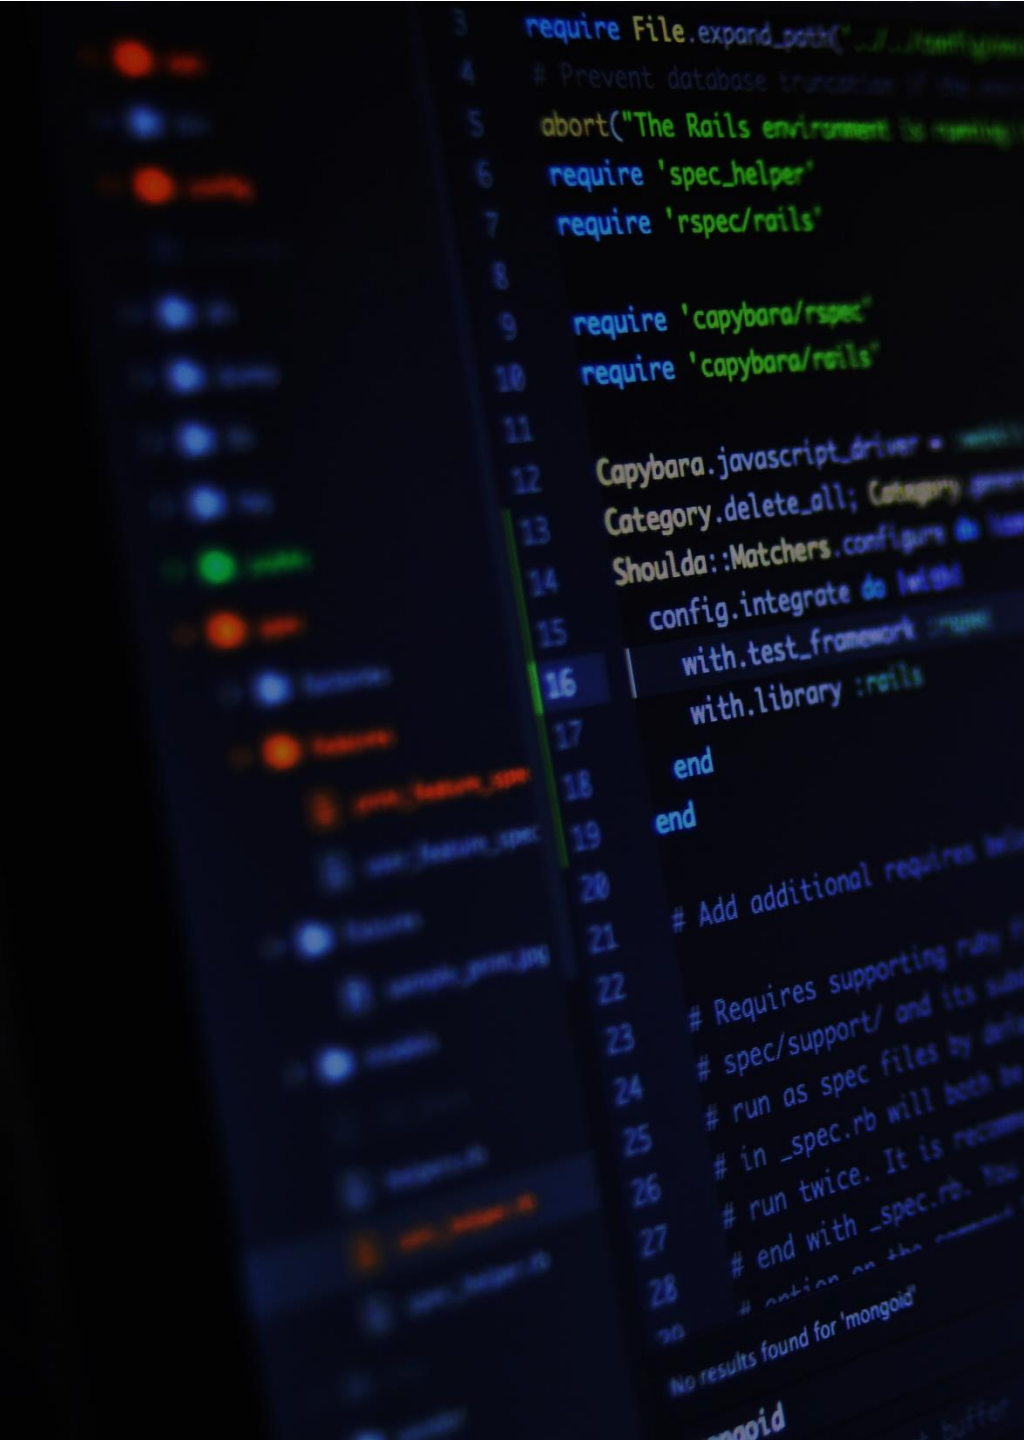


Intro to state management

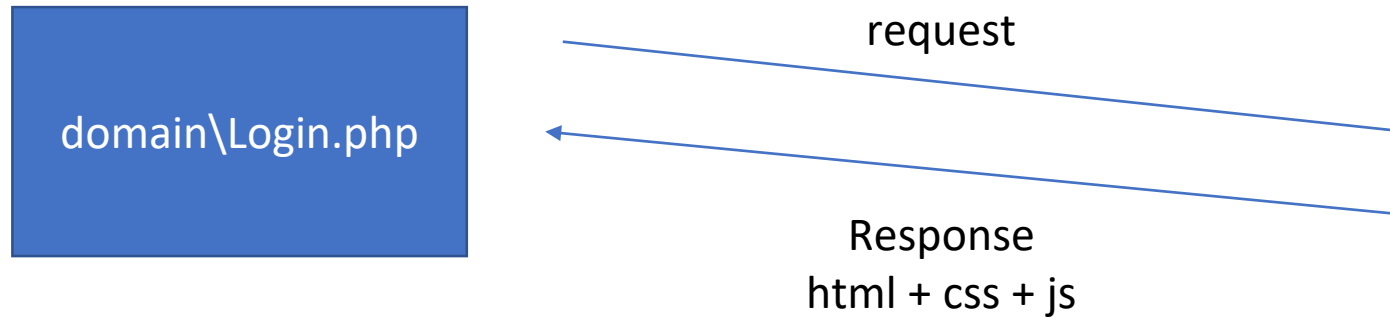

- 1- Query string – URL – GET
- 2- HTTP Request (body or header) via (Post , UPADTE ,) methods
- 3- HTML Hidden input
- 4- Cookie(memory – file (permanent))
- 5- Session - Ask server to save state on server memory (session)
server create session object at first request
- 6- Store File on server
- 7- store in database

Server don't save any state
delete it once response

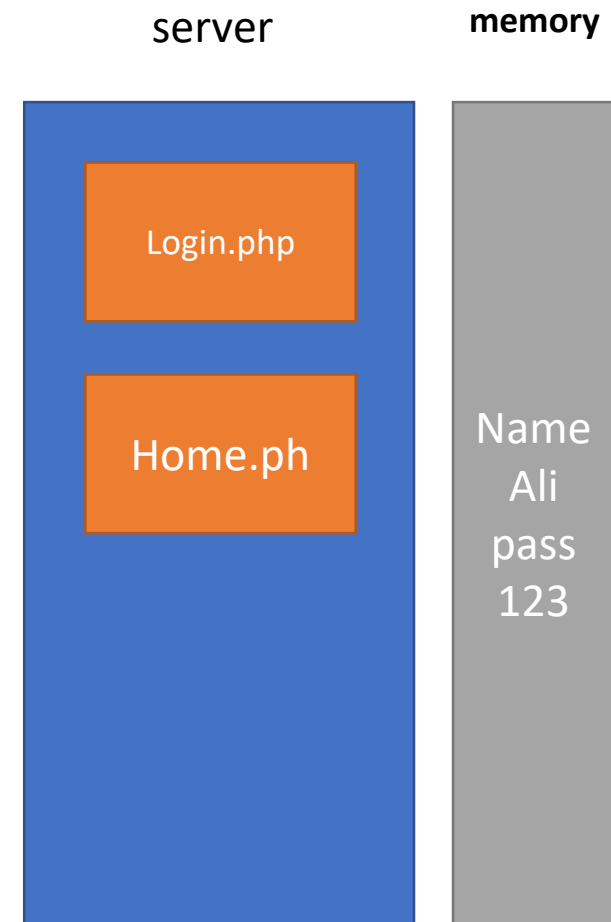

URL & Request

- **Superglobal are created by php in run time**

1- `$_GET[]`

2- `$_POST[]`

3- `$_REQUEST[]`

4- `$_server[]`

Hidden

- `<input type="hidden" name="name" value="ahmed">`

```
<form action="process_form.php" method="post">
```

```
  <label for="username">Username:</label>
```

```
  <input type="text" id="username" name="username">
```

```
  <!-- Hidden input field -->
```

```
  <input type="hidden" id="hiddenField" name="hiddenField" value="hidden_value">
```

```
  <input type="submit" value="Submit">
```

```
</form>
```

PHP Cookies

What is a Cookie?

A cookie is often used to identify a user. A cookie is a small file that the server embeds on the user's computer. Each time the same computer requests a page with a browser, it will send the cookie too. With PHP, you can both create and retrieve cookie values.

Create Cookies With PHP

```
<?php
$cookie_name = "user";
$cookie_value = "John Doe";
setcookie($cookie_name, $cookie_value, time() + (86400 * 30), "/"); // 86400 = 1 day
?>
```

PHP Cookies

Check if Cookies are Enabled

```
<?php
setcookie("test_cookie", "test", time() + 3600, '/');
?>
<html>
<body>
<?php
if(count($_COOKIE) > 0) {
    echo "Cookies are enabled.";
} else {
    echo "Cookies are disabled.";
}
?>
</body>
</html>
```

PHP Cookies

Modify a Cookie Value

```
<?php
$cookie_name = "user";
$cookie_value = "John Doe";
setcookie($cookie_name, $cookie_value, time() +
(86400 * 30), "/"); // 86400 = 1 day
?>
```

Delete a Cookie

```
<?php
// set the expiration date to one hour ago
setcookie("user", "", time() - 3600);
?>
```

Php Sessions – starting and set value

- A session is a way to store information (in variables) to be used across multiple pages.
- Unlike a cookie, the information is not stored on the users computer.
- A session is started with the `session_start()` function.

```
<?php  
// Start the session  
session_start();  
?>
```


Get PHP Session Variable Values

all session variable values are stored in the global `$_SESSION` variable:

```
<?php
// Echo session variables that were set on previous page
echo "Favorite color is " . $_SESSION["favcolor"] . "<br>";
echo "Favorite animal is " . $_SESSION["favanimal"] . ".";
?>
```

Modify a PHP Session Variable

```
<?php
// to change a session variable, just overwrite it
$_SESSION["favcolor"] = "yellow";
print_r($_SESSION);
?>
```

Destroy a PHP Session

```
<?php
// remove all session variables
session_unset();

// destroy the session
session_destroy();
?>
```

PHP File Handling

- PHP `readfile()` Function

```
<?php  
echo readfile("webdictionary.txt");  
?>
```

- PHP Open File - `fopen()`

```
<?php  
$myfile = fopen("webdictionary.txt", "r") or die("Unable to open file!");  
echo fread($myfile, filesize("webdictionary.txt"));  
fclose($myfile);  
?>
```

PHP File Handling

- PHP Read File - fread()

```
fread($myfile, filesize("webdictionary.txt"));
```

- PHP Close File - fclose()

```
<?php  
$myfile = fopen("webdictionary.txt", "r");  
// some code to be executed....  
fclose($myfile);  
?>
```

PHP File Handling

- PHP Read Single Line - fgets()

```
<?php
$myfile = fopen("webdictionary.txt", "r") or die("Unable to open file!");
echo fgets($myfile);
fclose($myfile);
?>
```

Resources

- <https://www.w3schools.com/>