Comparing Data-Driven and Physics-Informed Neural Networks

Main finding: adding a weak physics penalty slightly improved held-out prediction. Both models still have limited accuracy on the original target scale; this experiment does not validate the physical law.

1. Data and evaluation design

Item	What we did
Dataset	1,865 observations; both prediction networks use all nine features, x1–x9. ID is only an identifier.
Data quality	No missing/nonfinite values or duplicate IDs. All observations, including extreme values, were retained.
Repeated inputs	Six matching-input pairs: two share y, four have different y. All rows were kept; each pair stays together in every split.
Holdout split	Seed 42; 1,493 training / 372 testing rows (80.05% / 19.95%). Grouping explains the small departure from 80/20.
Validation	The same five grouped folds for both models; validation sizes 298, 298, 300, 300, 297. Preprocessing is fitted on each fitting fold only; the test set is excluded from tuning.

Preparation: compare raw inputs with log10(x1, x2, x4, x5, x6), then standardize. These inputs are positive; zero-valued features are not logged. The target is log10(y), reflecting its wide range (about 0.000075–46.86). Outputs are converted back with 10^z, ensuring positive predictions. Invalid numerical outputs raise errors; nothing is silently clipped.

2. Search choices and selected models

Search choice	Candidate values	Reason
Prediction network	1–3 layers; width 16/32/64; ReLU/tanh	Compare modest capacities for nine inputs.
Adam learning rate	0.0003 / 0.001 / 0.003	Explore slower and faster updates.
Batch size; L2	32/64/128; 0/1e−5/1e−4/1e−3	Balance update frequency and overfitting.
Input representation	Selected logs off/on	Test compression, especially for x2 and x4.
Exponent network	Tanh: (8), (16), (16,8); inputs x1–x2/all	Limit flexibility; test additional inputs.
Physics weight λ	0.01 / 0.1 / 1 / 10	Compare weak and strong equation penalties.

Budget: seed-42 random sampling without replacement; 20/1,296 data-driven and 20/72 physics candidates, each over five folds (200 fits). Physics keeps the selected prediction backbone, batch size, L2, and input transform fixed. Choose the lowest mean validation RMSLE. Early stopping: at most 1,000 epochs; patience 50; minimum improvement 1e−5. Retain the lowest-score checkpoint. L2 penalizes weights, not biases; no separate weight decay is used.

Selected setting	Data-driven	Physics-informed
Prediction network	16 → 16 → 16, ReLU	Same prediction backbone
Rate / batch / L2	0.003 / 64 / 0.001	0.003 / 64 / 0.001
Transforms	Selected logs + standardization; log10(y)	Same
Exponent / physics weight	Not applicable	One 16-neuron tanh layer; x1–x2; λ=0.01

3. How physics enters training

The equation is $y_{phys} = x2^2 / [72.2 \times x1^{(-m)}]$. A second network learns a separate m for each sample, jointly with the prediction network. Softplus enforces m>0. At inference, m uses features alone, never observed y. Features x3–x9 influence the prediction branch.

Using original units: $z_{phys} = 2\log10(x2) - \log10(72.2) + m\log10(x1)$, where z = log10(predicted y). Minimize data MSE in log10(y) + $\lambda \times \text{mean}[(z - z_{phys})^2]$ + L2. Equation equivalence and gradient flow to both networks and m were checked. Exponents are learned during training, not prescribed or fitted afterward.

4. Training and validation evidence

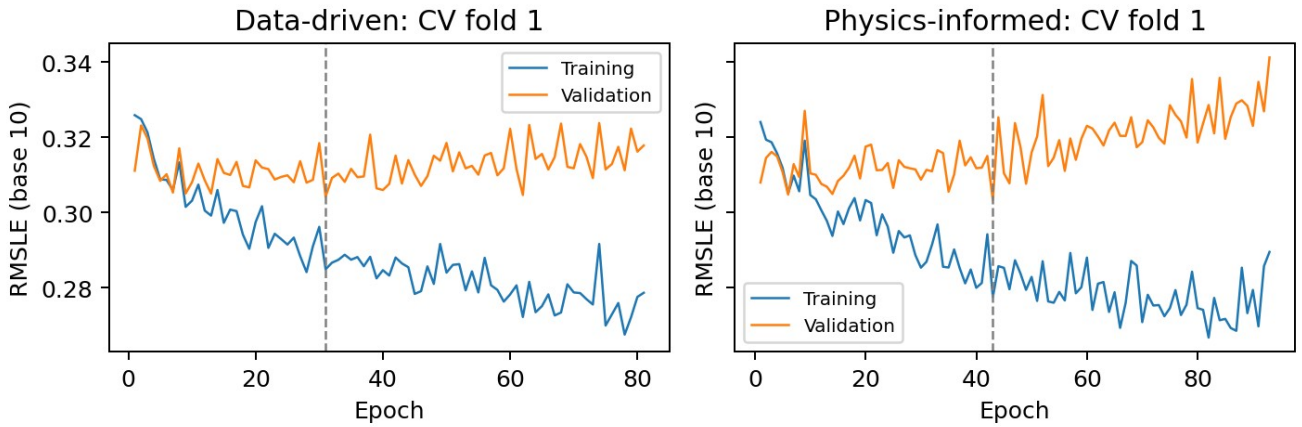


Figure 1. Training and validation RMSLE for preselected fold 1 of each selected model. Dashed lines mark retained epochs. Curves stop at actual early stopping. All five folds are included in supporting outputs; test error is never plotted against epoch.

Selected model	Validation RMSLE mean	Fold standard deviation
Data-driven	0.299685	0.016474
Physics-informed	0.298574	0.015089

Each summary uses five folds; SD uses ddof=1. These scores were used for selection and are not independent test estimates. Fold seeds are 42 + fold number.

5. What the exponent learned

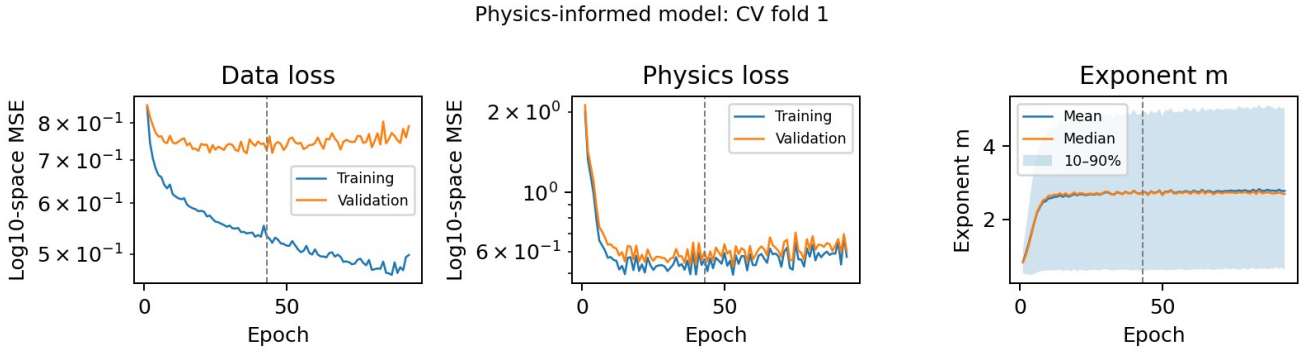


Figure 2. Physics-informed fold 1: separate data/physics losses and m evolution on fixed fitting-fold inputs. The shaded band is the sample 10th–90th percentile, not uncertainty. Dashed lines mark the retained epoch. Final-refit diagnostics are also saved.

Because m varies by sample, report its final distribution rather than one global value. Each sample's learned m is saved with its ID; held-out values are generated from inputs alone.

Final model inputs	Mean m	Median m	SD	10th–90th percentile
Training	2.843	2.718	1.723	0.649–5.296
Testing	2.959	2.958	1.652	0.768–5.419

6. Runtime and final refitting

Model	100 CV fits	Full-training refit
Data-driven	293.20 s	78 epochs; 1.29 s
Physics-informed	546.87 s	116 epochs; 2.67 s

About 14 minutes of CV training on one CPU thread, using deterministic algorithms; installation and smoke tests excluded. One nonselected physics-informed fold reached 1,000 epochs; selected folds did not. Refit durations are the median selected CV best epochs. Fresh models and scalers use all 1,493 training rows, seed 42, with no validation/test monitoring. Both models were fixed before testing and were not adjusted afterward.

7. Final predictive results

Model	Training R^2	Training RMSLE	Testing R^2	Testing RMSLE
Data-driven	0.0896	0.2808	0.1803	0.2855
Physics-informed	0.1886	0.2725	0.2082	0.2810

Higher R^2 and lower RMSLE are better. $R^2 = 1 - SSE/SST$ uses original-scale residuals, not squared correlation. Base-10 RMSLE = $\sqrt{\text{mean}[(\log10(1+\hat{y}) - \log10(1+y))^2]}$. This +1 convention differs from the log-target training loss.

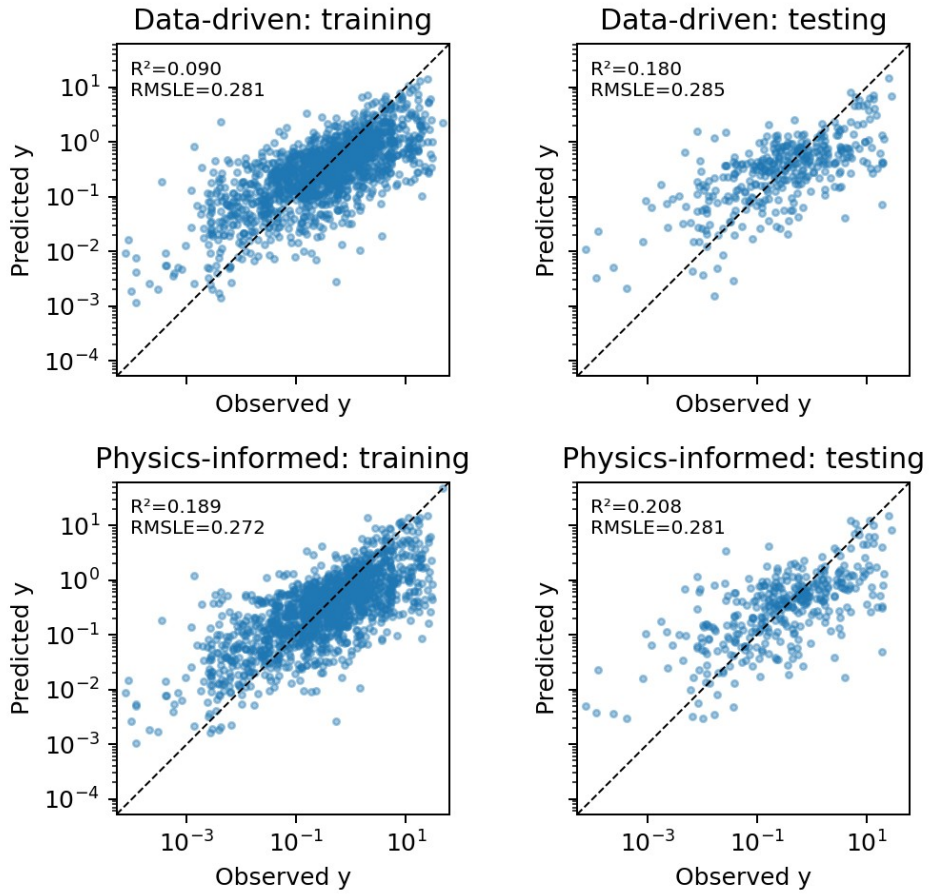


Figure 3. Final predictions: training and testing for both models. All panels use common logarithmic limits and a 1:1 line. Training predictions are in-sample; testing predictions are held out.

8. Interpretation and limitations

- Modest gain: physics lowers test RMSLE from 0.2855 to 0.2810, but both test R^2 values remain low. Small targets are often overpredicted and large targets underpredicted. One split does not establish a general advantage.
- Approximate physics: agreement RMSE is 0.7838 (training) and 0.7075 (testing), in log10 units. The selected $\lambda=0.01$ is weak. Since $x1<1$ and $m>0$, the equation requires $y_{phys}<x2^2/72.2$; 359/1,493 training observations exceed that bound and were retained.
- Limited certainty: m and the prediction network can co-adapt, so learned exponents are not proven physical parameters. Only 20 candidates per model and one seed per fold were tested. Fold SD is not a confidence interval. The saved accuracy–physics tradeoff plot is exploratory because other settings also vary.

Reproduction and disclosure

Reproduce with Database.xls, the notebook, README.md, and requirements.txt. Supporting files contain partitions, settings, fold records, final models, ID-linked predictions/m, and figures. Sources: supplied challenge/workbook and listed software libraries. OpenAI Codex assisted with code, execution, interpretation, figures, and writing. The author must verify and understand all submitted work.