

MARKS PROGRAM

Java Programming Assignment

Contents
1. Algorithm
2. UML Class Diagram
3. Java Source Code
4. Output Screen – VS Code Style

Date: 27/09/2026


1. ALGORITHM

Steps for executing the Marks program:

Step	Algorithm
1	Start the program.
2	Read five marks from command-line arguments args[0] to args[4].
3	Convert each command-line argument from String to int using Integer.parseInt().
4	Calculate the total of the five marks.
5	Calculate the average by dividing the total by 5.0.
6	Display the total marks.
7	Display the average marks.
8	Stop the program.

2. UML CLASS DIAGRAM

The Marks class contains the main() method. Marks are received through command-line arguments.

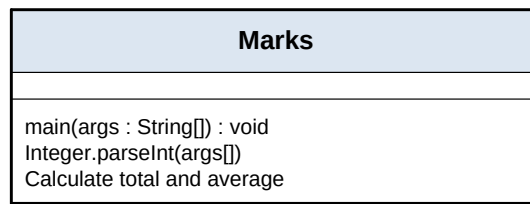

contains

main()

reads 5 command-line marks

UML: Marks is the only class. The main() method accepts String[] args and processes five integer marks.


3. JAVA SOURCE CODE

File name: **Marks.java**

```
class Marks {  
    public static void main(String[] args) {  
  
        int m1 = Integer.parseInt(args[0]);  
        int m2 = Integer.parseInt(args[1]);  
        int m3 = Integer.parseInt(args[2]);  
        int m4 = Integer.parseInt(args[3]);  
        int m5 = Integer.parseInt(args[4]);  
  
        int total = m1 + m2 + m3 + m4 + m5;  
        double average = total / 5.0;  
  
        System.out.println("Total Marks = " + total);  
        System.out.println("Average Marks = " + average);  
    }  
}
```

4. OUTPUT SCREEN – VS CODE STYLE

Example execution using command-line arguments: **80 75 90 85 70**

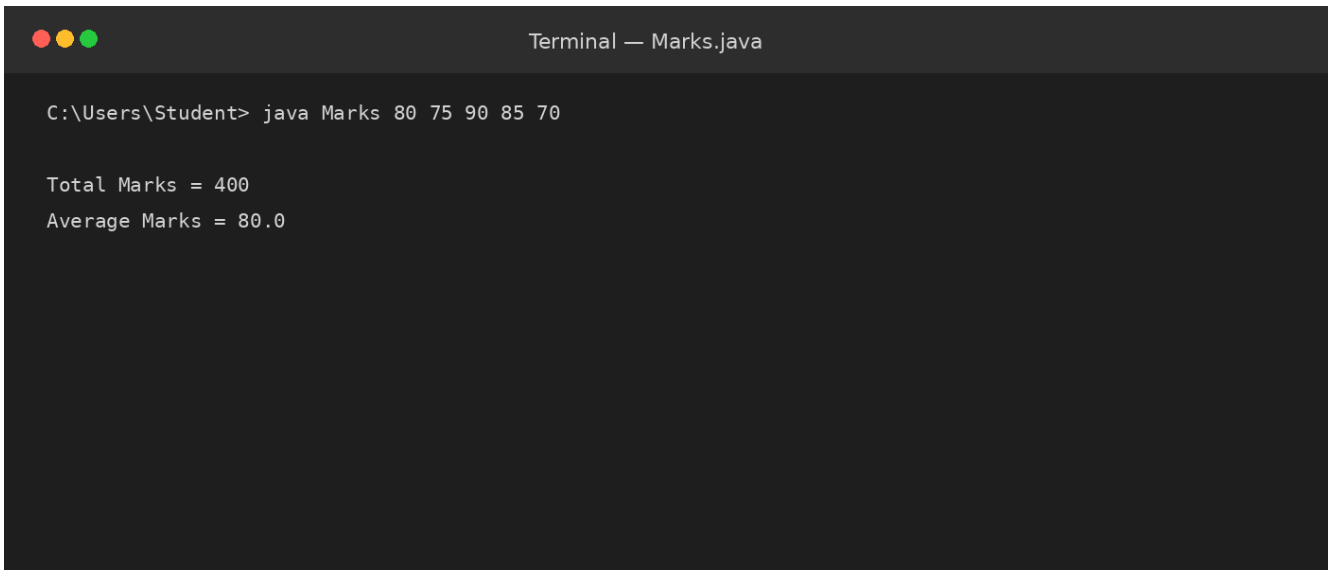A screenshot of a terminal window titled "Terminal — Marks.java". The terminal shows a command prompt "C:\Users\Student>" followed by the command "java Marks 80 75 90 85 70". The output of the program is displayed on the next two lines: "Total Marks = 400" and "Average Marks = 80.0".

```
C:\Users\Student> java Marks 80 75 90 85 70

Total Marks = 400
Average Marks = 80.0
```

Total Marks: 400 **Average Marks:** 80.0