


Farm Animals Java Application

UML Diagram and Algorithm

1. UML Class Diagram

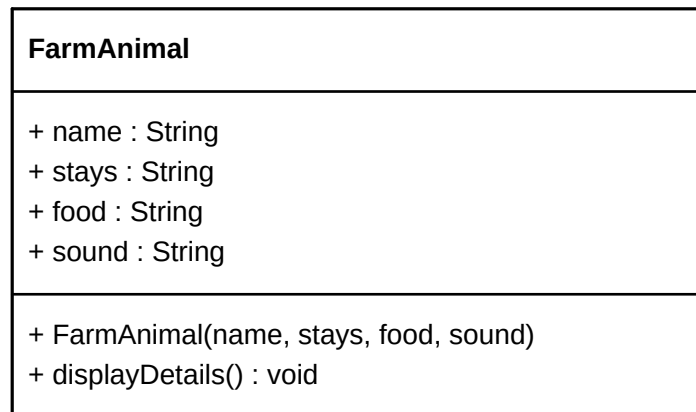

Objects created in main(): cow, pig, horse

Each object is created using the FarmAnimal constructor and stores its name, place of stay, food, and sound.

2. Algorithm

Step 1: Start.

Step 2: Define a class named FarmAnimal.

Step 3: Declare the attributes name, stays, food, and sound.

Step 4: Define a constructor to initialize these attributes.

Step 5: Define the displayDetails() method to print the animal details.

Step 6: In the main() method, create a cow object with its details.

Step 7: Create a pig object with its details.

Step 8: Create a horse object with its details.

Step 9: Call displayDetails() for the cow object.

Step 10: Call displayDetails() for the pig object.

Step 11: Call displayDetails() for the horse object.

Step 12: Display all animal details.

Step 13: Stop.

3. Sample Object Details

Object	Stays	Food	Sound
Cow	Cowshed	Grass	Moo
Pig	Pigsty	Grains	Oink
Horse	Stable	Grass and Hay	Neigh

4. Program Flow

Start → Define FarmAnimal class → Create cow, pig and horse objects → Display details → Stop