

# **Анализ файловой структуры UNIX. Команды для работы с файлами и каталогами**

---

Иовлев Максим Андреевич НПИбд-01-22<sup>1</sup>

8 марта, 2023, Москва, Россия

<sup>1</sup>Российский Университет Дружбы Народов

# Цели и задачи работы

---

## Цель лабораторной работы

Ознакомление с файловой системой Linux, её структурой, именами и содержанием каталогов. Приобретение практических навыков по применению команд для работы с файлами и каталогами, по управлению процессами, по проверке использования диска и обслуживанию файловой системы.


# Задачи лабораторной работы

- 1 Выполнить примеры
- 2 Выполнить действия по работе с каталогами и файлами
- 3 Выполнить действия с правами доступа
- 4 Получить дополнительные сведения при помощи справки по командам.

# **Процесс выполнения лабораторной работы**

---

# Выполнение примеров

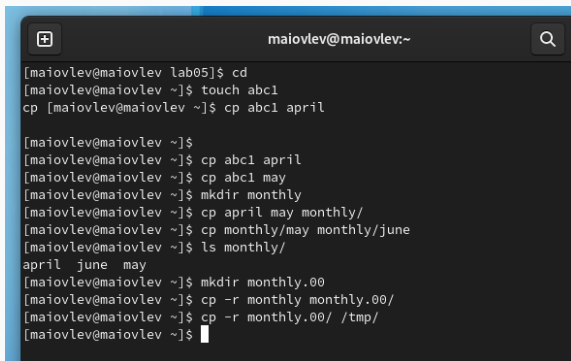

```
maiovlev@maiovlev:~  
[maiovlev@maiovlev lab05]$ cd  
[maiovlev@maiovlev ~]$ touch abc1  
cp [maiovlev@maiovlev ~]$ cp abc1 april  
  
[maiovlev@maiovlev ~]$  
[maiovlev@maiovlev ~]$ cp abc1 april  
[maiovlev@maiovlev ~]$ cp abc1 may  
[maiovlev@maiovlev ~]$ mkdir monthly  
[maiovlev@maiovlev ~]$ cp april may monthly/  
[maiovlev@maiovlev ~]$ cp monthly/may monthly/june  
[maiovlev@maiovlev ~]$ ls monthly/  
april  june  may  
[maiovlev@maiovlev ~]$ mkdir monthly.00  
[maiovlev@maiovlev ~]$ cp -r monthly monthly.00/  
[maiovlev@maiovlev ~]$ cp -r monthly.00/ /tmp/  
[maiovlev@maiovlev ~]$
```

**Рис. 1:** Выполнение примеров

# Выполнение примеров

```
[maiovlev@maiovlev ~]$  
[maiovlev@maiovlev ~]$  
[maiovlev@maiovlev ~]$ mv april july  
[maiovlev@maiovlev ~]$ mv july monthly.00/  
[maiovlev@maiovlev ~]$ ls monthly.00/  
july  monthly  
[maiovlev@maiovlev ~]$ mv monthly.00/ monthly.01  
[maiovlev@maiovlev ~]$ mkdir reports  
[maiovlev@maiovlev ~]$ mv monthly.01/ reports/  
[maiovlev@maiovlev ~]$ mv reports/monthly.01/ reports/monthly  
[maiovlev@maiovlev ~]$
```

Рис. 2: Выполнение примеров

# Выполнение примеров

```
[maiovlev@maiovlev ~]$  
[maiovlev@maiovlev ~]$  
[maiovlev@maiovlev ~]$ touch may  
[maiovlev@maiovlev ~]$ ls -l may  
-rw-r--r--. 1 maiovlev maiovlev 0 map  8 12:49 may  
[maiovlev@maiovlev ~]$ chmod u+x may  
[maiovlev@maiovlev ~]$ ls -l may  
-rwxr--r--. 1 maiovlev maiovlev 0 map  8 12:49 may  
[maiovlev@maiovlev ~]$ chmod u-x may  
[maiovlev@maiovlev ~]$ ls -l may  
-rw-r--r--. 1 maiovlev maiovlev 0 map  8 12:49 may  
[maiovlev@maiovlev ~]$ mkdir monthly  
mkdir: невозможно создать каталог «monthly»: Файл существует  
[maiovlev@maiovlev ~]$ chmod g-r,o-r monthly/  
[maiovlev@maiovlev ~]$ touch abc1  
[maiovlev@maiovlev ~]$ chmod g+w abc1  
[maiovlev@maiovlev ~]$
```

Рис. 3: Выполнение примеров




# Создание директорий и копирование файлов

```
[maiovlev@maiovlev ~]$  
[maiovlev@maiovlev ~]$ cp /usr/include/linux/sysinfo.h ~  
[maiovlev@maiovlev ~]$ mv sysinfo.h equipment  
[maiovlev@maiovlev ~]$ mkdir ski.plases  
[maiovlev@maiovlev ~]$ mv equipment ski.plases/  
[maiovlev@maiovlev ~]$ mv ski.plases/equipment ski.plases/equiplist  
[maiovlev@maiovlev ~]$ touch abc1  
[maiovlev@maiovlev ~]$ cp abc1 ski.plases/equiplist2  
[maiovlev@maiovlev ~]$ cd ski.plases/  
[maiovlev@maiovlev ski.plases]$ mkdir equipment  
[maiovlev@maiovlev ski.plases]$ mv equiplist equipment/  
[maiovlev@maiovlev ski.plases]$ mv equiplist2 equipment/  
[maiovlev@maiovlev ski.plases]$ cd  
[maiovlev@maiovlev ~]$ mkdir newdir  
[maiovlev@maiovlev ~]$ mv newdir/ ski.plases/  
[maiovlev@maiovlev ~]$ mv ski.plases/newdir/ ski.plases/plans  
[maiovlev@maiovlev ~]$
```

Рис. 4: Работа с каталогами


# Работа с командой chmod

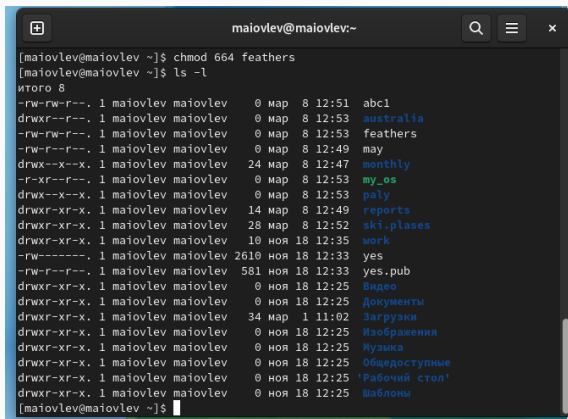A terminal window titled 'maiovlev@maiovlev:~' with search, menu, and close icons in the title bar. The terminal shows the execution of 'chmod 664 feathers' and 'ls -l'. The output of 'ls -l' is a long listing of files and directories with their permissions, owner, group, size, date, and name. The permissions for most files are '-rw-rw-r--', while for directories they are 'drwxr-xr-x'. The file 'feathers' is highlighted in blue in the original image.

```
[maiovlev@maiovlev ~]$ chmod 664 feathers
[maiovlev@maiovlev ~]$ ls -l
итого 8
-rw-rw-r--. 1 maiovlev maiovlev    0 мар  8 12:51 abc1
drwxr--r--. 1 maiovlev maiovlev    0 мар  8 12:53 australia
-rw-rw-r--. 1 maiovlev maiovlev    0 мар  8 12:53 feathers
-rw-r--r--. 1 maiovlev maiovlev    0 мар  8 12:49 may
drwx--x--x. 1 maiovlev maiovlev   24 мар  8 12:47 monthly
-r-xr--r--. 1 maiovlev maiovlev    0 мар  8 12:53 my_os
drwx--x--x. 1 maiovlev maiovlev    0 мар  8 12:53 paly
drwxr-xr-x. 1 maiovlev maiovlev   14 мар  8 12:49 reports
drwxr-xr-x. 1 maiovlev maiovlev   28 мар  8 12:52 ski.places
drwxr-xr-x. 1 maiovlev maiovlev   10 ноя 18 12:35 work
-rw-----. 1 maiovlev maiovlev  2610 ноя 18 12:33 yes
-rw-r--r--. 1 maiovlev maiovlev  581 ноя 18 12:33 yes.pub
drwxr-xr-x. 1 maiovlev maiovlev    0 ноя 18 12:25 Видео
drwxr-xr-x. 1 maiovlev maiovlev    0 ноя 18 12:25 Документы
drwxr-xr-x. 1 maiovlev maiovlev   34 мар  1 11:02 Загрузки
drwxr-xr-x. 1 maiovlev maiovlev    0 ноя 18 12:25 Изображения
drwxr-xr-x. 1 maiovlev maiovlev    0 ноя 18 12:25 Музыка
drwxr-xr-x. 1 maiovlev maiovlev    0 ноя 18 12:25 Общедоступные
drwxr-xr-x. 1 maiovlev maiovlev    0 ноя 18 12:25 'Рабочий стол'
drwxr-xr-x. 1 maiovlev maiovlev    0 ноя 18 12:25 Шаблоны
[maiovlev@maiovlev ~]$
```

Рис. 5: Настройка прав доступа

# Файл /etc/passwd

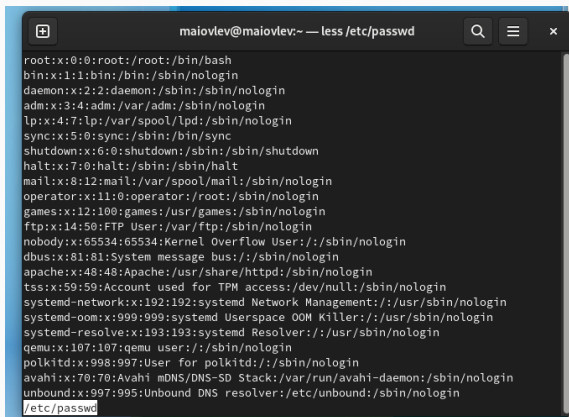

The screenshot shows a terminal window with the title bar "maiovlav@maiovlav:~ — less /etc/passwd". The terminal displays the contents of the /etc/passwd file, which lists system and user accounts. Each line represents an entry in the format username:x:uid:gid:gecos:home:shell. The entries are as follows:

```
root:x:0:0:root:/root:/bin/bash
bin:x:1:1:bin:/bin:/sbin/nologin
daemon:x:2:2:daemon:/sbin:/sbin/nologin
adm:x:3:4:adm:/var/adm:/sbin/nologin
lp:x:4:7:lp:/var/spool/lpd:/sbin/nologin
sync:x:5:0:sync:/sbin:/bin/sync
shutdown:x:6:0:shutdown:/sbin:/sbin/shutdown
halt:x:7:0:halt:/sbin:/sbin/halt
mail:x:8:12:mail:/var/spool/mail:/sbin/nologin
operator:x:11:0:operator:/root:/sbin/nologin
games:x:12:100:games:/usr/games:/sbin/nologin
ftp:x:14:50:FTP User:/var/ftp:/sbin/nologin
nobody:x:65534:65534:Kernel Overflow User:/:/sbin/nologin
dbus:x:81:81:System message bus:/:/sbin/nologin
apache:x:48:48:Apache:/usr/share/httpd:/sbin/nologin
tss:x:59:59:Account used for TPM access:/dev/null:/sbin/nologin
systemd-network:x:192:192:systemd Network Management:/:usr/sbin/nologin
systemd-oom:x:999:999:systemd Userspace OOM Killer:/:usr/sbin/nologin
systemd-resolve:x:193:193:systemd Resolver:/:usr/sbin/nologin
qemu:x:107:107:qemu user:/:/sbin/nologin
polkitd:x:998:997>User for polkitd:/:/sbin/nologin
avahi:x:70:70:Avahi mDNS/DNS-SD Stack:/var/run/avahi-daemon:/sbin/nologin
unbound:x:997:995:Unbound DNS resolver:/etc/unbound:/sbin/nologin
```


The cursor is positioned at the end of the last line, and the filename "/etc/passwd" is visible in the bottom left corner of the terminal window.

Рис. 6: Файл /etc/passwd

# Работа с файлами и правами доступа

```
[maiovlev@maiovlev ~]$  
[maiovlev@maiovlev ~]$ cp feathers file.old  
[maiovlev@maiovlev ~]$ mv paly/ play/  
[maiovlev@maiovlev ~]$ mv file.old play/  
[maiovlev@maiovlev ~]$ mkdir fun  
[maiovlev@maiovlev ~]$ cp -R play/ fun/  
[maiovlev@maiovlev ~]$ mv fun/ play/games  
[maiovlev@maiovlev ~]$ chmod u-r feathers  
[maiovlev@maiovlev ~]$ cat feathers  
cat: feathers: Отказано в доступе  
[maiovlev@maiovlev ~]$ cp feathers feathers2  
cp: невозможно открыть 'feathers' для чтения: Отказано в доступе  
[maiovlev@maiovlev ~]$ chmod u+r feathers  
[maiovlev@maiovlev ~]$ chmod u-x play/  
[maiovlev@maiovlev ~]$ cd play/  
bash: cd: play/: Отказано в доступе  
[maiovlev@maiovlev ~]$ chmod u+x play/  
[maiovlev@maiovlev ~]$
```

Рис. 7: Работа с файлами и правами доступа

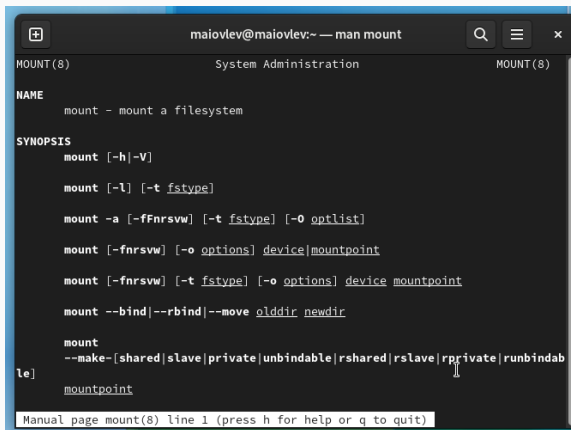

The screenshot shows a terminal window with the title bar "maiovlev@maiovlev:~ — man mount". The window displays the manual page for the 'mount' command. The content is as follows:

```
MOUNT(8)                                System Administration                                MOUNT(8)

NAME
    mount - mount a filesystem

SYNOPSIS
    mount [-h|-V]

    mount [-l] [-t fstype]

    mount -a [-fFnrsvw] [-t fstype] [-O optlist]

    mount [-fnrsvw] [-o options] device|mountpoint


    mount [-fnrsvw] [-t fstype] [-o options] device mountpoint

    mount --bind|--rbind|--move olddir newdir

    mount
    --make-[shared|slave|private|unbindable|rshared|rsave|private|runbindable]
    mountpoint

Manual page mount(8) line 1 (press h for help or q to quit)
```

Рис. 8: Команда mount

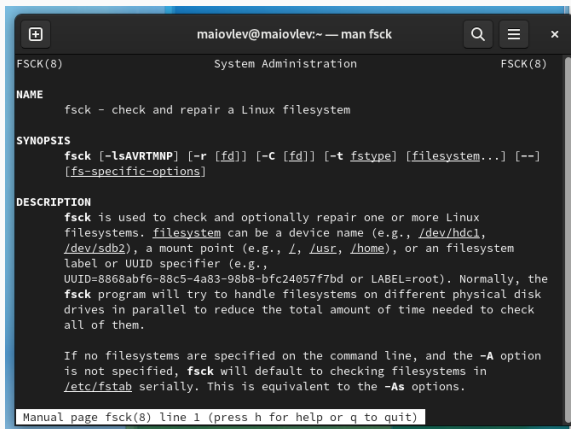

```
maiovlev@maiovlev:~ — man fsck
FSCK(8)                               System Administration                               FSCK(8)

NAME
    fsck - check and repair a Linux filesystem


SYNOPSIS
    fsck [-lsAVRTMNP] [-r [fd]] [-C [fd]] [-t fstype] [filesystem...] [--]
    [fs-specific-options]

DESCRIPTION
    fsck is used to check and optionally repair one or more Linux
    filesystems. filesystem can be a device name (e.g., /dev/hdc1,
    /dev/sdb2), a mount point (e.g., /, /usr, /home), or an filesystem
    label or UUID specifier (e.g.,
    UUID=8868abf6-88c5-4a83-98b8-bfc24057f7bd or LABEL=root). Normally, the
    fsck program will try to handle filesystems on different physical disk
    drives in parallel to reduce the total amount of time needed to check
    all of them.

    If no filesystems are specified on the command line, and the -A option
    is not specified, fsck will default to checking filesystems in
    /etc/fstab serially. This is equivalent to the -As options.

Manual page fsck(8) line 1 (press h for help or q to quit)
```

Рис. 9: Команда fsck

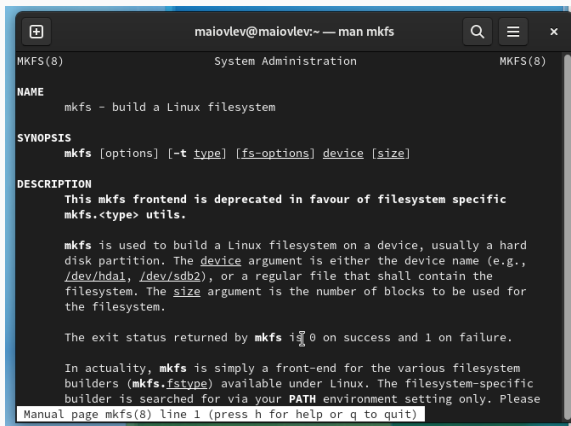

```
maiovlev@maiovlev:~ — man mkfs
MKFS(8)                                System Administration                                MKFS(8)

NAME
    mkfs - build a Linux filesystem

SYNOPSIS
    mkfs [options] [-t type] [fs-options] device [size]

DESCRIPTION
    This mkfs frontend is deprecated in favour of filesystem specific
    mkfs.<type> utils.


    mkfs is used to build a Linux filesystem on a device, usually a hard
    disk partition. The device argument is either the device name (e.g.,
    /dev/hda1, /dev/sdb2), or a regular file that shall contain the
    filesystem. The size argument is the number of blocks to be used for
    the filesystem.

    The exit status returned by mkfs is 0 on success and 1 on failure.

    In actuality, mkfs is simply a front-end for the various filesystem
    builders (mkfs.<fstype>) available under Linux. The filesystem-specific
    builder is searched for via your PATH environment setting only. Please

Manual page mkfs(8) line 1 (press h for help or q to quit)
```

Рис. 10: Команда mkfs

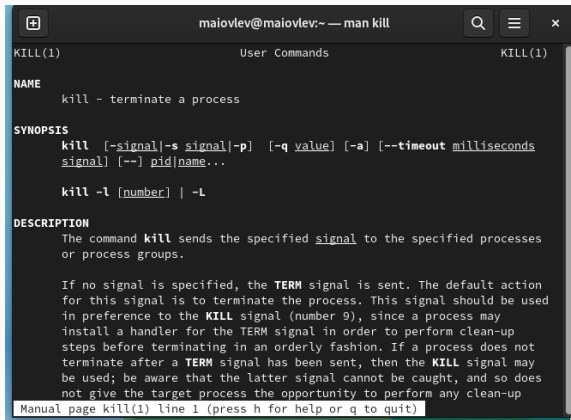

```
maiovlev@maiovlev:~ — man kill
KILL(1) User Commands KILL(1)

NAME
    kill - terminate a process

SYNOPSIS
    kill [-signal|-s signal|-p] [-q value] [-a] [--timeout milliseconds
    signal] [--] pid/name...

    kill -l [number] | -L

DESCRIPTION
    The command kill sends the specified signal to the specified processes
    or process groups.

    If no signal is specified, the TERM signal is sent. The default action
    for this signal is to terminate the process. This signal should be used
    in preference to the KILL signal (number 9), since a process may
    install a handler for the TERM signal in order to perform clean-up
    steps before terminating in an orderly fashion. If a process does not
    terminate after a TERM signal has been sent, then the KILL signal may
    be used; be aware that the latter signal cannot be caught, and so does
    not give the target process the opportunity to perform any clean-up

Manual page kill(1) line 1 (press h for help or q to quit)
```

Рис. 11: Команда kill



## **Выводы по проделанной работе**

---

В ходе данной работы мы ознакомились с файловой системой Linux, её структурой, именами и содержанием каталогов. Научились совершать базовые операции с файлами, управлять правами их доступа для пользователя и групп. Ознакомились с Анализом файловой системы. А также получили базовые навыки по проверке использования диска и обслуживанию файловой системы.