

Deep Learning

Mairi Hallman

May 2024

Contents

1	Introduction	3
2	A Brief Overview of Tensors	3
2.1	Tensor Products	3
2.1.1	Outer Product \circ	3
2.1.2	Kronecker Product \otimes	3
2.1.3	Khatri-Rao Product \odot	3
2.1.4	Hadamard Product $*$	3
2.2	Tensor Decompositions	4
2.2.1	CP Decomposition	4
2.2.2	Tucker Decomposition	4
2.2.3	Tensor Train	4
3	Architecture Design	4
3.1	Why Deep Networks	4
3.2	Hidden Units and Activation Functions	4
3.2.1	ReLU	4
3.2.2	The Sigmoid and Hyperbolic Tangent Functions	5
4	Training Deep Neural Networks	5
4.1	Hyperparameter Tuning	5
4.2	Regularization	5
4.2.1	Weight Decay	5
4.2.2	Early Stopping	6
4.2.3	Dropout	7
4.2.4	Semi-Supervised Learning	8
4.3	Optimization	8
4.3.1	Batch Normalization	8
4.3.2	Layer Normalization	8
5	Convolutional Neural Networks	8
5.1	What Is Convolution?	8
5.2	How Convolution is Used in Deep Neural Networks	8
5.3	The Convolutional Layer	8
5.4	Image Classification Example	9
6	Recurrent Neural Networks	16
7	Generative Models	16
7.1	Generative Adversarial Neural Networks	16
7.2	Variational Autoencoders	16
7.3	Quantization	16
	References	17

1 Introduction

2 A Brief Overview of Tensors

You are likely familiar with scalars, vectors, and matrices. These can be thought of as analagous data structures in zero, one, and two-dimensions, respectively. When generalizing to N dimensions, we refer to these collectively as tensors. A scalar is a zero-order tensor, a vector is a first-order tensor, and a matrix is a second-order tensor. A third-order tensor can be visualized as a stack of matrices. A fourth-order tensor would then be a vector of third order tensors. A fifth-order tensor is a matrix of third-order tensors... and so on.

2.1 Tensor Products

Tensor additon and subtraction are self-explanatory if matrix addition and subtraction are understood. The same cannot be said for tensor products. Below is an overview of tensor products necessary for the decompositions that will be presented in the next section.

2.1.1 Outer Product \circ

A tensor $T^{(N)}$ can be expressed as a product of N vectors. This is called the outer product (denoted \circ).

$$T^{(N)} = u_1 \circ u_2 \circ \dots \circ u_N \quad (1)$$

2.1.2 Kronecker Product \otimes

The Konecker product of two matrices A and B , their Kronecker product is a matrix of the products of each element in A and the entire matrix B .

$$A \otimes B = \begin{bmatrix} a_{11}B & a_{12}B & \dots & a_{1n}B \\ a_{21}B & a_{22}B & \dots & a_{2n}B \\ \vdots & \vdots & \ddots & \vdots \\ a_{m1}B & am2B & \dots & a_{mn}B \end{bmatrix} \quad (2)$$

2.1.3 Khatri-Rao Product \odot

The Khatri-Rao product of two matrices A and B , each with the same number of columns, is a matrix composed of the Kronecker products of the columns in matrix A and the columns in matrix B with the same indices.

$$A^{:\times n} \odot B^{:\times n} = [a_{:,1} \otimes b_{:,1} \quad a_{:,2} \otimes b_{:,2} \quad \dots \quad a_{:,n} \otimes b_{:,n}] \quad (3)$$

2.1.4 Hadamard Product $*$

The Hadamard product of two matrices A and B of the same dimensions is a matrix formed of the products of the elements in A and B with the same indices.

$$A^{m \times n} * B^{m \times n} = \begin{bmatrix} a_{11}b_{11} & a_{12}b_{12} & \dots & a_{1n}b_{1n} \\ a_{21}b_{21} & a_{22}b_{22} & \dots & a_{2n}b_{2n} \\ \vdots & \vdots & \ddots & \vdots \\ a_{m1}b_{m1} & a_{m2}b_{m2} & \dots & a_{mn}b_{mn} \end{bmatrix} \quad (4)$$

2.2 Tensor Decompositions

2.2.1 CP Decomposition

The canonical polyadic, or CP Decomposition, decomposes a tensor into vectors.

$$T = \sum_{r=1}^R u_r^{(1)} \circ u_r^{(2)} \circ \dots \circ u_r^{(R)} \quad (5)$$

2.2.2 Tucker Decomposition

The Tucker decomposition decomposes a tensor into a core tensor and factored matrices.

$$T = C \prod_{n=1}^N A^n \quad (6)$$

where C is the core tensor.

2.2.3 Tensor Train

The tensor train decomposition decomposes a tensor into a product of third-order tensors. It is used when a tensor is too large for the CP decomposition to be practical.

3 Architecture Design

3.1 Why Deep Networks

Deep networks can often approximate complex functions with far fewer nodes than a shallow network. This is because the number of linear regions in the network grows exponentially with the number of layers [4].

To illustrate, consider a network with 5 layers, each with 10 nodes for a total of 50 nodes. For the sake of this example, we will assume that each layer has one input. The number of linear regions that can be learned by this network is 10^5 . For a single-layer network to learn 10^5 linear regions, it would require 10^5 nodes.

3.2 Hidden Units and Activation Functions

Different types of hidden units serve different purposes within deep networks. Most types of hidden units perform an affine transformation on the layer's input, and then apply an activation function $g(z)$ to the transformed inputs [3]. If all activation functions within a deep network are linear, then the network reduces to a linear model [5]. While linear activation functions can be useful for reducing the number of parameters in a model, the discussion surrounding hidden units and their activation functions within a deep network typically concerns non-linear units [3].

3.2.1 ReLU

In modern deep networks, the default most commonly used activation function for hidden layer is the rectified linear unit, or ReLU activation function.

$$a(z) = \max(0, z) \quad (7)$$

This is analogous to a linear activation function with negative inputs "turned off" [5].

Notice that this function isn't differentiable at zero. In theory, this should make ReLU useless for gradient-based learning. In practice, most deep networks don't achieve a loss of zero, so this typically isn't a problem.

Variations of ReLU typically modify the slope for negative inputs [3]. For a given input z_i , this can be generalized as

$$a(z, \alpha)_i = \max(0, z_i) + \alpha_i \min(0, z_i) \quad (8)$$

Several ReLU variations of this form are listed below.

Absolute value rectification $\alpha = -1$; commonly used for image processing [3].

Leaky ReLU α is a small positive value. Leaky ReLU is used in place of standard ReLU to prevent the "dying ReLUs" problem. Units using ReLU as an activation "die" when all of the inputs are non-positive. All negative inputs results in all zero outputs, and the weights can't be updated [2].

Parametric Leaky ReLU Leaky ReLU where *alpha* is learned by the model [2].

3.2.2 The Sigmoid and Hyperbolic Tangent Functions

In the early days of deep learning, two commonly used activation functions for hidden units were the sigmoid function

$$a(z) = \sigma(z) = \frac{1}{1 + e^{-z}} \quad (9)$$

and the hyperbolic tangent function

$$a(z) = \tanh(z) \quad (10)$$

These activation functions are no longer recommended for hidden units because they saturate. The sigmoid function saturates at zero and one, and the hyperbolic tangent function saturates at negative one and one. Saturation is problematic because it leads to the gradient of a layer's output with respect to its input. Recall what we know about backpropagation from section 21.4.3. If the gradient is close to zero, the weights will update very slowly, if at all. Without a gradient, the model can't converge to a solution. This phenomenon is known as the vanishing gradient problem.

4 Training Deep Neural Networks

4.1 Hyperparameter Tuning

4.2 Regularization

4.2.1 Weight Decay

Recall ridge and LASSO regression from section 20.2.4. When generalized beyond linear models, these regularization techniques are known respectively as L^2 and L^1 regularization. In the context of neural networks, these methods are both commonly referred to as weight decay. Weight decay applies a regularization term to the objective function $J(\mathbf{w})$. The regularized objective function $\tilde{J}(\mathbf{w})$ is

$$\tilde{J}(\mathbf{w}) = J(\mathbf{w}) + \frac{\lambda}{2} \|\mathbf{w}\|_2^2 \quad (11)$$

for L^2 weight decay, and

$$\tilde{J}(\mathbf{w}) = J(\mathbf{w}) + \lambda \|\mathbf{w}\|_1 \quad (12)$$

for L^1 weight decay, where λ is a hyperparameter.

Tensorflow offers functionality for L^2 weight decay L^1 weight decay, and using both together [1].

```

import tensorflow as tf

n = 10 # desired number of units in layer

# dense layer with L2 weight decay
l2_regularizer=tf.keras.regularizers.L2(
    l2=0.01 # hyperparameter for l2 regularization, default is 0.01
)

layer = tf.keras.layers.Dense(n, regularizer=l2_regularizer)

# dense layer with L1 weight decay
l1_regularizer=tf.keras.regularizers.L1(
    l1=0.01 # hyperparameter for l2 regularization, default is 0.01
)

layer = tf.keras.layers.Dense(n, regularizer=l1_regularizer)

# dense layer with L2 and L1 weight decay
l1l2_regularizer=tf.keras.regularizers.L1L2(
    l1=0.01, # hyperparameter for l2 regularization, default is 0.01
    l2=0.01 # hyperparameter for l2 regularization, default is 0.01
)

layer = tf.keras.layers.Dense(n, regularizer=l1l2_regularizer)

```

4.2.2 Early Stopping

If a model is trained for too many epochs, the validation set error will reach a minimum at the optimal number of epochs, and then begin to increase as a result of overfitting. This can be prevented by implementing early stopping. When early stopping is used, a copy of the model's parameters is only saved at the end of a training iteration if the validation loss improves [3]. Training stops automatically if the validation loss hasn't decreased, or has only decreased by a very small amount, after a given number of training loops.

Early stopping can be implemented in Tensorflow as follows.

```

import tensorflow as tf

callback = tf.keras.callbacks.EarlyStopping(
    monitor='val_loss', # how improvement is quantified'
    min_delta=0, # decrease in monitored metric required to be considered an "
    improvement"
    patience=3, # number of epochs without improvement after which the model will
    stop training
    restore_best_weights=True, # whether to restore weights from the best epoch (
    True) or last epoch (False); should be set to True
    start_from_epoch=0 # how many epochs to wait before checking for early stop
)

model = keras.models.Sequential([
    # define your model here
])

model.compile(
    # ...
)

history = model.fit(
    # ...

```

```
callbacks=[callback]
)
```

4.2.3 Dropout

Dropout is a regularization technique that randomly sets a given proportion of the models weights to zero after each gradient step. This means that for each epoch, a "different" model is being trained [6]. This is similar to bagging, but instead of being independent, each model's weights are a subset of the full network's weights [3].

Dropout helps prevent overfitting by stopping units from becoming "lazy". Consider a hockey team consisting of a few star players, many average players, and some weak players. Typically, the best players get the most playing time. The downside of this is that the others get less practice, and therefore don't improve at the same rate. If, for each game, a certain number of players were randomly selected and told to stay hom, the rest of the team would have to adapt to play without those players. In this scenario, the team is less at risk of becoming dependent on a few superstars, and the benchwarmers get a chance to improve and contribute. In this example, the team is the model, and each player is a unit. By randomly "dropping out" some players, the others get more practice and become better assets to the team [2].



Figure 1: Consider this meme from user @mlinterview on X. In the Marvel series, Thanos is a villain whose goal is to make half of all living organisms in the universe disappear. Those who disappear are randomly selected. While Thanon's motivations are not related to regularization, do you think this would force the remaining life forms to adapt for the better? Why or why not?

Like Thanos, we can dropout in Tensorflow (note that dropping out 50% of the weights is very excessive and not advised)[1].

```
import tensorflow as tf

my_dropout = tf.keras.layers.Dropout(
    rate=0.1 # the proportion of units to be randomly dropped out at each
            iteration
)

model = keras.models.Sequential([
    # ...
    my_dropout,
    # ...
])
```

4.2.4 Semi-Supervised Learning

4.3 Optimization

4.3.1 Batch Normalization

4.3.2 Layer Normalization

5 Convolutional Neural Networks

5.1 What Is Convolution?

Many young people who are active on social media use filters on their pictures before posting them. These filters apply different effects to the photo, such as blurring, making the image black and white, or adding cartoon-like effects. When you apply a filter to a photo, you are using convolution. Convolution is an operation that takes the aggregation of the element-wise product of a tensor of input data and a (typically smaller) tensor, called a kernel. This produces a feature map. In the context of image processing, the original image is the input data, the filter is the kernel, and the filtered image is the feature map.

This is an example of discrete convolution, which is the case that we will be primarily concerned with.

In one dimension, discrete convolution is denoted

$$\underbrace{s(i)}_{\text{feature map}} = (x * y)(i) = \sum_m \underbrace{x(m)}_{\text{input data}} \underbrace{y(i-m)}_{\text{kernel}} \quad (13)$$

One of the most common applications of CNNs is in digital image processing. In the case of a black and white image, the input data is a two-dimensional tensor. Discrete convolution in two dimensions can be performed as follows [3].

$$s(i, j) = (x * y)(i, j) = \sum_m \sum_n x(i, j) y(i - m, j - n) \quad (14)$$

Since convolution is commutative, the following also holds.

$$s(i, j) = (y * x)(i, j) = \sum_m \sum_n x(i - m, j - n) y(i, j) \quad (15)$$

Two-dimensional discrete convolution is equivalent to reversing the row and column indices of the kernel, performing element-wise multiplication, and taking the sum of the products. In the context of deep learning, the term “convolution” often refers to a similar operation called cross-correlation (equation). This is equivalent to convolution without the reversing of the matrix indices [3].

$$s(i, j) = (y * x)(i, j) = \sum_m \sum_n x(i + m, j + n) y(i, j) \quad (16)$$

5.2 How Convolution is Used in Deep Neural Networks

Since one kernel can only extract one feature, each convolutional layer in a network uses multiple kernels. CNNs can be very computationally expensive to train, so we often skip over positions in the kernels to reduce training time. The width of the kernel and the size of the output can also be controlled by zero padding the input. Without zero padding, the output of each later would continue to shrink. The number of rows/columns per convolution is referred to as the stride of the convolution operation [3].

5.3 The Convolutional Layer

The convolutional layers used in a CNN have three steps [3].

1. Several parallel convolutions yield a set of linear activations.

2. Each linear activation function is run through a non-linear activation function, such as ReLU. This introduces non-linearity and gives the network more flexibility.
3. A pooling function replaces the output at a given location with a summary statistic of nearby outputs. One common pooling function is the max pooling function, which provides the maximum output within a rectangular neighbourhood. Pooling is useful when we only care about whether a feature is present and not its specific location. It is also helpful when processing different-sized inputs.

The output of each layer is then used as input to the next layer.

5.4 Image Classification Example

In this example, we will use convolutional neural networks to perform image classification on the Rock Paper Scissors dataset.

```
import tensorflow as tf
from tensorflow.keras import layers, models, Input
from tensorflow.keras.callbacks import EarlyStopping
import tensorflow_datasets as tfds
import matplotlib.pyplot as plt
import numpy as np

tf.keras.utils.set_random_seed(42) # Set random seed for reproducibility
```

The dataset is only partitioned into training and test sets, so we set aside 30% of the training set as a validation set.

```
(ds_train, ds_val, ds_test) = tfds.load(
    'rock_paper_scissors',
    split=['train[:70%]', 'train[70%:]', 'test'],
    shuffle_files=True,
    as_supervised=True
)
```

Next, we normalize by dividing by 255 and resize the images to 128x128. We also shuffle the training data to ensure that the model doesn't learn its order, and batch the training, validation, and test data.

```
def preprocess(image, label):
    image = tf.cast(image, tf.float32) / 255.0 # Normalize images
    image = tf.image.resize(image, [128, 128]) # Resize images
    return image, label

BATCH_SIZE = 32
SHUFFLE_BUFFER_SIZE = 1000

ds_train = ds_train.map(preprocess).shuffle(SHUFFLE_BUFFER_SIZE).batch(BATCH_SIZE)
# shuffle so the model doesn't learn the order of the training data
ds_val = ds_val.map(preprocess).batch(BATCH_SIZE)
ds_test = ds_test.map(preprocess).batch(BATCH_SIZE)
```

We start with a simple network with one convolutional layer with 16 filters and a 3x3 kernel.

```
input_shape = (128, 128, 3)

model = models.Sequential([
    layers.Input(shape=input_shape),
    layers.Conv2D(16, (3, 3), activation='relu'), # Convolution step
    layers.MaxPooling2D((2, 2)), # Pooling step
    layers.Flatten(), # Flattening for classification
    layers.Dense(128, activation='relu'), # Dense layer before final
    classification layer
])
```

```

        layers.Dense(3) # 3 classes
    ])

model.compile(optimizer='adam',
              loss=tf.keras.losses.SparseCategoricalCrossentropy(from_logits=True)
              ,
              metrics=['accuracy']
              )

```

Before fitting our model, we add an early stop mechanism to prevent overfitting.

```

early_stop = EarlyStopping(
    monitor='val_loss',
    min_delta=0.001,
    patience=3,
    verbose=1,
    mode='auto',
    restore_best_weights=True
)

history = model.fit(ds_train, epochs=10, validation_data=(ds_val), callbacks=[
    early_stop])

```

```

Epoch 1/10
56/56 [=====] - 10s 85ms/step - loss: 1.0240 - accuracy:
    0.7137 - val_loss: 0.2209 - val_accuracy: 0.9563
Epoch 2/10
56/56 [=====] - 5s 61ms/step - loss: 0.0743 - accuracy:
    0.9881 - val_loss: 0.0240 - val_accuracy: 0.9947
Epoch 3/10
56/56 [=====] - 4s 37ms/step - loss: 0.0131 - accuracy:
    0.9989 - val_loss: 0.0148 - val_accuracy: 0.9947
Epoch 4/10
56/56 [=====] - 4s 37ms/step - loss: 0.0045 - accuracy:
    1.0000 - val_loss: 0.0062 - val_accuracy: 0.9987
Epoch 5/10
56/56 [=====] - 5s 58ms/step - loss: 0.0020 - accuracy:
    1.0000 - val_loss: 0.0042 - val_accuracy: 1.0000
Epoch 6/10
56/56 [=====] - 4s 38ms/step - loss: 0.0013 - accuracy:
    1.0000 - val_loss: 0.0039 - val_accuracy: 1.0000
Epoch 7/10
56/56 [=====] - 4s 38ms/step - loss: 0.0010 - accuracy:
    1.0000 - val_loss: 0.0041 - val_accuracy: 0.9987
Epoch 8/10
53/56 [=====>.] - ETA: 0s - loss: 8.3814e-04 - accuracy:
    1.0000Restoring model weights from the end of the best epoch: 5.
56/56 [=====] - 5s 59ms/step - loss: 8.2481e-04 -
    accuracy: 1.0000 - val_loss: 0.0032 - val_accuracy: 0.9987
Epoch 8: early stopping

```

Training accuracy of 100% and validation accuracy of over 99%? If something seems too good to be true, it probably is. Let's evaluate on the test data.

```

model.evaluate(ds_test)

12/12 [=====] - 1s 104ms/step - loss: 1.3345 - accuracy:
    0.7151
[1.3345420360565186, 0.7150537371635437]

```

As expected, no such luck. What happens when we add another convolutional layer?

```

model = models.Sequential([
    layers.Input(shape=input_shape),
    layers.Conv2D(16, (3, 3), activation='relu'), # First convolution step
    layers.MaxPooling2D((2, 2)), # First pooling step
    layers.Conv2D(32, (3, 3), activation='relu'), # Second convolution step
    layers.MaxPooling2D((2, 2)), # Second pooling step
    layers.Flatten(), # Flattening for classification
    layers.Dense(128, activation='relu'), # Dense layer before final
    classification layer
    layers.Dense(3) # 3 classes
])

model.compile(optimizer='adam',
              loss=tf.keras.losses.SparseCategoricalCrossentropy(from_logits=True),
              metrics=['accuracy'])

history = model.fit(ds_train, epochs=10, validation_data=(ds_val), callbacks=[
    early_stop])

```

```

Epoch 1/10
56/56 [=====] - 6s 43ms/step - loss: 1.4043 - accuracy:
0.5890 - val_loss: 0.4816 - val_accuracy: 0.9206
Epoch 2/10
56/56 [=====] - 5s 54ms/step - loss: 0.2150 - accuracy:
0.9552 - val_loss: 0.0609 - val_accuracy: 0.9881
Epoch 3/10
56/56 [=====] - 4s 38ms/step - loss: 0.0441 - accuracy:
0.9909 - val_loss: 0.0182 - val_accuracy: 0.9987
Epoch 4/10
56/56 [=====] - 4s 39ms/step - loss: 0.0143 - accuracy:
0.9977 - val_loss: 0.0076 - val_accuracy: 0.9987
Epoch 5/10
56/56 [=====] - 5s 60ms/step - loss: 0.0053 - accuracy:
0.9994 - val_loss: 0.0030 - val_accuracy: 1.0000
Epoch 6/10
56/56 [=====] - 4s 41ms/step - loss: 0.0022 - accuracy:
1.0000 - val_loss: 0.0019 - val_accuracy: 1.0000
Epoch 7/10
56/56 [=====] - 4s 39ms/step - loss: 0.0016 - accuracy:
1.0000 - val_loss: 0.0013 - val_accuracy: 1.0000
Epoch 8/10
56/56 [=====] - 5s 60ms/step - loss: 9.5238e-04 -
accuracy: 1.0000 - val_loss: 0.0011 - val_accuracy: 1.0000
Epoch 9/10
56/56 [=====] - 4s 38ms/step - loss: 6.9435e-04 -
accuracy: 1.0000 - val_loss: 8.4804e-04 - val_accuracy: 1.0000
Epoch 10/10
56/56 [=====] - 4s 38ms/step - loss: 5.3139e-04 -
accuracy: 1.0000 - val_loss: 7.7833e-04 - val_accuracy: 1.0000

```

```
\lstinputlisting[firstline=100,lastline=100]{dl-scripts/cnn-ex1-colab.py}
```

```
\begin{lstlisting}[style=output]
```

```

12/12 [=====] - 0s 16ms/step - loss: 1.0663 - accuracy:
0.7634
[1.0662583112716675, 0.7634408473968506]

```

An improvement, but still not amazing. Would a third convolutional layer help?

```

model = models.Sequential([
    layers.Input(shape=input_shape),
    layers.Conv2D(16, (3, 3), activation='relu'), # First convolution step
    layers.MaxPooling2D((2, 2)), # First pooling step
    layers.Conv2D(32, (3, 3), activation='relu'), # Second convolution step
    layers.MaxPooling2D((2, 2)), # Second pooling step
    layers.Conv2D(64, (3, 3), activation='relu'), # Third convolution step
    layers.MaxPooling2D((2, 2)), # Third pooling step
    layers.Flatten(), # Flattening for classification
    layers.Dense(128, activation='relu'), # Dense layer before final
    classification layer
    layers.Dense(3) # 3 classes
])

model.compile(optimizer='adam',
              loss=tf.keras.losses.SparseCategoricalCrossentropy(from_logits=True)
              ,
              metrics=['accuracy'])

history = model.fit(ds_train, epochs=10, validation_data=(ds_val), callbacks=[
    early_stop])

```

```

Epoch 1/10
56/56 [=====] - 7s 44ms/step - loss: 0.6999 - accuracy:
0.7035 - val_loss: 0.1999 - val_accuracy: 0.9101
Epoch 2/10
56/56 [=====] - 4s 39ms/step - loss: 0.0600 - accuracy:
0.9864 - val_loss: 0.0188 - val_accuracy: 0.9934
Epoch 3/10
56/56 [=====] - 5s 53ms/step - loss: 0.0240 - accuracy:
0.9949 - val_loss: 0.0071 - val_accuracy: 1.0000
Epoch 4/10
56/56 [=====] - 4s 39ms/step - loss: 0.0022 - accuracy:
1.0000 - val_loss: 0.0011 - val_accuracy: 1.0000
Epoch 5/10
56/56 [=====] - 4s 41ms/step - loss: 7.2477e-04 -
accuracy: 1.0000 - val_loss: 7.4349e-04 - val_accuracy: 1.0000
Epoch 6/10
56/56 [=====] - 5s 63ms/step - loss: 4.0359e-04 -
accuracy: 1.0000 - val_loss: 3.2628e-04 - val_accuracy: 1.0000
Epoch 7/10
52/56 [=====>...] - ETA: 0s - loss: 2.2042e-04 - accuracy:
1.0000Restoring model weights from the end of the best epoch: 4.
56/56 [=====] - 4s 39ms/step - loss: 2.1410e-04 -
accuracy: 1.0000 - val_loss: 3.2290e-04 - val_accuracy: 1.0000
Epoch 7: early stopping

```

```

model.evaluate(ds_test)

12/12 [=====] - 0s 10ms/step - loss: 1.1395 - accuracy:
0.7930
[1.1395031213760376, 0.7930107712745667]

```

A slight improvement. What about a fourth layer?

```

model = models.Sequential([
    layers.Input(shape=input_shape),
    layers.Conv2D(16, (3, 3), activation='relu'), # First convolution step
    layers.MaxPooling2D((2, 2)), # First pooling step
    layers.Conv2D(32, (3, 3), activation='relu'), # Second convolution step

```

```

layers.MaxPooling2D((2, 2)), # Second pooling step
layers.Conv2D(64, (3, 3), activation='relu'), # Third convolution step
layers.MaxPooling2D((2, 2)), # Third pooling step
layers.Conv2D(128, (3, 3), activation='relu'), # Fourth convolution step
layers.MaxPooling2D((2, 2)), # Fourth pooling step
layers.Flatten(), # Flattening for classification
layers.Dense(128, activation='relu'), # Dense layer before final
classification layer
layers.Dense(3) # 3 classes
])

model.compile(optimizer='adam',
              loss=tf.keras.losses.SparseCategoricalCrossentropy(from_logits=True),
              metrics=['accuracy'])

history = model.fit(ds_train, epochs=10, validation_data=(ds_val), callbacks=[
    early_stop])

```

```

Epoch 1/10
56/56 [=====] - 6s 46ms/step - loss: 0.7071 - accuracy:
0.6604 - val_loss: 0.1421 - val_accuracy: 0.9563
Epoch 2/10
56/56 [=====] - 5s 40ms/step - loss: 0.0583 - accuracy:
0.9853 - val_loss: 0.0080 - val_accuracy: 0.9987
Epoch 3/10
56/56 [=====] - 4s 39ms/step - loss: 0.0057 - accuracy:
0.9983 - val_loss: 0.0020 - val_accuracy: 1.0000
Epoch 4/10
56/56 [=====] - 4s 48ms/step - loss: 0.0026 - accuracy:
0.9989 - val_loss: 0.0017 - val_accuracy: 1.0000
Epoch 5/10
56/56 [=====] - 5s 40ms/step - loss: 0.0038 - accuracy:
0.9994 - val_loss: 0.0136 - val_accuracy: 0.9921
Epoch 6/10
56/56 [=====] - 4s 41ms/step - loss: 0.0018 - accuracy:
0.9994 - val_loss: 2.4979e-04 - val_accuracy: 1.0000
Epoch 7/10
56/56 [=====] - 4s 43ms/step - loss: 1.2425e-04 -
accuracy: 1.0000 - val_loss: 1.3199e-04 - val_accuracy: 1.0000
Epoch 8/10
56/56 [=====] - 5s 39ms/step - loss: 9.3137e-05 -
accuracy: 1.0000 - val_loss: 9.6794e-05 - val_accuracy: 1.0000
Epoch 9/10
54/56 [=====>..] - ETA: 0s - loss: 7.5662e-05 - accuracy:
1.0000Restoring model weights from the end of the best epoch: 6.
56/56 [=====] - 4s 39ms/step - loss: 7.4308e-05 -
accuracy: 1.0000 - val_loss: 7.7891e-05 - val_accuracy: 1.0000
Epoch 9: early stopping

```

```
model.evaluate(ds_test)
```

```

12/12 [=====] - 0s 10ms/step - loss: 0.1825 - accuracy:
0.9409
[0.1824917197227478, 0.9408602118492126]

```

Now that we have reached the accuracy threshold, let's plot the learning curves.

```

def plot_learning_curves(history):
    plt.figure(figsize=(12, 8))

```


```

plt.subplot(2, 2, 1)
plt.plot(history.history['loss'], label='loss')
plt.plot(history.history['val_loss'], label='val_loss')
plt.title('Loss evolution during training')
plt.legend()

plt.subplot(2, 2, 2)
plt.plot(history.history['accuracy'], label='accuracy')
plt.plot(history.history['val_accuracy'], label='val_accuracy')
plt.title('Accuracy score evolution during training')
plt.legend();

plot_learning_curves(history)

```

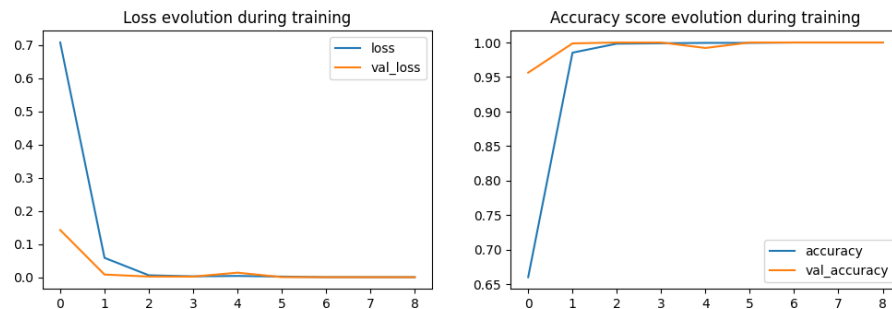

```

# Make predictions on the test set
test_images, test_labels = [], []
for images, labels in ds_test:
    test_images.append(images.numpy())
    test_labels.append(labels.numpy())
test_images = np.concatenate(test_images)
test_labels = np.concatenate(test_labels)

predictions = model.predict(test_images)
predicted_labels = np.argmax(predictions, axis=1)

# Identify correct and incorrect predictions
correct_predictions = predicted_labels == test_labels
incorrect_predictions = predicted_labels != test_labels

# Get indices for correct and incorrect predictions
correct_indices = np.where(correct_predictions)[0]
incorrect_indices = np.where(incorrect_predictions)[0]

# Function to plot images with their predictions and true labels
def plot_predictions(images, true_labels, predicted_labels, indices, title):
    plt.figure(figsize=(10, 10))
    for i, index in enumerate(indices[:25]): # Plot the first 25 images
        plt.subplot(5, 5, i + 1)
        plt.imshow(images[index])
        plt.title(f"True: {true_labels[index]}, Pred: {predicted_labels[index]}")
        plt.axis('off')
    plt.suptitle(title)
    plt.show()

# Plot correct predictions

```

```

plot_predictions(test_images, test_labels, predicted_labels, correct_indices,
                 title="Correct Predictions")

# Plot incorrect predictions
plot_predictions(test_images, test_labels, predicted_labels, incorrect_indices,
                 title="Incorrect Predictions")

```

Correct Predictions



Incorrect Predictions



Look at the images that were classified incorrectly. It seems that the model's most significant weakness is misclassifying scissors as paper. Do you notice anything about these scissor images compared to the scissor and paper images in the correct predictions? How could the model potentially be improved?

6 Recurrent Neural Networks

7 Generative Models

7.1 Generative Adversarial Neural Networks

7.2 Variational Autoencoders

7.3 Quantization

References

- [1] Martín Abadi et al. *TensorFlow: Large-Scale Machine Learning on Heterogeneous Systems*. Software available from tensorflow.org. 2015. URL: <https://www.tensorflow.org/>.
- [2] Aurélien Géron. *Hands-On Machine Learning with Scikit-Learn, Keras, and TensorFlow, Third Edition*. O'Reilly Media, Inc, 2022.
- [3] Ian Goodfellow, Yoshua Bengio, and Aaron Courville. *Deep Learning*. MIT Press, 2016. URL: <http://www.deeplearningbook.org>.
- [4] Guido Montúfar et al. *On the Number of Linear Regions of Deep Neural Networks*. 2014. arXiv: 1402.1869 [id='stat.ML' full_name='Machine Learning' is_active=True alt_name=None in_archive='stat' is_general=False description='Covers machine learning papers (supervised, unsupervised, semi-supervised learning, graphical models, reinforcement learning, bandits, high dimensional inference, etc.) with a statistical or theoretical grounding'].
- [5] Kevin P. Murphy. *Probabilistic Machine Learning: An Introduction*. MIT Press, 2022. URL: probml.ai.
- [6] Nitish Srivastava et al. “Dropout: A Simple Way to Prevent Neural Networks from Overfitting”. In: *Journal of Machine Learning Research* 15.56 (2014), pp. 1929–1958. URL: <http://jmlr.org/papers/v15/srivastava14a.html>.