

# Tables & Geographic data

---

Daniel Anderson

Week 9

# Data viz in the wild

---

Rebecca

# Agenda

---

- Review homework
- Tables
  - `{gt}`
  - `{kableExtra}` (quickly)
  - `reactable`
- Geographic data
  - Vector/raster data
  - Producing basic maps
  - Geospatial ecosystem

# Learning objectives: Tables

---

- Be comfortable with the basics of **gt**
  - create a table
  - format columns
  - create spanner heads
  - etc.

# Learning objectives: geo

---


- Know the difference between vector and raster data
- Be able to produce basic maps using a variety of tools
- Be able to obtain different types of geographic data from a few different places
- Be able to produce basic interactive maps
- Understand the basics of the R geospatial ecosystem

# Review homework

---

# Tables

---

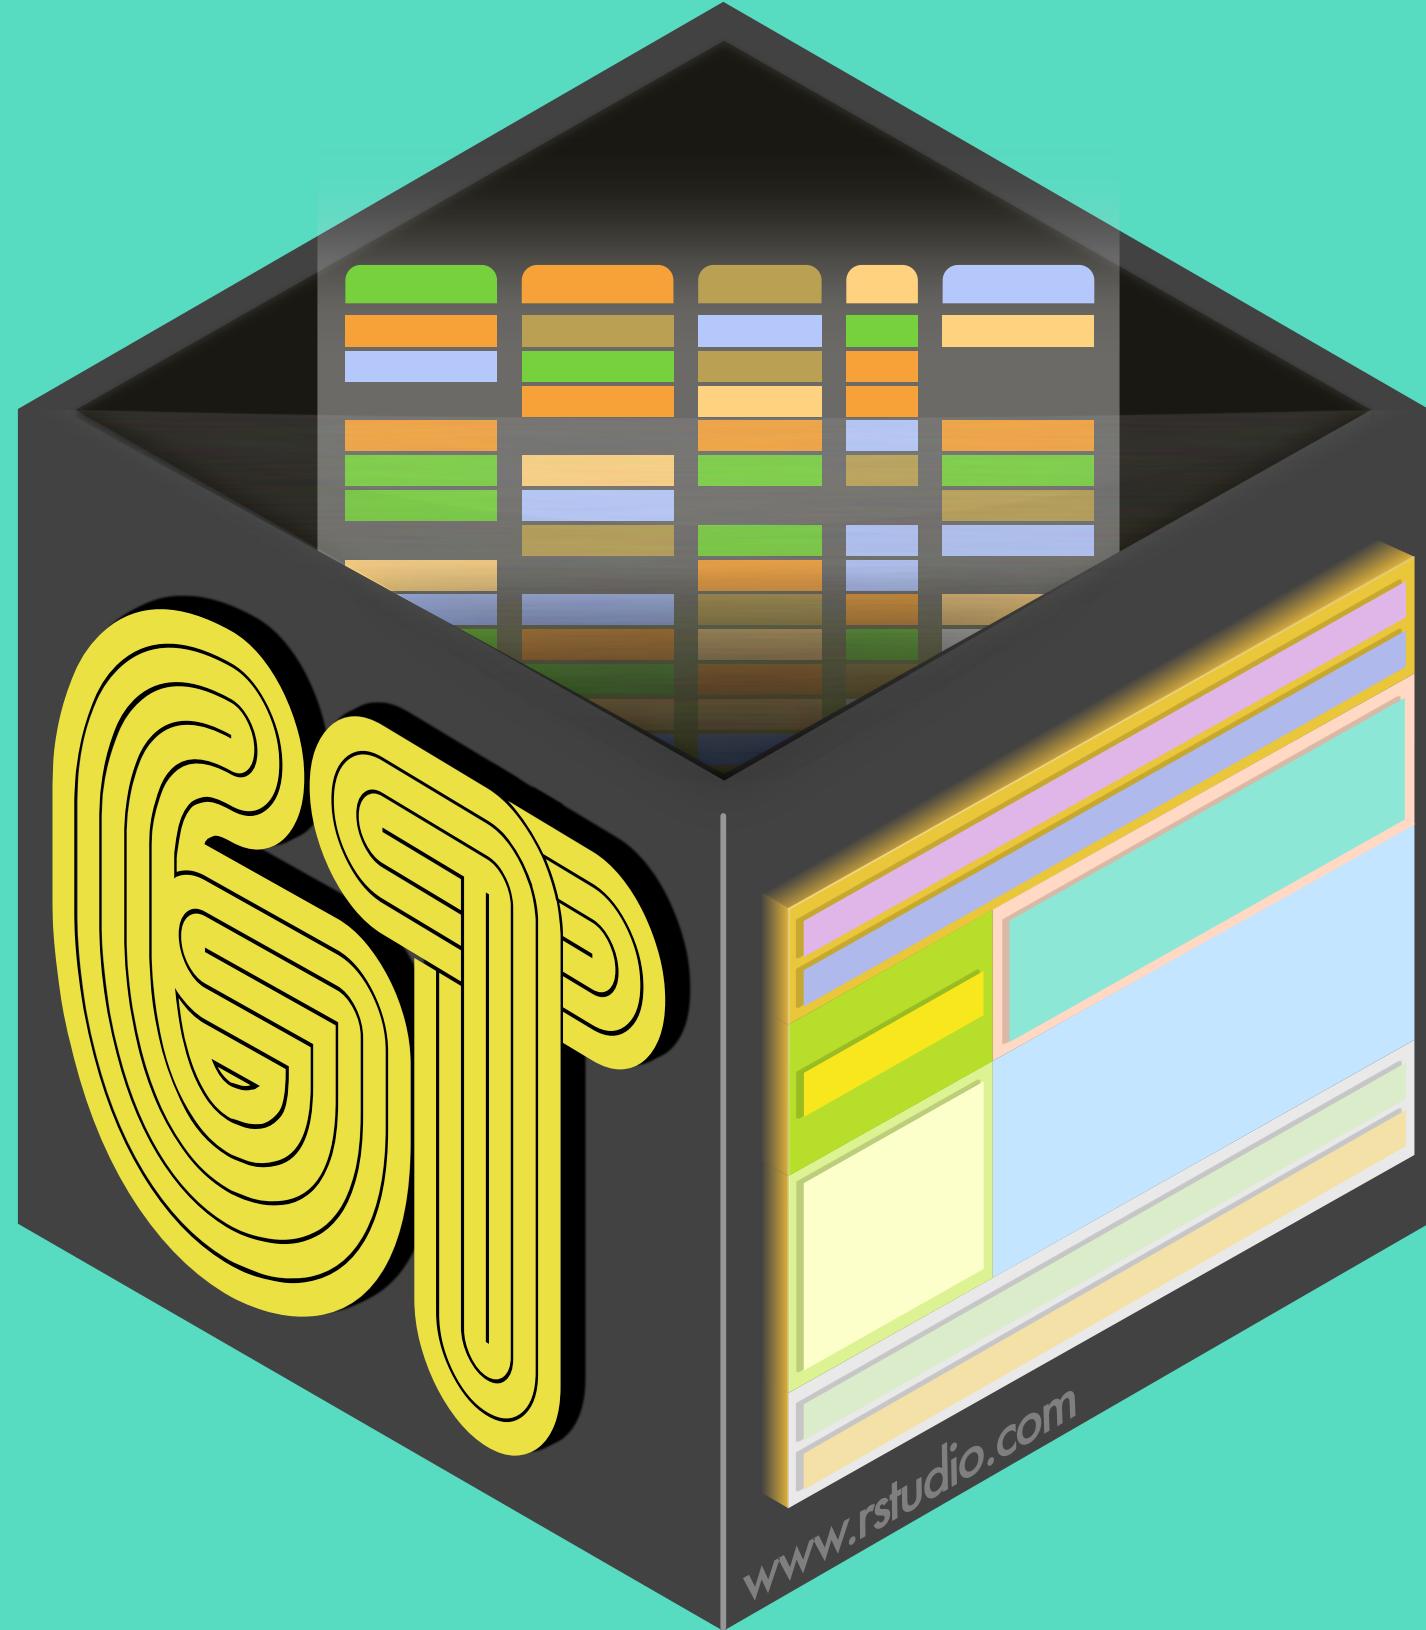

# Overview

---

- Pipe-oriented
- Beautiful tables easy
- Spanner heads/grouping used to be a total pain – not so anymore
- Renders to HTML/PDF without even thinking about it

Probably my favorite package for creating static tables, although  
**kableExtra** is great too.

My experience is that fewer people are generally familiar with **gt**, which is why I cover it here.

# Install

---

```
install.packages("gt")  
# or  
remotes::install_github("rstudio/gt")
```

Please follow along



01:00

# The hard part

---

- Getting your data in the format you want a table in
- Utilize your **pivot\_\*** skills regularly

```
library(fivethirtyeight)
flying
```

```
## # A tibble: 1,040 × 27
##   respondent_id gender age   height children_under_18 household_income
##   <dbl> <chr> <ord> <ord> <lgl>          <ord>
## 1 3436139758 <NA> <NA>   <NA>    NA             <NA>
## 2 3434278696 Male  30-44 "6'3\" TRUE            <NA>
## 3 3434275578 Male  30-44 "5'8\" FALSE           $100,000 - $149,999
## 4 3434268208 Male  30-44 "5'11\" FALSE           $0 - $24,999
## 5 3434250245 Male  30-44 "5'7\" FALSE           $50,000 - $99,999
## 6 3434245875 Male  30-44 "5'9\" TRUE            $25,000 - $49,999
## 7 3434235351 Male  30-44 "6'2\" TRUE            <NA>
## 8 3434218031 Male  30-44 "6'0\" TRUE            $0 - $24,999
## 9 3434213681 <NA> <NA>   "6'0\" TRUE            <NA>
## 10 3434172894 Male  30-44 "5'6\" FALSE           $0 - $24,999
## # ... with 1,030 more rows, and 21 more variables: education <ord>,
## #   location <chr>, frequency <ord>, recline_frequency <ord>,
## #   recline_obligation <lgl>, recline_rude <ord>, recline_eliminate <lgl>,
## #   switch_seats_friends <ord>, switch_seats_family <ord>,
## #   wake_up_bathroom <ord>, wake_up_walk <ord>, baby <ord>, unruly_child <ord>,
## #   two_arm_rests <chr>, middle_arm_rest <chr>, shade <chr>, unsold_seat <ord>,
## #   talk_stranger <ord>, get_up <ord>, electronics <lgl>, smoked <lgl>
```

```
flying %>%  
  count(gender, age, recline_frequency)
```

```
## # A tibble: 53 × 4  
##   gender age   recline_frequency     n  
##   <chr>  <ord> <ord>           <int>  
## 1 Female 18-29 Never             24  
## 2 Female 18-29 Once in a while  36  
## 3 Female 18-29 About half the time 10  
## 4 Female 18-29 Usually          13  
## 5 Female 18-29 Always           10  
## 6 Female 18-29 <NA>            19  
## 7 Female 30-44 Never           21  
## 8 Female 30-44 Once in a while  25  
## 9 Female 30-44 About half the time 22  
## 10 Female 30-44 Usually         22  
## # ... with 43 more rows
```

```
smry <- flying %>%
  count(gender, age, recline_frequency) %>%
  drop_na(age,recline_frequency) %>%
  pivot_wider(
    names_from = "age",
    values_from = "n"
  )
smry
```

```
## # A tibble: 10 × 6
##   gender recline_frequency `18-29` `30-44` `45-60` `> 60`
##   <chr>  <ord>          <int>    <int>    <int>    <int>
## 1 Female  Never           24       21       19       23
## 2 Female  Once in a while 36       25       30       36
## 3 Female  About half the time 10       22       18       17
## 4 Female  Usually          13       22       26       28
## 5 Female  Always           10       21       29       12
## 6 Male    Never            24       17       20       18
## 7 Male    Once in a while 19       39       40       29
## 8 Male    About half the time 11       11       16       11
## 9 Male    Usually           14       30       15       27
## 10 Male   Always            11      14       21       14
```

# Turn into table

---

```
library(gt)
smry %>%
  gt()
```

Disclaimer: these all look slightly different  
on the slides

The way they look for you locally is how they will render in standard R  
Markdown files

gender	recline_frequency	18–29	30–44	45–60	> 60
Female	Never	24	21	19	23
Female	Once in a while	36	25	30	36
Female	About half the time	10	22	18	17
Female	Usually	13	22	26	28
Female	Always	10	21	29	12
Male	Never	24	17	20	18
Male	Once in a while	19	39	40	29
Male	About half the time	11	11	16	11
Male	Usually	14	30	15	27
Male	Always	11	14	21	14

# Add gender as a grouping variable

```
smry %>%  
  group_by(gender) %>%  
  gt()
```

recline_frequency	18–29	30–44	45–60	> 60
<b>Female</b>				
Never	24	21	19	23
Once in a while	36	25	30	36
About half the time	10	22	18	17
Usually	13	22	26	28
Always	10	21	29	12
<b>Male</b>				
Never	24	17	20	18
Once in a while	19	39	40	29
About half the time	11	11	16	11
Usually	14	30	15	27
Always	11	14	21	14

This is an example of a table that looks better with the default CSS

# Add a spanner head

---

```
smry %>%
  group_by(gender) %>%
  gt() %>%
  tab_spanner(
    label = "Age Range",
    columns = vars(`18-29`, `30-44`, `45-60`, `> 60`)
  )
```

recline_frequency	Age Range			
	18–29	30–44	45–60	> 60
<b>Female</b>				
Never	24	21	19	23
Once in a while	36	25	30	36
About half the time	10	22	18	17
Usually	13	22	26	28
Always	10	21	29	12
<b>Male</b>				
Never	24	17	20	18
Once in a while	19	39	40	29
About half the time	11	11	16	11
Usually	14	30	15	27
Always	11	14	21	14

# Change column names

---

```
smry %>%
  group_by(gender) %>%
  gt() %>%
  tab_spanner(
    label = "Age Range",
    columns = vars(`18-29`, `30-44`, `45-60`, `> 60`)
  ) %>%
  cols_label(recline_frequency = "Recline")
```

Recline	Age Range			
	18–29	30–44	45–60	> 60
<b>Female</b>				
Never	24	21	19	23
Once in a while	36	25	30	36
About half the time	10	22	18	17
Usually	13	22	26	28
Always	10	21	29	12
<b>Male</b>				
Never	24	17	20	18
Once in a while	19	39	40	29
About half the time	11	11	16	11
Usually	14	30	15	27
Always	11	14	21	14

# Align columns

---

```
smry %>%
  group_by(gender) %>%
  gt() %>%
  tab_spanner(
    label = "Age Range",
    columns = vars(`18-29`, `30-44`, `45-60`, `> 60`)
  ) %>%
  cols_label(recline_frequency = "Recline") %>%
  cols_align(align = "left",
             columns = vars(recline_frequency))
```

Recline	Age Range			
	18–29	30–44	45–60	> 60
<b>Female</b>				
Never	24	21	19	23
Once in a while	36	25	30	36
About half the time	10	22	18	17
Usually	13	22	26	28
Always	10	21	29	12
<b>Male</b>				
Never	24	17	20	18
Once in a while	19	39	40	29
About half the time	11	11	16	11
Usually	14	30	15	27
Always	11	14	21	14

# Add a title

---

```
smry %>%
  group_by(gender) %>%
  gt() %>%
  tab_spanner(
    label = "Age Range",
    columns = vars(`18-29`, `30-44`, `45-60`, `> 60`)
  ) %>%
  cols_label(recline_frequency = "Recline") %>%
  cols_align(align = "left",
             columns = vars(recline_frequency)) %>%
  tab_header(
    title = "Airline Passengers",
    subtitle = "Leg space is limited, what do you do?"
  )
```

---

## Airline Passengers

Leg space is limited, what do you do?

---

		Age Range			
Recline		18–29	30–44	45–60	> 60
Female					
Never		24	21	19	23
Once in a while		36	25	30	36
About half the time		10	22	18	17
Usually		13	22	26	28
Always		10	21	29	12
Male					
Never		24	17	20	18
Once in a while		19	39	40	29
About half the time		11	11	16	11
Usually		14	30	15	27
Always		11	14	21	14

# Format columns

---

```
smry %>%
  mutate(across(c(`18-29`, `30-44`, `45-60`, `> 60`),
               ~.x/100)) %>%
  group_by(gender) %>%
  gt() %>%
  tab_header(
    label = "Age Range",
    columns = vars(`18-29`, `30-44`, `45-60`, `> 60`)
  ) %>%
  fmt_percent(
    vars(`18-29`, `30-44`, `45-60`, `> 60`),
    decimals = 0
  ) %>%
  cols_label(recline_frequency = "Recline") %>%
  cols_align(align = "left",
             columns = vars(recline_frequency)) %>%
  tab_header(
    title = "Airline Passengers",
    subtitle = "Leg space is limited, what do you do?"
  )
```

---

## Airline Passengers

Leg space is limited, what do you do?

---

	Age Range			
Recline	18–29	30–44	45–60	> 60
Female				
Never	24%	21%	19%	23%
Once in a while	36%	25%	30%	36%
About half the time	10%	22%	18%	17%
Usually	13%	22%	26%	28%
Always	10%	21%	29%	12%
Male				
Never	24%	17%	20%	18%
Once in a while	19%	39%	40%	29%
About half the time	11%	11%	16%	11%
Usually	14%	30%	15%	27%
Always	11%	14%	21%	14%

# Add a source note

---

```
smry %>%
  mutate(across(c(`18-29`, `30-44`, `45-60`, `> 60`),
               ~.x/100)) %>%
  group_by(gender) %>%
  gt() %>%
  tab_spinner(
    label = "Age Range",
    columns = vars(`18-29`, `30-44`, `45-60`, `> 60`)
  ) %>%
  fmt_percent(
    vars(`18-29`, `30-44`, `45-60`, `> 60`),
    decimals = 0
  ) %>%
  cols_label(recline_frequency = "Recline") %>%
  cols_align(align = "left",
             columns = vars(recline_frequency)) %>%
  tab_header(
    title = "Airline Passengers",
    subtitle = "Leg space is limited, what do you do?"
  ) %>%
  tab_source_note(
    source_note = md("Data from [fivethirtyeight](https://fivethirtyeight.com/)")
  )
```

---

## Airline Passengers

Leg space is limited, what do you do?

---

Recline	Age Range			
	18–29	30–44	45–60	> 60
<b>Female</b>				
Never	24%	21%	19%	23%
Once in a while	36%	25%	30%	36%
About half the time	10%	22%	18%	17%
Usually	13%	22%	26%	28%
Always	10%	21%	29%	12%
<b>Male</b>				
Never	24%	17%	20%	18%
Once in a while	19%	39%	40%	29%
About half the time	11%	11%	16%	11%
Usually	14%	30%	15%	27%
Always	11%	14%	21%	14%

---

Data from [fivethirtyeight](#)

# Color cells

---

```
... %>%  
  data_color(  
    vars(`18-29`, `30-44`, `45-60`, `> 60`),  
    colors = scales::col_numeric(  
      palette = c("#FFFFFF", "#FF0000"),  
      domain = NULL  
    )  
  ) %>%  
  ...
```

---

## Airline Passengers

Leg space is limited, what do you do?

---

		Age Range			
Recline		18–29	30–44	45–60	> 60
Female					
Never		24%	21%	19%	23%
Once in a while		36%	25%	30%	36%
About half the time		10%	22%	18%	17%
Usually		13%	22%	26%	28%
Always		10%	21%	29%	12%
Male					
Never		24%	17%	20%	18%
Once in a while		19%	39%	40%	29%
About half the time		11%	11%	16%	11%
Usually		14%	30%	15%	27%
Always		11%	14%	21%	14%

Data from [fivethirtyeight](#)

---

# What else?

---

- Lots more it can do, see the website

Thomas Mock does a lot of great work with tables and often has tutorials showing you how to go further (e.g., see here and here and here).

A few other  
table options

---

# kableExtra

---

## A few quick examples

Make sure to specify `results = "asis"` in your chunk options.

```
library(knitr)
library(kableExtra)
dt <- mtcars[1:5, 1:6]
kable(dt) %>%
  kable_styling("striped") %>%
  column_spec(5:7, bold = TRUE)
```

	mpg	cyl	disp	hp	drat	wt
Mazda RX4	21.0	6	160	<b>110</b>	<b>3.90</b>	<b>2.620</b>
Mazda RX4 Wag	21.0	6	160	<b>110</b>	<b>3.90</b>	<b>2.875</b>
Datsun 710	22.8	4	108	<b>93</b>	<b>3.85</b>	<b>2.320</b>
Hornet 4 Drive	21.4	6	258	<b>110</b>	<b>3.08</b>	<b>3.215</b>
Hornet Sportabout	18.7	8	360	<b>175</b>	<b>3.15</b>	<b>3.440</b>

```

kable(dt) %>%
  kable_styling("striped") %>%
  column_spec(5:7, bold = TRUE) %>%
  row_spec(c(2, 4),
           bold = TRUE,
           color = "#EFF3F7",
           background = "#71B0DE")

```

	mpg	cyl	disp	hp	drat	wt
Mazda RX4	21.0	6	160	<b>110</b>	<b>3.90</b>	<b>2.620</b>
<b>Mazda RX4 Wag</b>	<b>21.0</b>	<b>6</b>	<b>160</b>	<b>110</b>	<b>3.90</b>	<b>2.875</b>
Datsun 710	22.8	4	108	<b>93</b>	<b>3.85</b>	<b>2.320</b>
<b>Hornet 4 Drive</b>	<b>21.4</b>	<b>6</b>	<b>258</b>	<b>110</b>	<b>3.08</b>	<b>3.215</b>
Hornet Sportabout	18.7	8	360	<b>175</b>	<b>3.15</b>	<b>3.440</b>

```

kable(dt) %>%
  kable_styling("striped", full_width = FALSE) %>%
  pack_rows(
    "Group 1", 1, 3,
    label_row_css = "background-color: #666; color: #fff;"
  ) %>%
  pack_rows(
    "Group 2", 4, 5,
    label_row_css = "background-color: #666; color: #fff;"
  )

```

	mpg	cyl	disp	hp	drat	wt
<b>Group 1</b>						
Mazda RX4	21.0	6	160	110	3.90	2.620
Mazda RX4 Wag	21.0	6	160	110	3.90	2.875
Datsun 710	22.8	4	108	93	3.85	2.320
<b>Group 2</b>						
Hornet 4 Drive	21.4	6	258	110	3.08	3.215
Hornet Sportabout	18.7	8	360	175	3.15	3.440

# KableExtra wrapup

---

Many other options, please see the documentation. Works well for PDF and HTML.

What about Microsoft Word?

# flextable

flextable **0.5.8**

Overview

Selectors

Layout

Format visual properties

Format Content

Render as image

Examples

Function reference



## flextable R package

[build passing](#) [BUILD PASSING](#) [CRAN 0.5.8](#) [downloads 16K/month](#) [repo status Active](#)



The flextable package provides a framework for easily create tables for reporting and publications. Tables can be embedded within:

- R Markdown documents with support for HTML, Word and PowerPoint documents.
- Microsoft Word or PowerPoint documents.
- PDF documents with package `pagedown` (it's only HTML)

Tables can also be rendered as R plots or graphic files (png, pdf and jpeg).

## Getting Started

An API is available to let R users create tables for reporting and control their formatting properties and their layout. A `flextable` object is a `data.frame` representation, it can be manipulated with functions that give control over:

### Links

Download from CRAN at  
[https://cloud.r-project.org/  
package=flextable](https://cloud.r-project.org/package=flextable)

Report a bug at  
[https://github.com/davidgohel/flextable/  
issues](https://github.com/davidgohel/flextable/issues)

Visit [ARDATA](#) website at  
<https://www.ardata.fr>

### License

[GPL-3](#)

### Developers

David Gohel  
Author, maintainer  
[All authors...](#)

# Many others

---

- huxtable
- formattable
- DT (my former favorite for shiny)
- rhandsontable

Particularly helpful for modeling

- stargazer
- pixiedust
- modelsummary

For descriptives

- gtsummary

# reactable

---

My favorite for interactive tables

## 2019 Women's World Cup Predictions

Soccer Power Index (SPI) ratings and chances of advancing for every team

TEAM	GROUP	Team Rating			Chance of Finishing Group Stage In ...			Knockout Stage Chances				
		SPI	OFF.	DEF.	1ST PLACE	2ND PLACE	3RD PLACE	MAKE ROUND OF 16	MAKE QTR-FINALS	MAKE SEMIFINALS	MAKE FINAL	WIN WORLD CUP
USA 6 pts.	F	98.3	5.5	0.6	83%	17%	-	✓	78%	47%	35%	24%
France 6 pts.	A	96.3	4.3	0.5	>99%	<1%	<1%	✓	78%	42%	30%	19%
Germany 6 pts.	B	93.8	4.0	0.7	98%	2%	-	✓	89%	48%	28%	12%
Canada 6 pts.	E	93.5	3.7	0.6	39%	61%	-	✓	59%	36%	20%	9%
England 6 pts.	D	91.9	3.5	0.6	71%	29%	-	✓	69%	43%	16%	8%
Netherlands 6 pts.	E	92.7	3.9	0.7	61%	39%	-	✓	59%	37%	19%	8%
Australia 3 pts.	C	92.8	4.2	0.9	13%	54%	34%	>99%	54%	26%	10%	5%
Sweden 3 pts.	F	92.6	5.0	0.6	47%	32%	-	✓	67%	30%	10%	5%

Works great with **shiny** too

# Penguins data

---

```
library(palmerpenguins)
library(reactable)
reactable(penguins)
```

species	island	bill_length_mm	bill_depth_mm	flipper_length_mm	body_mass_g	sex	year
Adelie	Torgersen	39.1	18.7	181	3750	male	2007
Adelie	Torgersen	39.5	17.4	186	3800	female	2007
Adelie	Torgersen	40.3	18	195	3250	female	2007
Adelie	Torgersen						2007
Adelie	Torgersen	36.7	19.3	193	3450	female	2007
Adelie	Torgersen	39.3	20.6	190	3650	male	2007
Adelie	Torgersen	38.9	17.8	181	3625	female	2007
Adelie	Torgersen	39.2	19.6	195	4675	male	2007
Adelie	Torgersen	34.1	18.1	193	3475		2007
Adelie	Torgersen	42	20.2	190	4250		2007

1–10 of 344 rows

Previous [1](#) [2](#) [3](#) [4](#) [5](#) ... [35](#) [Next](#)

# Rename columns

---

```
penguins %>%
  reactable(
    columns = list(
      bill_length_mm = colDef(name = "Bill Length (mm)") ,
      bill_depth_mm = colDef(name = "Bill Depth (mm)") )
    )
```

species	island	Bill Length (mm)	Bill Depth (mm)	flipper_length_mm	body_mass_g	sex	year
Adelie	Torgersen	39.1	18.7	181	3750	male	2007
Adelie	Torgersen	39.5	17.4	186	3800	female	2007
Adelie	Torgersen	40.3	18	195	3250	female	2007
Adelie	Torgersen						2007
Adelie	Torgersen	36.7	19.3	193	3450	female	2007
Adelie	Torgersen	39.3	20.6	190	3650	male	2007
Adelie	Torgersen	38.9	17.8	181	3625	female	2007
Adelie	Torgersen	39.2	19.6	195	4675	male	2007
Adelie	Torgersen	34.1	18.1	193	3475		2007
Adelie	Torgersen	42	20.2	190	4250		2007

1–10 of 344 rows

Previous **1** 2 3 4 5 ... 35 Next

# Or use a function

---

```
library(stringr)

penguins %>%
  reactable(
    defaultColDef = colDef(
      header = function(x) str_to_title(gsub("_", " ", x))
    )
  )
```

Species	Island	Bill Length Mm	Bill Depth Mm	Flipper Length Mm	Body Mass G	Sex	Year
Adelie	Torgersen	39.1	18.7	181	3750	male	2007
Adelie	Torgersen	39.5	17.4	186	3800	female	2007
Adelie	Torgersen	40.3	18	195	3250	female	2007
Adelie	Torgersen						2007
Adelie	Torgersen	36.7	19.3	193	3450	female	2007
Adelie	Torgersen	39.3	20.6	190	3650	male	2007
Adelie	Torgersen	38.9	17.8	181	3625	female	2007
Adelie	Torgersen	39.2	19.6	195	4675	male	2007
Adelie	Torgersen	34.1	18.1	193	3475		2007
Adelie	Torgersen	42	20.2	190	4250		2007

1–10 of 344 rows

Previous **1** 2 3 4 5 ... 35 Next

# Add filter

---

```
reactable(penguins, filterable = TRUE)
```

species	island	bill_length_m m	bill_depth_m m	flipper_lengt h_mm	body_mass_ g	sex	year
Adelie	Torgersen	39.1	18.7	181	3750	male	2007
Adelie	Torgersen	39.5	17.4	186	3800	female	2007
Adelie	Torgersen	40.3	18	195	3250	female	2007
Adelie	Torgersen						2007
Adelie	Torgersen	36.7	19.3	193	3450	female	2007
Adelie	Torgersen	39.3	20.6	190	3650	male	2007
Adelie	Torgersen	38.9	17.8	181	3625	female	2007
Adelie	Torgersen	39.2	19.6	195	4675	male	2007
Adelie	Torgersen	34.1	18.1	193	3475		2007
Adelie	Torgersen	42	20.2	190	4250		2007

1–10 of 344 rows

Previous **1** 2 3 4 5 ... 35 Next

# Searchable

---

```
reactable(penguins, searchable = TRUE)
```

species	island	bill_length_mm	bill_depth_mm	flipper_length_mm	body_mass_g	sex	year
Adelie	Torgersen	39.1	18.7	181	3750	male	2007
Adelie	Torgersen	39.5	17.4	186	3800	female	2007
Adelie	Torgersen	40.3	18	195	3250	female	2007
Adelie	Torgersen						2007
Adelie	Torgersen	36.7	19.3	193	3450	female	2007
Adelie	Torgersen	39.3	20.6	190	3650	male	2007
Adelie	Torgersen	38.9	17.8	181	3625	female	2007
Adelie	Torgersen	39.2	19.6	195	4675	male	2007
Adelie	Torgersen	34.1	18.1	193	3475		2007
Adelie	Torgersen	42	20.2	190	4250		2007

1–10 of 344 rows

Previous **1** 2 3 4 5 ... 35 Next

# Pagination

---

```
reactable(penguins, defaultPageSize = 3)
```

species	island	bill_length_m m	bill_depth_m m	flipper_length_mm h_mm	body_mass_g g	sex	year
Adelie	Torgersen	39.1	18.7	181	3750	male	2007
Adelie	Torgersen	39.5	17.4	186	3800	female	2007
Adelie	Torgersen	40.3	18	195	3250	female	2007

1–3 of 344 rows

Previous **1** 2 3 4 5 ... 115 Next

# Page jump

---

```
reactable(penguins,  
          defaultPageSize = 3,  
          paginationType = "jump")
```

species	island	bill_length_mm	bill_depth_mm	flipper_length_mm	body_mass_g	sex	year
Adelie	Torgersen	39.1	18.7	181	3750	male	2007
Adelie	Torgersen	39.5	17.4	186	3800	female	2007
Adelie	Torgersen	40.3	18	195	3250	female	2007

1–3 of 344 rows

Previous

1

of 115

Next

# Grouping

---

```
reactable(penguins, groupBy = c("species", "island"))
```

species	island	bill_length_m	bill_depth_m	flipper_length_mm	body_mass_g	sex	year
<hr/>							
► Adelie	(3)						
► Gentoo							
(1)							
► Chinstrap							
(1)							

# Aggregate

---

```
penguins %>%
  reactable(
    groupBy = c("species", "island"),
    columns = list(
      bill_length_mm = colDef.aggregate = "mean",
      format = colFormat(digits = 2))
  )
)
```

species	island	bill_length_m	bill_depth_m	flipper_length_mm	body_mass_g	sex	year
		m	m	h_mm	g		
► Adelie	(3)	38.81					
► Gentoo		47.50					
(1)							
► Chinstrap		48.83					
(1)							


# Sparklines

---

```
library(sparkline)
table_data <- penguins %>%
  group_by(species) %>%
  summarize(bill_length = list(bill_length_mm)) %>%
  mutate(boxplot = NA,
        sparkline = NA)
table_data
```

```
## # A tibble: 3 × 4
##   species    bill_length boxplot sparkline
##   <fct>      <list>     <lgl>    <lgl>
## 1 Adelie     <dbl [152]> NA       NA
## 2 Chinstrap  <dbl [68]>  NA       NA
## 3 Gentoo    <dbl [124]> NA       NA
```

```
table_data %>%
  reactable(
    columns = list(
      bill_length = colDef(cell = function(value) {
        sparkline(value, type = "bar")
      }),
      boxplot = colDef(cell = function(value, index) {
        sparkline(table_data$bill_length[[index]], type = "box")
      }),
      sparkline = colDef(cell = function(value, index) {
        sparkline(table_data$bill_length[[index]])
      })
    )
  )
```

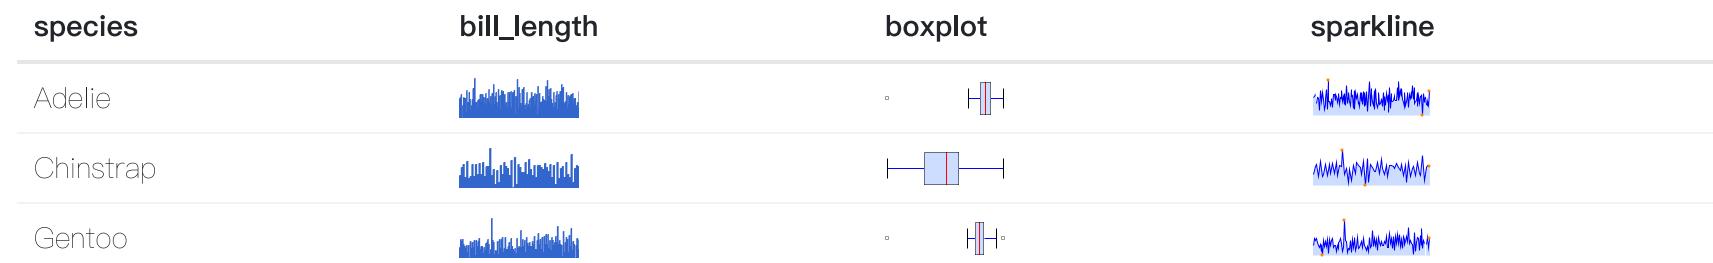

# Lots more!

---

Idea of today is not to teach you everything, but to give you an idea of what's possible. Check out the documentation for more information. Also check out {reactablefmtr} for easier use and amazing extensions!

# Geographic data

---

# First – a disclaimer

---

- We're *only* talking about visualizing geographic data, not analyzing geographic data
- Even so, there's SO MUCH we won't get to
- Today is an intro – lots more you can do, hopefully you'll feel comfortable with the basics

# Learning objectives

---


- Know the difference between vector and raster data
- Be able to produce basic maps
- Be able to obtain different types of geographic data from a few different places
- Be able to produce basic interactive maps
- Understand the basics of the R geospatial ecosystem

Today is partially about content and partially about exposure

# Where to learn more

---


## Geocomputation with R

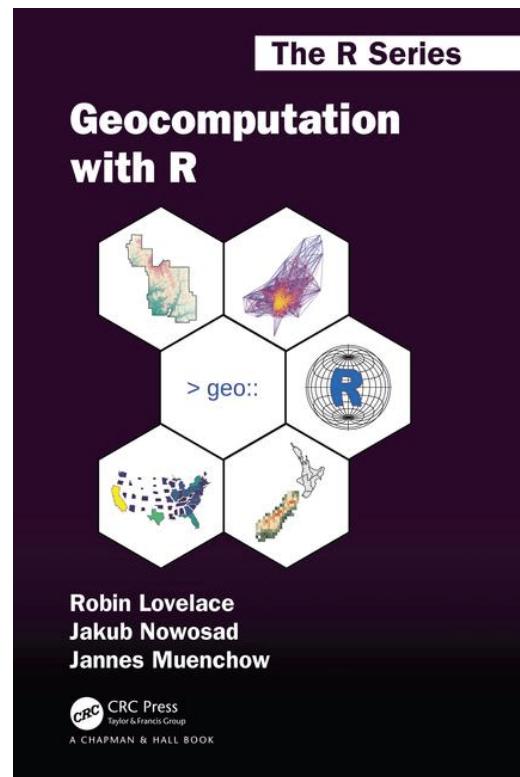


# Zev Ross 2-day Workshop

---

From rstudio::conf(2020)



Some of this presentation comes from the above.

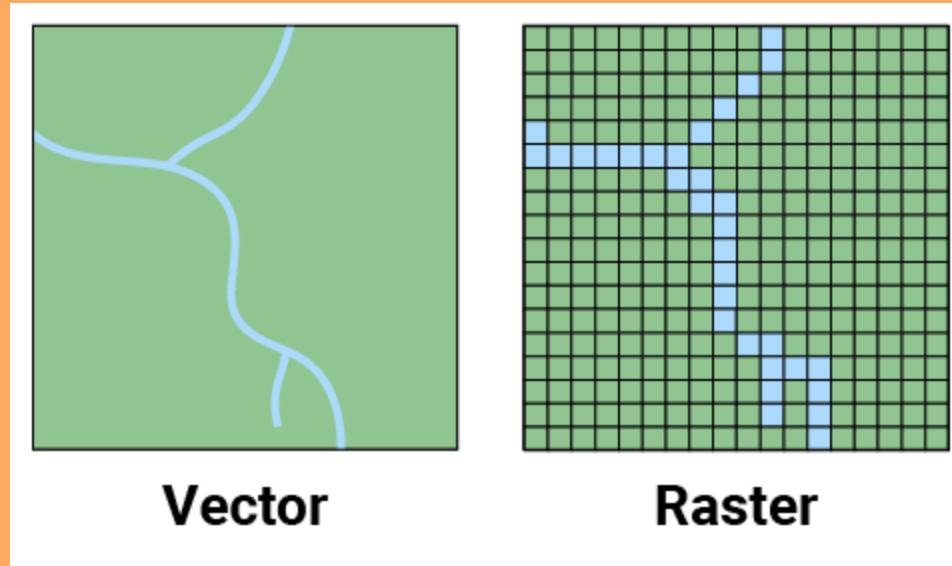

# Vector versus raster data

---

Image from Zev Ross

# Vector data

---

- points, lines, and polygons
- Can easily include non-spatial data (e.g., number of people living within the polygon)
- Come in the form of shapefiles ([.shp](#)), GeoJSON, or frequently in R packages.

This is what we'll talk about almost exclusively today


Tends to be the most relevant for social science research questions

# Raster data

---

- Divide the space into a grid
- Assign each square (pixel) a value


Common formats include images and are often used in satellite and remote sensing data.

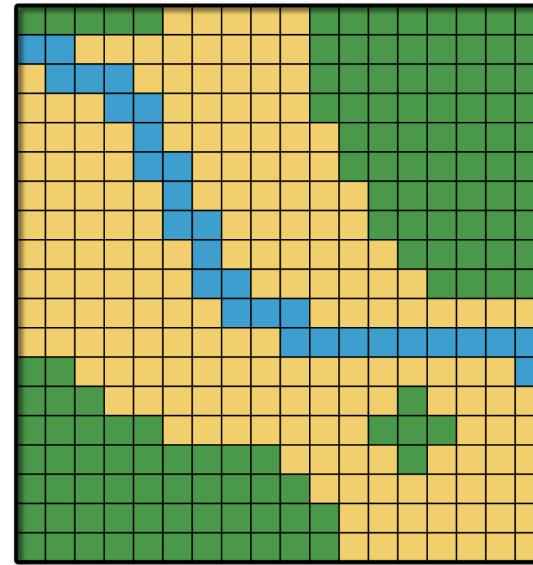

Can occasionally be helpful in social science data to show things like population density.

# Example

---

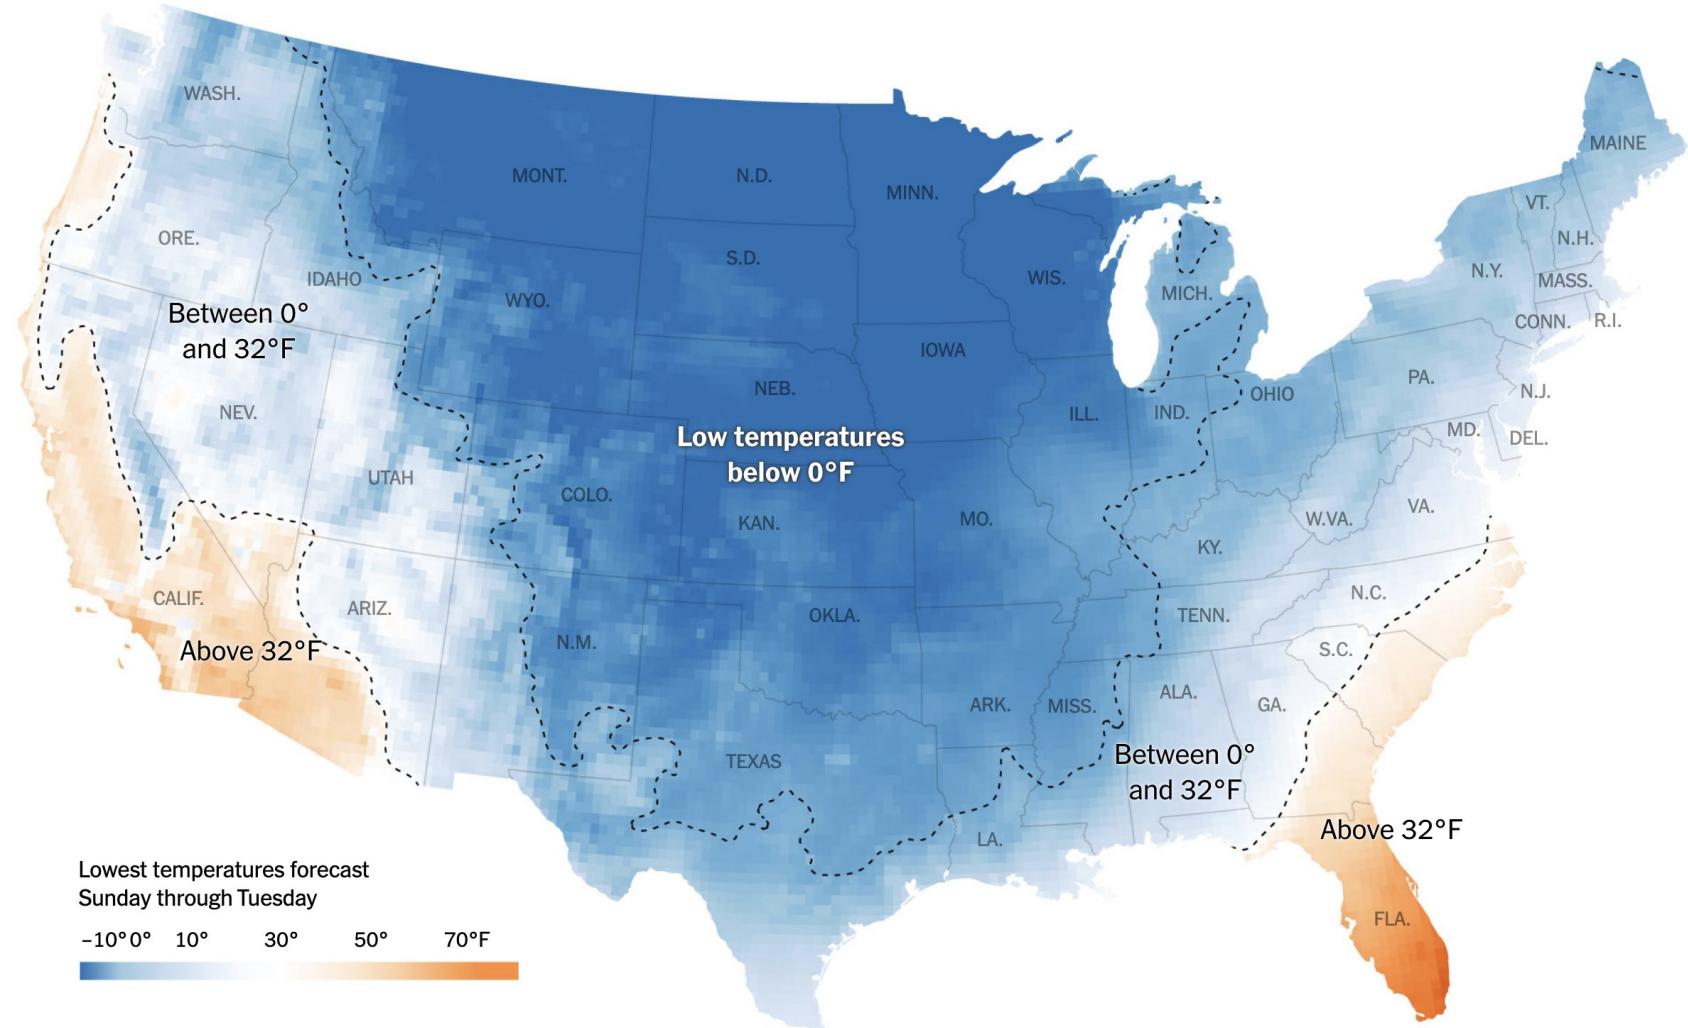

# Some of the #rspatial ecosystem

---

- {sf}
- {raster}
- {ggplot2}
- {tmap}
- {mapview}

## My goal

Take you through at least a basic tour of each of these (minus {raster}, although we'll discuss raster data).

# Some specific challenges with geospatial data

---

- Coordinate reference systems and projections (we won't have much time for this)
- List columns (specifically when working with `{sf}` objects)
- Different geometry types (lines, points, polygons)
- Vector versus raster
- Data regularly stored in data "cubes" or "bricks" to represent, e.g., longitude, latitude, and elevation, or time series, or different colors

# Getting spatial data

---

- We'll only cover a few ways to do this
- Purposefully United States centric
- Generally reading shape files is not terrifically difficult. Reading in and manipulating raster data can be tricky at times.
- Lots of organizations out there that publish spatial data, and a fair amount are available through R packages

# Working with spatial data

---

Two basic options

- `spatial*DataFrame` (from the `{sp}` package)
- sf data frame (simple features)
  - We'll mostly talk about this

I can show you `spatial*DataFrame` outside the slides (it hung things up here). Generally, I'd stick with `{sf}`.

Use `sf::st_as_sf` to convert `{sp}` to `{sf}`

# {tigris}

---

```
library(tigris)
library(sf)
options(tigris_class = "sf")

roads_laneco <- roads("OR", "Lane")
roads_laneco
```

```
## Simple feature collection with 20433 features and 4 fields
## Geometry type: LINESTRING
## Dimension: XY
## Bounding box: xmin: -124.1536 ymin: 43.4376 xmax: -121.8078 ymax: 44.29001
## Geodetic CRS: NAD83
## # A tibble: 20,433 × 5
##   LINEARID FULLNAME      RTTYP MTFCC               geometry
##   <chr>     <chr>      <chr> <chr>   <LINESTRING [°]>
## 1 1102152610459 W Lone Oak Lp      M    S1640 (-123.1256 44.10108, -123.1262 ...
## 2 1102217699747 Sheldon Village Lp M    S1640 (-123.0742 44.07891, -123.073 4...
## 3 110458663505 Cottage Hts Lp      M    S1400 (-123.0522 43.7893, -123.0522 4...
## 4 1102152615811 Village Plz Lp      M    S1640 (-123.1051 44.08716, -123.1058 ...
## 5 110458661289 River Pointe Lp      M    S1400 (-123.0864 44.10306, -123.0852 ...
## 6 1102217699746 Sheldon Village Lp M    S1640 (-123.0723 44.07875, -123.0723 ...
## 7 110458664549 Village Plz Lp      M    S1400 (-123.1053 44.08658, -123.1052 ...
## 8 1102223141058 Carpenter Byp      M    S1400 (-123.3368 43.78013, -123.3367 ...
## 9 1106092829172 State Hwy 126 Bus  S    S1200 (-123.0502 44.04391, -123.0502 ...
## 10 1104493105112 State Hwy 126 Bus S    S1200 (-122.996 44.04587, -122.9959 4...
## # ... with 20,423 more rows
```

# I/O

---

Let's say I want to write the file to disk.

```
# from the sf library
write_sf(roads_laneco, here::here("data", "roads_lane.shp"))
```

Then read it in later

```
roads_laneco <- read_sf(here::here("data", "roads_lane.shp"))
roads_laneco
```


```
## Simple feature collection with 20433 features and 4 fields
## Geometry type: LINESTRING
## Dimension: XY
## Bounding box: xmin: -124.1536 ymin: 43.4376 xmax: -121.8078 ymax: 44.29001
## Geodetic CRS: NAD83
## # A tibble: 20,433 × 5
##   LINEARID FULLNAME      RTTYP MTFCC           geometry
##   <chr>     <chr>      <chr> <chr>          <LINESTRING [°]>
## 1 1102152610459 W Lone Oak Lp    M    S1640 (-123.1256 44.10108, -123.1262 ...
## 2 1102217699747 Sheldon Village Lp M    S1640 (-123.0742 44.07891, -123.073 4...
## 3 110458663505 Cottage Hts Lp    M    S1400 (-123.0522 43.7893, -123.0522 4...
## 4 1102152615811 Village Plz Lp   M    S1640 (-123.1051 44.08716, -123.1058 ...
## 5 110458661289 River Pointe Lp   M    S1400 (-123.0864 44.10306, -123.0852 ...
## 6 1102217699746 Sheldon Village Lp M    S1640 (-123.0723 44.07875, -123.0723 ...
## 7 110458664549 Village Plz Lp    M    S1400 (-123.1053 44.08658, -123.1052 ...
## 8 1102223141058 Carpenter Byp    M    S1400 (-123.3368 43.78013, -123.3367 ...
## 9 1106092829172 State Hwy 126 Bus S    S1200 (-123.0502 44.04391, -123.0502 ...
## 10 1104493105112 State Hwy 126 Bus S   S1200 (-122.996 44.04587, -122.9959 4...
```

# {sf} works with ggplot

---

Use `ggplot2::geom_sf`

```
ggplot(roads_laneco) +  
  geom_sf(color = "gray60")
```

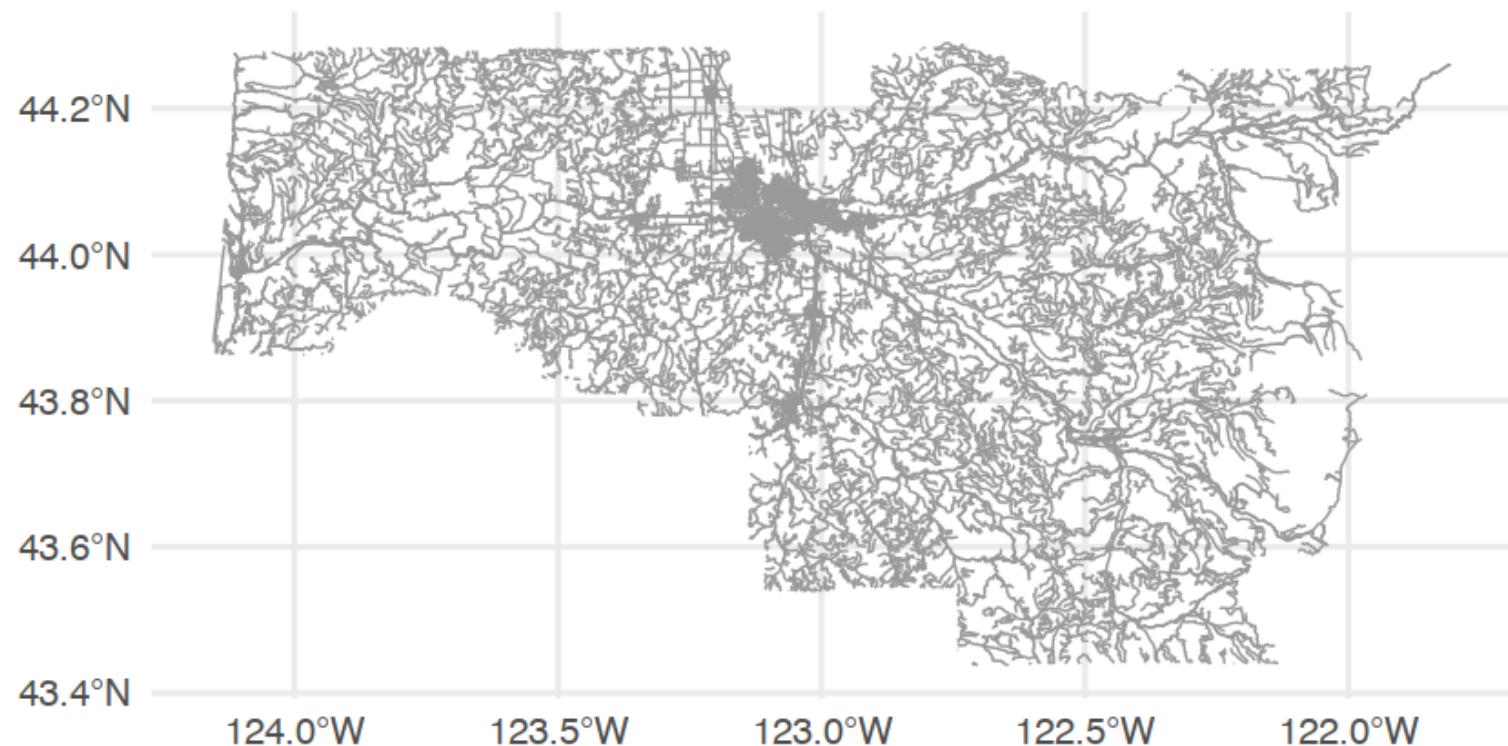


# Add water features

---

```
lakes <- area_water("OR", "Lane")
streams <- linear_water("OR", "Lane")

ggplot() +
  geom_sf(data = lakes, fill = "#518FB5") + # Add lakes
  geom_sf(data = streams, color = "#518FB5") + # Add streams/drainage
  geom_sf(data = roads_laneco, color = "gray60") # add roads
```

Note – these functions are all from the `{tigris}` package.

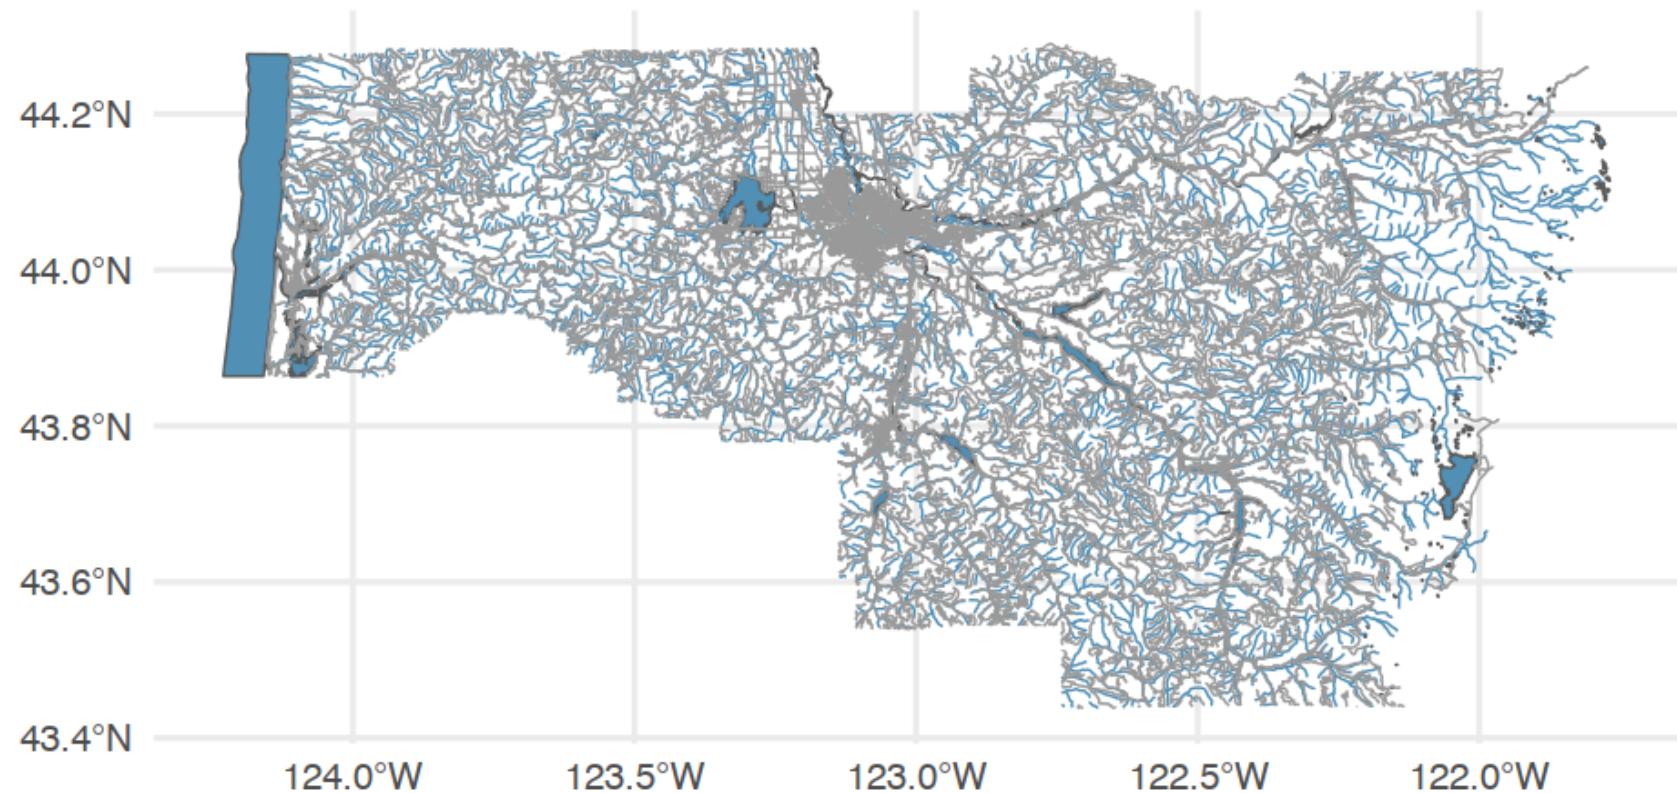

# Quick aside

---


## Similar package **osmdata**

- Specifically for street-level data.
- We'll just use the boundary box functionality, but you can add many of the same things (and there are other packages that will provide you with boundary boxes)

```
bb <- osmdata::getbb("Eugene")
bb
```

```
##           min         max
## x -123.20876 -123.03589
## y    43.98753   44.13227
```

```
ggplot() +  
  geom_sf(data = lakes, fill = "#518FB5") + # Add lakes  
  geom_sf(data = streams, color = "#518FB5", size = 1.2) + # Add streams  
  geom_sf(data = roads_laneco, color = "gray60") + # add roads  
  coord_sf(xlim = bb[1, ], ylim = bb[2, ]) # limit range
```

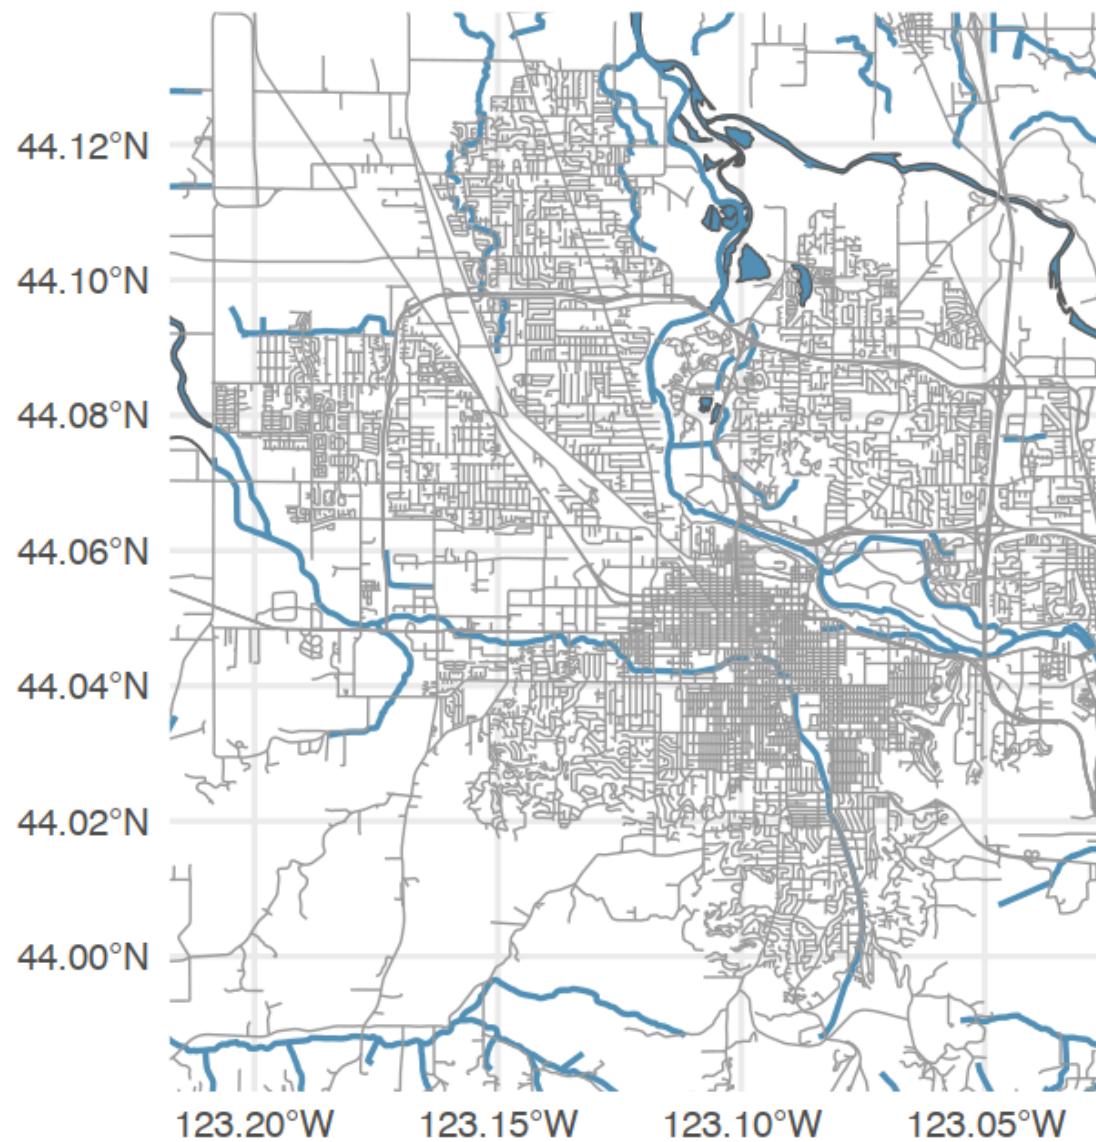

# Quickly

---

Same thing but fully **osmdata**

```
library(osmdata)
library(colorspace)

bb <- getbb("Eugene")


roads <- bb %>%
  opq() %>% #overpass query
  add_osm_feature("highway") %>% # feature to add
  osmdata_sf() # Change it to sf

water <- bb %>%
  opq() %>%
  add_osm_feature("water") %>%
  osmdata_sf()
```

# Use the data to plot

---

```
ggplot() +
  geom_sf(data = water$osm_multipolygons,
          fill = "#518FB5",
          color = darken("#518FB5")) +
  geom_sf(data = water$osm_polygons,
          fill = "#518FB5",
          color = darken("#518FB5")) +
  geom_sf(data = water$osm_lines,
          color = darken("#518FB5")) +
  geom_sf(data = roads$osm_lines,
          color = "gray40",
          size = 0.2) +
  coord_sf(xlim = bb[1, ],
            ylim = bb[2, ],
            expand = FALSE) +
  labs(caption = "Eugene, OR")
```

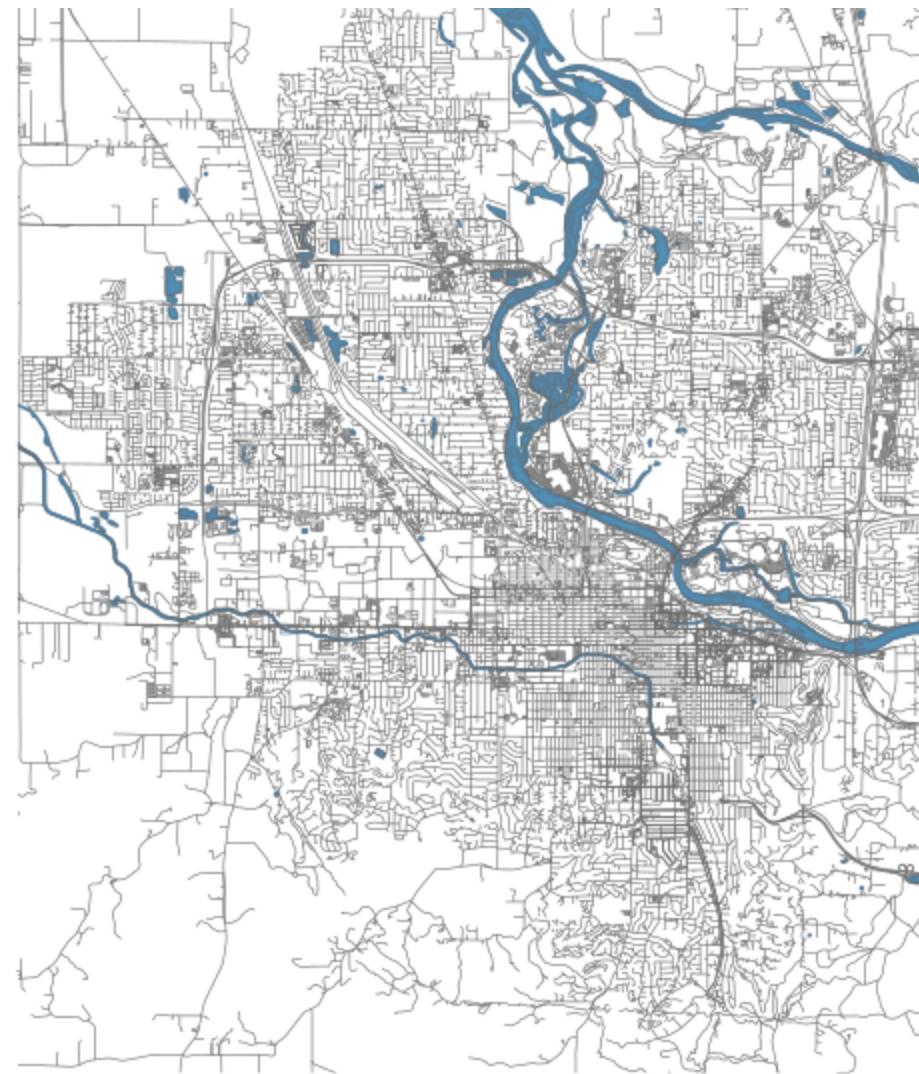

Eugene, OR

# Let's get some census data

---

## Note

To do this, you need to first register an API key with the US Census, which you can do [here](#). Then use `census_api_key("YOUR API KEY")`.

Alternatively, you can specify `CENSUS_API_KEY = "YOUR API KEY"` in **.Renviron**. You can do this by using `usethis::edit_r_environ()`

# Getting the data

---

```
library(tidycensus)
# Find variable code
# v <- load_variables(2019, "acs5")
# View(v)

census_vals <- get_acs(
  geography = "tract",
  state = "OR",
  variables = c(med_income = "B06011_001",
                ed_attain = "B15003_001"),
  year = 2019,
  geometry = TRUE
)
```



# Look at the data

---

census\_vals

```
## Simple feature collection with 1668 features and 5 fields (with 12 geometries empty)
## Geometry type: MULTIPOLYGON
## Dimension: XY
## Bounding box: xmin: -124.5662 ymin: 41.99179 xmax: -116.4635 ymax: 46.29204
## Geodetic CRS: NAD83
## First 10 features:
##           GEOID                         NAME      variable
## 1  41031960302 Census Tract 9603.02, Jefferson County, Oregon med_income
## 2  41031960302 Census Tract 9603.02, Jefferson County, Oregon ed_attain
## 3  41057960100          Census Tract 9601, Tillamook County, Oregon med_income
## 4  41057960100          Census Tract 9601, Tillamook County, Oregon ed_attain
## 5  41015950100          Census Tract 9501, Curry County, Oregon med_income
## 6  41015950100          Census Tract 9501, Curry County, Oregon ed_attain
## 7  41039001902          Census Tract 19.02, Lane County, Oregon med_income
## 8  41039001902          Census Tract 19.02, Lane County, Oregon ed_attain
## 9  41029000300          Census Tract 3, Jackson County, Oregon med_income
## 10 41029000300          Census Tract 3, Jackson County, Oregon ed_attain
##           estimate    moe      geometry
## 1      30061 2953 MULTIPOLYGON (((-121.8495 4...
## 2      3011  228 MULTIPOLYGON (((-121.8495 4...
## 3      30243 3888 MULTIPOLYGON (((-123.983 45...
## 4      2707  245 MULTIPOLYGON (((-123.983 45...
## 5      18989 3531 MULTIPOLYGON (((-124.5646 4...
## 6      2337  295 MULTIPOLYGON (((-124.5646 4...
## 7      24874 2893 MULTIPOLYGON (((-122.9855 4...
## 8      4003  368 MULTIPOLYGON (((-122.9855 4...
## 9      25000 3432 MULTIPOLYGON (((-122.9079 4...
## 10     4331  366 MULTIPOLYGON (((-122.9079 4...
```

# Remove missing geometry rows

---

- Tidycensus is (currently) bringing in some rows with missing geometries
- This is not a big deal for ggplot, but is for other plotting systems
- Let's remove those rows

```
census_vals <- census_vals[!st_is_empty(census_vals$geometry), , drop = FALSE]
```


# Plot it

---

```
library(colorspace)
ggplot(census_vals) +
  geom_sf(aes(fill = estimate, color = estimate)) +
  facet_wrap(~variable) +
  guides(color = "none") +
  scale_fill_continuous_diverging("Blue-Red 3", rev = TRUE) +
  scale_color_continuous_diverging("Blue-Red 3", rev = TRUE)
```

hmm...

---

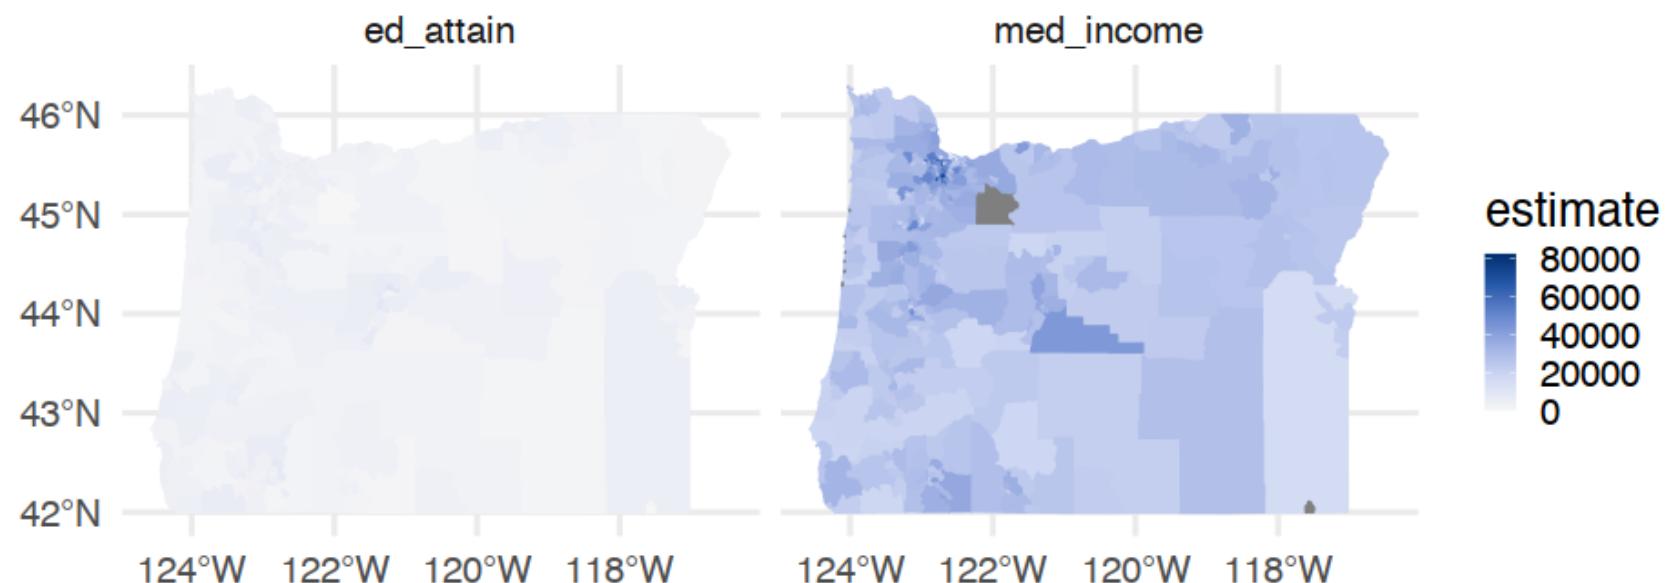


# Try again

---

```
library(colorspace)
income <- filter(census_vals, variable == "med_income")

income_plot <- ggplot(income) +
  geom_sf(aes(fill = estimate, color = estimate)) +
  facet_wrap(~variable) +
  guides(color = "none") +
  scale_fill_continuous_diverging(
    "Blue-Red 3",
    rev = TRUE,
    mid = mean(income$estimate, na.rm = TRUE))
  ) +
  scale_color_continuous_diverging(
    "Blue-Red 3",
    rev = TRUE,
    mid = mean(income$estimate, na.rm = TRUE))
  ) +
  theme(legend.position = "bottom",
        legend.key.width = unit(2, "cm"))
```

income\_plot

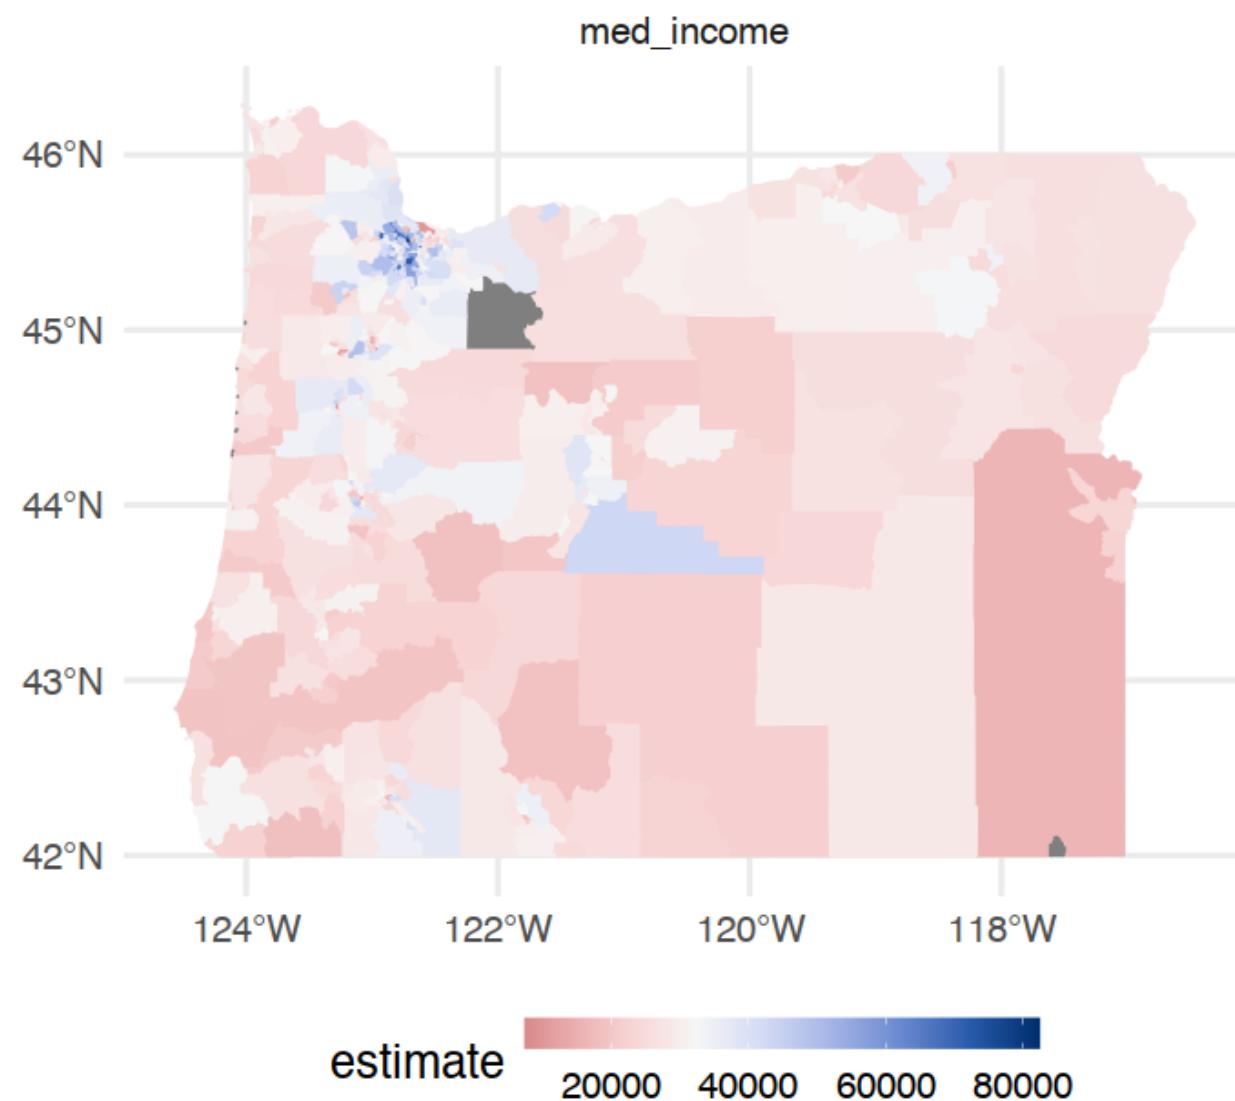


# Same thing for education

---

```
ed <- filter(census_vals, variable == "ed_attain")


ed_plot <- ggplot(ed) +
  geom_sf(aes(fill = estimate, color = estimate)) +
  facet_wrap(~variable) +
  guides(color = "none") +
  scale_fill_continuous_diverging(
    "Blue-Red 3",
    rev = TRUE,
    mid = mean(ed$estimate, na.rm = TRUE)
  ) +
  scale_color_continuous_diverging(
    "Blue-Red 3",
    rev = TRUE,
    mid = mean(ed$estimate, na.rm = TRUE)
  ) +
  theme(legend.position = "bottom",
        legend.key.width = unit(2, "cm"))
```

ed\_plot

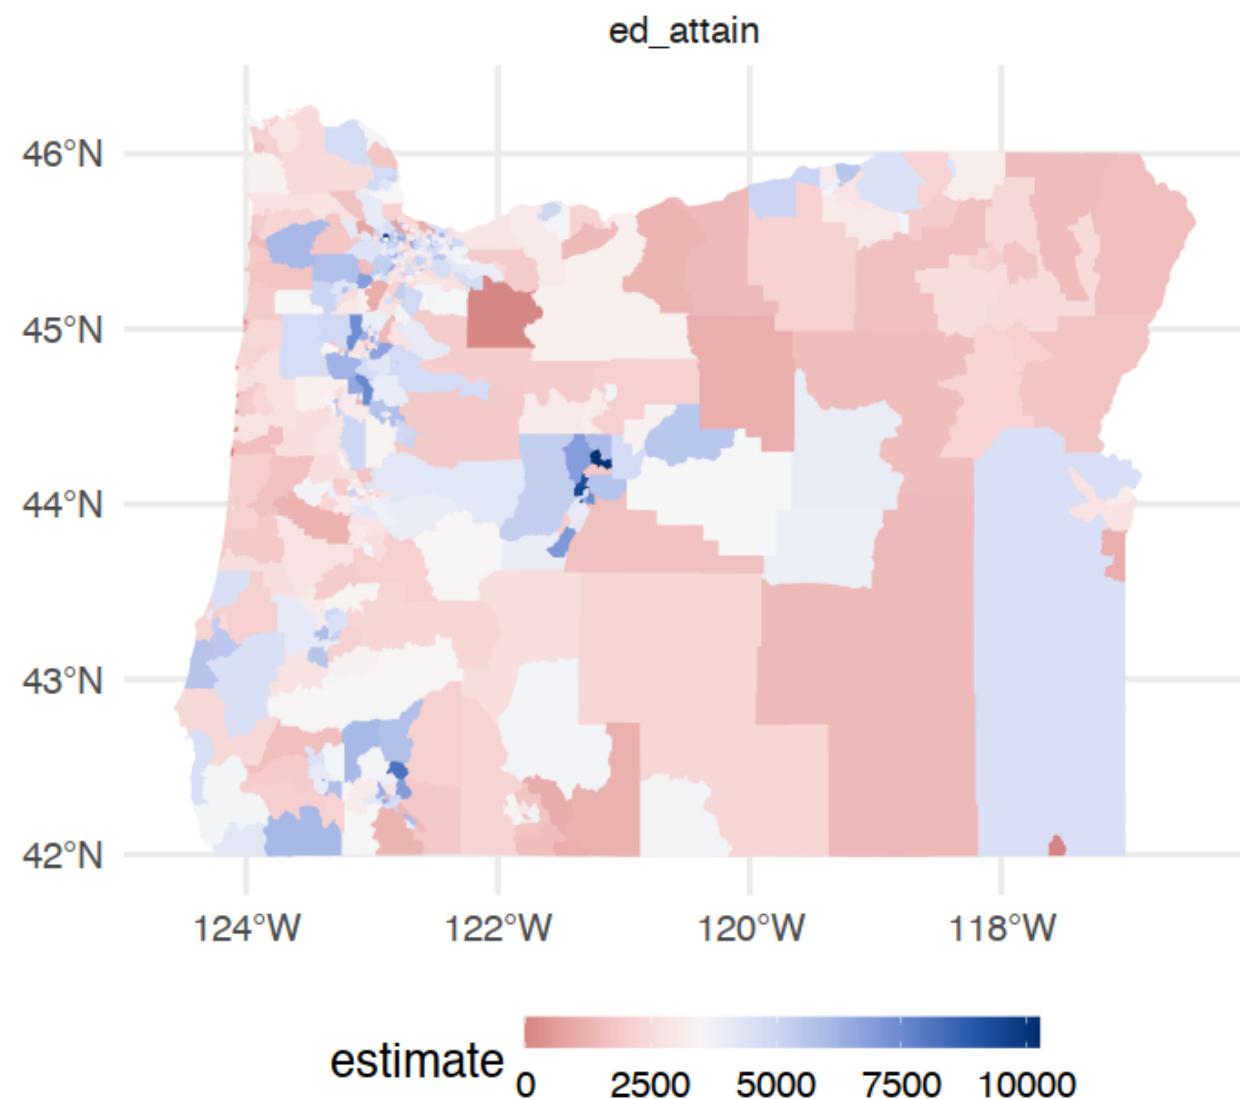

# Put them together

```
gridExtra::grid.arrange(income_plot, ed_plot, ncol = 2)
```

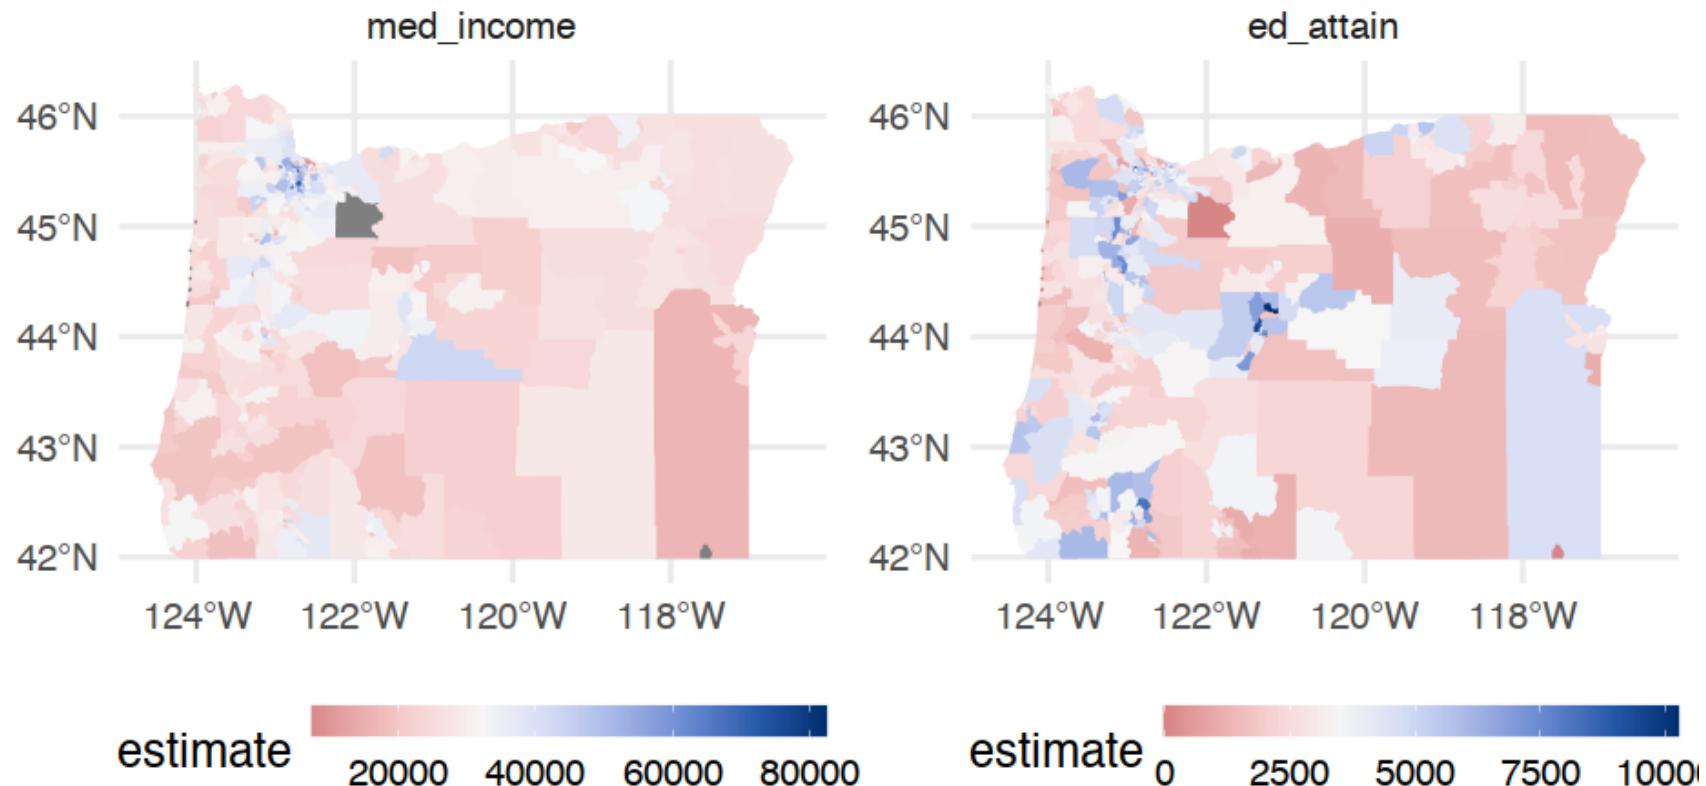


# Bivariate color scales

---

# Switzerland's regional income (in-)equality

Average yearly income and income (in-)equality in Swiss municipalities, 2015

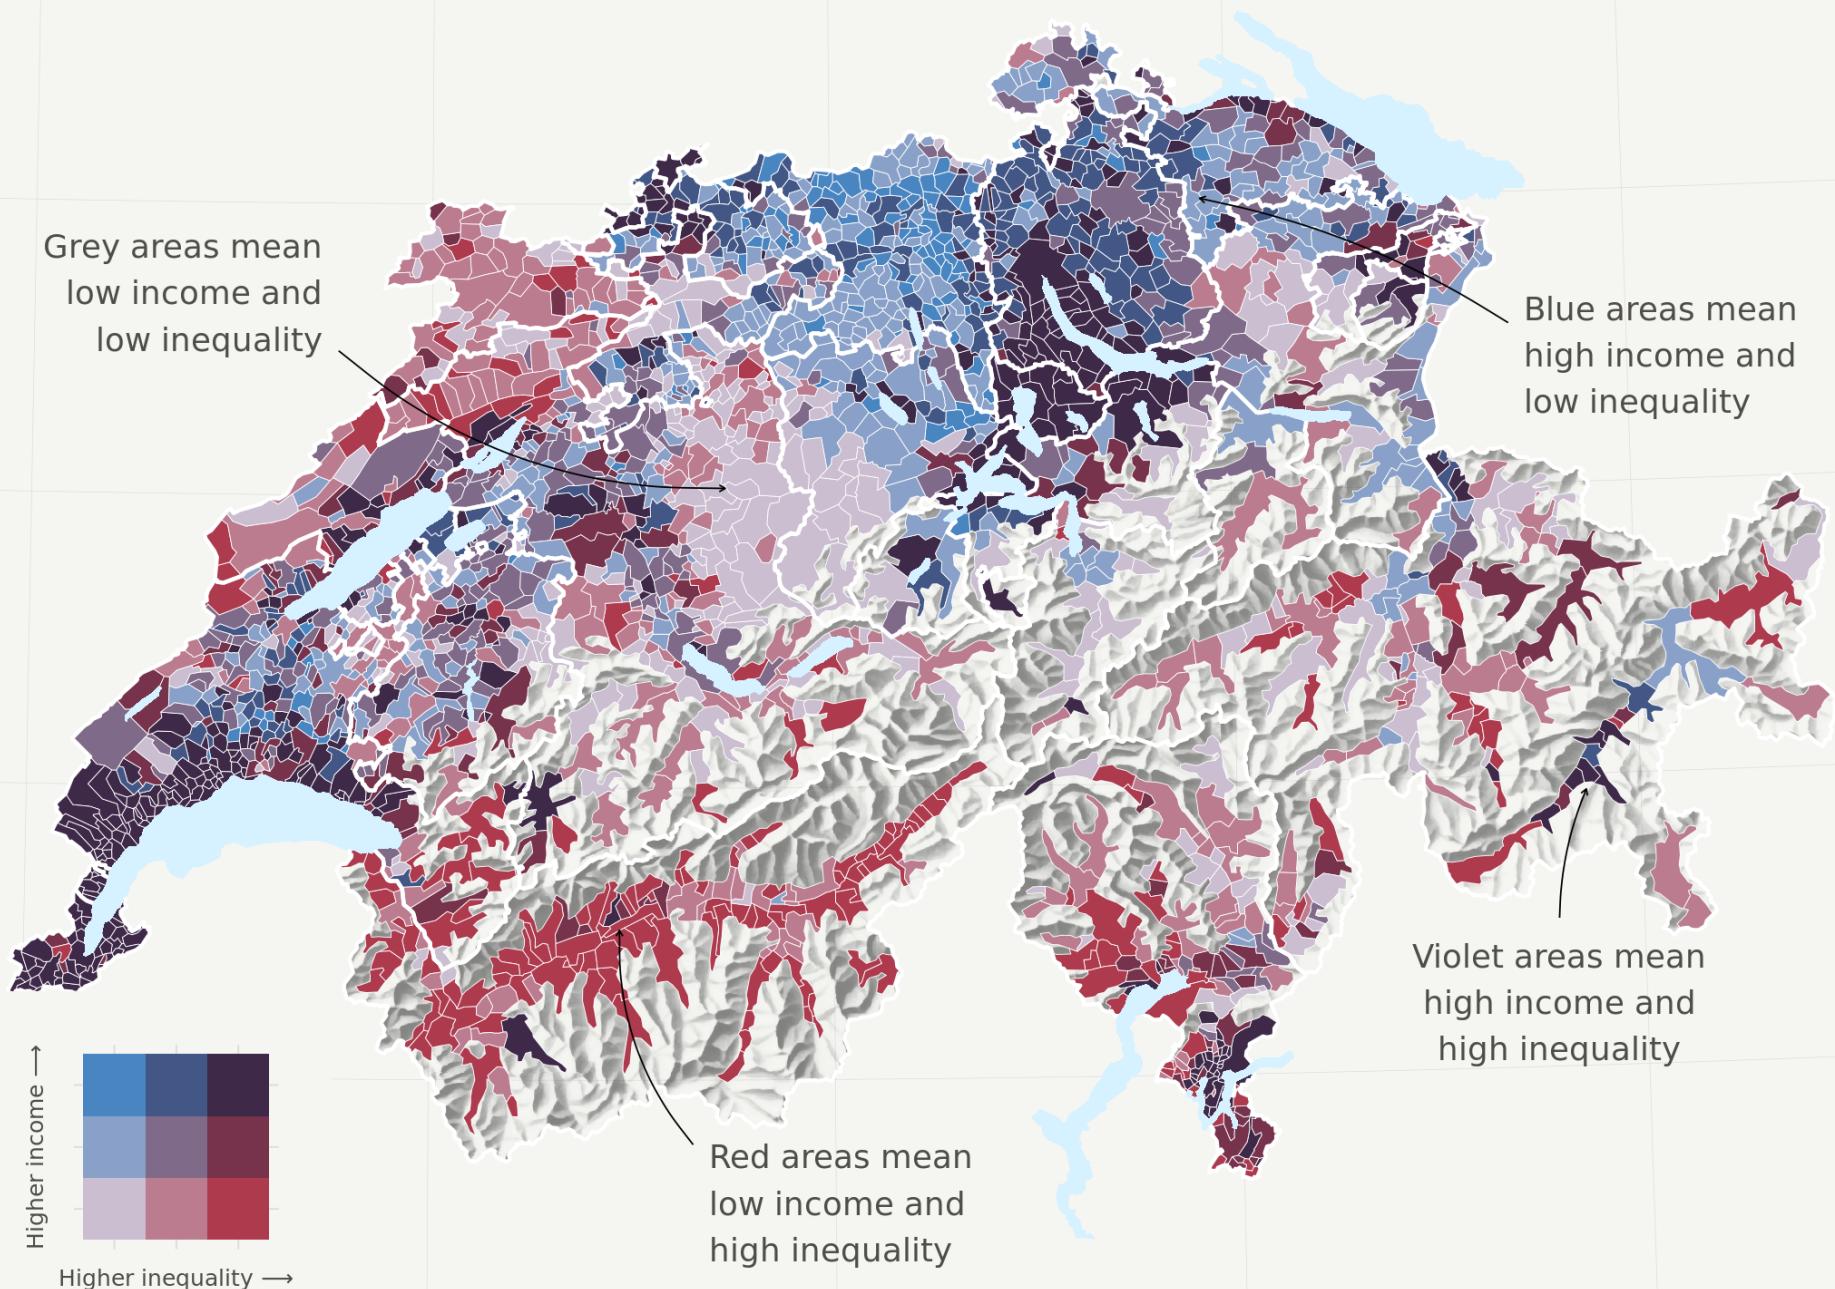


Map CC-BY-SA; Code: [github.com/grssnbchr/bivariate-maps-ggplot2-sf](https://github.com/grssnbchr/bivariate-maps-ggplot2-sf)  
Authors: Timo Grossenbacher (@grssnbchr), Angelo Zehr (@angelozehr)  
Geometries: ThemaKart BFS and swissstopo; Data: ESTV, 2015

# How?

---

There are a few different ways. Here's one:

- Break continuous variable into categorical values
- Assign each combination of values between categorical vars a color
- Make sure the combinations of the colors make sense

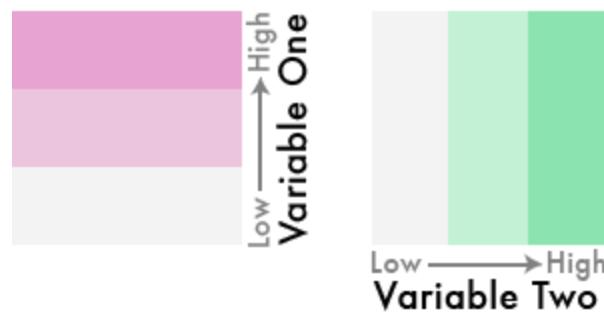

# Do it

---

Note – this will be fairly quick. I'm not expecting you to know how to do this, but I want to show you the idea and give you the breadcrumbs for the code you may need.

First – move it to wider

```
wider <- get_acs(  
  geography = "tract",  
  state = "OR",  
  variables = c(med_income = "B06011_001",  
               ed_attain = "B15003_001"),  
  year = 2019,  
  geometry = TRUE,  
  output = "wide")  
  
# remove missing geometry rows  
wider <- wider[!st_is_empty(wider$geometry), , drop = FALSE]
```

# Find the quartiles

---

```
ed_quartiles <- quantile(  
  wider$ed_attainE,  
  probs = seq(0, 1, length.out = 4),  
  na.rm = TRUE  
)  
  
inc_quartiles <- quantile(  
  wider$med_incomeE,  
  probs = seq(0, 1, length.out = 4),  
  na.rm = TRUE  
)  
  
ed_quartiles
```

```
##      0% 33.333333% 66.666667%      100%  
##    0.000  2715.000  3949.333 10245.000
```

```
inc_quartiles
```

```
##      0% 33.333333% 66.666667%      100%  
##   7449.00  26718.33  34375.00  82375.00
```

# Create the cut variable

---

```
wider <- wider %>%
  mutate(cat_ed = cut(ed_attainE, ed_quartiles),
        cat_inc = cut(med_incomeE, inc_quartiles))
wider %>%
  select(starts_with("cat"))

## Simple feature collection with 828 features and 2 fields
## Geometry type: MULTIPOLYGON
## Dimension: XY
## Bounding box: xmin: -124.5662 ymin: 41.99179 xmax: -116.4635 ymax: 46.29204
## Geodetic CRS: NAD83
## First 10 features:
##           cat_ed      cat_inc          geometry
## 1 (2.71e+03,3.95e+03] (2.67e+04,3.44e+04] MULTIPOLYGON (((-121.8495 4...
## 2 (0,2.71e+03] (2.67e+04,3.44e+04] MULTIPOLYGON (((-123.983 45...
## 3 (0,2.71e+03] (7.45e+03,2.67e+04] MULTIPOLYGON (((-124.5646 4...
## 4 (3.95e+03,1.02e+04] (7.45e+03,2.67e+04] MULTIPOLYGON (((-122.9855 4...
## 5 (3.95e+03,1.02e+04] (7.45e+03,2.67e+04] MULTIPOLYGON (((-122.9079 4...
## 6 (2.71e+03,3.95e+03] (3.44e+04,8.24e+04] MULTIPOLYGON (((-123.5016 4...
## 7 (0,2.71e+03] (7.45e+03,2.67e+04] MULTIPOLYGON (((-123.0927 4...
## 8 (2.71e+03,3.95e+03] (7.45e+03,2.67e+04] MULTIPOLYGON (((-120.8811 4...
## 9 (2.71e+03,3.95e+03] (7.45e+03,2.67e+04] MULTIPOLYGON (((-123.5093 4...
## 10 (2.71e+03,3.95e+03] (7.45e+03,2.67e+04] MULTIPOLYGON (((-123.8179 4...
```

# Set palette

---


```
# First drop geo column
pal <- st_drop_geometry(wider) %>%
  count(cat_ed, cat_inc) %>%
  arrange(cat_ed, cat_inc) %>%
  drop_na(cat_ed, cat_inc) %>%
  mutate(pal = c("#F3F3F3", "#C3F1D5", "#8BE3AF",
                "#EBC5DD", "#C3C5D5", "#8BC5AF",
                "#E7A3D1", "#C3A3D1", "#8BA3AE"))
pal
```

```
##          cat_ed            cat_inc   n      pal
## 1 (0,2.71e+03] (7.45e+03,2.67e+04] 116 #F3F3F3
## 2 (0,2.71e+03] (2.67e+04,3.44e+04]  85 #C3F1D5
## 3 (0,2.71e+03] (3.44e+04,8.24e+04]  70 #8BE3AF
## 4 (2.71e+03,3.95e+03] (7.45e+03,2.67e+04] 87 #EBC5DD
## 5 (2.71e+03,3.95e+03] (2.67e+04,3.44e+04] 97 #C3C5D5
## 6 (2.71e+03,3.95e+03] (3.44e+04,8.24e+04] 92 #8BC5AF
## 7 (3.95e+03,1.02e+04] (7.45e+03,2.67e+04] 71 #E7A3D1
## 8 (3.95e+03,1.02e+04] (2.67e+04,3.44e+04] 92 #C3A3D1
## 9 (3.95e+03,1.02e+04] (3.44e+04,8.24e+04] 113 #8BA3AE
```

# Join & plot

---

```
bivar_map <- left_join(wider, pal) %>%  
  ggplot() +  
  geom_sf(aes(fill = pal, color = pal)) +  
  guides(fill = "none", color = "none") +  
  scale_fill_identity() +  
  scale_color_identity()
```

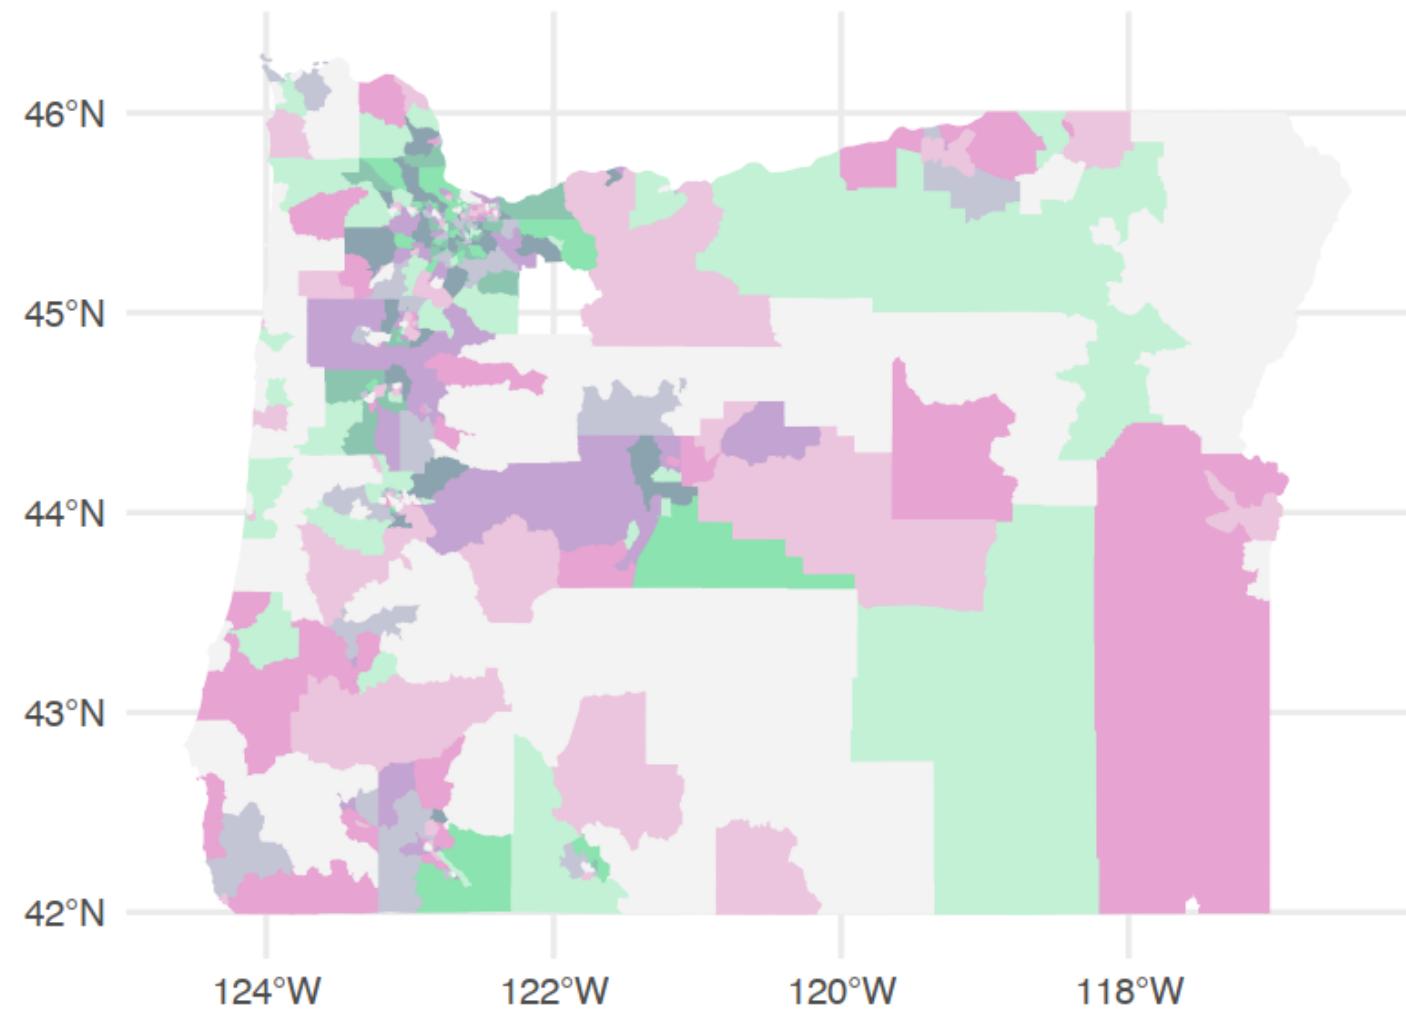


# Add in legend

---

First create it

```
leg <- ggplot(pal, aes(cat_ed, cat_inc)) +  
  geom_tile(aes(fill = pal)) +  
  scale_fill_identity() +  
  coord_fixed() +  
  labs(x = expression("Higher education" %->% ""),  
       y = expression("Higher income" %->% "")) +  
  theme(axis.text = element_blank(),  
        axis.title = element_text(size = 12))  
leg
```

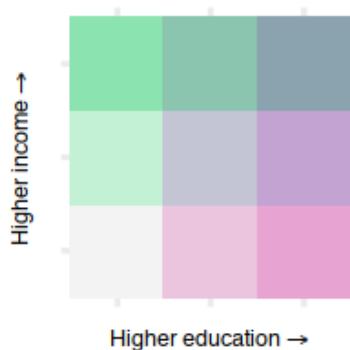


# Put together

---

```
library(cowplot)
ggdraw() +
  draw_plot(bivar_map + theme_void(), 0.1, 0.1, 1, 1) +
  draw_plot(leg, -0.05, 0, 0.3, 0.3)
```

Coordinates are mostly guess/check depending on aspect ratio

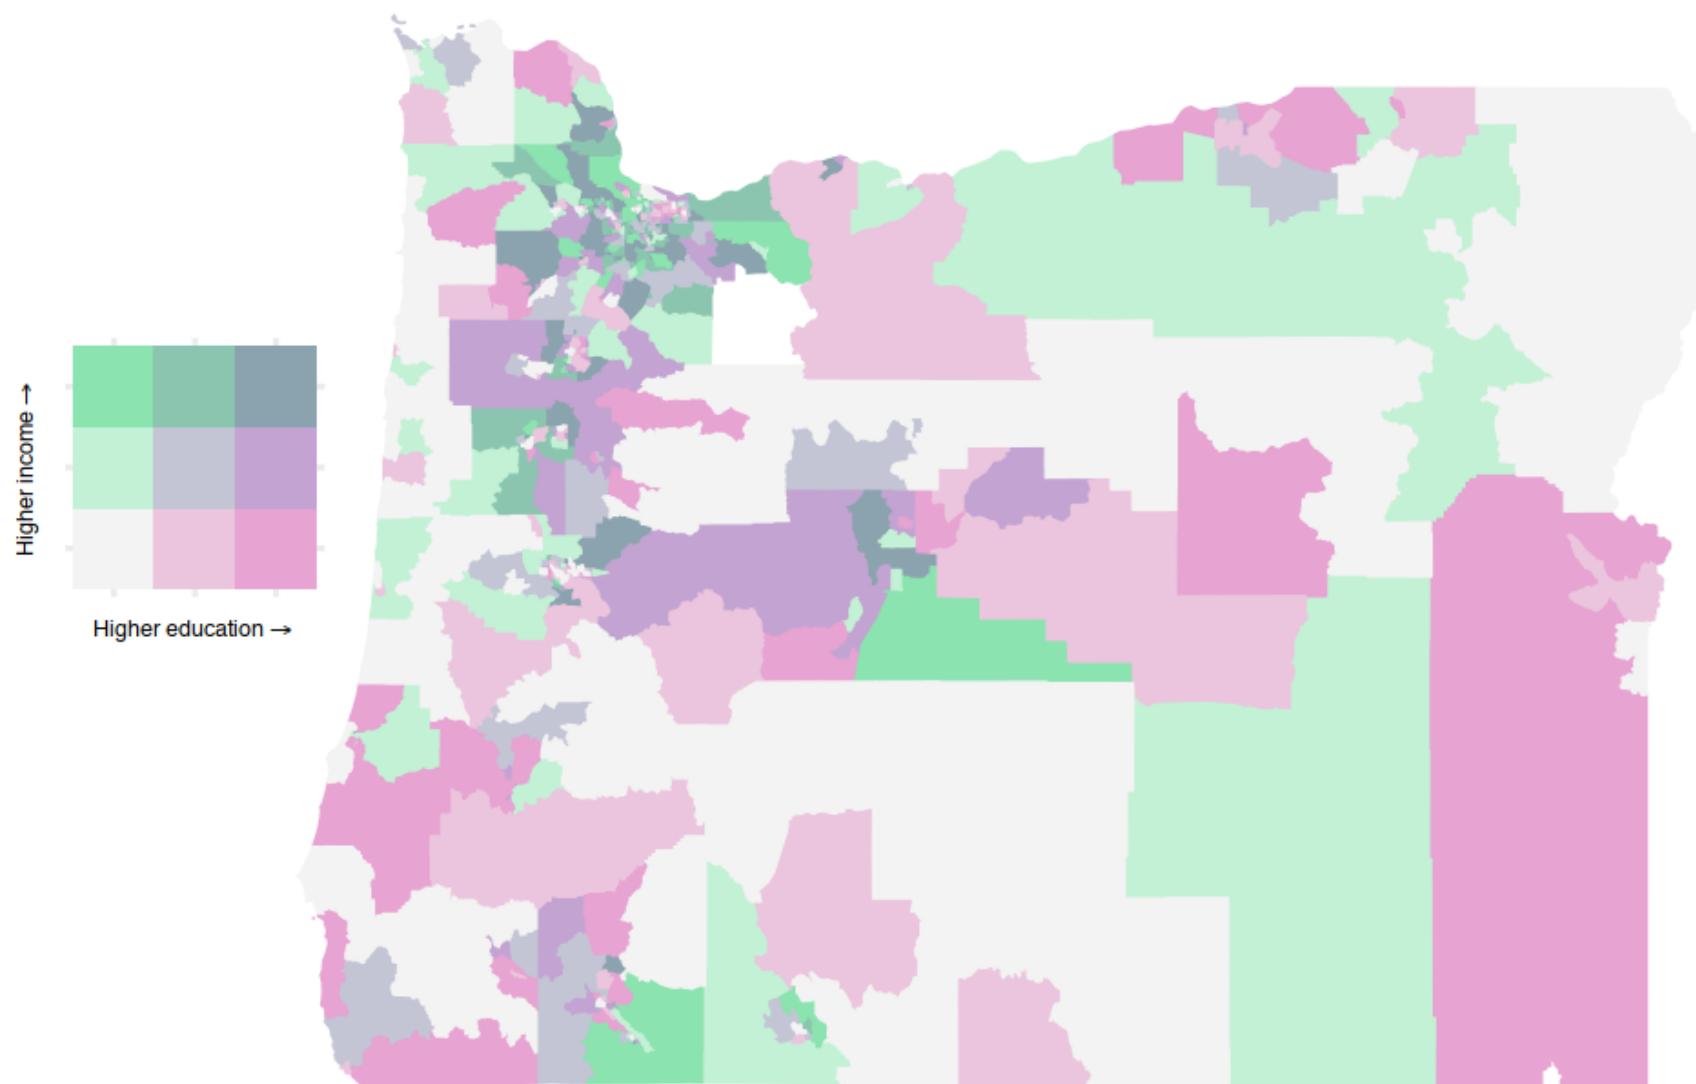

# {tmap}


---

Back to just one variable

I mostly use `ggplot()`, but the `{tmap}` package is really powerful and the syntax is pretty straightforward, so let's have a quick overview.

# Education map with {tmap}.


```
library(tmap)
tm_shape(wider) +
  tm_polygons("ed_attainE") +
  tm_layout(legend.outside = TRUE)
```

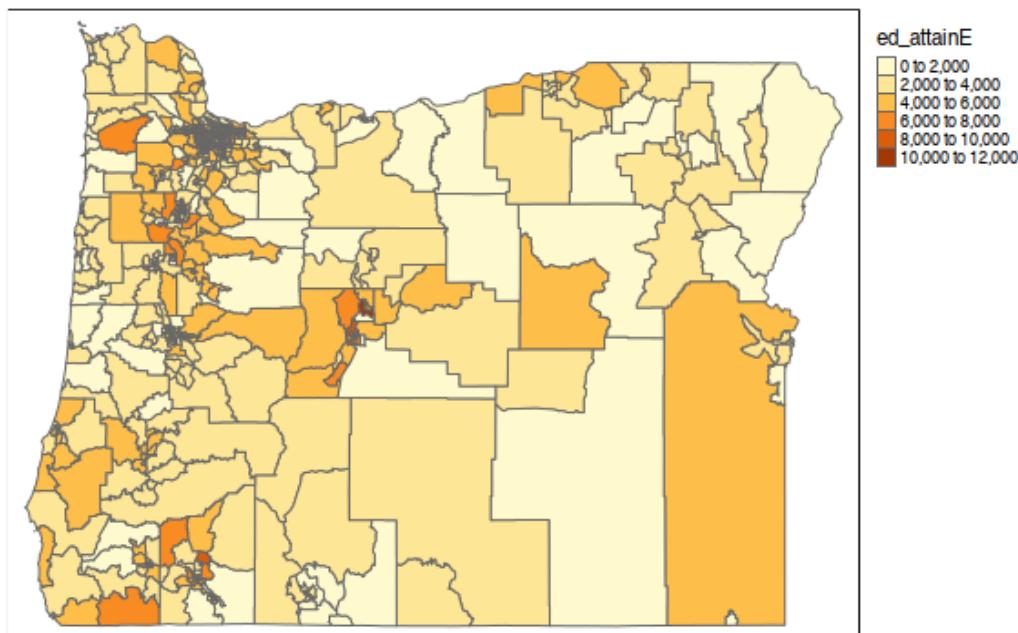

# Facet

---


```
tm_shape(census_vals) +  
  tm_polygons("estimate") +  
  tm_facets("variable") +  
  tm_layout(legend.outside = TRUE)
```

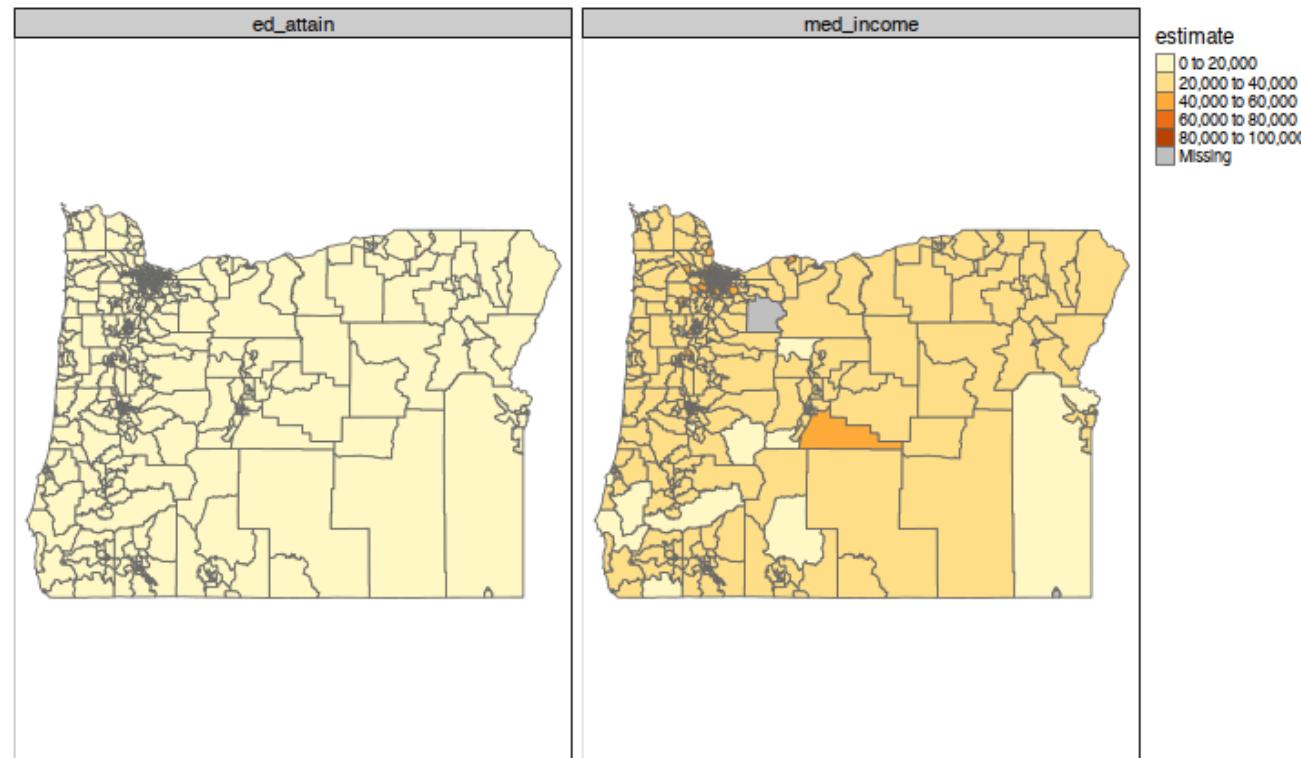

# Change colors

---


```
tm_shape(wider) +  
  tm_polygons("ed_attainE",  
    palette = "magma",  
    border.col = "gray90",  
    lwd = 0.1) +  
  tm_layout(legend.outside = TRUE)
```

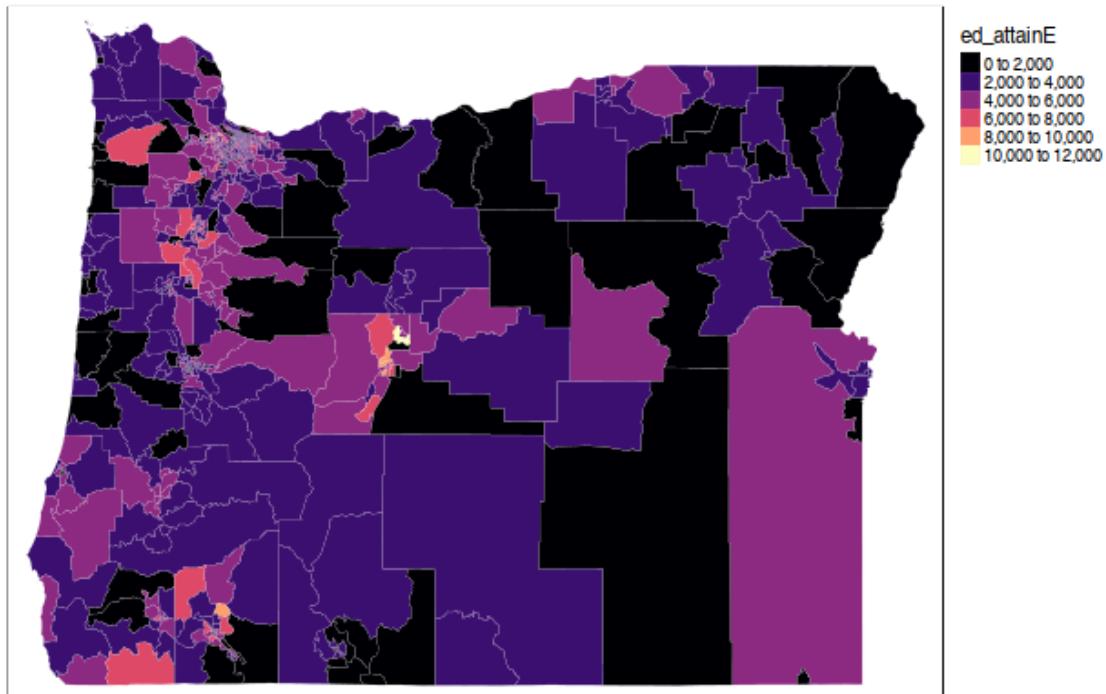

# Continuous legend

---

```
tm_shape(wider) +  
  tm_polygons("ed_attainE",  
              style = "cont") +  
  tm_layout(legend.outside = TRUE)
```

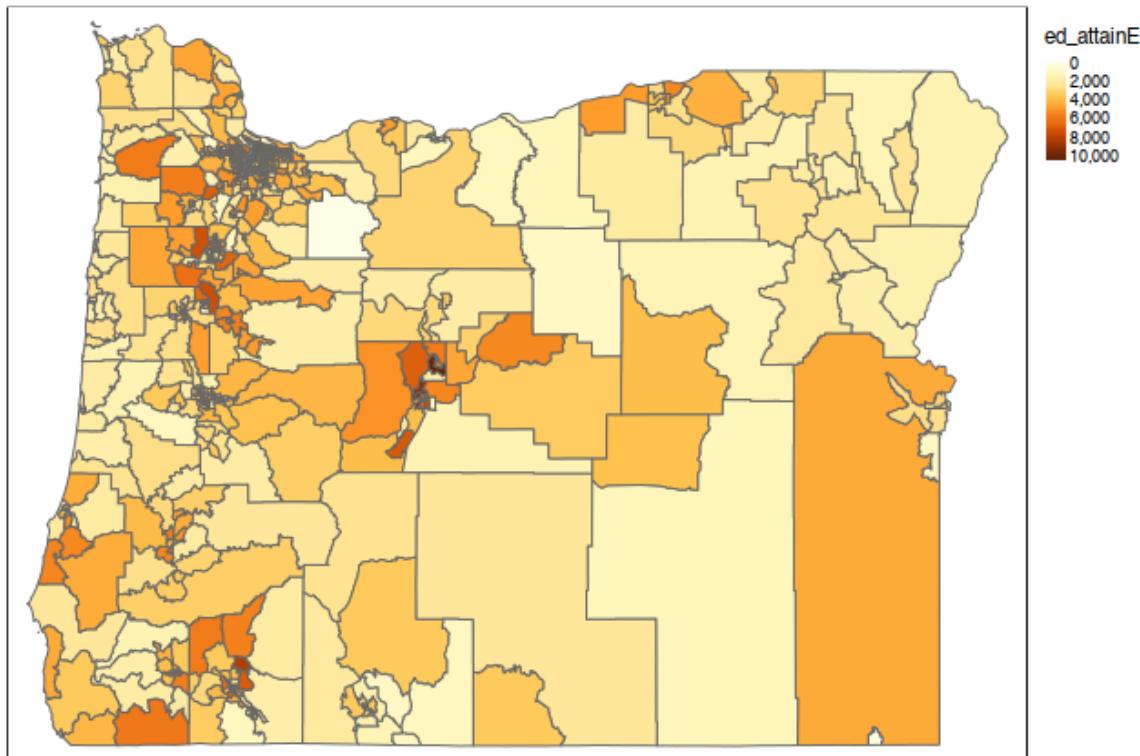

# Add text

---

- First, let's get data at the county level, instead of census tract level

```
cnty <- get_acs(  
  geography = "county",  
  state = "OR",  
  variables = c(ed_attain = "B15003_001"),  
  year = 2019,  
  geometry = TRUE  
)
```

```
##  
| 0 %  
| 1 %  
|= 1 %  
|= 2 %  
== 2 %  
==== 4 %  
==== 5 %  
===== 6 %  
===== 7 %
```

cnty

```
## Simple feature collection with 36 features and 5 fields
## Geometry type: MULTIPOLYGON
## Dimension: XY
## Bounding box: xmin: -124.5662 ymin: 41.99179 xmax: -116.4635 ymax: 46.29204
## Geodetic CRS: NAD83
## First 10 features:
##   GEOID             NAME variable estimate moe
## 1 41017 Deschutes County, Oregon ed_attain 135615 192
## 2 41003 Benton County, Oregon ed_attain 55359 143
## 3 41015 Curry County, Oregon ed_attain 18304 139
## 4 41061 Union County, Oregon ed_attain 17539 78
## 5 41055 Sherman County, Oregon ed_attain 1251 84
## 6 41051 Multnomah County, Oregon ed_attain 587290 134
## 7 41007 Clatsop County, Oregon ed_attain 28475 165
## 8 41033 Josephine County, Oregon ed_attain 63802 148
## 9 41031 Jefferson County, Oregon ed_attain 16197 24
## 10 41039 Lane County, Oregon ed_attain 256373 147
##               geometry
## 1 MULTIPOLYGON (((-122.0019 4...
## 2 MULTIPOLYGON (((-123.8167 4...
## 3 MULTIPOLYGON (((-124.3239 4...
## 4 MULTIPOLYGON (((-118.6978 4...
## 5 MULTIPOLYGON (((-121.0312 4...
## 6 MULTIPOLYGON (((-122.9292 4...
## 7 MULTIPOLYGON (((-123.5989 4...
## 8 MULTIPOLYGON (((-124.042 42...
## 9 MULTIPOLYGON (((-121.8495 4...
## 10 MULTIPOLYGON (((-124.1503 4...
```

# Estimate polygon centroid

---

```
centroids <- st_centroid(cnty)
```


Extract just county name

```
centroids <- centroids %>%
  mutate(county = str_replace_all(NAME, " County, Oregon", ""))
```

# Plot

---

```
tm_shape(ctny) +  
  tm_polygons("estimate",  
              style = "cont") +  
  tm_shape(centroids) +  
  tm_text("county", size = 0.5) +  
  tm_layout(legend.outside = TRUE)
```

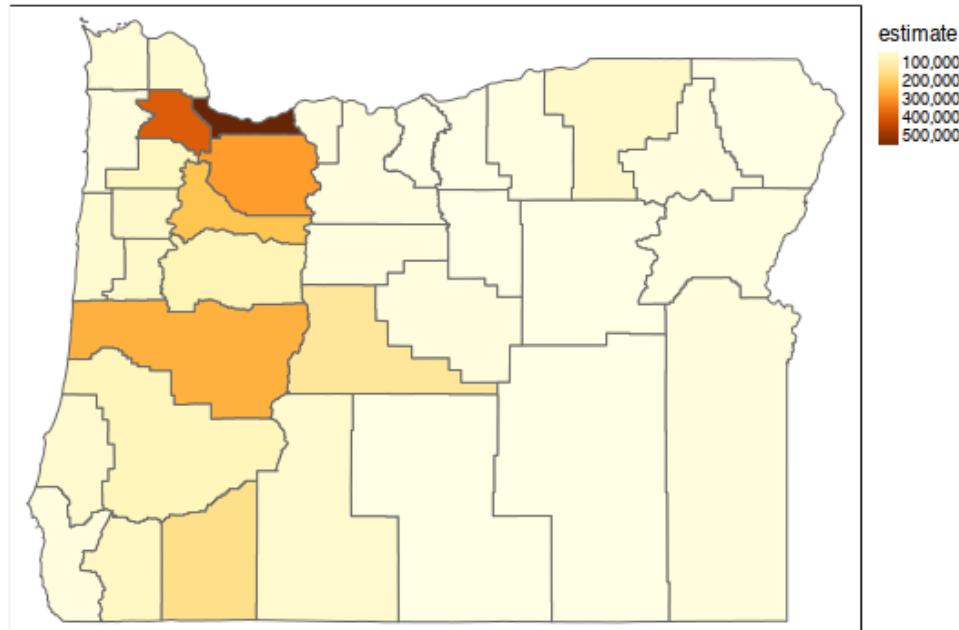

Doesn't work for me on the slides. Not sure why, but should work for you locally.

# Add raster elevation data


---

```
states <- get_acs(  
  "state",  
  variables = c(ed_attain = "B15003_001"),  
  year = 2019,  
  geometry = TRUE  
)  
  
or <- filter(states, NAME == "Oregon")  
  
# convert to spatial data frame  
sp <- as(or, "Spatial")  
  
# use elevatr library to pull data  
library(elevatr)  
or_elev <- get_elev_raster(sp, z = 9)  
lane_elev <- get_elev_raster(sp, z = 9)
```

# Plot

---


```
tm_shape(or_elev) +  
  tm_raster(midpoint = NA,  
             style = "cont") +  
  tm_layout(legend.outside = TRUE) +  
  tm_shape(cnty) +  
  tm_borders(col = "gray60")
```

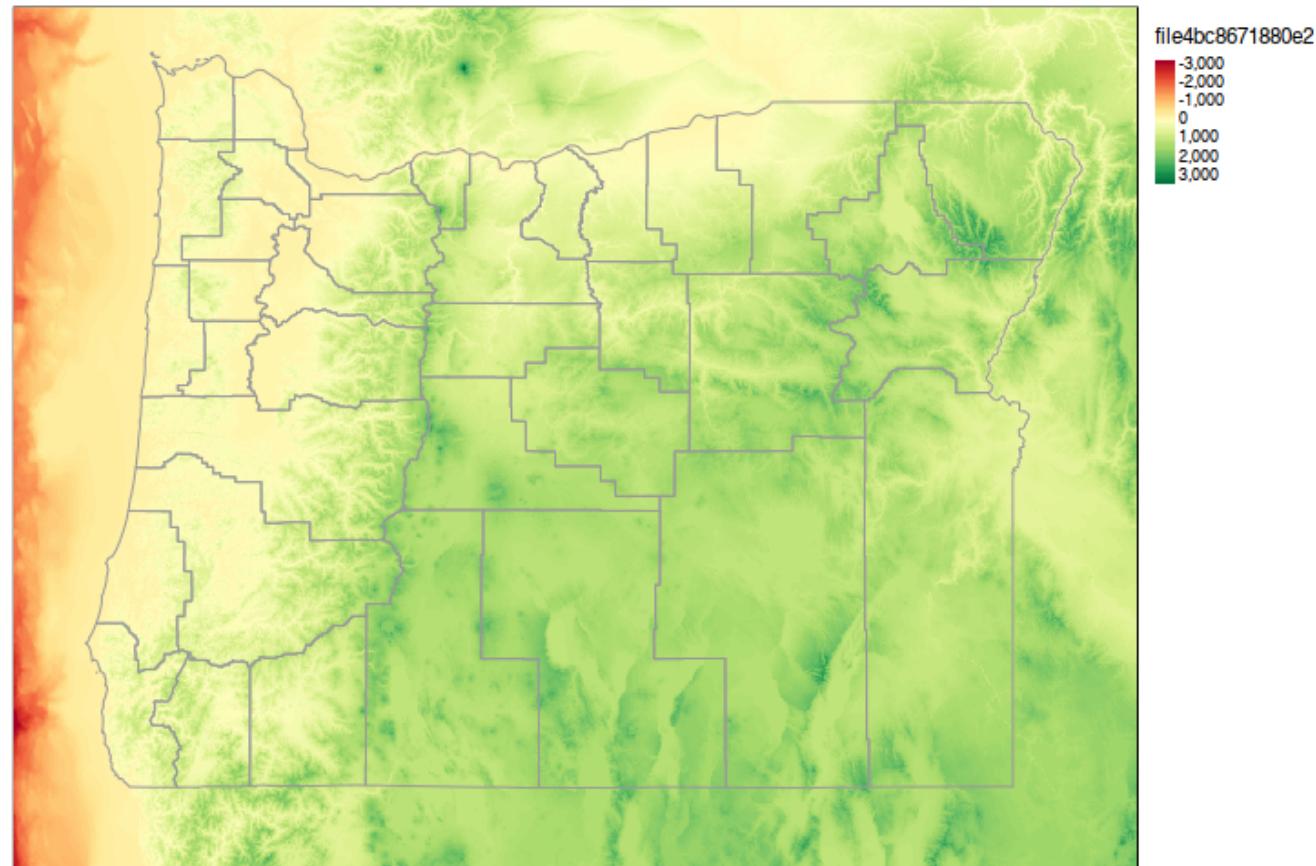

# Add custom palette


---

```
tm_shape(or_elev) +
  tm_raster(midpoint = NA,
             style = "cont",
             palette = c("#E2FCFF", "#83A9CE", "#485C6E",
                         "#181818", "#5C5B3E", "#AAA971",
                         "#FCFCD3", "#ffffff")) +
  tm_layout(legend.outside = TRUE) +
  tm_shape(cnty) +
  tm_borders(col = "gray60")
```

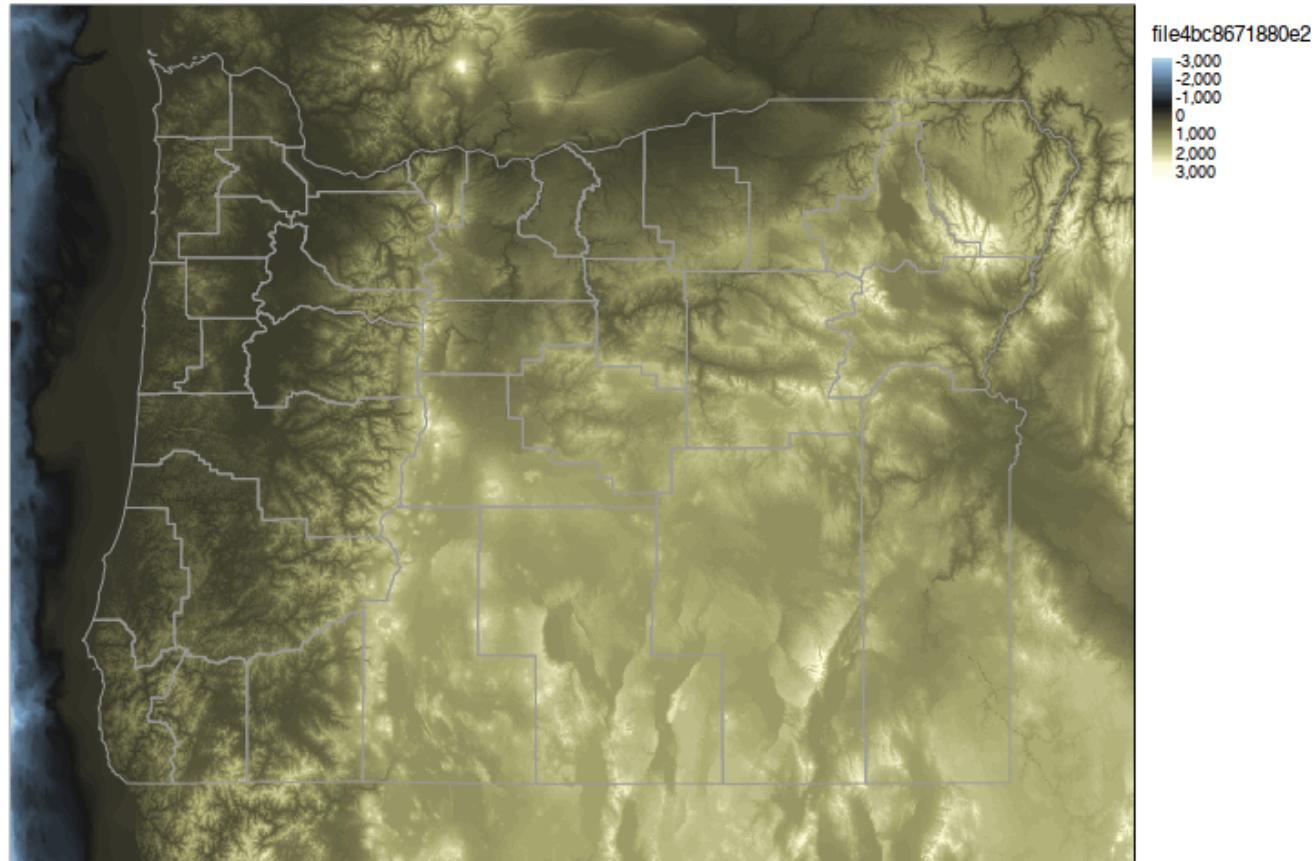

# You can do some amazing things!

---

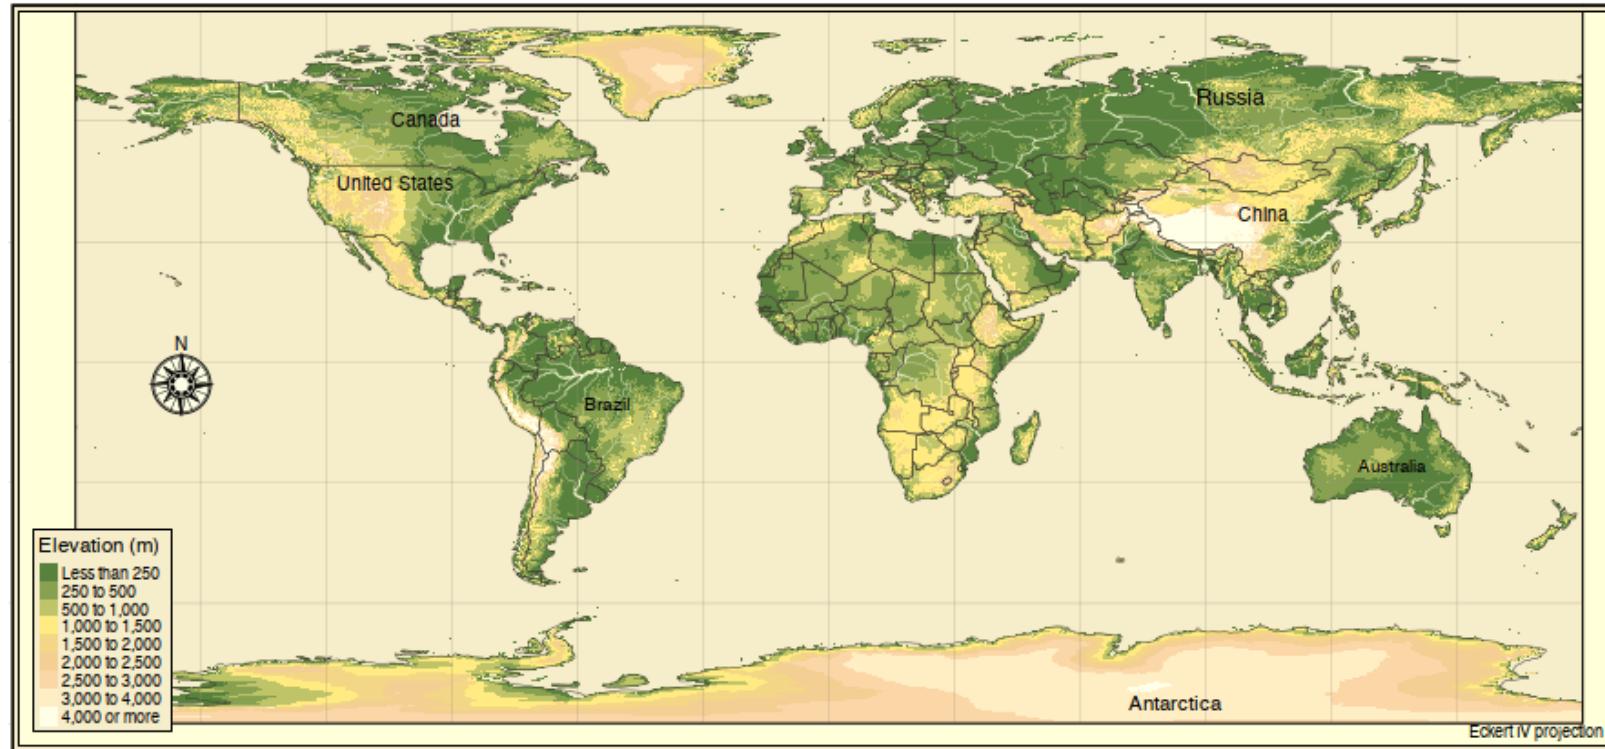

# Create interactive maps

---

Just change run `tmap_mode("view")` then run the same code as before

```
tmap_mode("view")  
  
tm_shape(cnty) +  
  tm_polygons("estimate") +  
tm_shape(centroids) +  
  tm_text("county", size = 0.5)
```

Crook




Harney

Malheur

Lake



### estimate

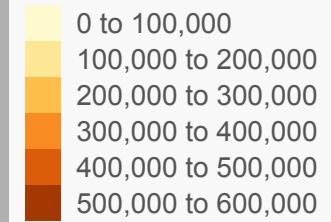


[Leaflet](#) | Tiles © Esri — Esri, DeLorme, NAVTEQ

# mapview


---

- Really quick easy interactive maps


```
library(mapview)  
mapview(cnty)
```

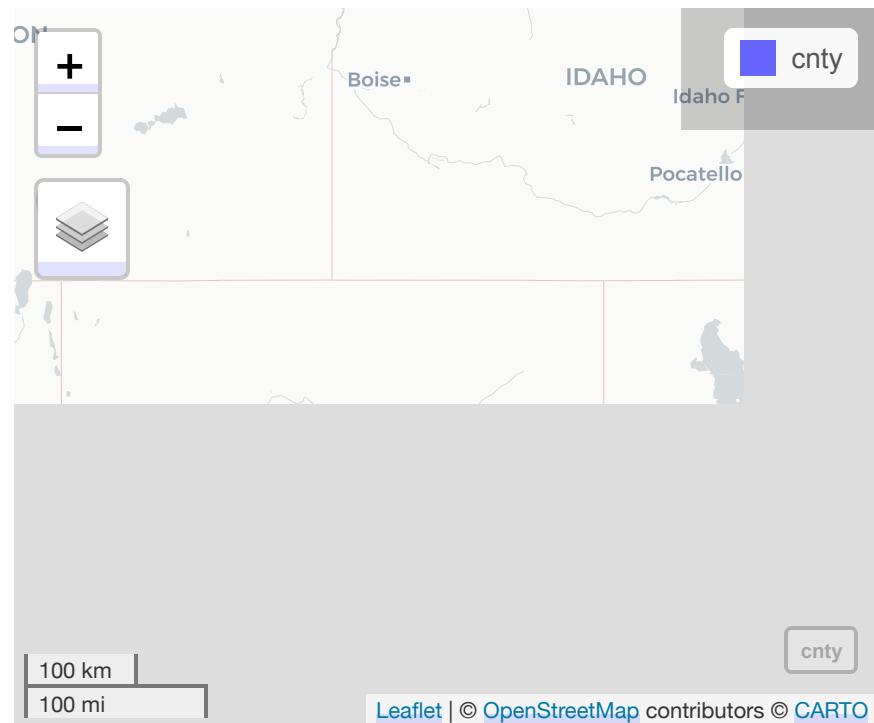

```
mapview(cnty, zcol = "estimate")
```

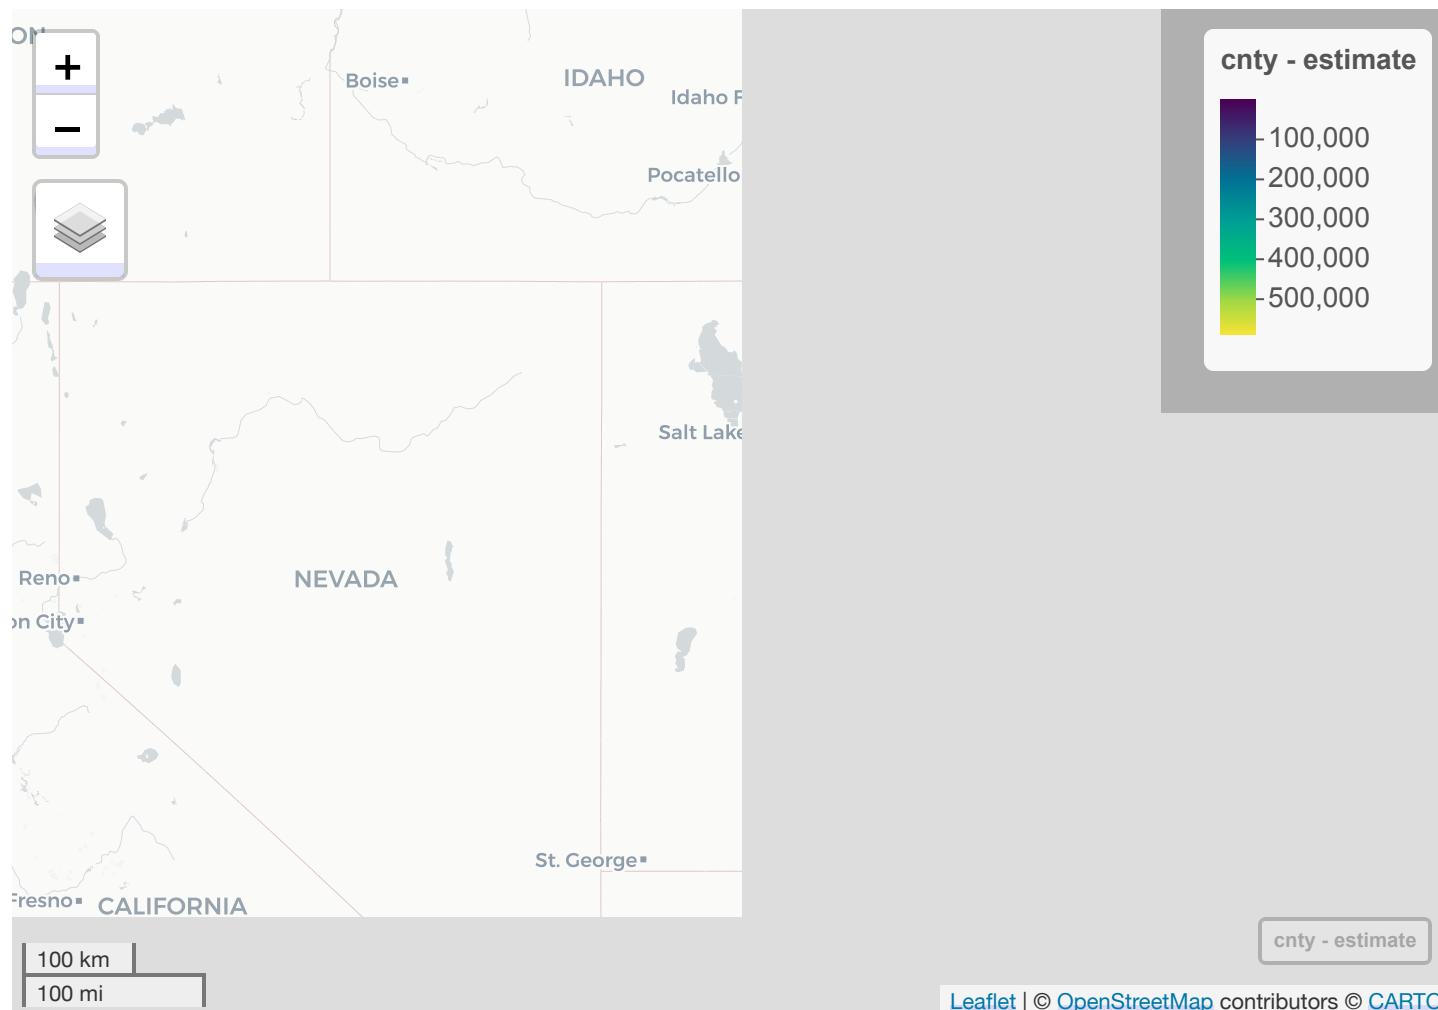

```
mapview(cnty,  
        zcol = "estimate",  
        popup = leafpop::popupTable(cnty,  
                                      zcol = c("NAME", "estimate")))
```

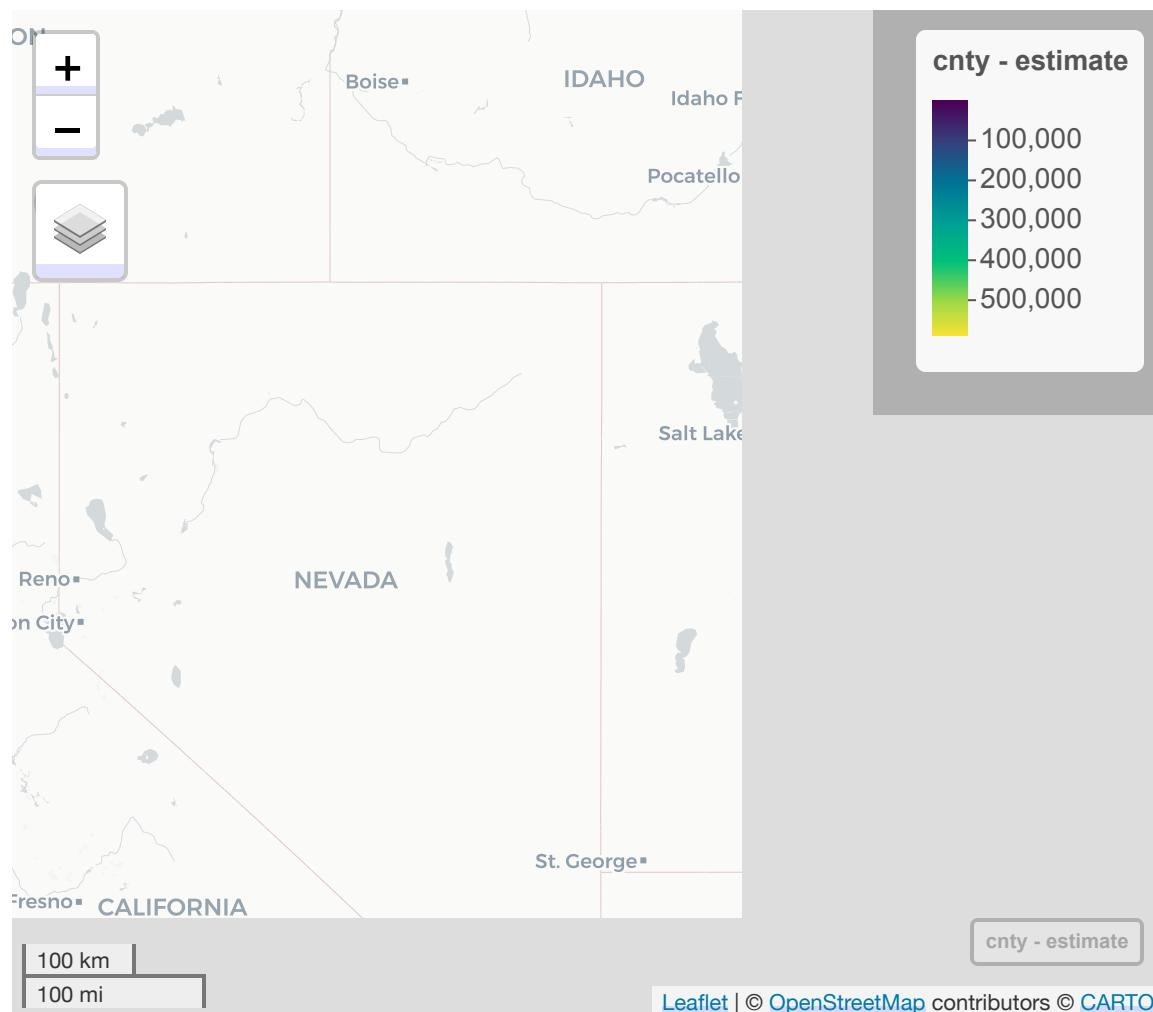

Leaflet | © OpenStreetMap contributors © CARTO


A few other  
things of note

---

# statebins

---

```
library(statebins)
statebins(states,
          state_col = "NAME",
          value_col = "estimate") +
theme_void()
```

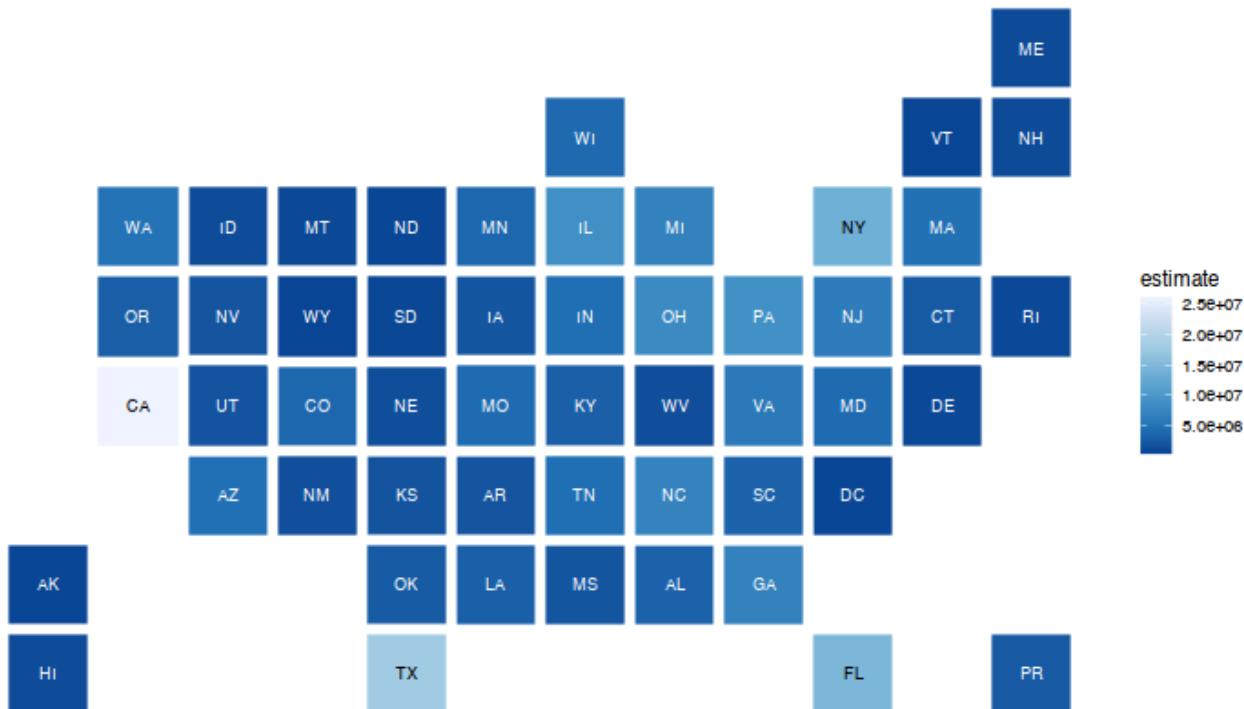

# Cartograms

---


```
library(cartogram)
or_county_pop <- get_acs(
  geography = "county",
  state = "OR",
  variables = "B01001E_001",
  year = 2018,
  geometry = TRUE
)
```




# Compare

---

```
ggplot(or_county_pop) +  
  geom_sf(fill = "#BCD8EB")
```

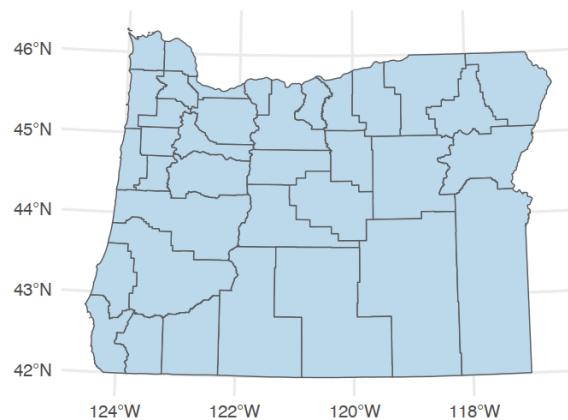

```
ggplot(carto_counties) +  
  geom_sf(fill = "#D5FFFA")
```

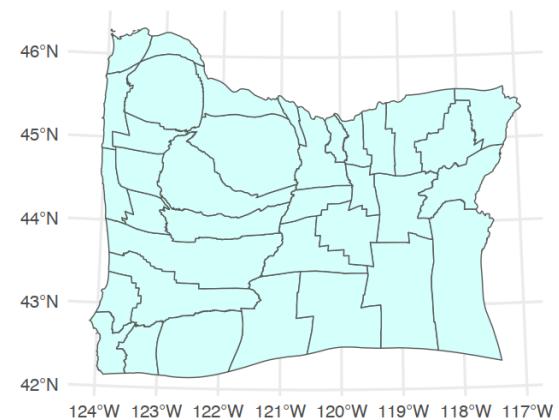


# State

---

```
state_pop <- get_acs(  
  geography = "state",  
  variables = "B00001_001",  
  year = 2018,  
  geometry = TRUE  
)  
  
# Set projection  
state_pop <- st_transform(state_pop, crs = 2163)  
  
# found the CRS here: https://epsg.io/transform#s\_srs=3969&t\_srs=4326  
carto_states <- cartogram_cont(state_pop, "estimate")
```

# Cartogram of USA by population


```
ggplot(carto_states) +  
  geom_sf()
```

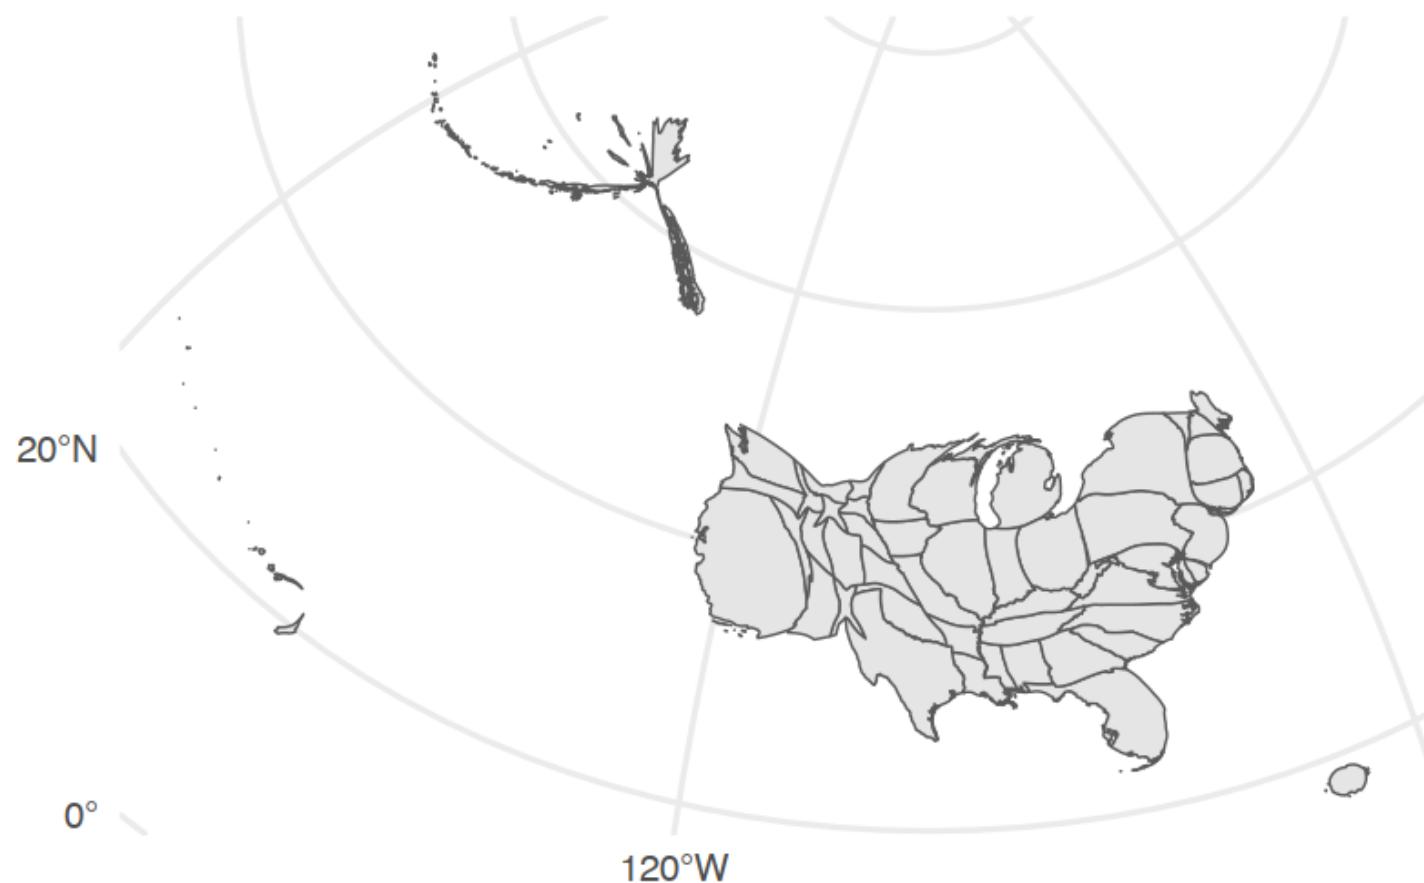

# Last note

---

You may or may not like cartograms. Just be careful not to lie with maps.

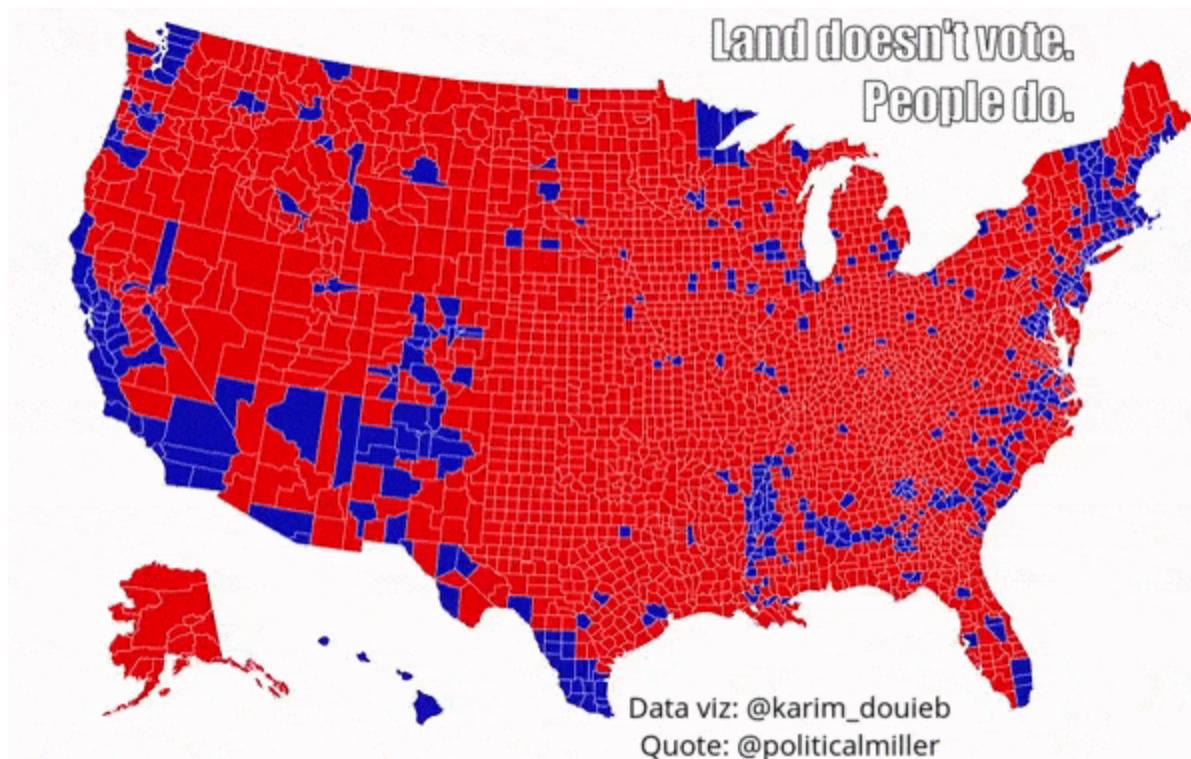

Next time:  
Presentations!

---