


Spring MVC assignment

Maithreyan K


Creating Order

<http://localhost:8080/api/order/create>(POST)

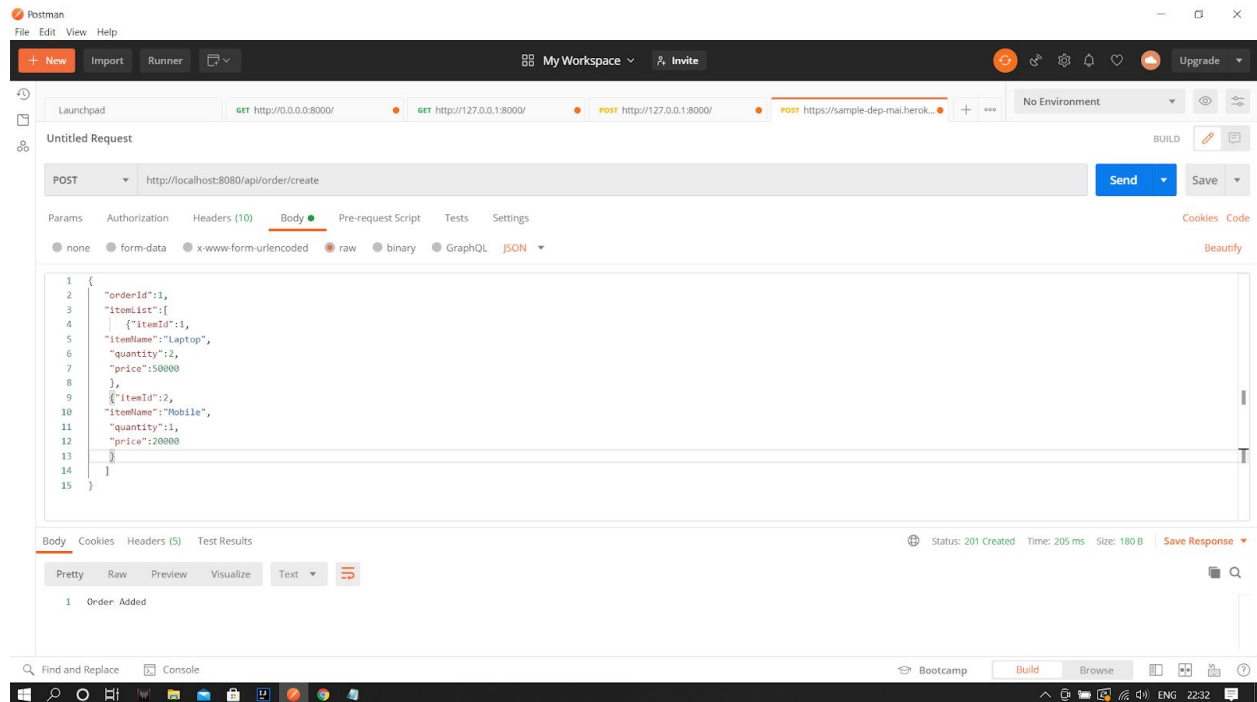

Listing All Orders

<http://localhost:8080/api/order/list>

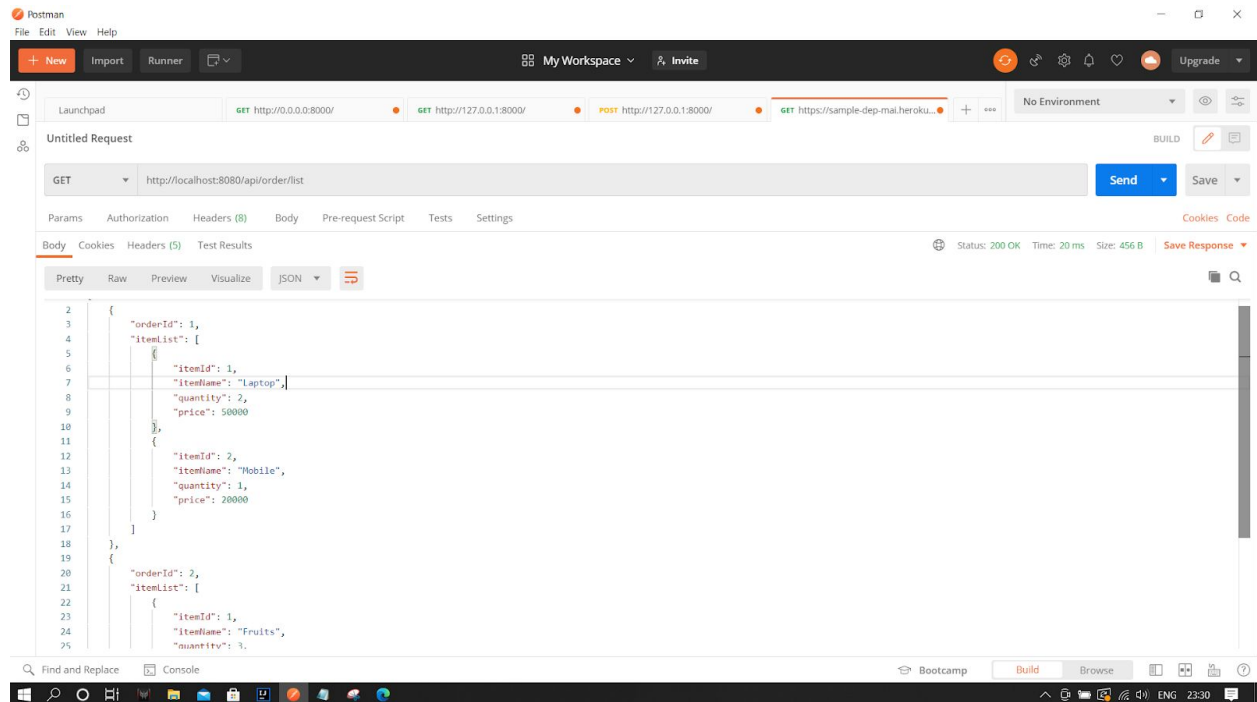


Postman interface showing a GET request to `http://localhost:8080/api/order/list`. The response status is 200 OK, Time: 20 ms, Size: 456 B. The response body is a JSON array of two orders:

```
2 {
3   "orderId": 1,
4   "itemList": [
5     {
6       "itemId": 1,
7       "itemName": "Laptop",
8       "quantity": 2,
9       "price": 50000
10    },
11    {
12      "itemId": 2,
13      "itemName": "Mobile",
14      "quantity": 1,
15      "price": 20000
16    }
17  ],
18  "orderId": 2,
19  "itemList": [
20    {
21      "itemId": 1,
22      "itemName": "Fruits",
23      "quantity": 3,
24      "price": 50
25    }
26  ]
27 }
```

Getting Particular Order by Id

<http://localhost:8080/api/order/get/2>

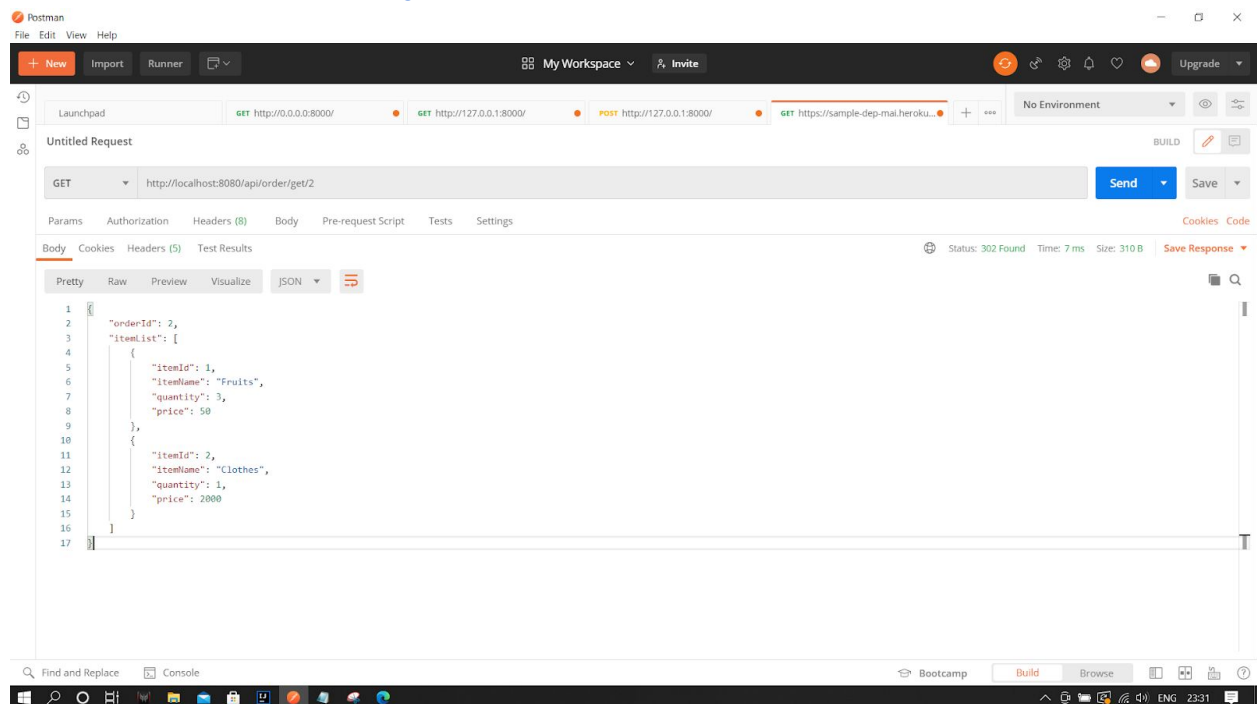


Postman interface showing a GET request to `http://localhost:8080/api/order/get/2`. The response status is 302 Found, Time: 7 ms, Size: 310 B. The response body is a JSON object representing a specific order:

```
1 {
2   "orderId": 2,
3   "itemList": [
4     {
5       "itemId": 1,
6       "itemName": "Fruits",
7       "quantity": 3,
8       "price": 50
9     },
10    {
11      "itemId": 2,
12      "itemName": "Clothes",
13      "quantity": 1,
14      "price": 2000
15    }
16  ]
17 }
```

Updating Item of an Order

<http://localhost:8080/api/order/update/2/1>(PUT) orderId/itemId

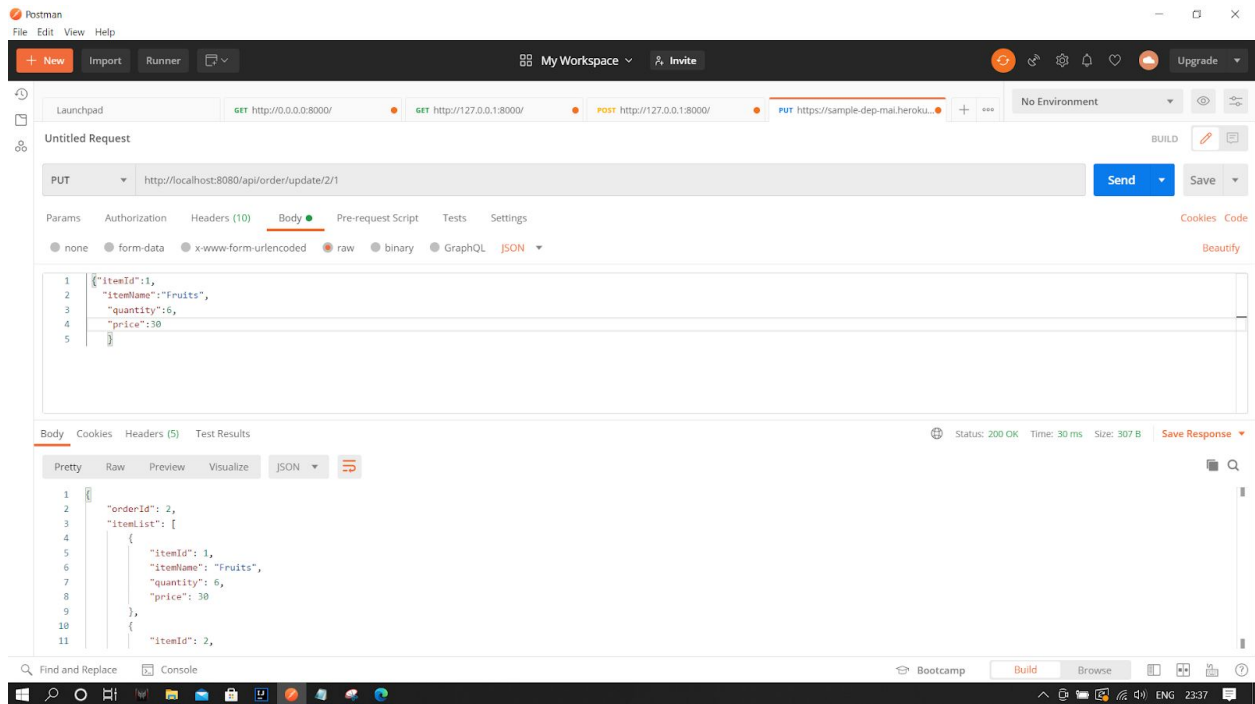

Deleting an Order by id

<http://localhost:8080/api/order/delete/2>

Launchpad

GET http://0.0.0.0:8000/

GET http://127.0.0.1:8000/

POST http://127.0.0.1:8000/

Untitled Request

DELETE

http://localhost:8080/api/order/delete/3

Params

Authorization

Headers (8)

Body

Pre-request Script

Tests

Settings

none

form-data

x-www-form-urlencoded

raw

binary

GraphQL

JSON

1

Body

Cookies

Headers (5)

Test Results

Pretty

Raw

Preview

Visualize

Text

1

Order Removed