


No block has a parameter whose shape depends on $|V|$ $\rightarrow$ same $\sim 25\text{k-param } \theta$ runs on $N = 40, 10, \text{ or } 4$

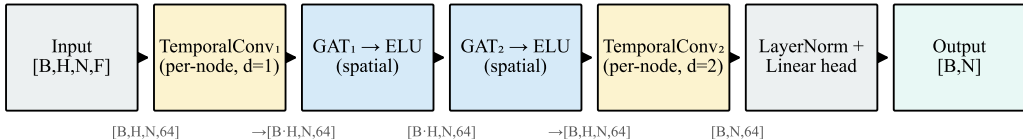

GAT layers are vectorized over the $B \cdot H$ per-timestep graphs; TemporalConv mixes only along time, per node.