DepEd Division ICT Inventory System (DICTIS) User Manual

Schools Division Office of Angeles City

About This System

DICTIS is the web-based inventory of ICT equipment, personnel and internet connectivity for the Schools Division Office of Angeles City. It keeps the asset register with generated property numbers and QR labels, a permanent record of who is accountable for each item, internet service subscriptions and their readings, and a profile and connectivity survey for every school and office, with every change recorded in an audit trail.

Prepared by
Keith V. Polintan
November 2026

Disclaimer: Personnel names, employee and ID numbers, contact numbers and email addresses shown in this manual and its screenshots are placeholders that replace real data. Any resemblance to real persons is coincidental. Equipment types, offices and reference values are shown as they appear in the system.

Table of Contents

1. Introduction 4
Conventions 4
Glossary 4
2. Getting Started 6
2.1 Sign in (Figures 1-5) 6
2.2 If you cannot sign in 9
2.3 Screen layout (Figures 6-7) 9
3. Roles, Permissions and Data Scope 11
3.1 Data scope 11
3.2 Built-in roles 11
4. Dashboard 12
4.1 Dashboard (Figure 8) 12
5. Personnel 14
5.1 Personnel list (Figures 9-10) 14
5.2 Add personnel (Figure 11) 15
5.3 Edit, separate or delete (Figures 12-13) 15
6. Equipment 18
6.1 Equipment list (Figure 14) 18
6.2 Add equipment (Figures 15-19) 18
6.3 Desktops and peripherals (Figure 20) 22
6.4 Equipment record (Figures 21-22) 22
6.5 Attach documents (Figure 23) 23
6.6 Log a transaction (Figure 24) 24
6.7 Audit history and delete (Figures 25-26) 27
7. ISP Accounts 29
7.1 ISP accounts list (Figure 27) 29
7.2 Add an ISP account (Figures 28-30) 29
7.3 Speed tests and subscription costs (Figures 31-32) 31
7.4 Delete (Figure 33) 32
8. Office Profiles 34
8.1 Stakeholder profiles (Figures 34-37) 34
8.2 Internet connectivity survey (Figures 38-39) 36
9. Libraries 40
9.1 Reference data (Figures 40-45) 40
9.2 Offices (Figures 46-49) 44
10. Administration 47
10.1 Users (Figures 50-52) 47
10.2 Roles (Figures 53-56) 48

10.3 Audit Log (Figures 57-58) 52
10.4 Settings (Figure 59) 53
11. Your Profile 54
11.1 Profile settings (Figures 60-61) 54
12. Data Privacy and Security 56
13. Troubleshooting and FAQ 57
14. Database Diagrams (ERD) 59
15. Data Dictionary 64
15.1 Users, roles and access 64
15.2 Personnel and offices 66
15.3 Equipment 68
15.4 ISP accounts 70
15.5 Office profiles 72
15.6 Reference data 74
15.7 Geographic reference (PSGC) 78
15.8 System tables 79

1. Introduction

The DepEd Division ICT Inventory System (DICTIS) is the web-based inventory of ICT equipment, personnel and internet connectivity for the Schools Division Office (SDO) of Angeles City. It replaces the Excel workbook the division used to keep these records and keeps every change in an audit trail.

DICTIS covers:

- **Personnel:** the division staff directory, used to say who is accountable for each item.
- **Equipment:** the ICT asset register, with generated property numbers, QR labels, attached documents and a permanent accountability history.
- **ISP accounts:** internet subscriptions with their speed tests and subscription costs.
- **Office profiles:** a stakeholder profile and an internet connectivity survey for every school and office.
- **Libraries and administration:** reference lists, offices, user accounts, roles, the audit log and security settings.

Who this manual is for: SDO staff who encode and review inventory records, school and office encoders, and the administrators who manage accounts and settings.

How this manual is ordered: getting started first, then the sidebar menu from top to bottom, then reference chapters. Figure numbers match the file names in the **DICTIS Screenshots** folder.

Conventions

- **Bold** text is a button, menu item, tab or field label as it appears on screen.
- Fields marked with a red asterisk (*) are required; fields marked (optional) can be left blank.
- Every list page has a search box and filters with **Reset** and **Apply Filters**, **Columns** to show or hide columns, **Compact** for a denser table, and paging at the bottom.
- The info icon (i) beside a field shows a short explanation when you point to it.
- What you see depends on your role. A menu item or button you lack the permission for is hidden.

Glossary

Term	Meaning
SDO	Schools Division Office of Angeles City
PRIME	The division's central user system. Your DICTIS account, name, office and password come from PRIME.
2FA	Two-factor authentication: a 6-digit code from an authenticator app, required at every sign-in
Recovery code	One of 8 single-use codes for signing in when you cannot use your authenticator app
Trusted device	A browser you chose to trust, so DICTIS skips the 2FA code there for a set number of days
Property number	Number generated for each item: AC-YYYY-IT-ABV-NNNNNN (year received, item type abbreviation, 6-digit series)
Accountable officer	The person accountable for an item (on the PAR or ICS)
End user	The person who actually uses the item
Transaction	An entry in an item's accountability history, such as Beginning Inventory or a transfer

Term	Meaning
PPE	Property, Plant and Equipment: items costing 50,000 pesos or more (High-value)
Semi-expendable	Items costing less than 50,000 pesos (Low-value)
PAR / ICS	Property Acknowledgment Receipt / Inventory Custodian Slip
DCP	DepEd Computerization Program
UACS	Unified Accounts Code Structure object code
Data scope	Which records a role reaches: own records only, own office, or all records
PSGC	Philippine Standard Geographic Code (province, city/municipality, barangay)

2. Getting Started

2.1 Sign in (Figures 1-5)

Open DICTIS in your browser and sign in with your **PRIME account**: your DepEd email and your PRIME password. DICTIS does not keep a separate password.

1. Enter your **Email** and **Password**, then click **Sign In**.
2. Complete two-factor authentication as described below.

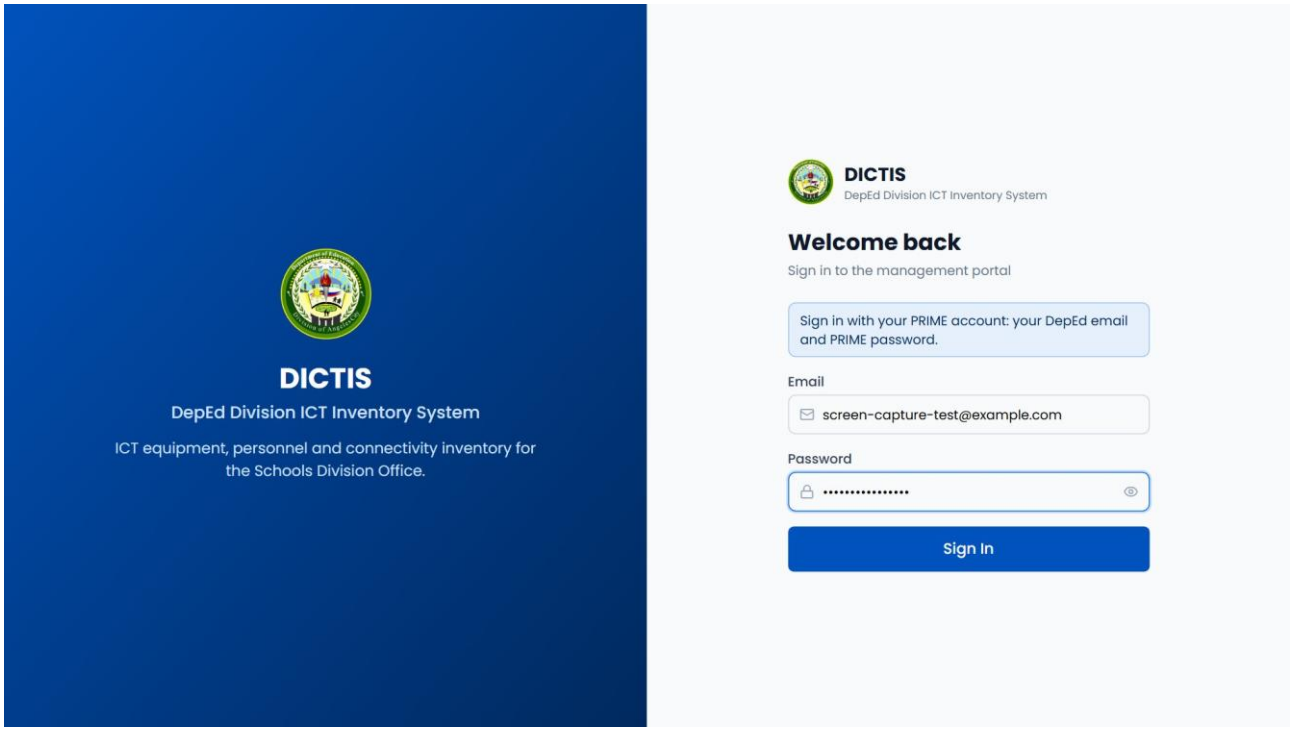


Figure 1. Sign in with your PRIME account

First sign-in: set up two-factor authentication

Two-factor authentication is required for every account. The first time you sign in, DICTIS asks you to set it up:

1. Install an authenticator app on your phone (Google Authenticator, Microsoft Authenticator, Authy, 1Password and others).
2. Scan the QR code with the app. If you cannot scan it, enter the code shown under **Can't scan? Enter this code manually**.
3. Type the 6-digit code from the app and click **Verify and Enable**.
4. Save your 8 recovery codes: click **Download codes** or write them down, tick **I've saved these recovery codes somewhere safe**, then click **Continue to Dashboard**.

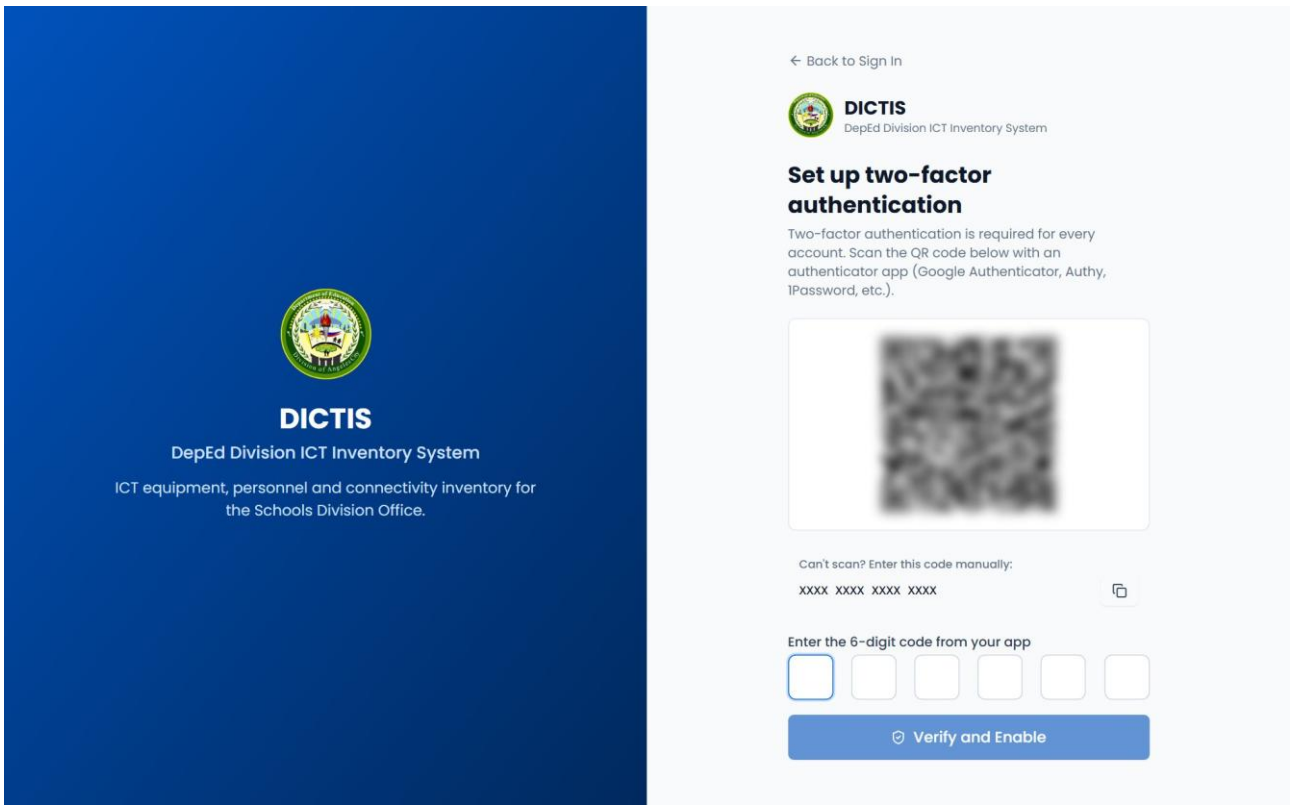


Figure 2. Set up two-factor authentication (first sign-in)

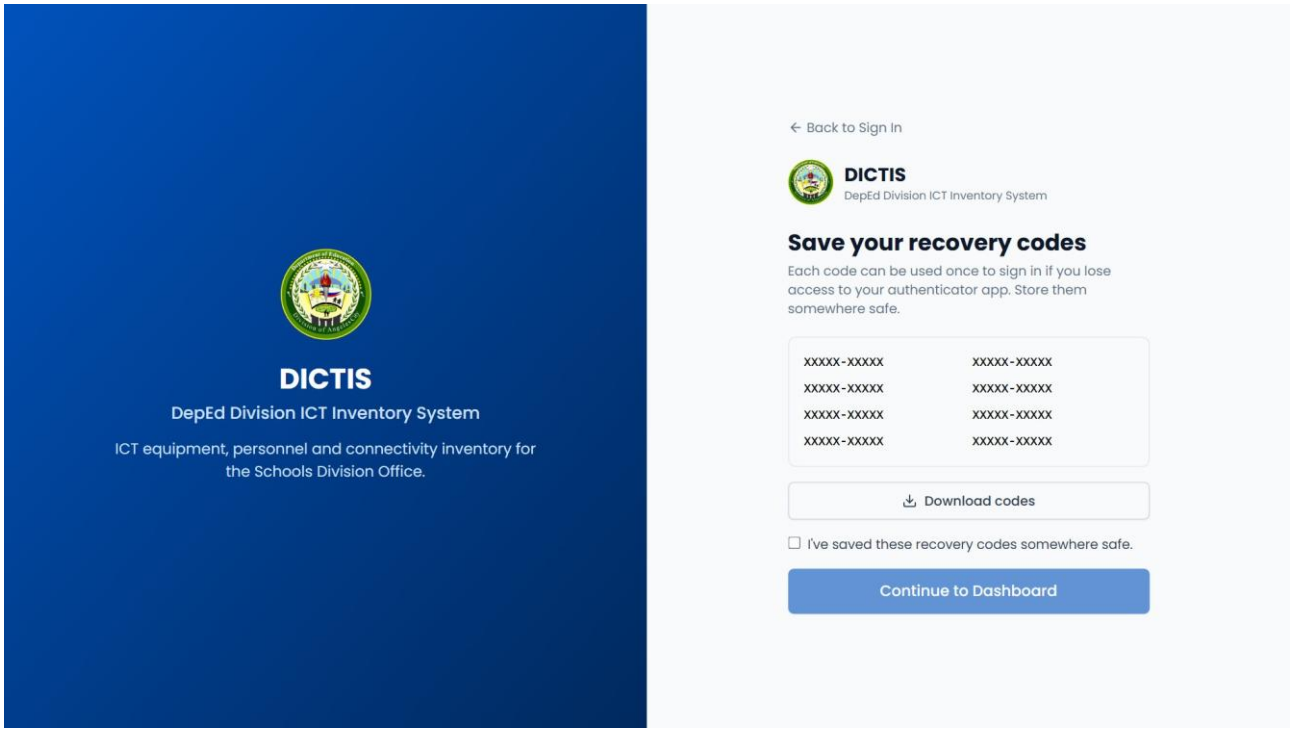


Figure 3. Save your recovery codes

Keep your recovery codes private. Each code works once. If you lose your phone and your codes, ask an administrator to reset your two-factor authentication (section 10.1).

Every other sign-in

After your password, enter the current 6-digit code from your authenticator app and click **Verify**. If the option is offered, tick **Trust this device** to skip the code on this browser for a set number of days. Administrators who can change access or settings always need the code.

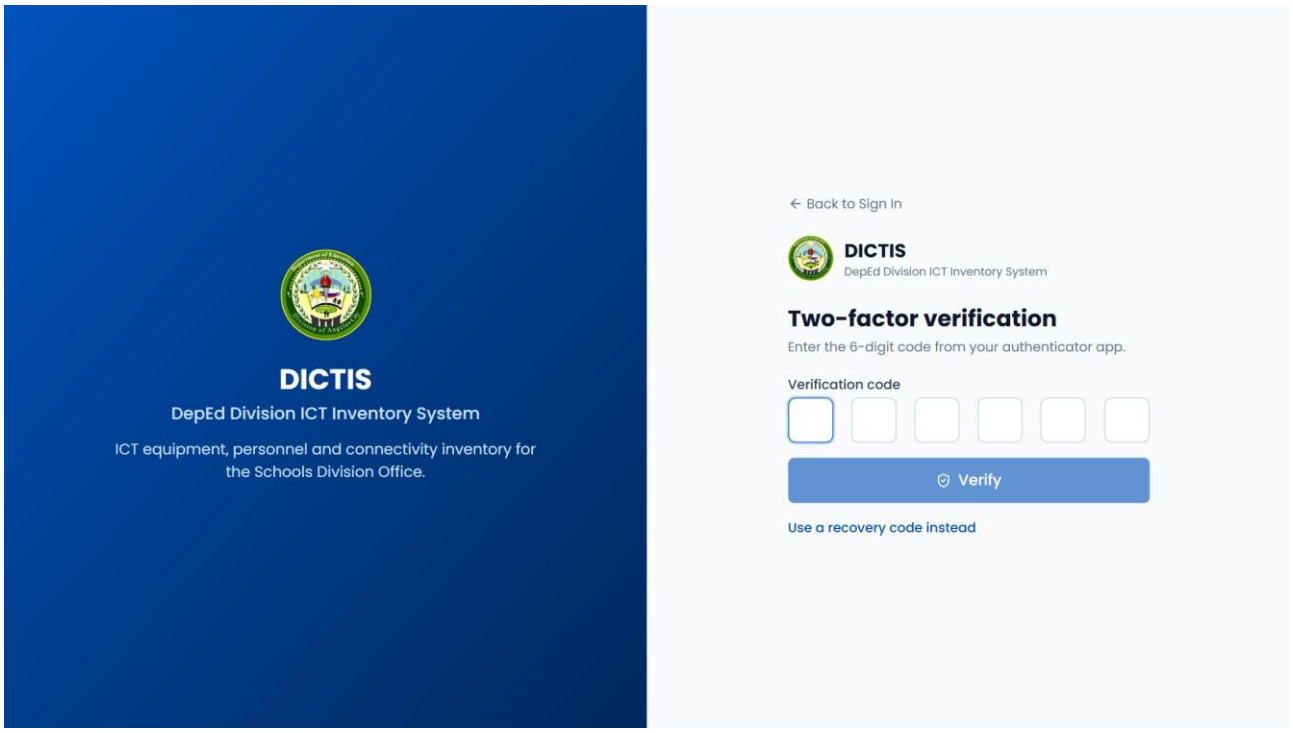


Figure 4. Two-factor verification

If you do not have your phone, click **Use a recovery code instead**, enter one of your saved codes and click **Verify**. When two or fewer codes remain, DICTIS warns you; generate new ones from your profile (chapter 11).

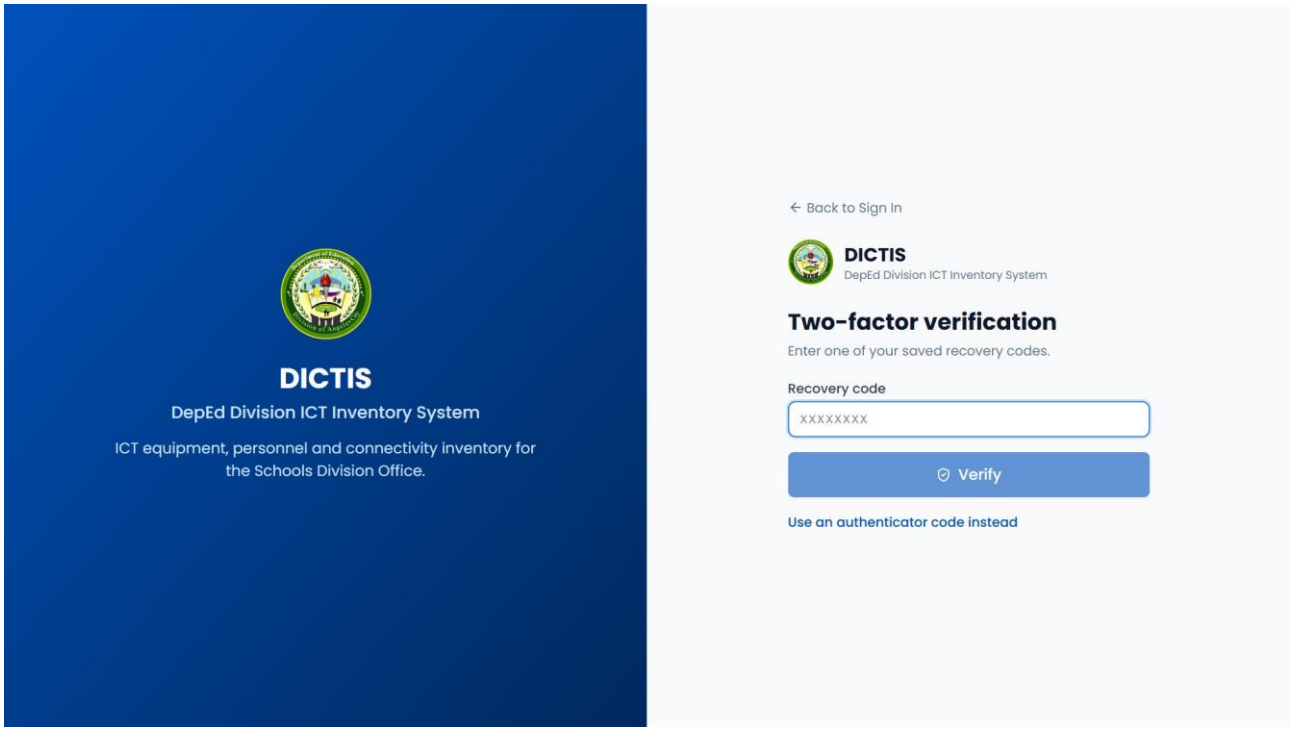


Figure 5. Sign in with a recovery code

2.2 If you cannot sign in

- **Invalid credentials:** check your DepEd email and PRIME password. A deactivated account shows the same message.
- **Your account doesn't have access to DICTIS yet:** your PRIME account exists but has no role. Ask an administrator to assign one, then sign in again.
- **Forgot your password:** DICTIS has no password reset, because passwords are managed in PRIME. Change or recover your password in PRIME.

2.3 Screen layout (Figures 6-7)

The **sidebar** on the left lists the modules in groups: Records, Office Profiles, Libraries and Administration. The menu button at the top collapses it. The sun/moon button switches between light and dark themes. Click your name at the top right for **Profile settings** and **Log out**.

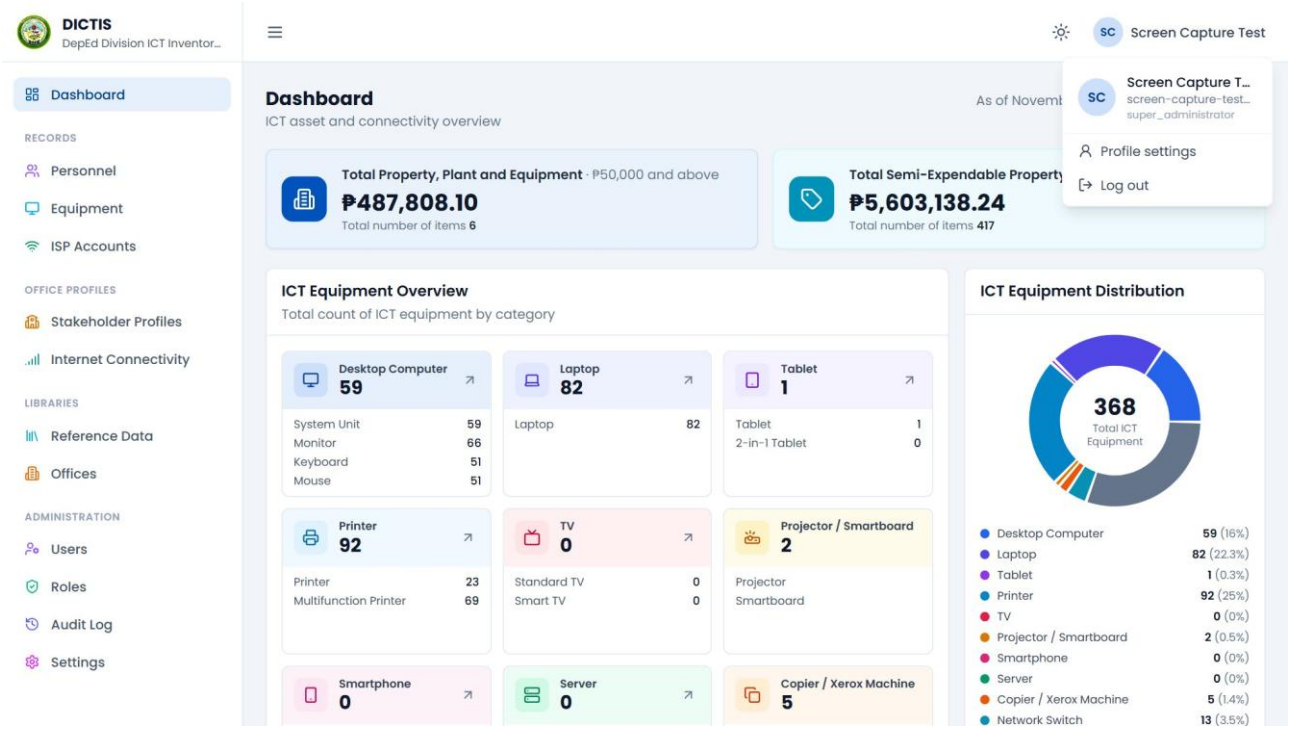


Figure 6. Menu under your name

Log out asks you to confirm. DICTIS also signs you out automatically after a period without activity (set by an administrator, section 10.4).


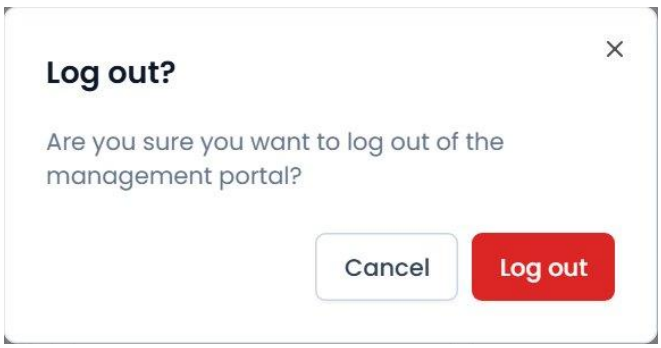


Figure 7. Log out confirmation

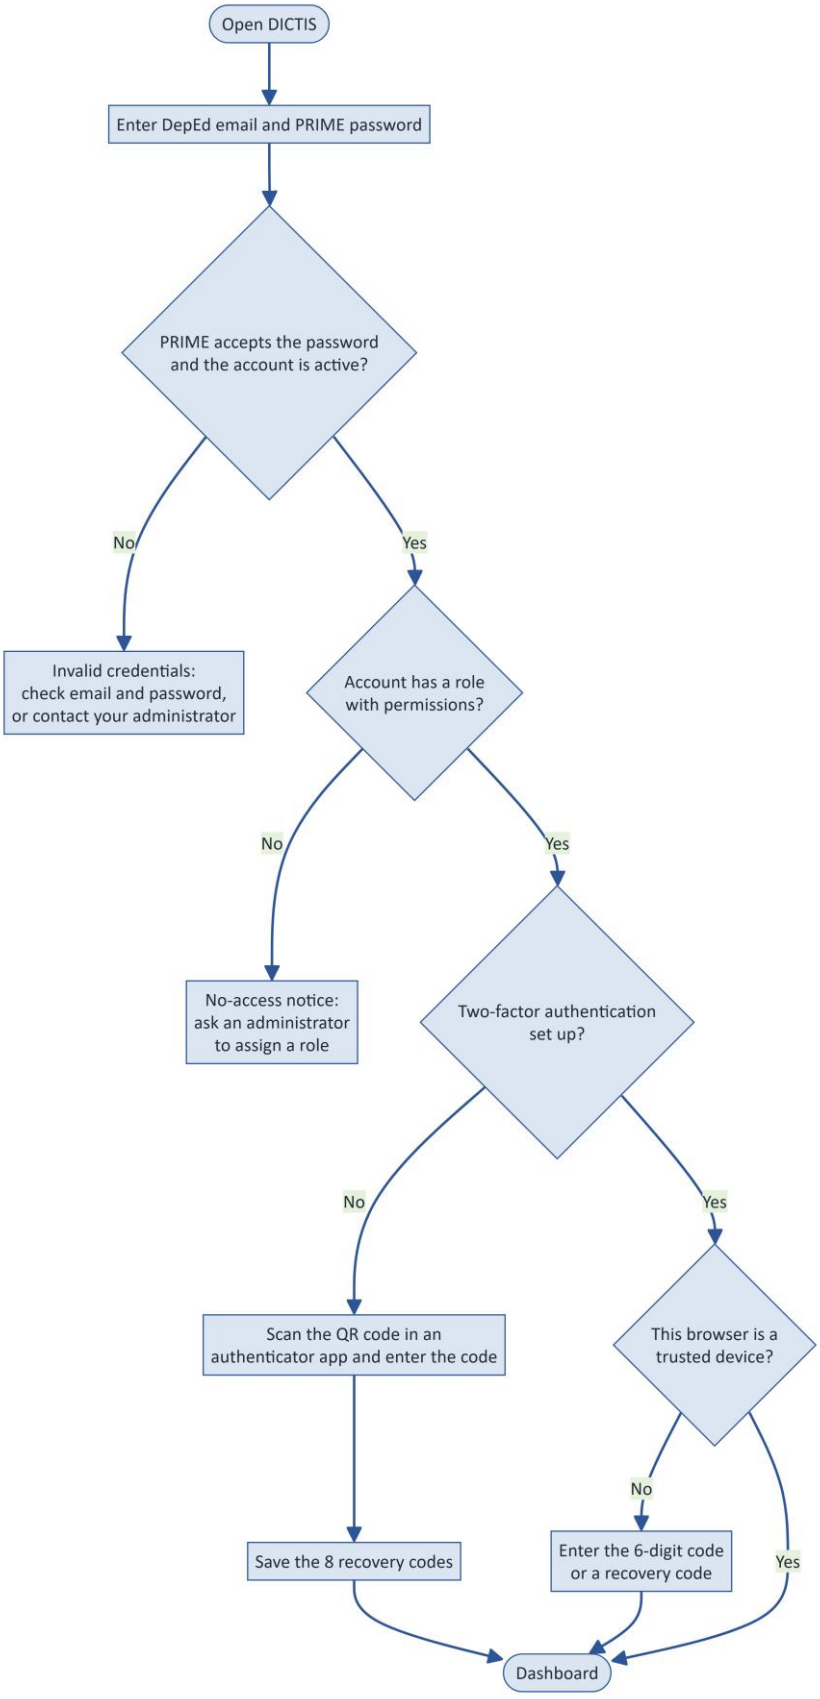

Flowchart 1. Signing in

3. Roles, Permissions and Data Scope

Each account holds one **role**. The role's **permissions** decide what you can do (view, add, edit, delete, log transactions and so on). Its **data scope** decides which records those permissions reach.

3.1 Data scope

Data scope	Personnel	Equipment	ISP accounts, office profiles
Own records only	Your own personnel record	Items issued to you, and unissued items you registered	Your own office
Own office	Personnel at your office, plus your own record	Items issued to anyone you reach, and unissued items registered by anyone at your office	Your own office
All records	Everyone	Everything	Every office, plus the lists of all offices

Your office and your link to your personnel record come from PRIME. If either is missing, the dashboard says so and you see fewer records; ask an administrator to fix the PRIME record.

Equipment follows its **current holders**: when an item is transferred to someone outside your reach, it leaves your list. An item returned to nobody goes back to the reach of the user who registered it.

3.2 Built-in roles

Role	Data scope	What it can do
Super Administrator	All records	Everything. Cannot be renamed or deleted, and always has every permission.
System Administrator	All records	Everything except creating, editing or deleting roles.
Division Encoder	All records	View, add and edit Personnel, Equipment and ISP Accounts; log equipment transactions; view and edit every office's profile and connectivity survey. No deletes or administration.
Office Encoder	Own office	The same as Division Encoder, limited to the user's own office.
Viewer	Own records only	View personnel, equipment, the office profile and the connectivity survey.

Administrators can create other roles (section 10.2). The menus change with the scope: an Office Encoder sees **Our Office Profile** and **Our Office Connectivity** instead of the lists of all offices, and a Viewer's **Personnel** item opens their own record.

4. Dashboard

4.1 Dashboard (Figure 8)

Menu: **Dashboard**

The dashboard summarises the inventory within your data scope:

- **Total Property, Plant and Equipment** (items of 50,000 pesos and above) and **Total Semi-Expendable Property**, each with its total cost and number of items.
- **ICT Equipment Overview:** the count per category (Desktop Computer, Laptop, Printer and so on), broken down by item type. Click a card to open the Equipment list filtered to it.
- **ICT Equipment Distribution:** the share of each category.
- **Internet Connectivity:** the number of ISP accounts, the total cost per month, accounts per provider and connection types. Click **View ISP accounts** to open the list.

The **As of** date shows when the figures were read. Click **Refresh data** to reload them.

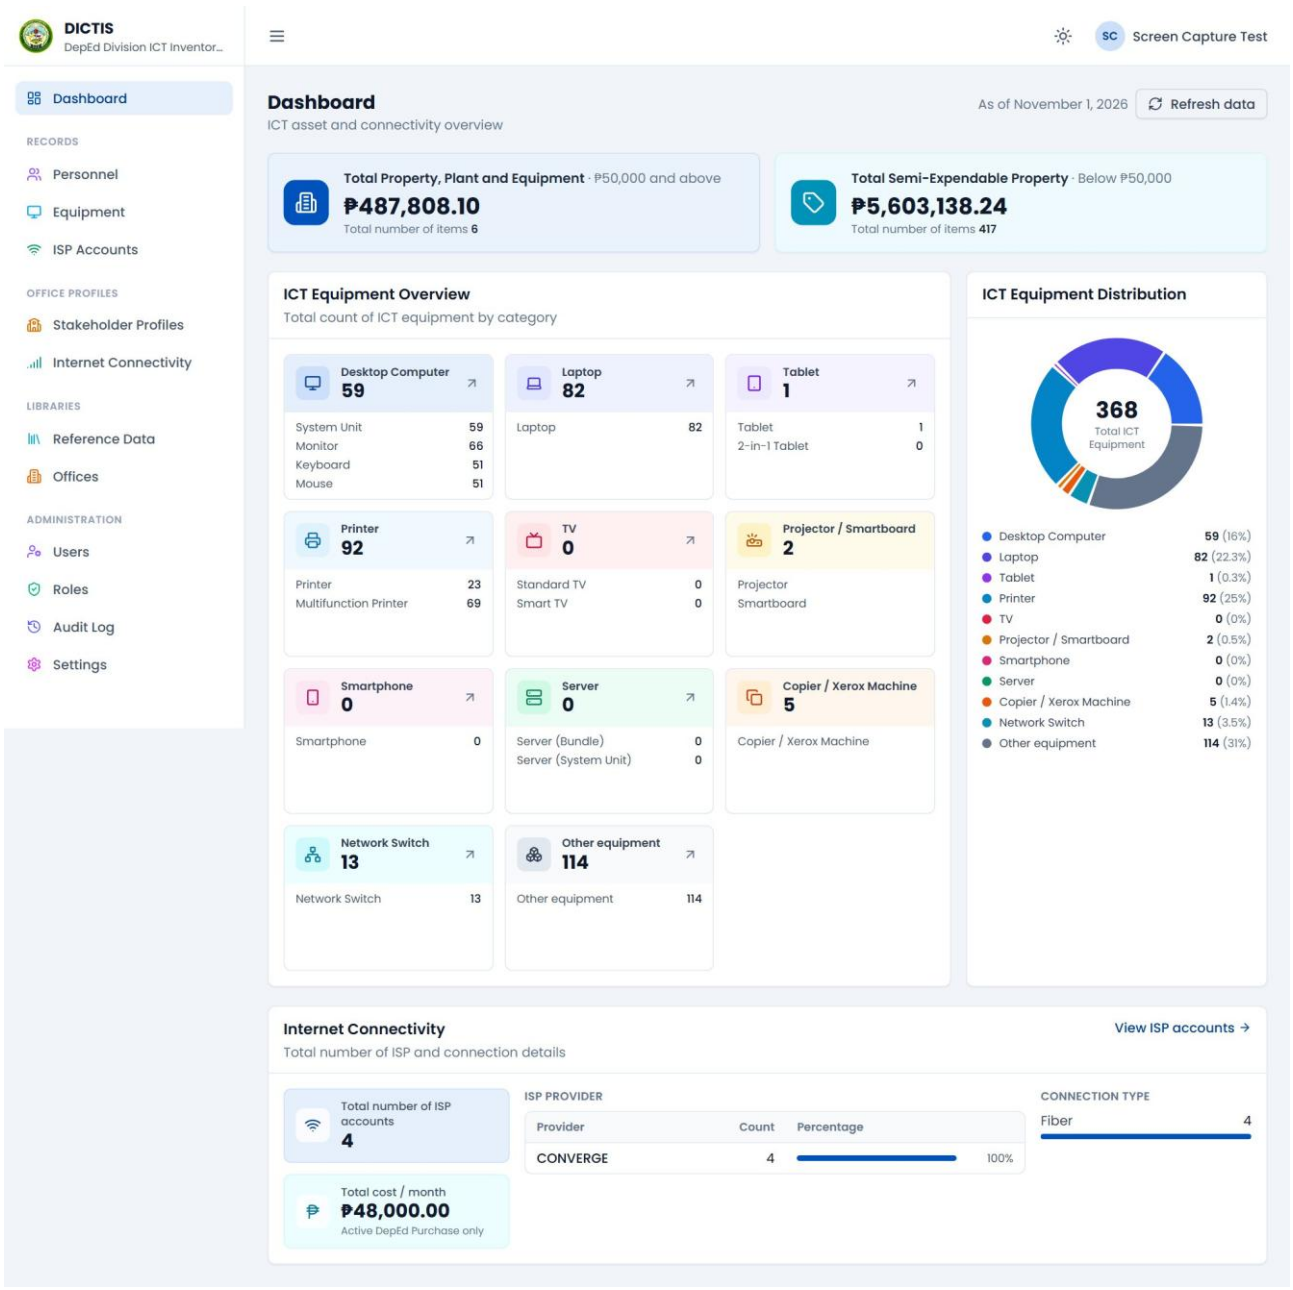


Figure 8. Dashboard

5. Personnel

5.1 Personnel list (Figures 9-10)

Menu: **Records > Personnel**

Lists personnel with employee ID, name, position, office, mobile number and status. Search by name, employee ID or email, and filter by status (Active, Inactive or All). Use the edit and delete icons on each row. **Columns** shows or hides columns.

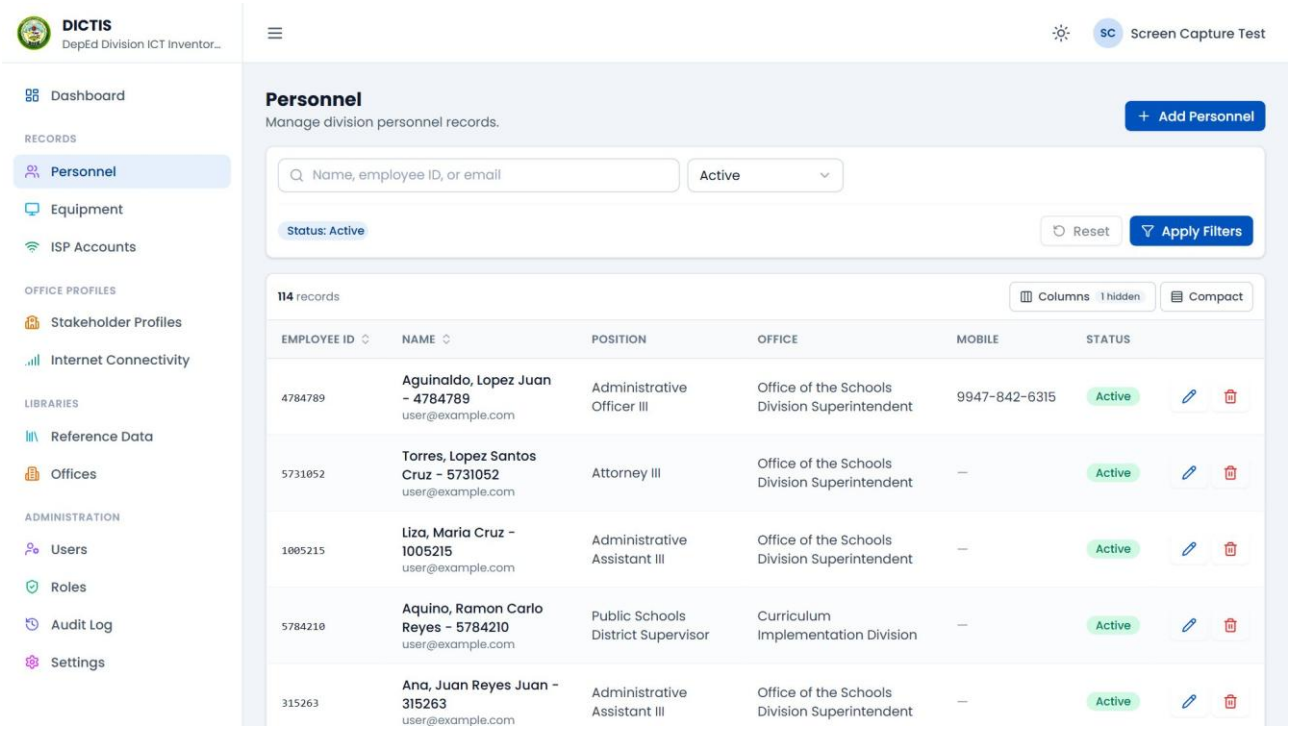


Figure 9. Personnel

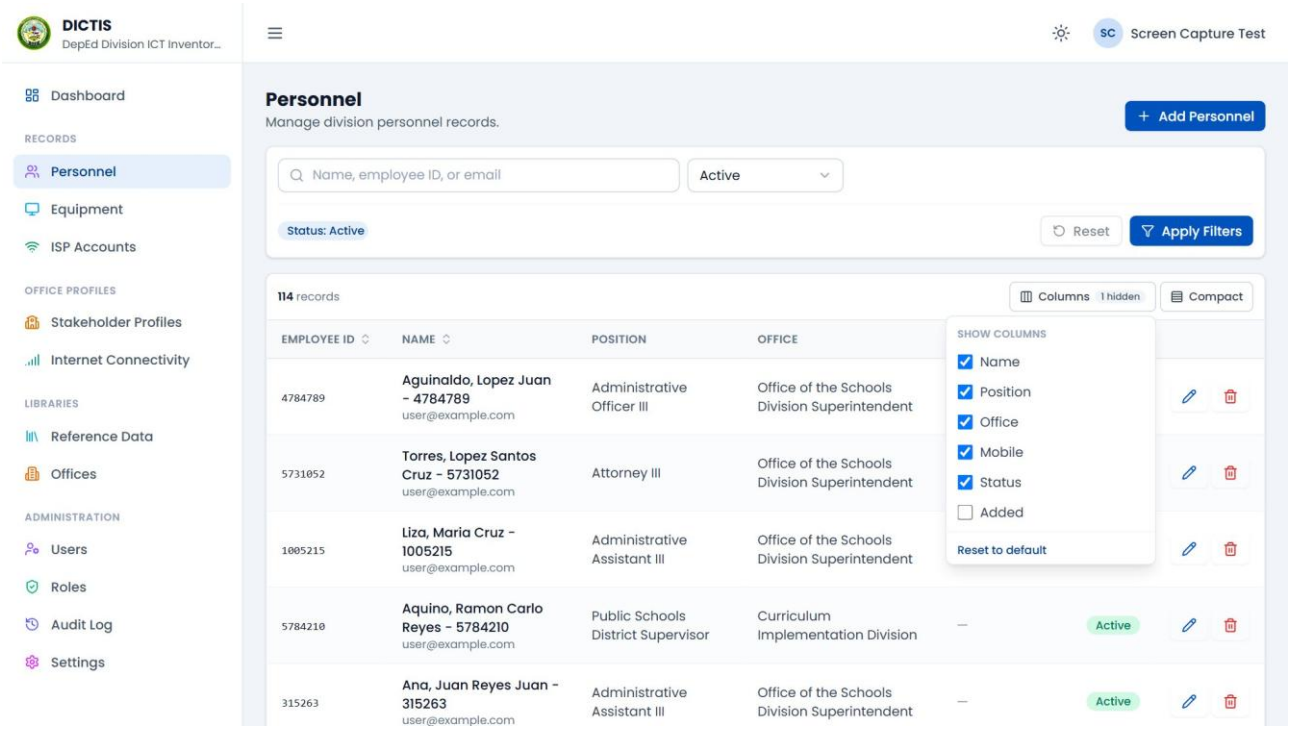


Figure 10. Columns menu

5.2 Add personnel (Figure 11)

Click **Add Personnel**. Enter the **Employee ID**, **Last name** and **First name** (required), then the optional details:

- **Identification:** middle name and suffix.
- **Assignment:** position, RO division, division/unit, school/office, and **Officer-in-charge (OIC)**.
- **Contact information:** two mobile numbers, DepEd email and personal email.
- **Employment:** date hired and **Non-DepEd funded** (with its funding sources).

Click **Save personnel**. Office Encoders always add personnel to their own office.

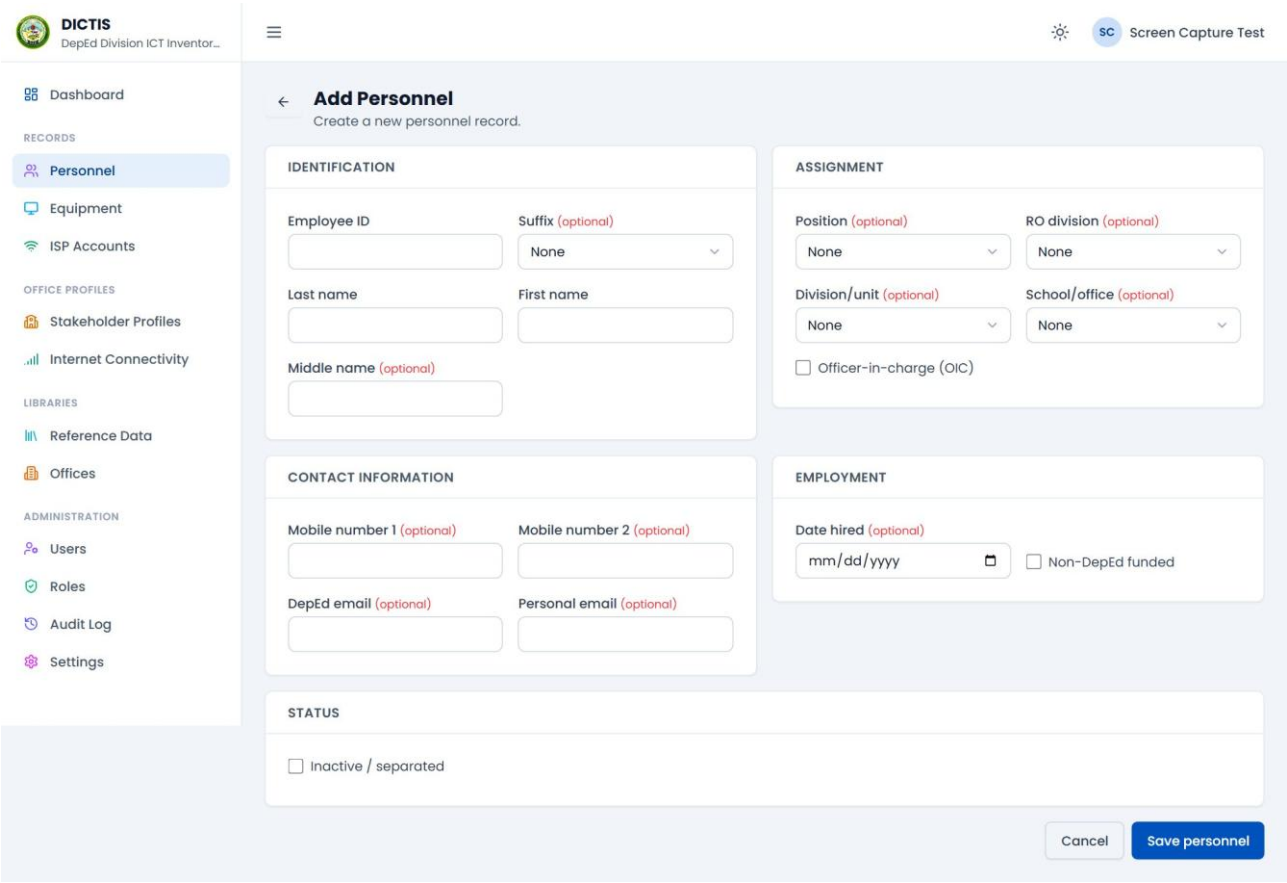


Figure 11. Add Personnel

5.3 Edit, separate or delete (Figures 12-13)

Click the edit icon to change a record, then **Save changes**. When someone leaves the division, tick **Inactive / separated** and enter the separation date, cause and transfer details. The record leaves the default list but keeps its equipment history.

Delete is only for records entered by mistake. It asks you to confirm and hides the record; transactions that name the person stay intact.

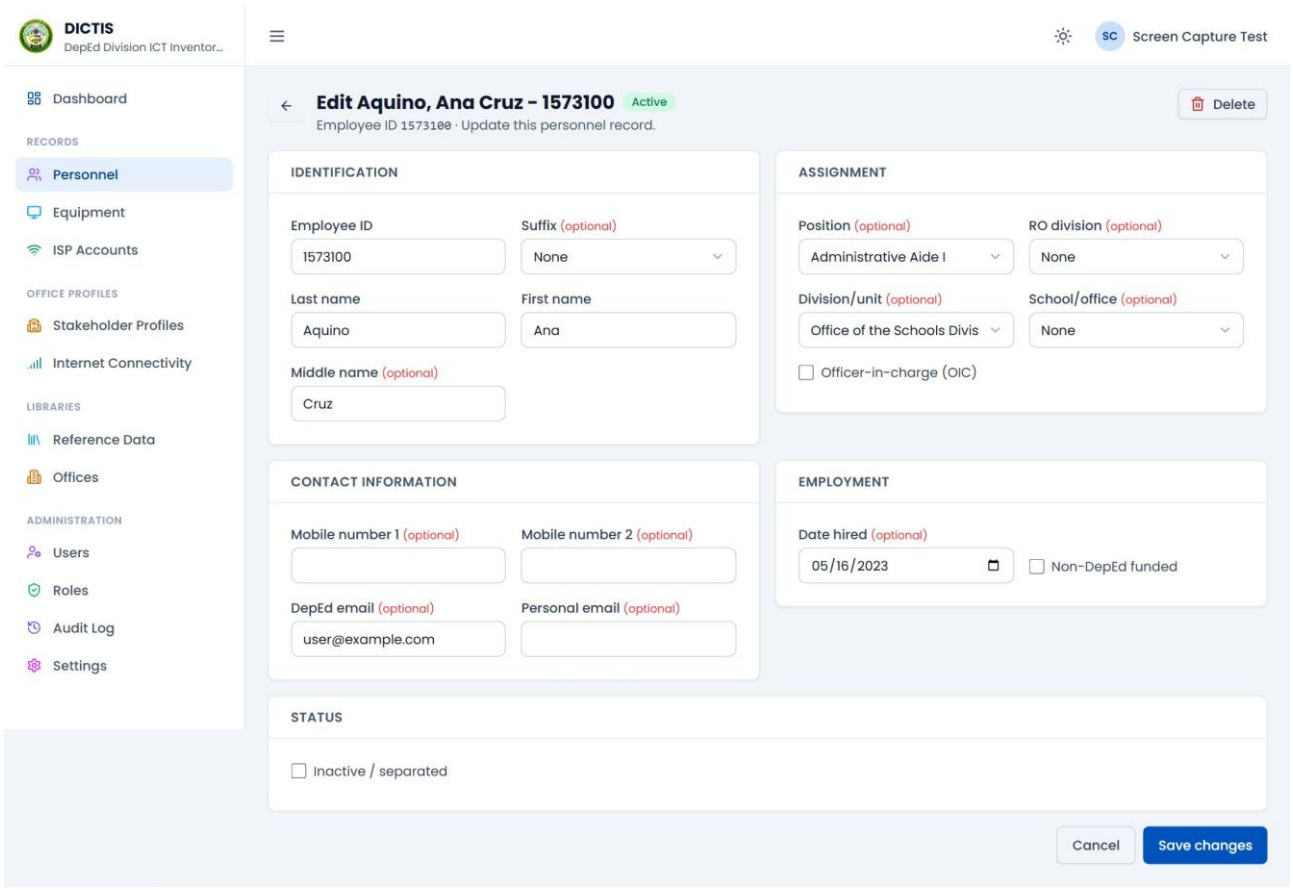


Figure 12. Edit personnel


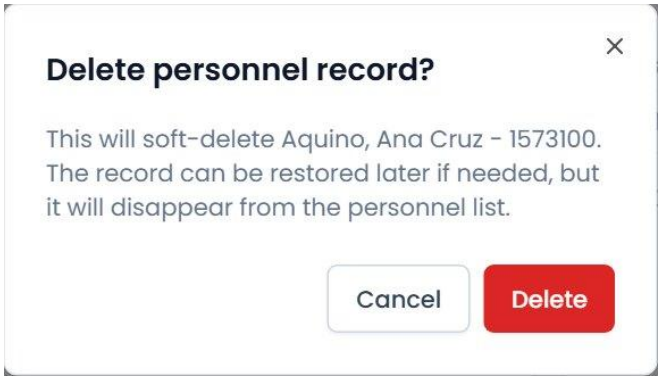


Figure 13. Delete personnel confirmation

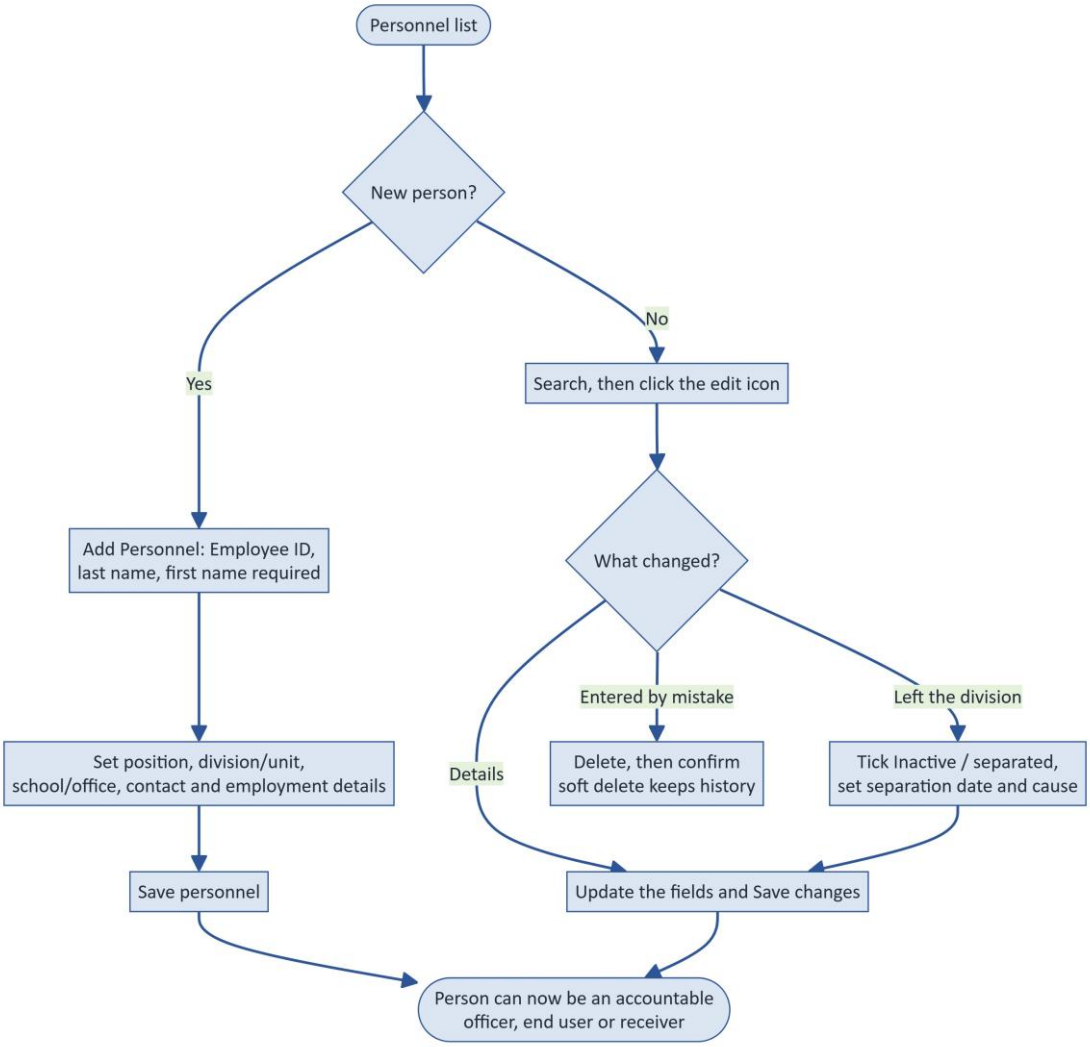

Flowchart 2. Adding and maintaining personnel

6. Equipment

6.1 Equipment list (Figure 14)

Menu: **Records > Equipment**

Lists items with property number, item, condition, disposition, accountable officer, end user and cost. Search by property number, serial number or model, and filter by condition, category and disposition status.

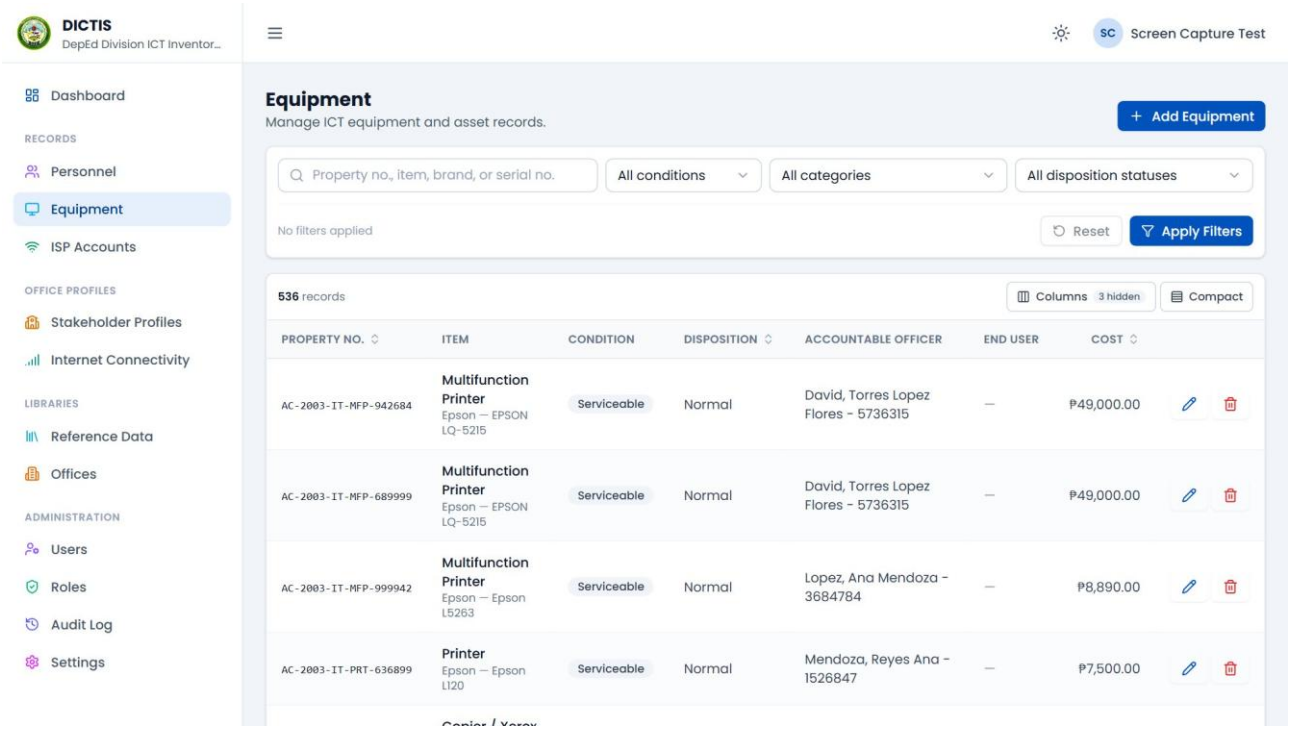


Figure 14. Equipment

6.2 Add equipment (Figures 15-19)

Click **Add Equipment** and fill in the tabs. A tab with an error opens automatically when you save.

1. **Equipment:** item type, unit of measure, brand/manufacturer, model, serial number and specifications. The **Property number** shows a preview once the item type and acquisition date are set; the real number is assigned when you save.
2. **Acquisition:** acquisition cost and date, mode and source of acquisition, source of funds (and donor when the source is a donation), DCP package and year (or **Non-DCP**), UACS and allotment class. **Category** and **GL-SL code** are filled in from the cost: 50,000 pesos and above is High-value (PPE), below is Low-value (semi-expendable).
3. **Accountability:** the first transaction: accountable officer, end user, received by, the dates, supporting documents and their numbers, and who uses the item (Learner, Teacher, Teaching-Related or Non-Teaching).
4. **Status / Location:** location, condition, **Non-functional**, disposition status, remarks, estimated useful life, supplier and warranty.
5. **Documents:** the PM plan and supporting documents. Files can be attached after the item is saved (section 6.5).

Click **Save equipment**. DICTIS assigns the property number **AC-YYYY-IT-ABV-NNNNNN**, where YYYY is the year received, ABV the item type's abbreviation and NNNNNN the next number in that item type's series. The number cannot be changed afterwards.

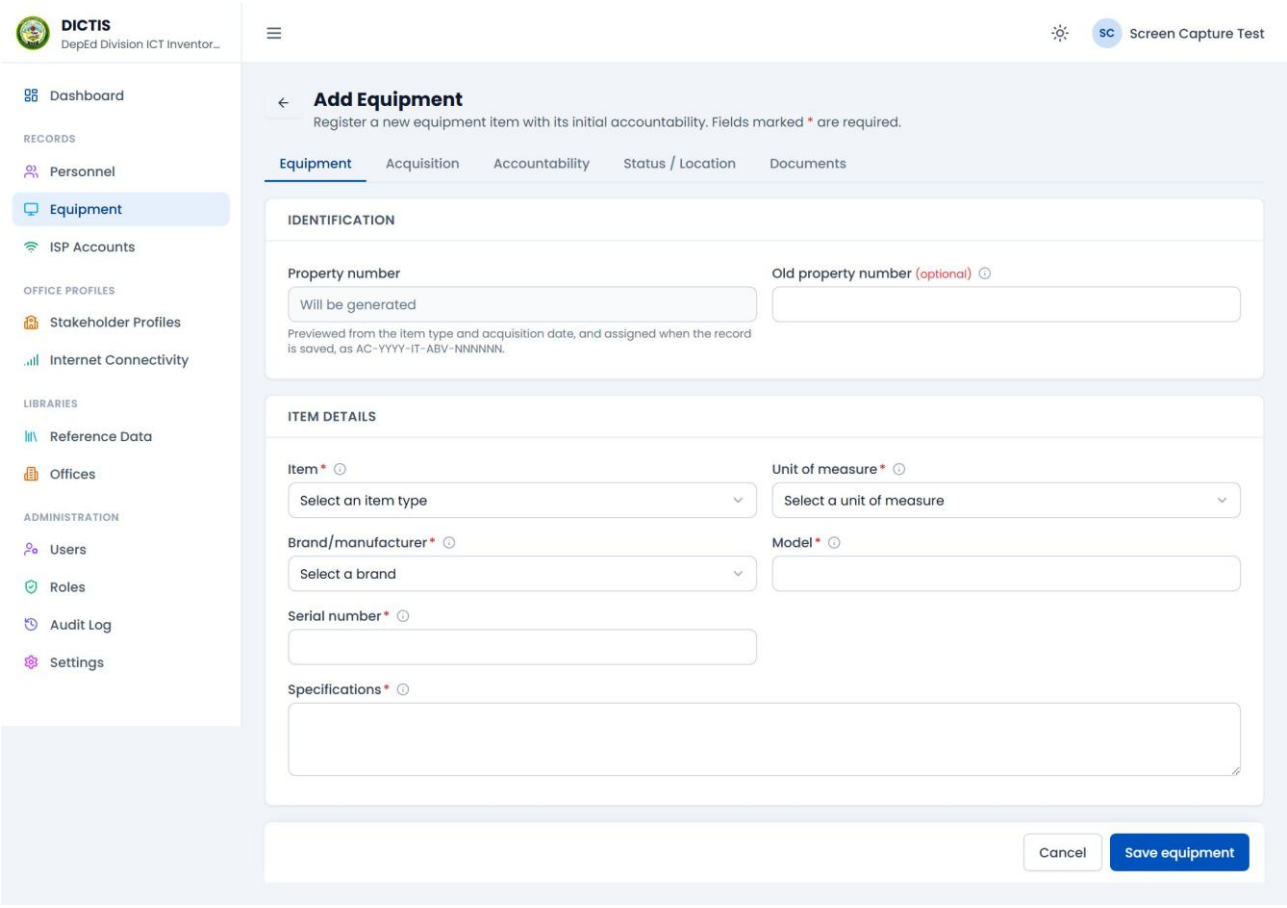


Figure 15. Add Equipment, Equipment tab

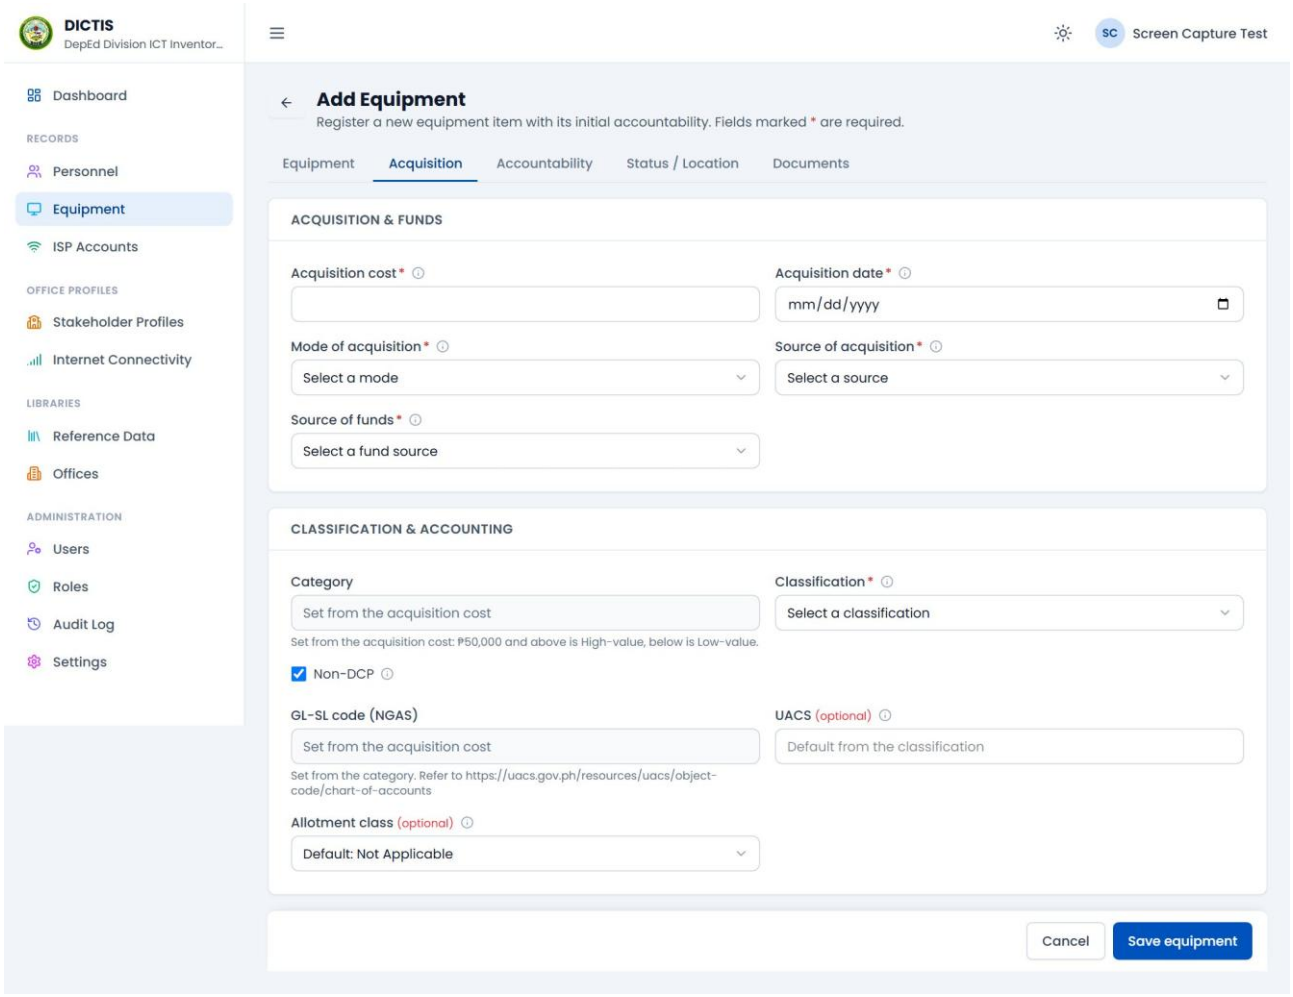


Figure 16. Add Equipment, Acquisition tab

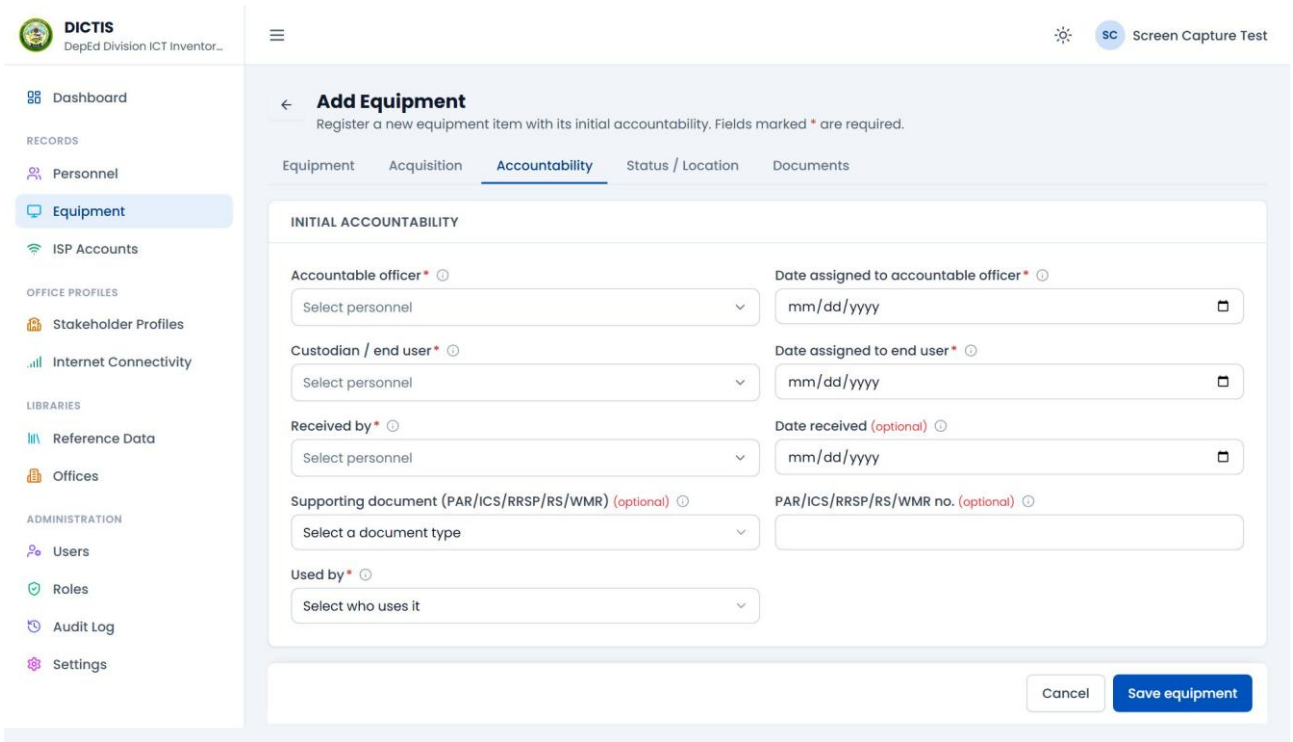


Figure 17. Add Equipment, Accountability tab

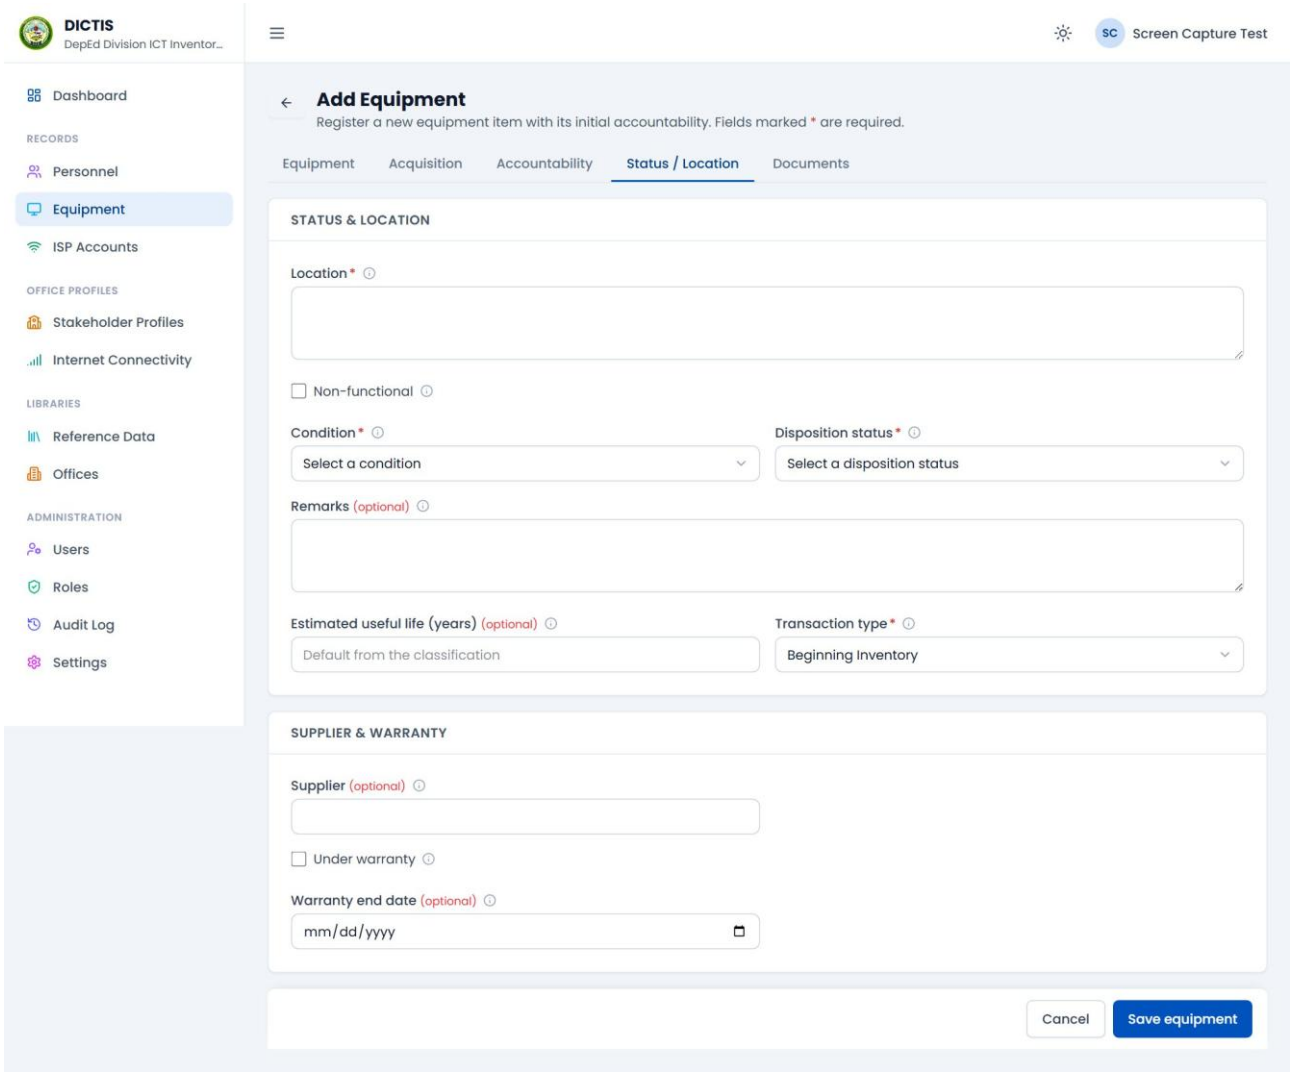


Figure 18. Add Equipment, Status and Location tab

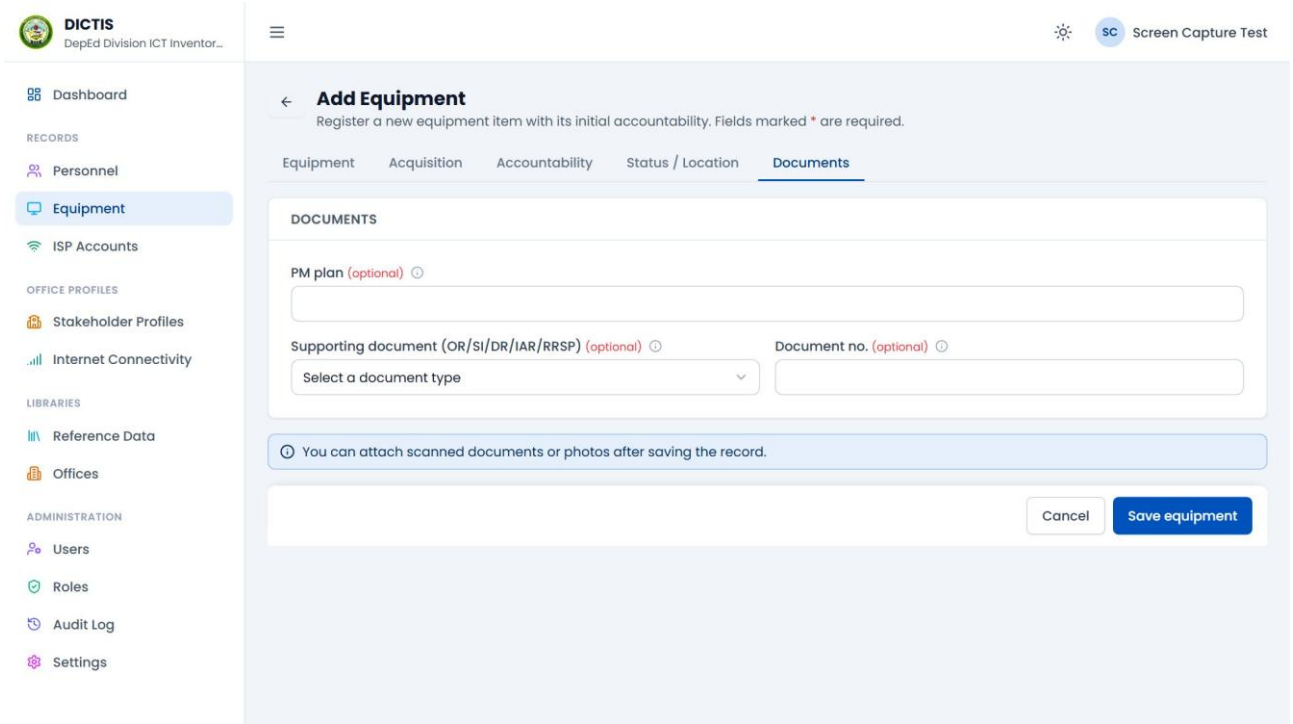


Figure 19. Add Equipment, Documents tab

6.3 Desktops and peripherals (Figure 20)

When the item type is **Desktop (package)** or **CPU**, a **Peripherals** tab appears. Click **Add monitor, keyboard and mouse** (or **Add another**, up to 10 rows) to register the peripherals delivered with the desktop. Brand and condition default to **Same as desktop**. Each peripheral is numbered after the desktop, for example AC-2026-IT-DST-000045-001, and shares the desktop's accountability. Transfers of the desktop move its peripherals with it.

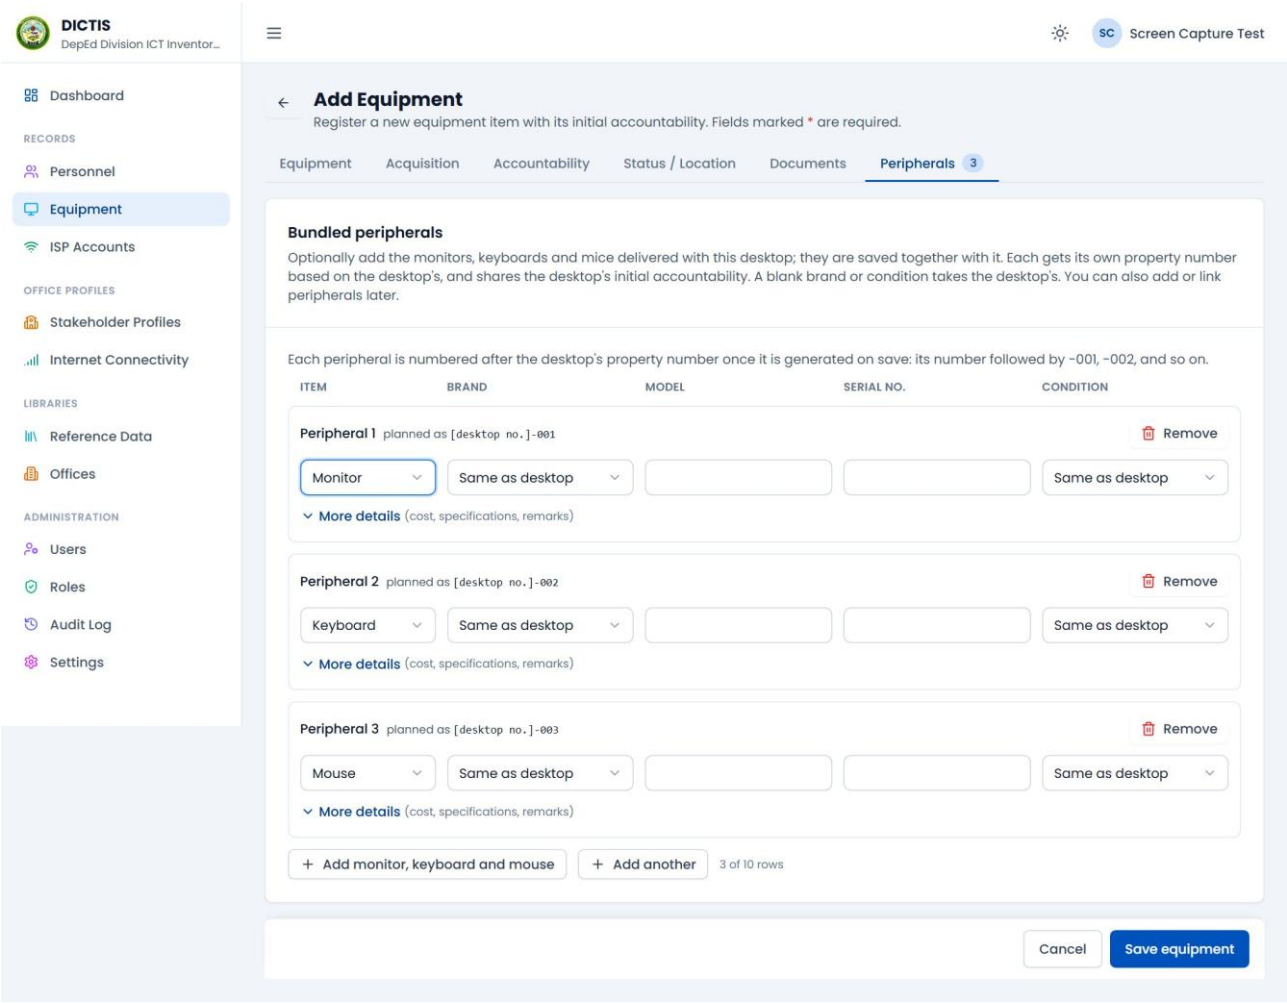


Figure 20. Add Equipment, Peripherals tab for a desktop

6.4 Equipment record (Figures 21-22)

Click the edit icon on a row to open the record. The **Overview** tab shows the QR code, the current accountability, the status and key facts. Click **Print** or **Download** to make the QR label; scanning the label opens this record (after sign-in).

The other tabs hold the same fields as when the item was added. On the **Accountability** tab the current holders are read-only: change them by logging a transaction (section 6.6). Click **Save changes** after editing.

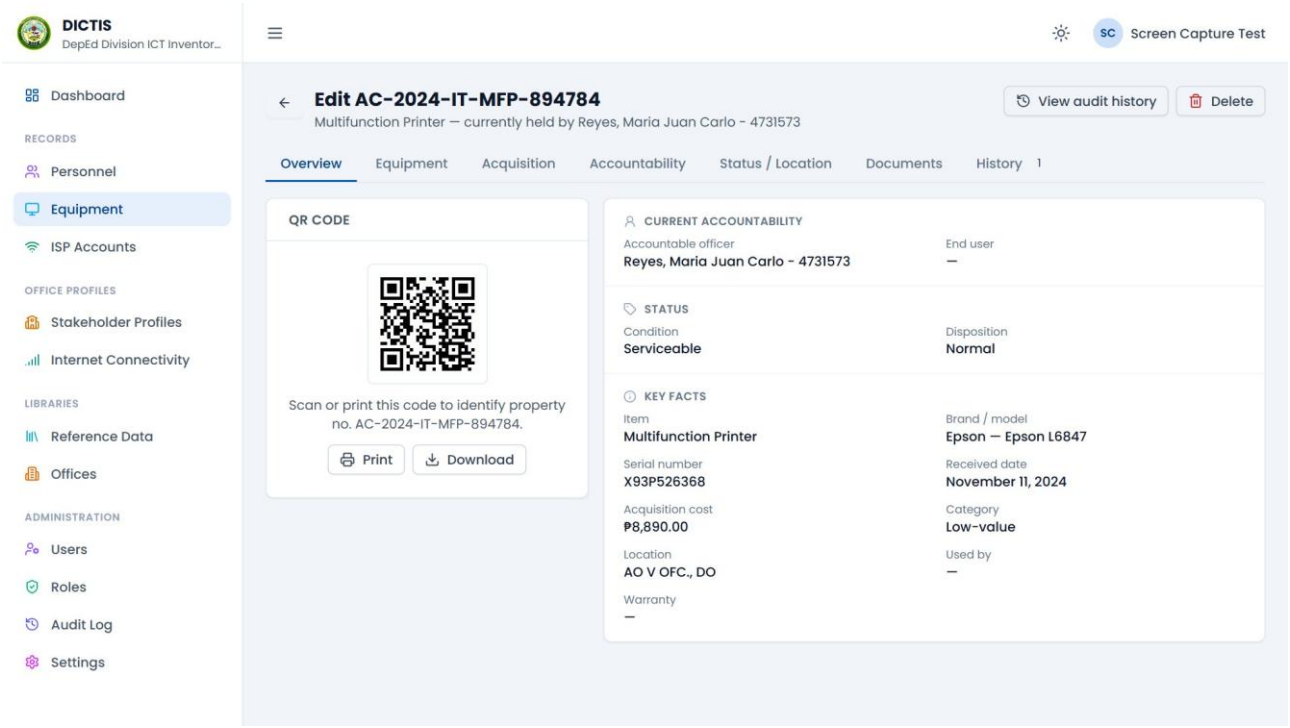


Figure 21. Equipment record, Overview tab with QR code

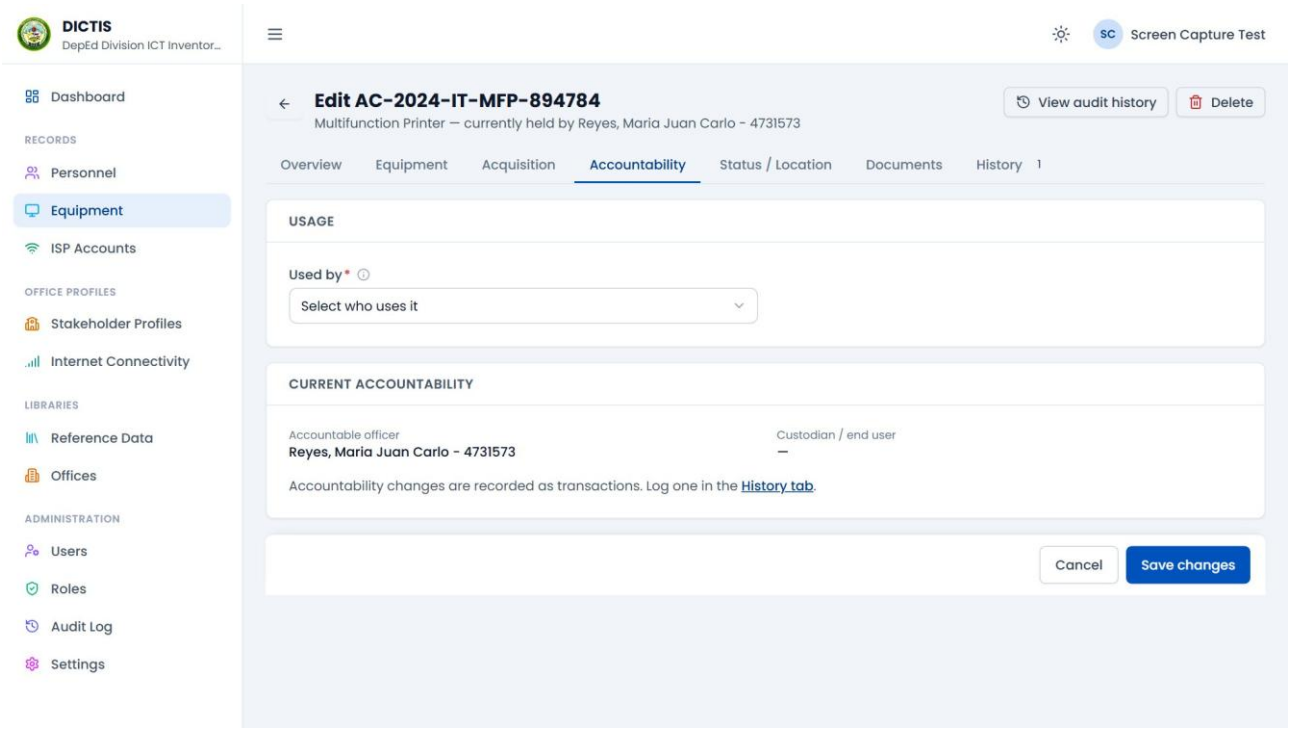


Figure 22. Equipment record, Accountability tab

6.5 Attach documents (Figure 23)

On the **Documents** tab, choose the **Document type**, enter the **Document no.** if any, click **Choose file** (or **Take photo** on a phone) and click **Upload file**. PDF, JPG, PNG and WEBP files up to 5 MB are accepted; photos are cleaned of location data. Each file lists its type, number, size, date and uploader, with **View** and **Download**. Deleting a file asks you to confirm.

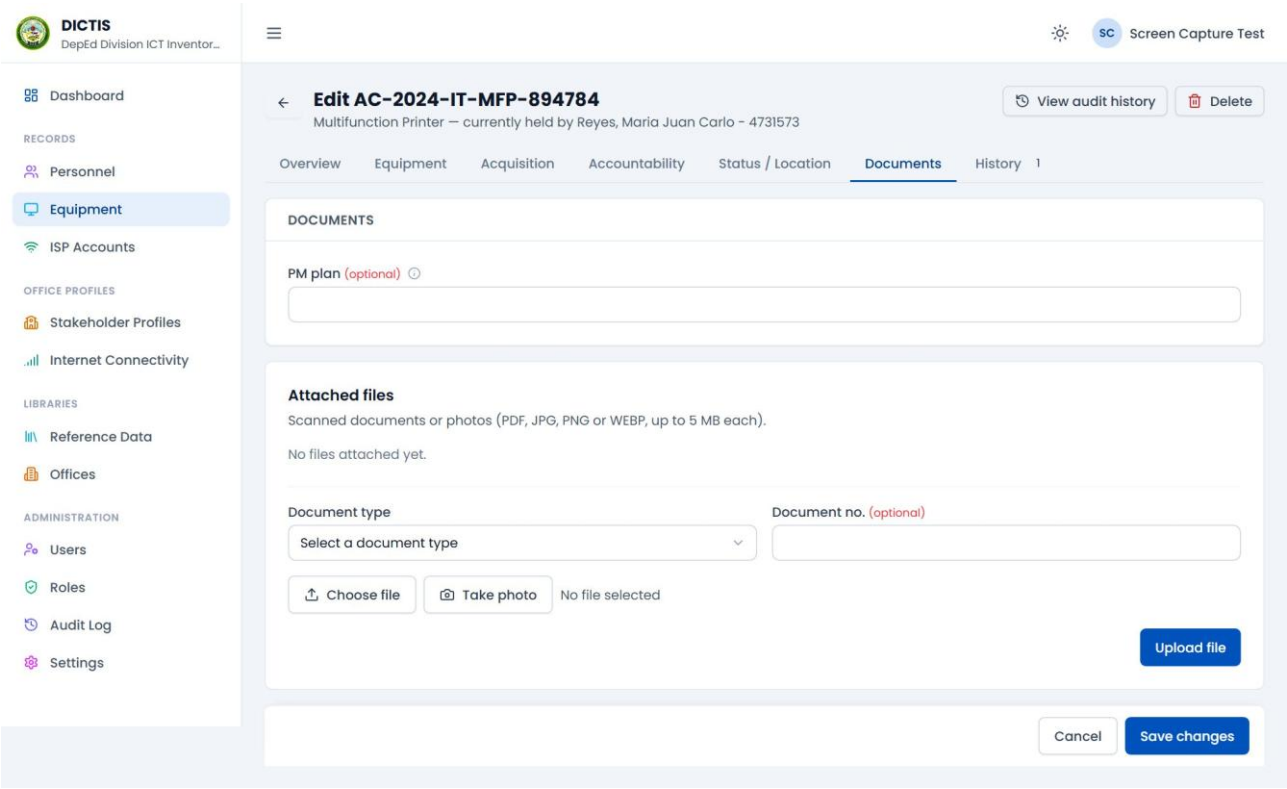


Figure 23. Equipment record, Documents tab with attachments

6.6 Log a transaction (Figure 24)

Every change of accountability is logged as a transaction, which can never be edited or deleted. To issue, transfer, return or otherwise update an item:

1. Open the item and click the **History** tab.
2. Choose the **Transaction type** (for the first entry of an existing item, **Beginning Inventory**).
3. Select the new **Accountable officer**, **End user** and **Received by**, with their dates. Leaving a person blank means nobody holds the item in that role.
4. Add the supporting documents and their PAR/ICS/RRSP/RS/WMR and OR/SI/DR/IAR numbers.
5. Click **Log transaction**.

The item's current holders change to match the new transaction, and it appears in the **Transaction history** below. You can only choose personnel within your data scope.



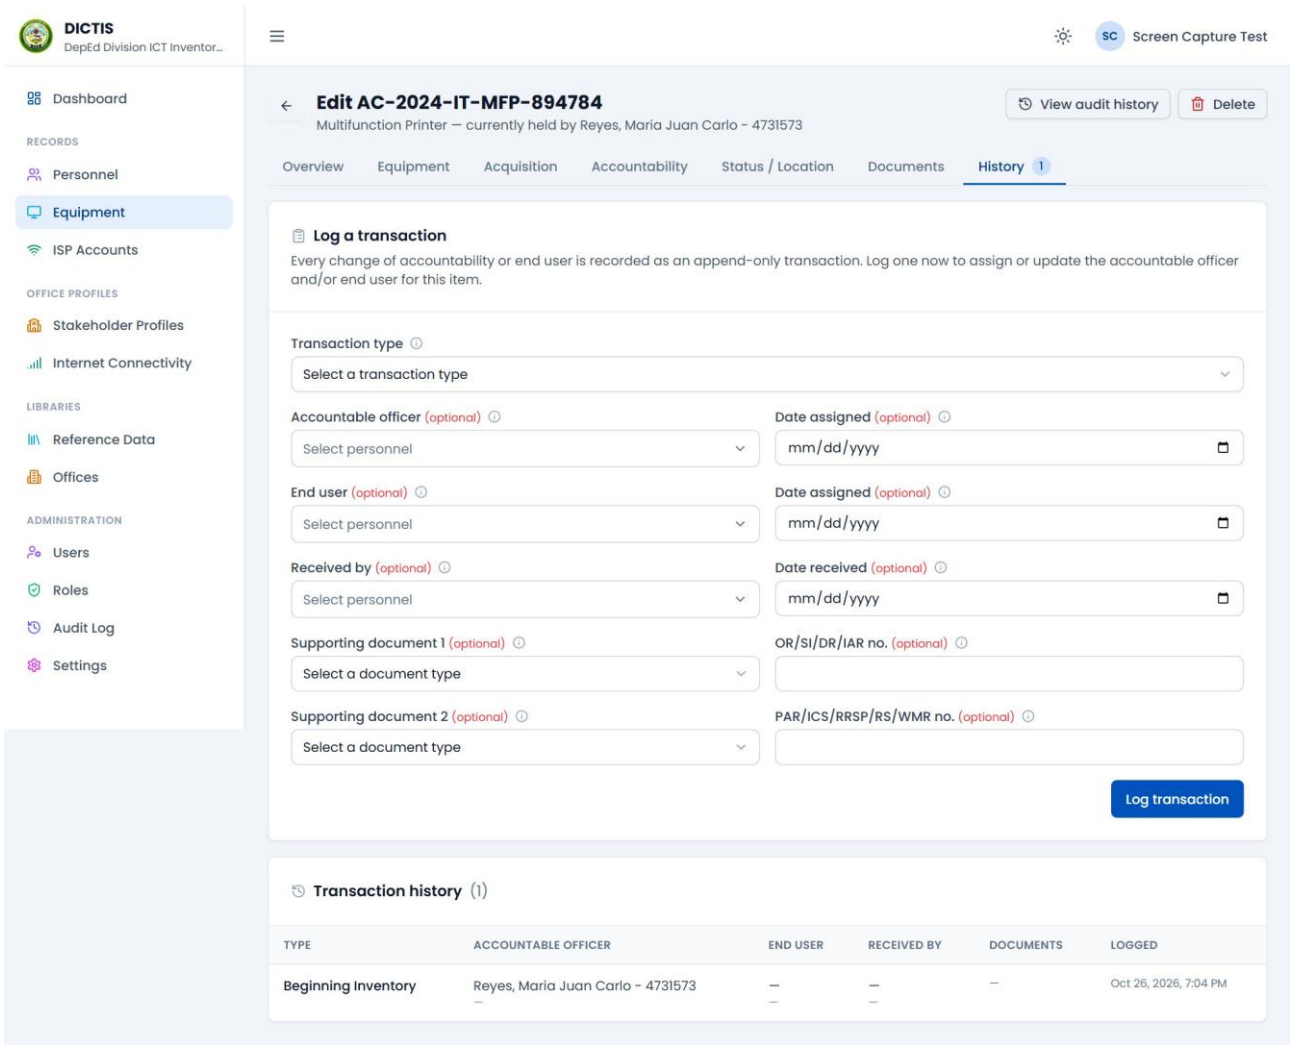


Figure 24. Equipment record, History tab and Log a transaction

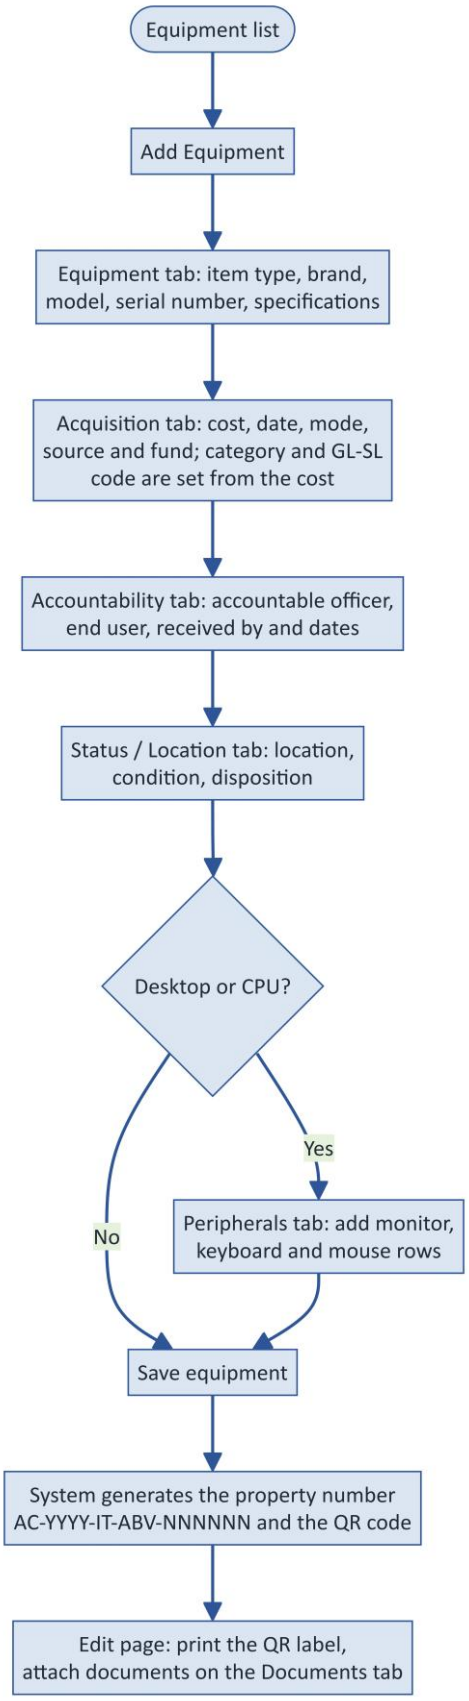

Flowchart 3. Registering equipment

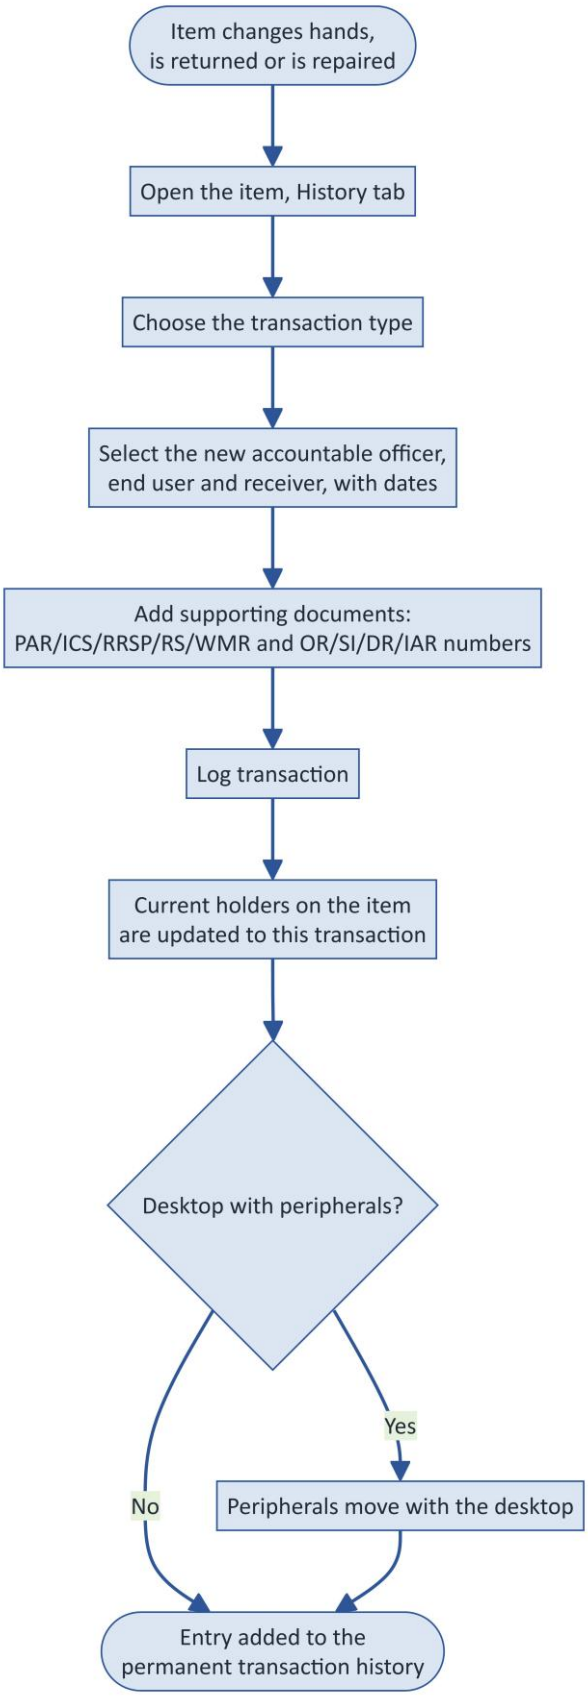

Flowchart 4. Transferring accountability

6.7 Audit history and delete (Figures 25-26)

Users who can view the audit log see **View audit history**, which opens the Audit Log filtered to this item: every change, transaction and attachment, with who made it and when.

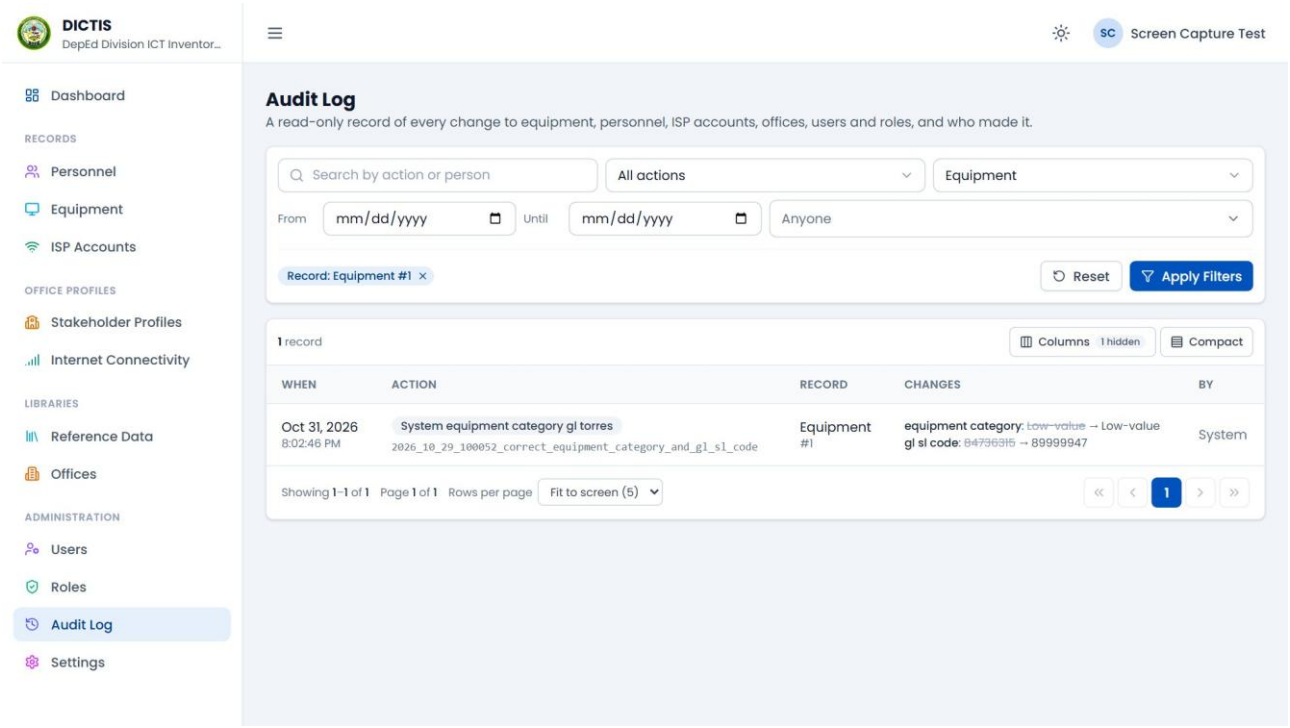


Figure 25. Audit history of one equipment record

Delete asks you to confirm. The item is hidden from lists but kept, with its history and attachments.

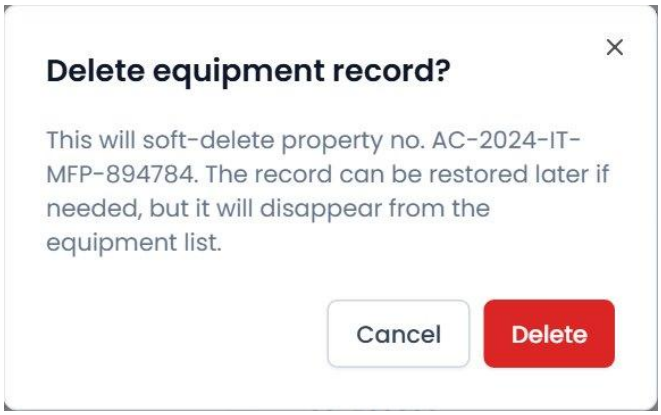


Figure 26. Delete equipment confirmation

7. ISP Accounts

7.1 ISP accounts list (Figure 27)

Menu: **Records > ISP Accounts**

Lists internet subscriptions with provider, account number, office, subscription and connection type, cost per month, contract period and signal quality. Filter by provider and contract status.

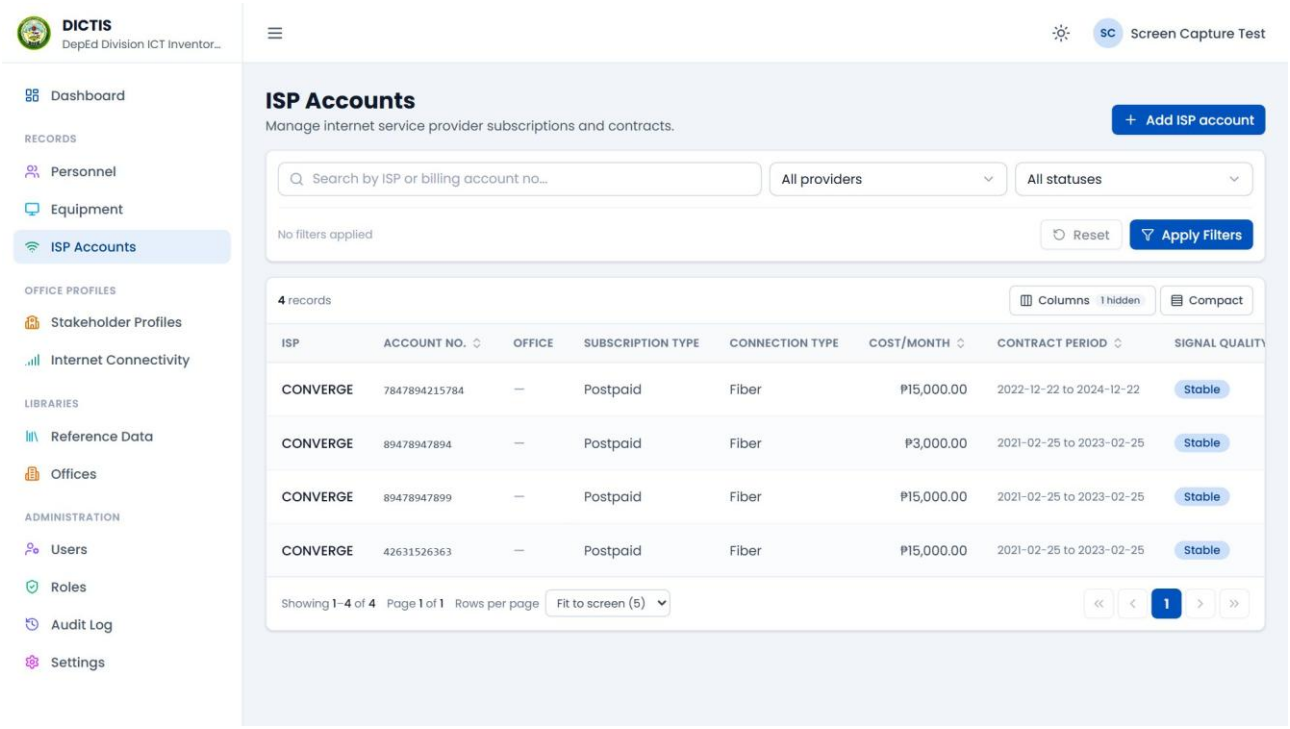


Figure 27. ISP Accounts

7.2 Add an ISP account (Figures 28-30)

Click **Add ISP account** and fill in the three tabs:

- **ISP Provider:** provider, source of funds, cost per month, subscription and connection type, minimum and maximum speed, and school/office.
- **Billing and Contract:** billing account number, package inclusions, contract start and end, subscriber upload and download speeds, mode and source of acquisition, donor, and **Inactive contract**.
- **Coverage and Quality:** purpose, school area coverage, access points, admin areas and classrooms covered with their ratings, overall signal quality and ISP service rating (1-5).

Click **Save ISP account**. Speeds are in Mbps.

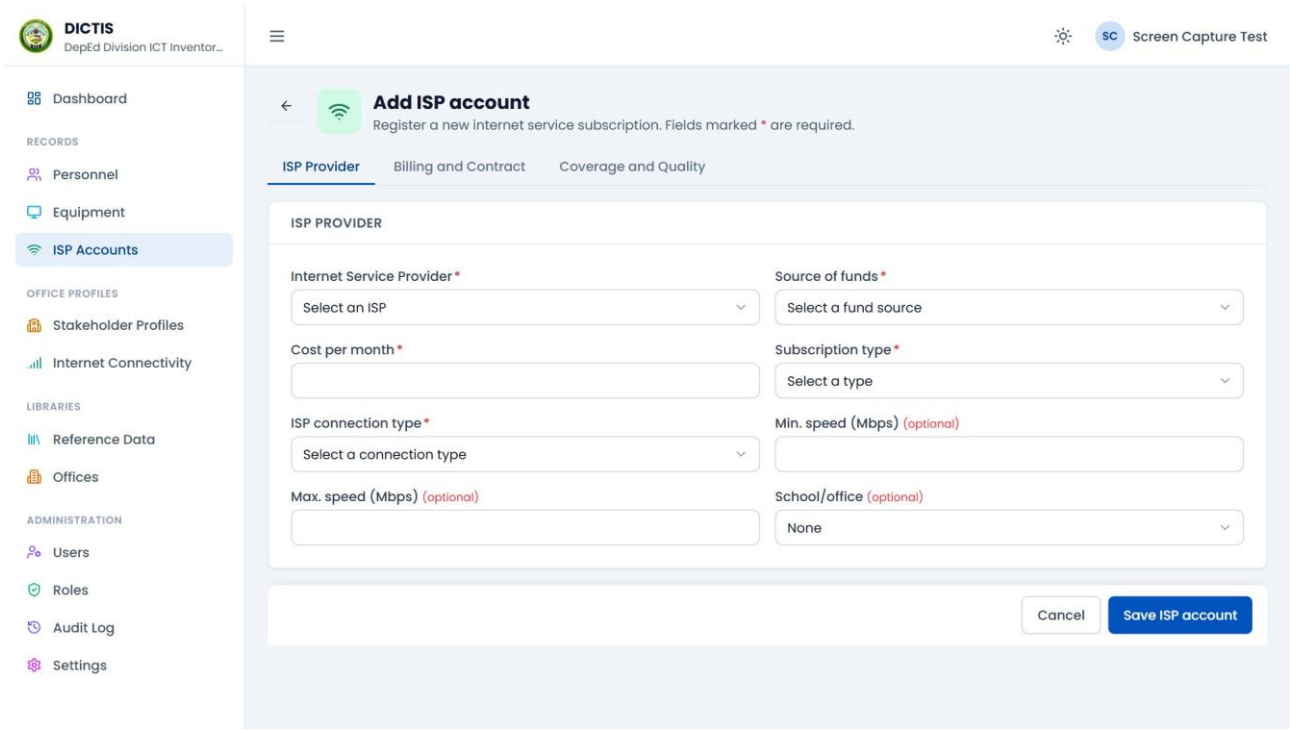


Figure 28. Add ISP account, ISP Provider tab

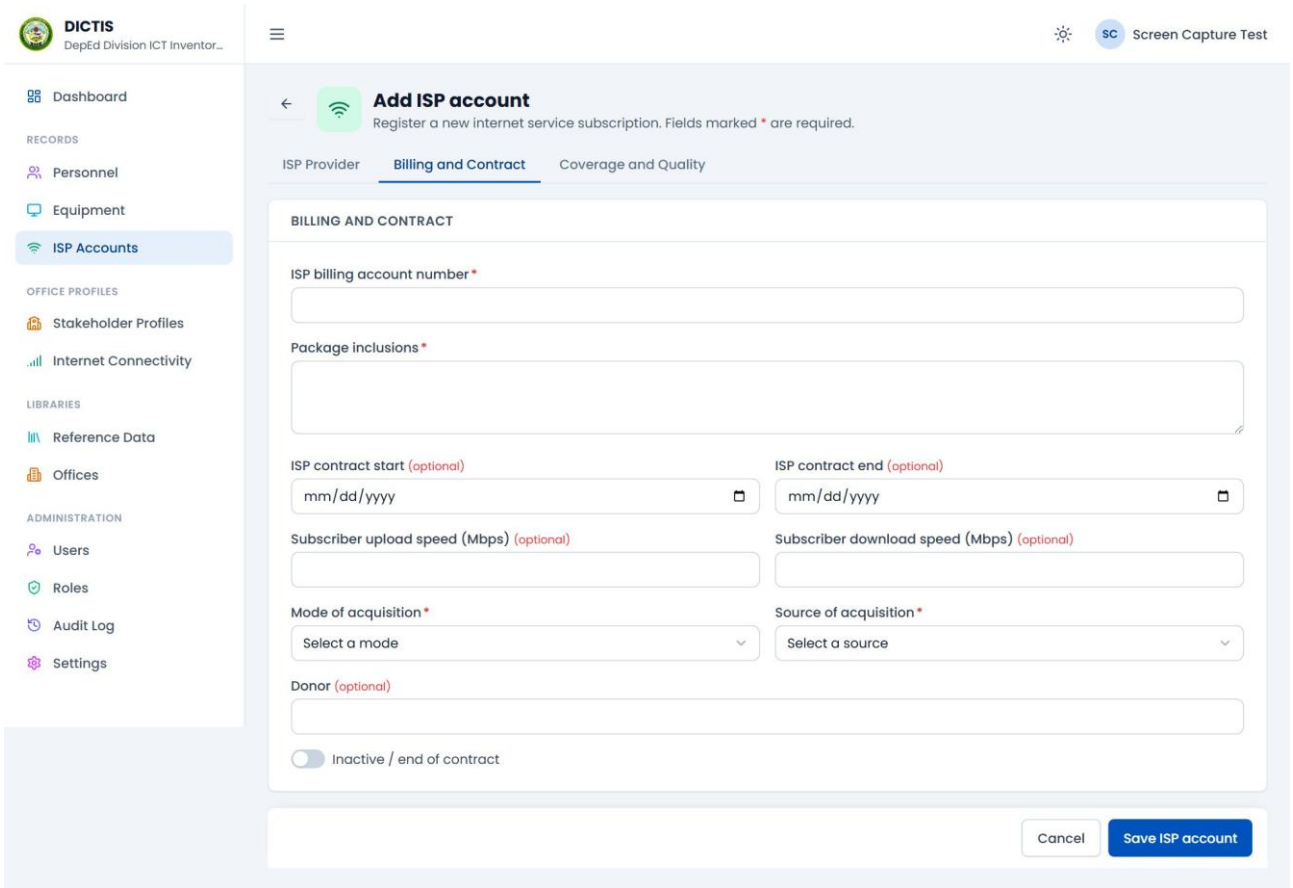


Figure 29. Add ISP account, Billing and Contract tab

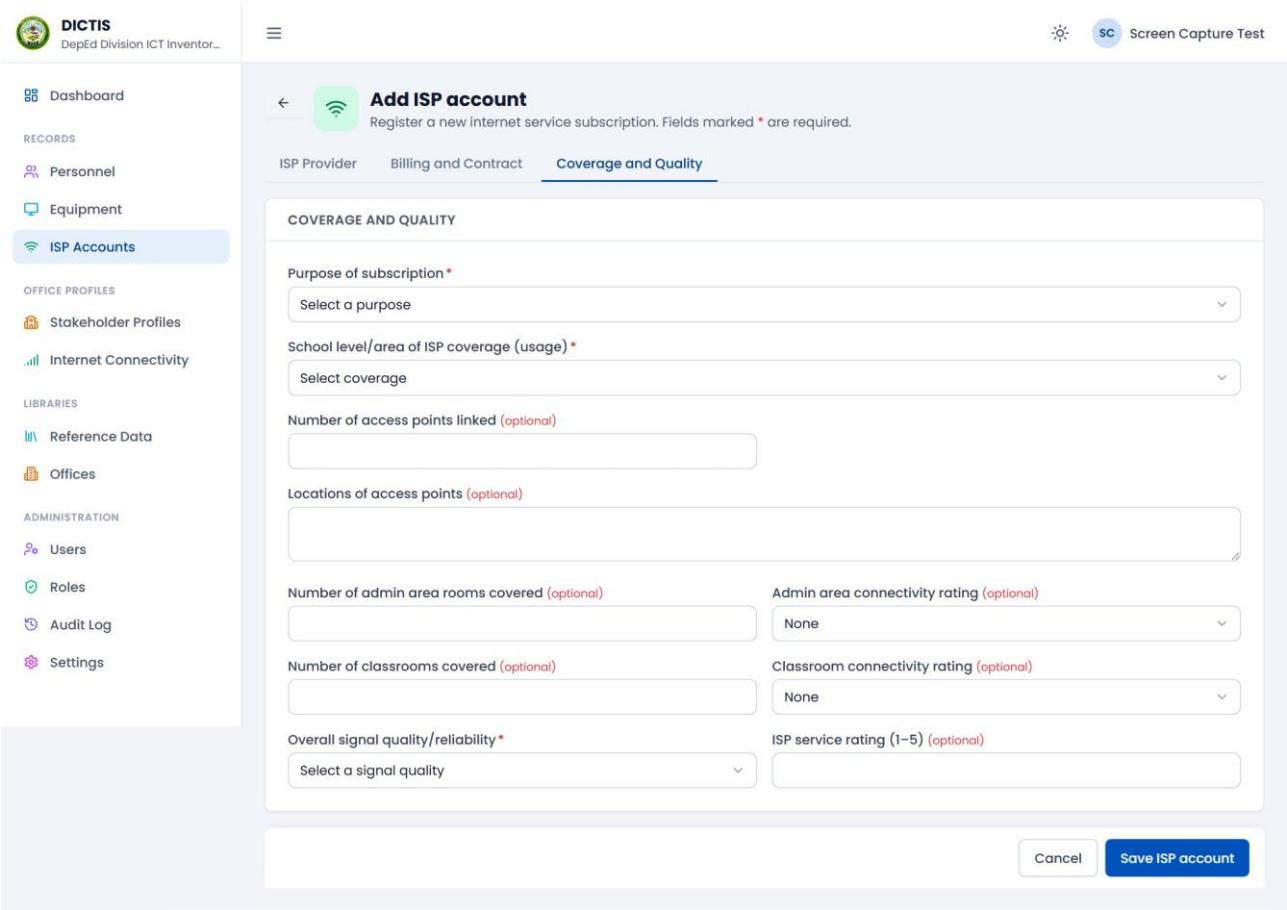


Figure 30. Add ISP account, Coverage and Quality tab

7.3 Speed tests and subscription costs (Figures 31-32)

Open an account to see two growing histories. On **Speed tests**, enter the download and upload speed, ping, when the test was run, signal quality and service rating, then click **Log speed test**. On **Subscription costs**, enter the actual and projected contract dates and amounts, then click **Log subscription cost**. Entries are added to the history and cannot be edited.

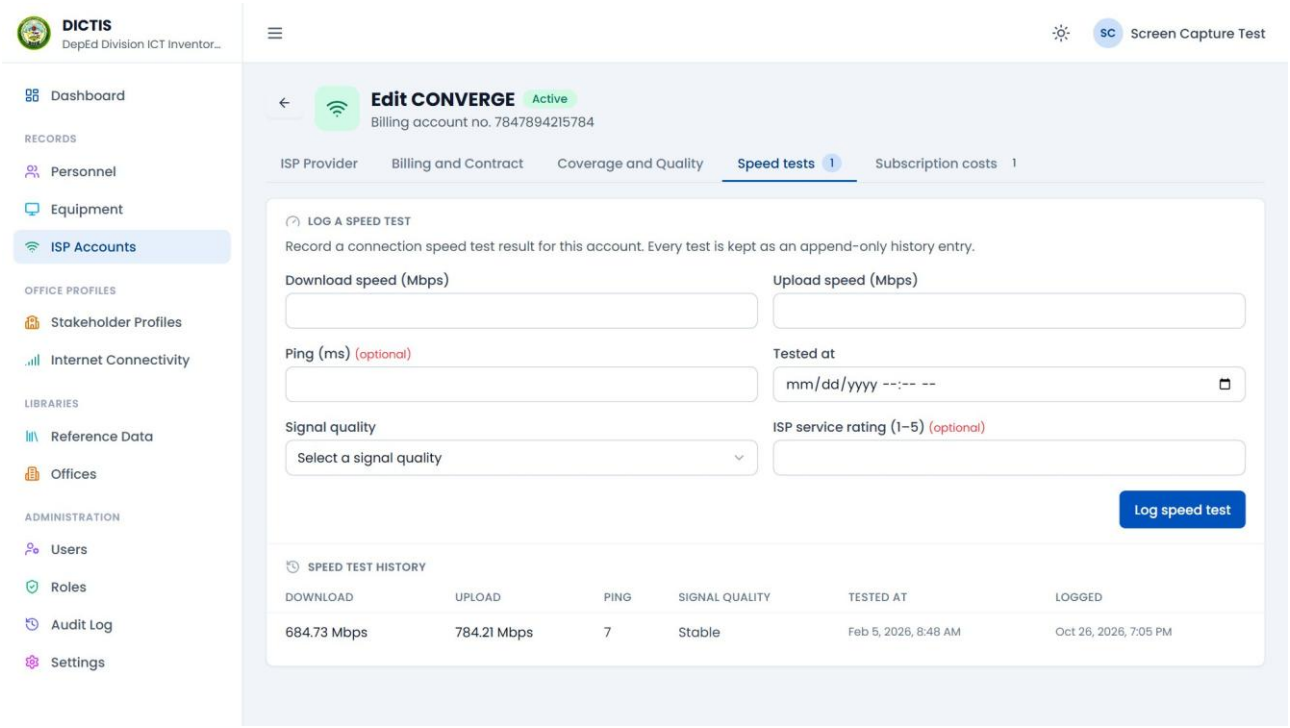


Figure 31. ISP account, Speed tests tab

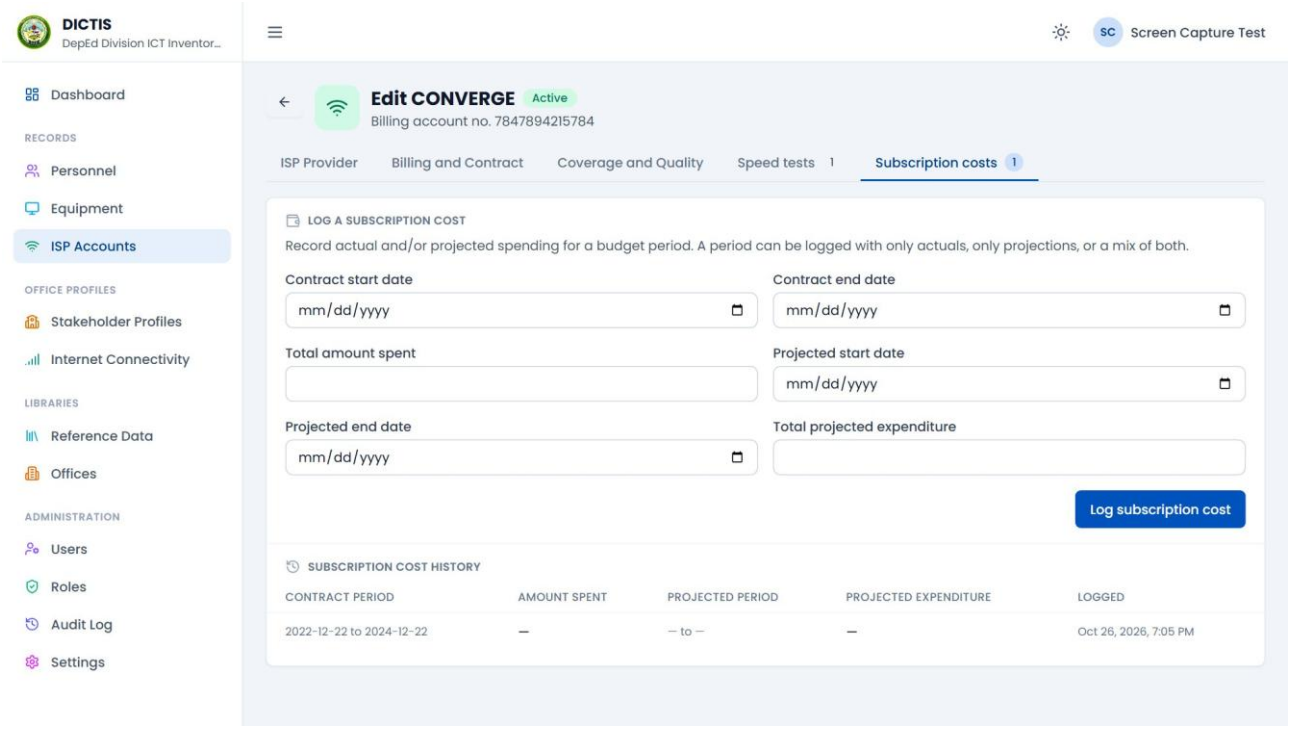


Figure 32. ISP account, Subscription costs tab

7.4 Delete (Figure 33)

The delete icon on a row asks you to confirm, then hides the account from the list.


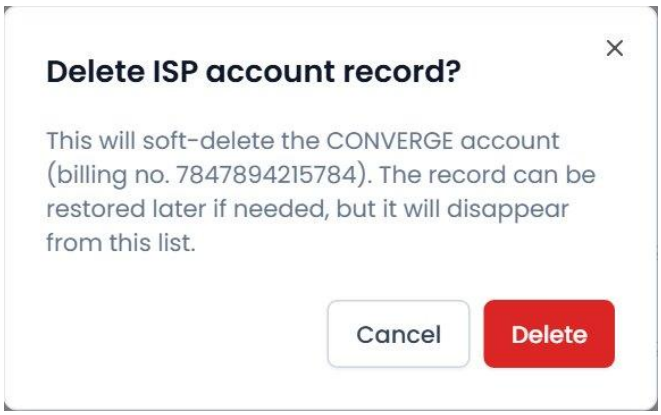


Figure 33. Delete ISP account confirmation

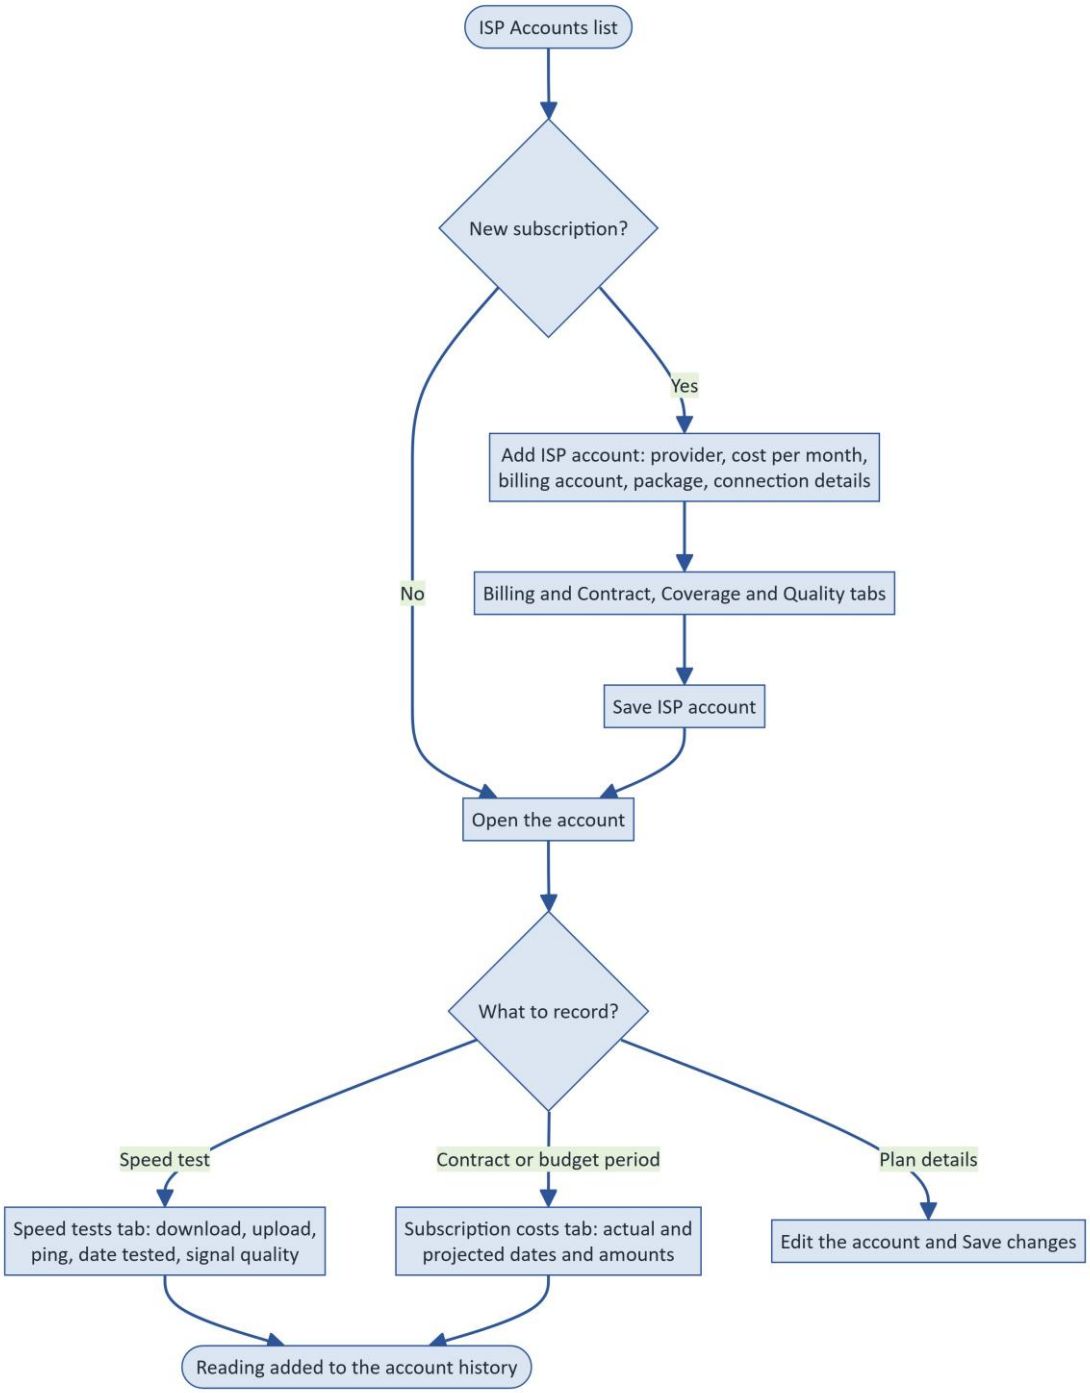

Flowchart 5. Recording ISP accounts and readings

8. Office Profiles

Every school and office has one **stakeholder profile** and one **internet connectivity survey**, shared by everyone assigned to that office. Users who reach all records see the lists of every office; others see **Our Office Profile** and **Our Office Connectivity**, which open their own office directly.

8.1 Stakeholder profiles (Figures 34-37)

Menu: **Office Profiles > Stakeholder Profiles**

The list shows each office with its type, school ID, whether the profile is started and when it was last updated. Click **Start** (or the row) to open the profile.

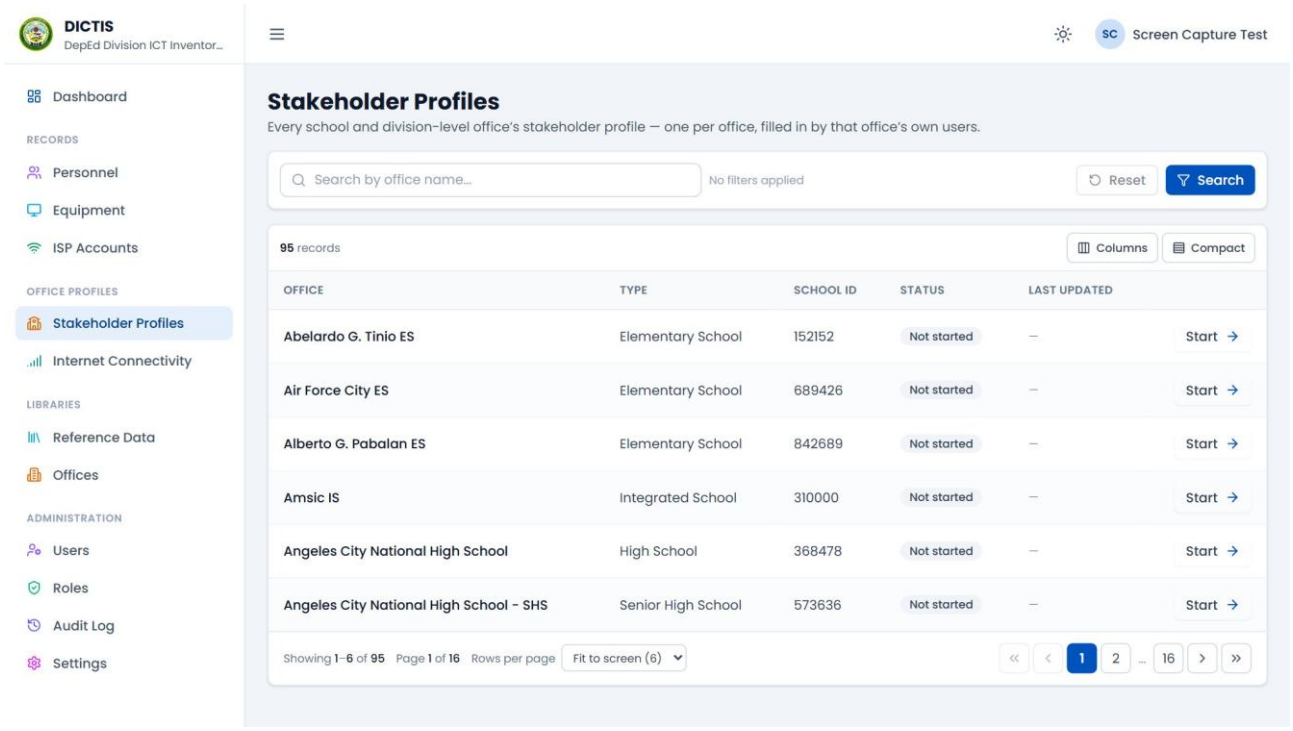


Figure 34. Stakeholder Profiles

The profile is split into eight sections shown one at a time: **Location**, **Organization**, **Key personnel**, **Contact numbers**, **Geographic coordinates**, **Accessibility**, **Community engagement** and **Submission & notes**. The bar at the top shows how complete the profile is, and each step marks sections with empty fields. Use **Previous** and **Next**, then **Save changes**. Province, city/municipality and barangay are chosen from the PSGC list.

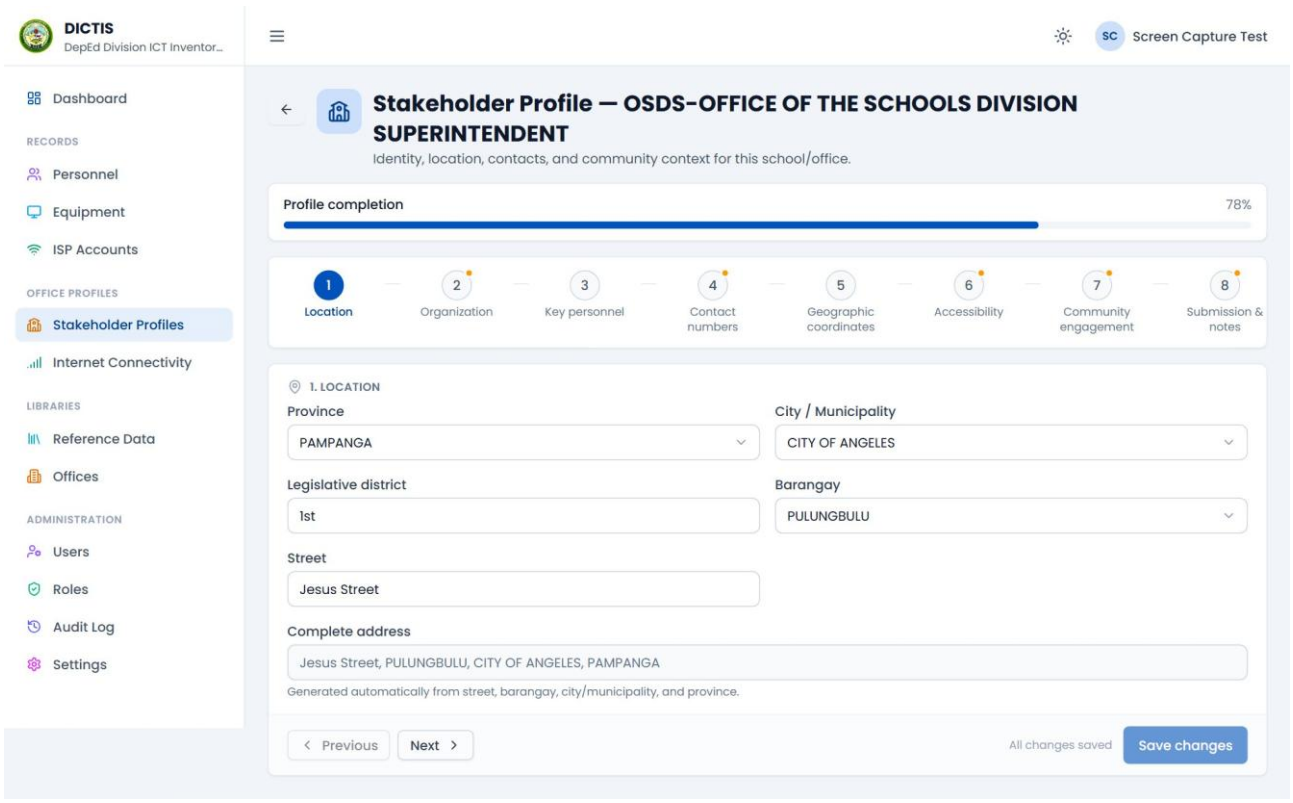


Figure 35. Stakeholder profile, Location section

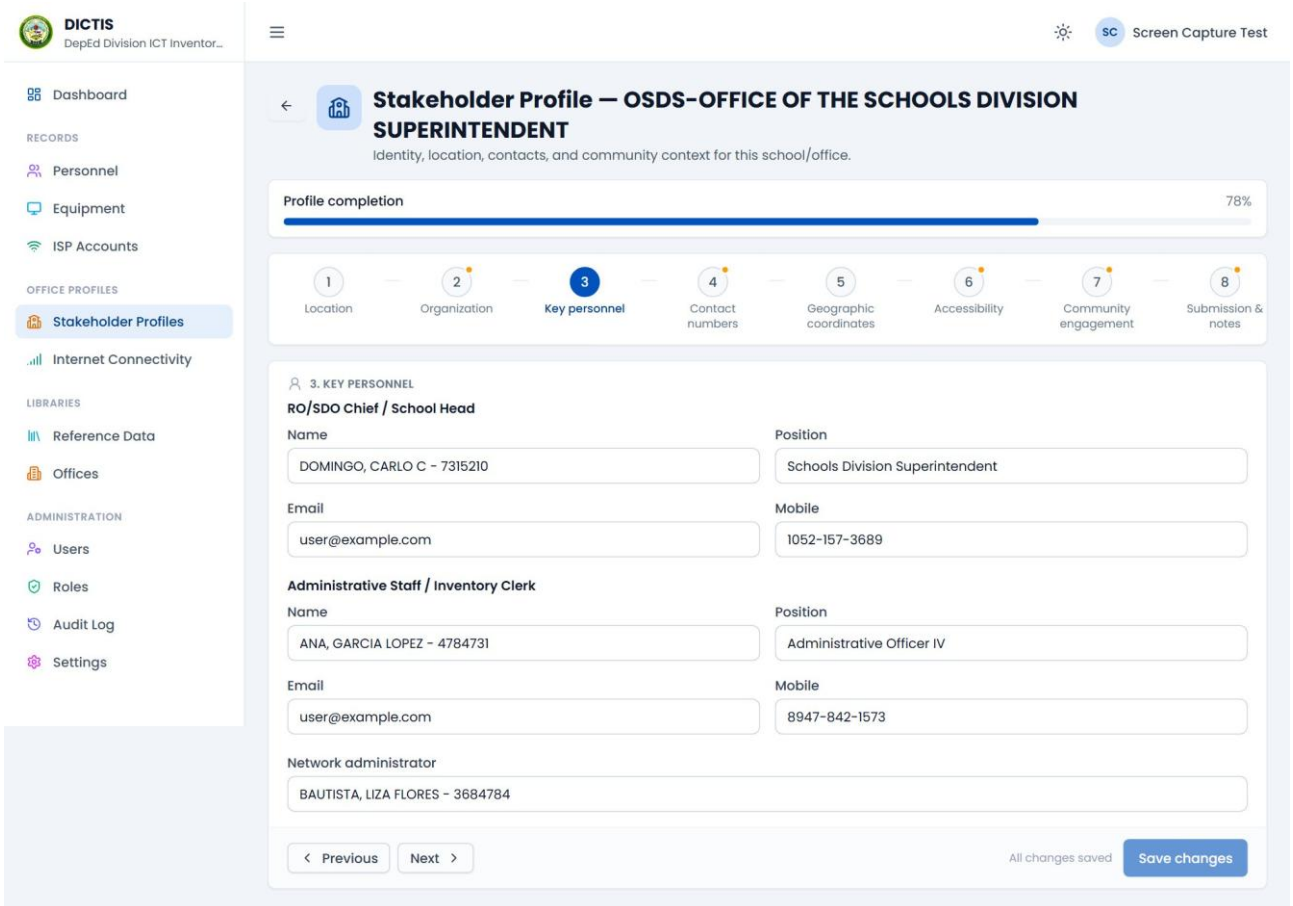


Figure 36. Stakeholder profile, Key personnel section

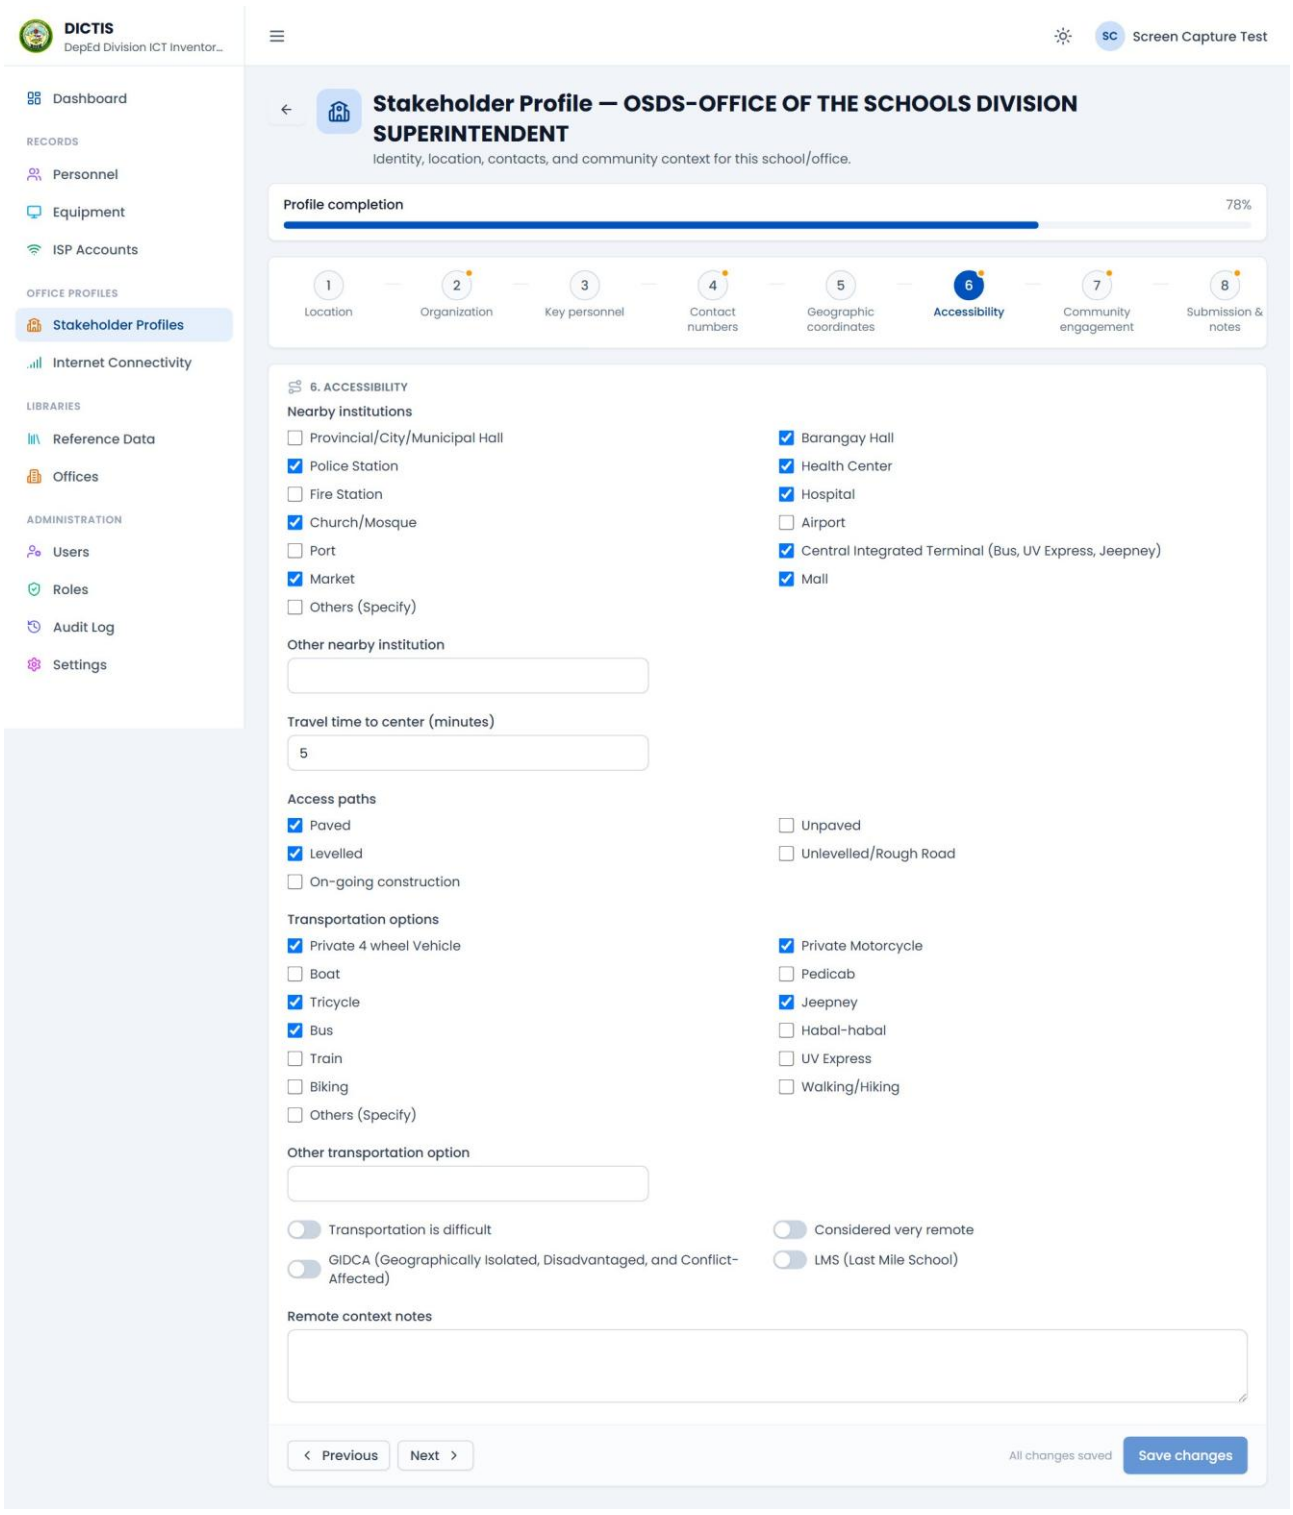


Figure 37. Stakeholder profile, Accessibility section

8.2 Internet connectivity survey (Figures 38-39)

Menu: **Office Profiles > Internet Connectivity**

The list works like the stakeholder profiles. The survey records ISP availability (available and subscribed ISPs), mobile signal types and data quality, subscription details and bandwidth, DICT free Wi-Fi, coverage areas and the source and reliability of electricity. Click **Save changes** when done.

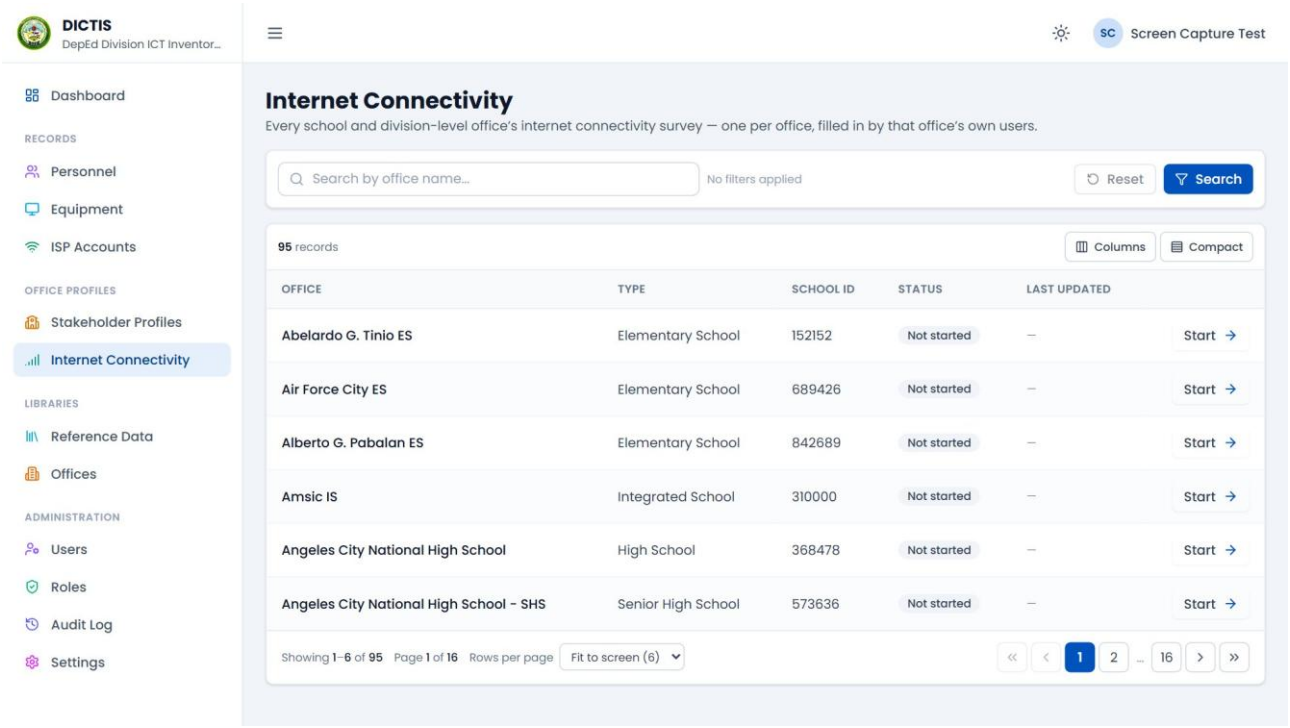


Figure 38. Internet Connectivity


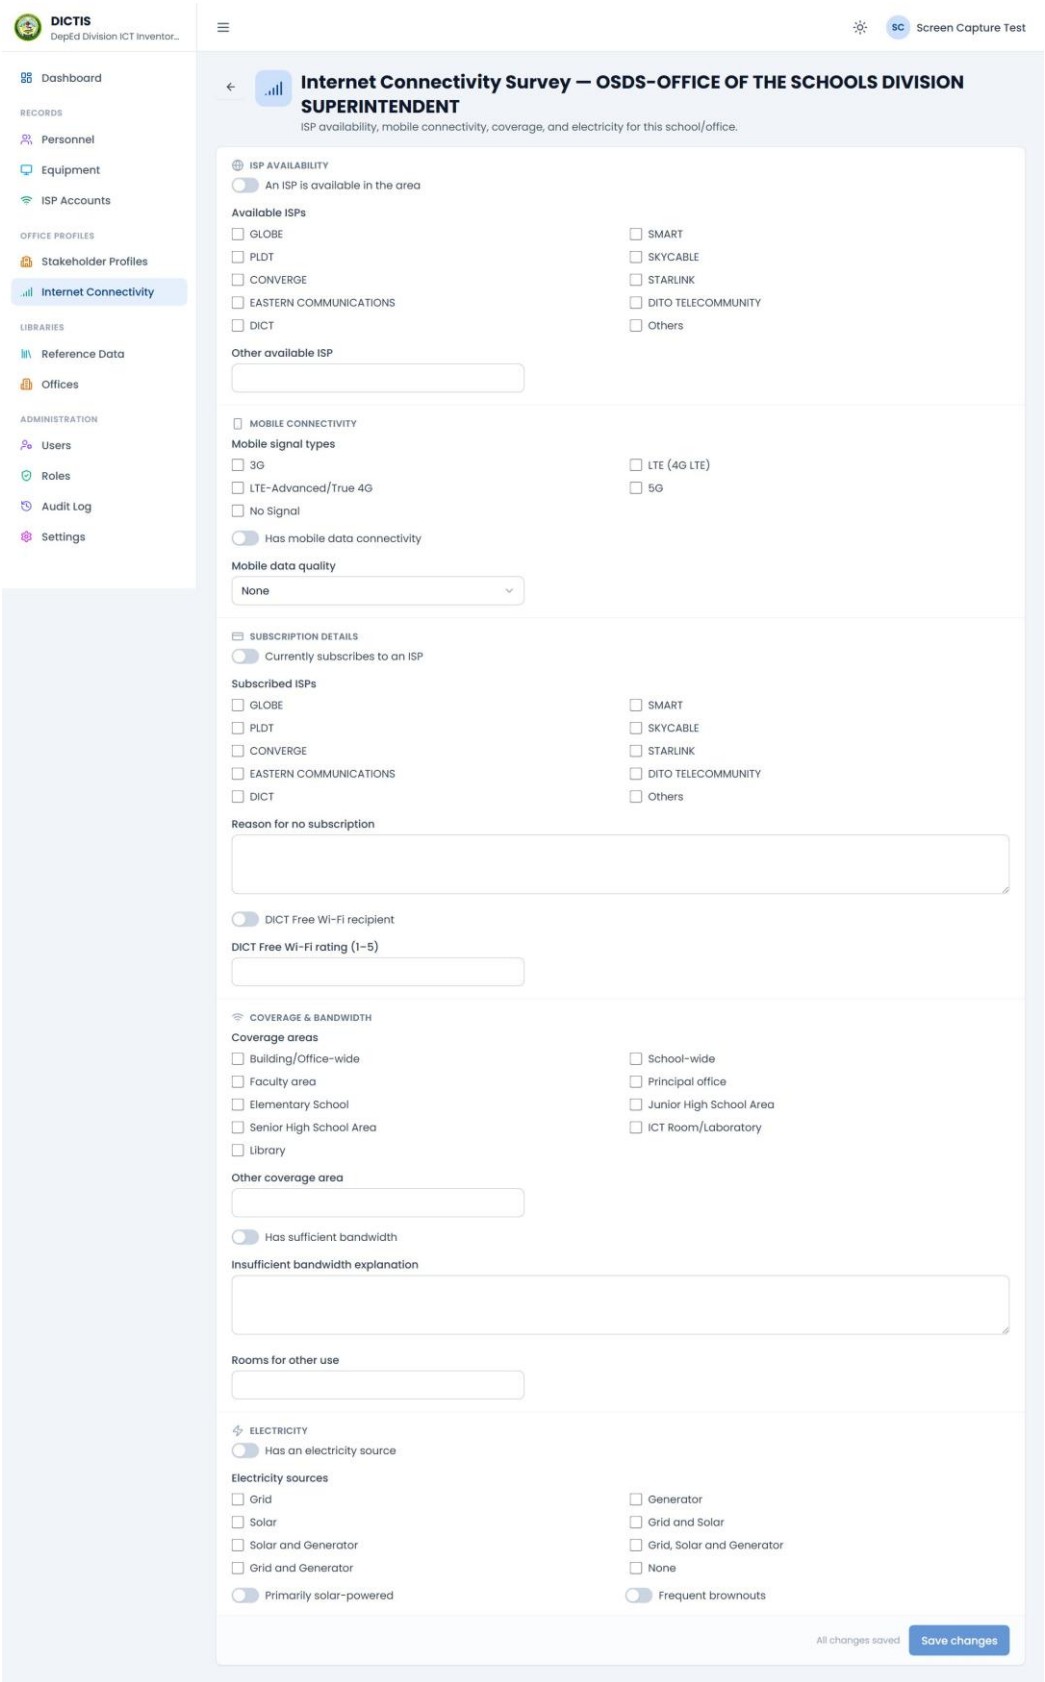


Figure 39. Internet connectivity survey

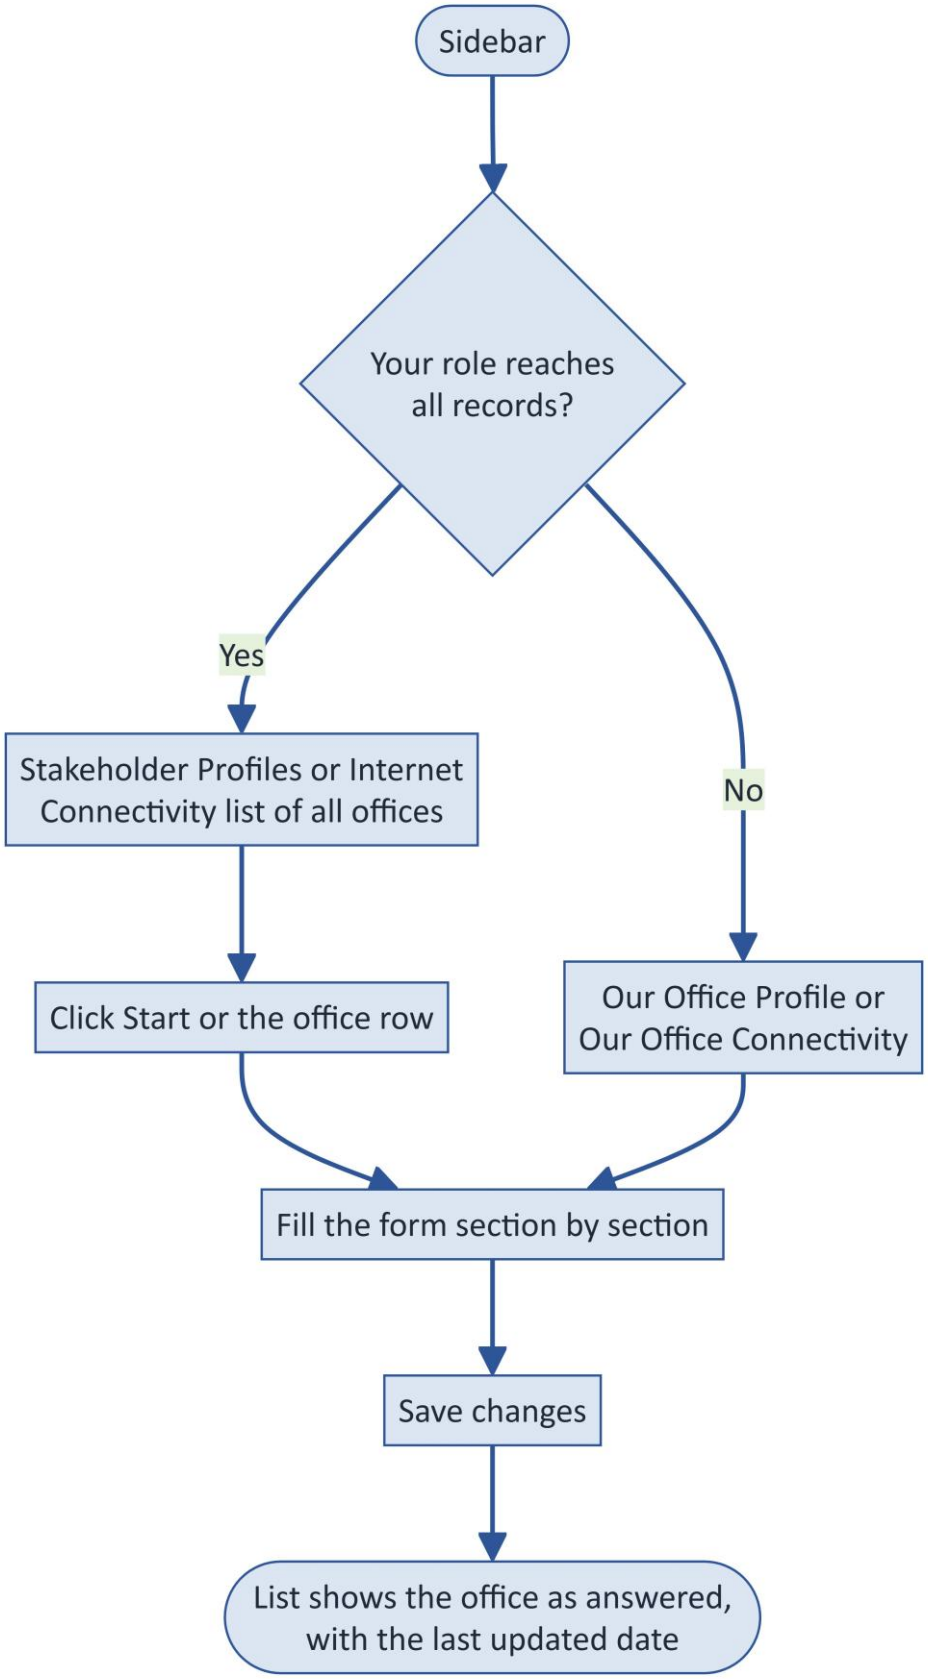

Flowchart 6. Filling in office profiles

9. Libraries

9.1 Reference data (Figures 40-45)

Menu: **Libraries > Reference Data**

Reference data holds every dropdown list in DICTIS. **Dedicated tables** (Tier 1) are larger lists such as item types, brands, positions and ISP providers. **Grouped libraries** (Tier 2) hold the small lists, such as units of measure, disposition statuses and signal quality, grouped by type. Click a card to open a table.

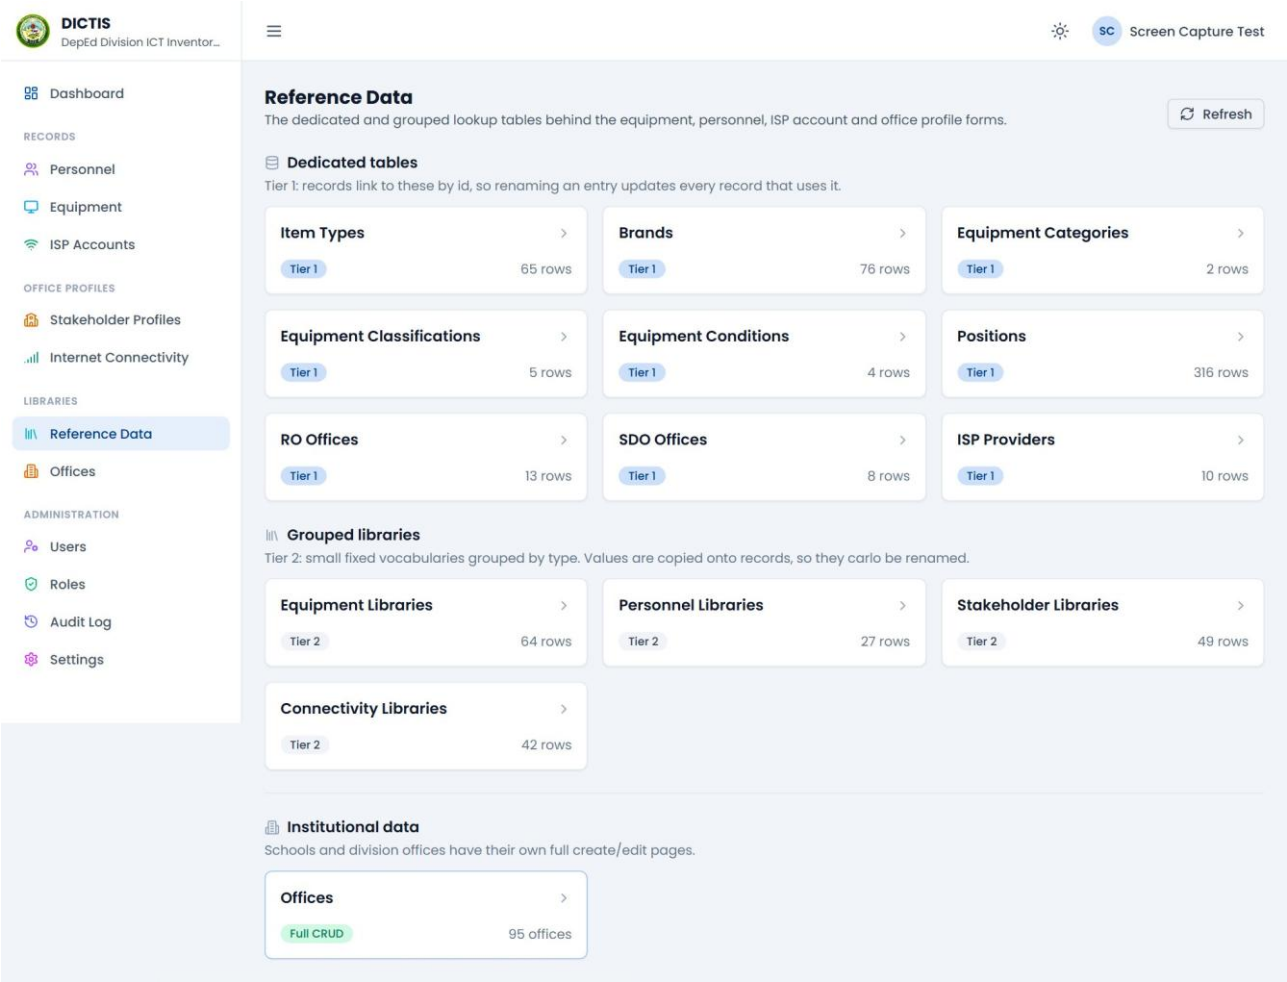


Figure 40. Reference Data

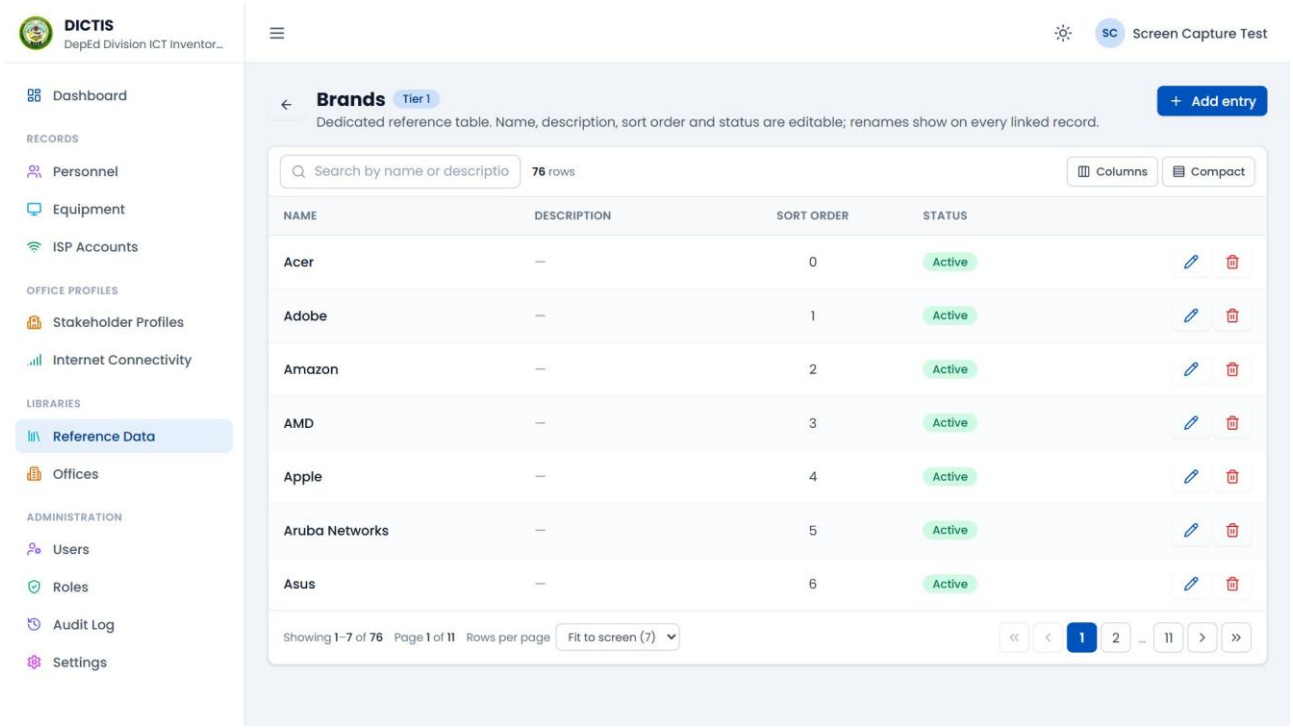


Figure 41. Reference table (Brands)

Click **Add entry**, enter the name (or, in a grouped library, the type and value), an optional description, the sort order and whether it is **Active**, then click **Add**.

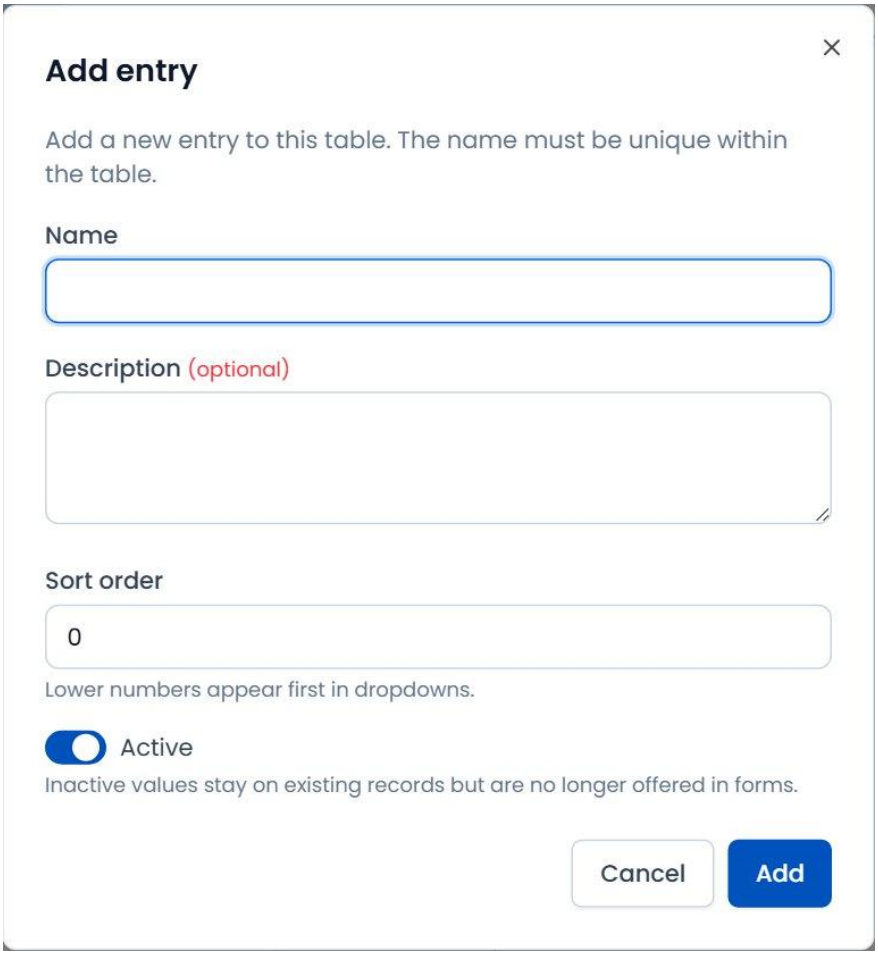


Figure 42. Add entry

Item types also carry an **Abbreviation** (three letters or digits, used in property numbers) and a **Dashboard group** (the dashboard card the item is counted under). Equipment classifications carry a default UACS code and useful life.

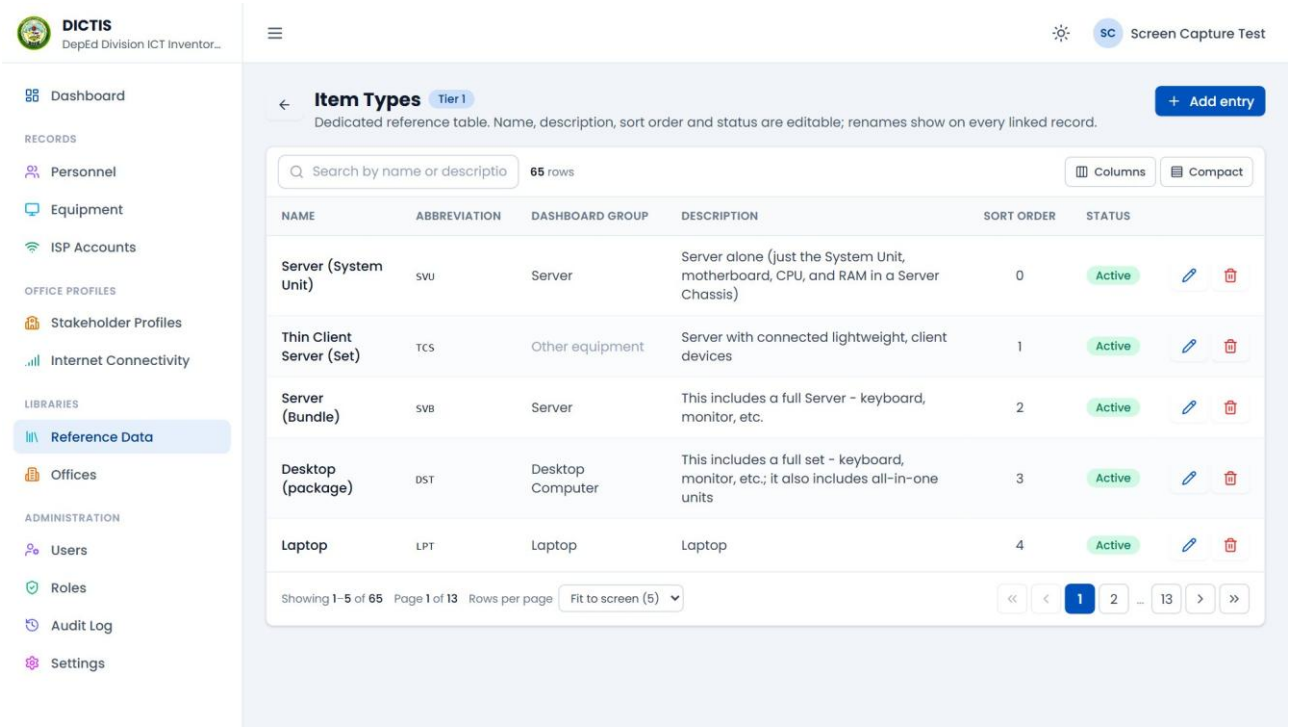


Figure 43. Item Types with abbreviations

Use the edit icon to rename an entry or change its order and status. Renaming a dedicated-table entry updates every record that uses it. Values in grouped libraries cannot be renamed: add a new value and deactivate the old one.

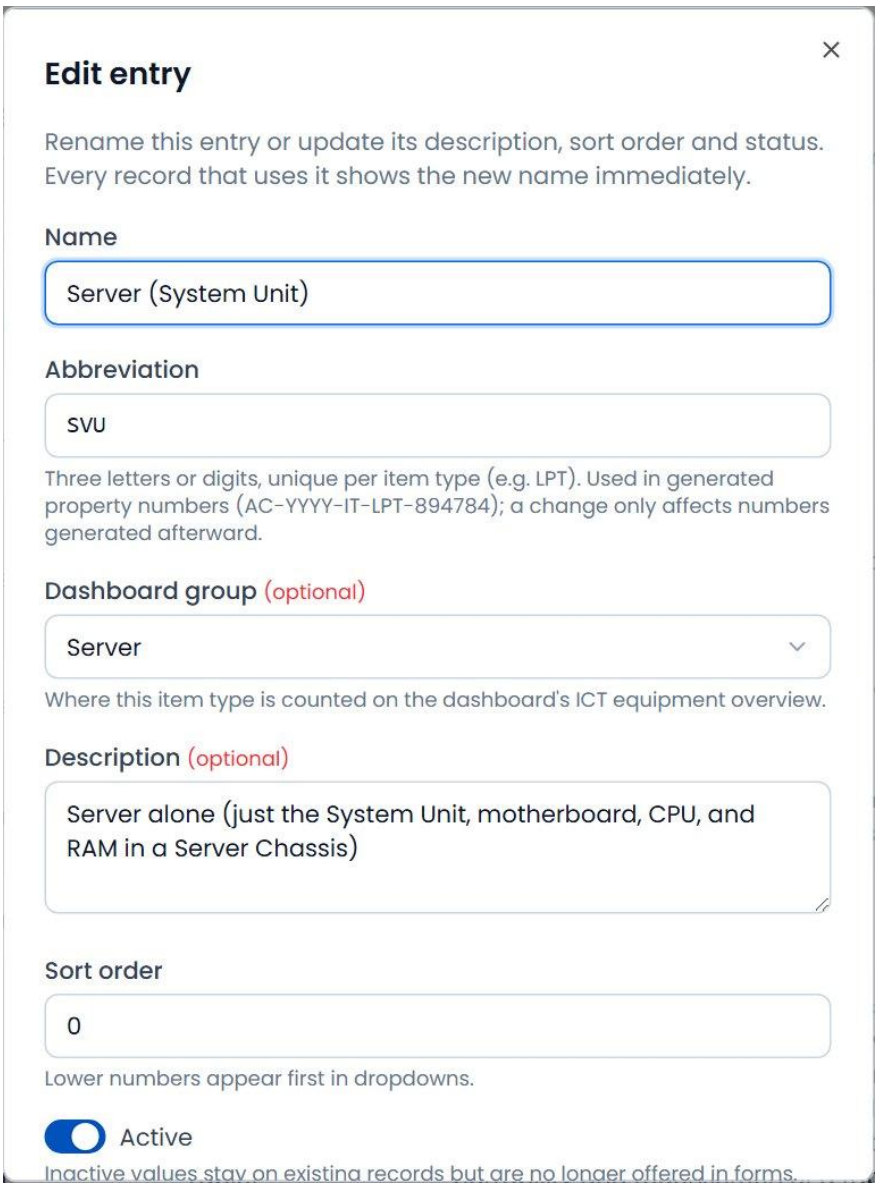


Figure 44. Edit entry (item type)

Delete asks you to confirm and is refused while any record still uses the value. To retire a value, switch **Active** off: it stays on existing records but is no longer offered in forms.

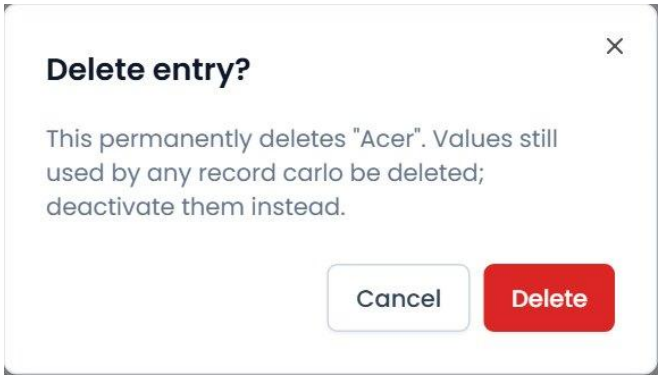


Figure 45. Delete entry confirmation

9.2 Offices (Figures 46-49)

Menu: **Libraries > Offices**

Lists every school and division office or unit. Click **Add office** and enter the office name (required), type, school ID, address, region, division, district, contact number and email, then **Save office**.

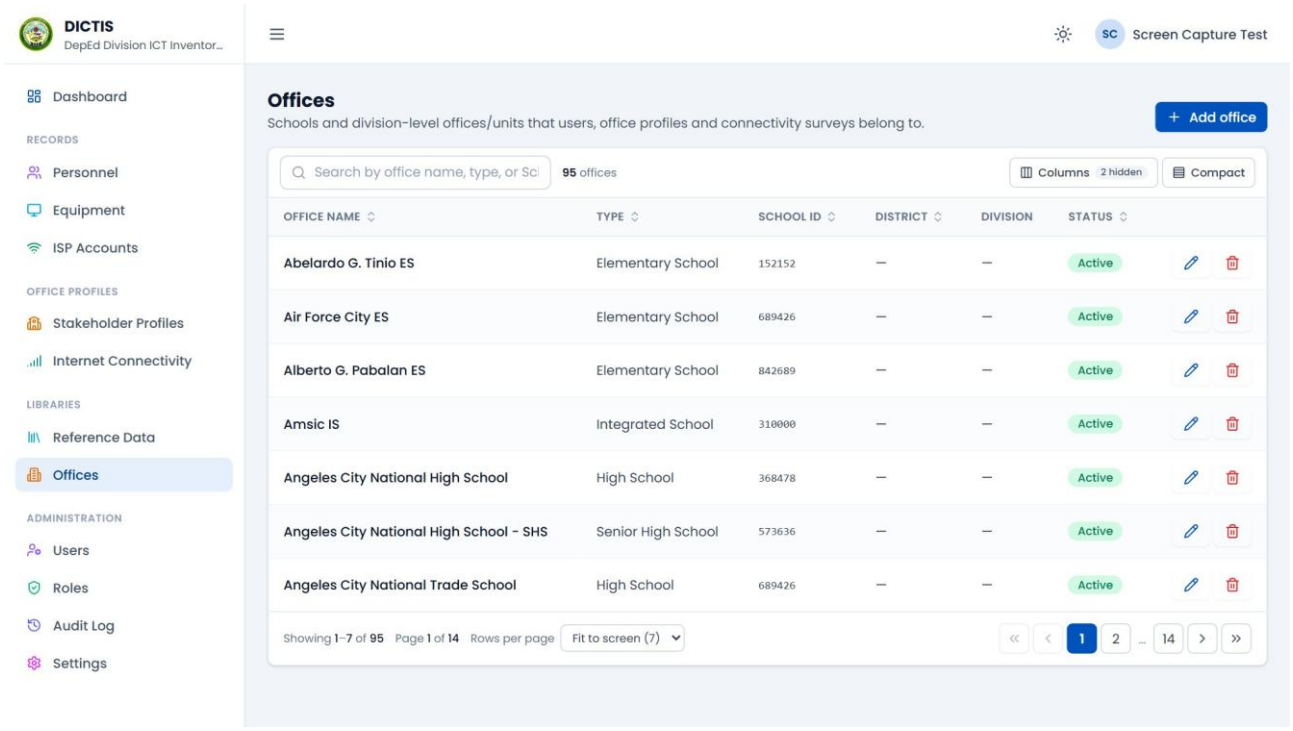


Figure 46. Offices

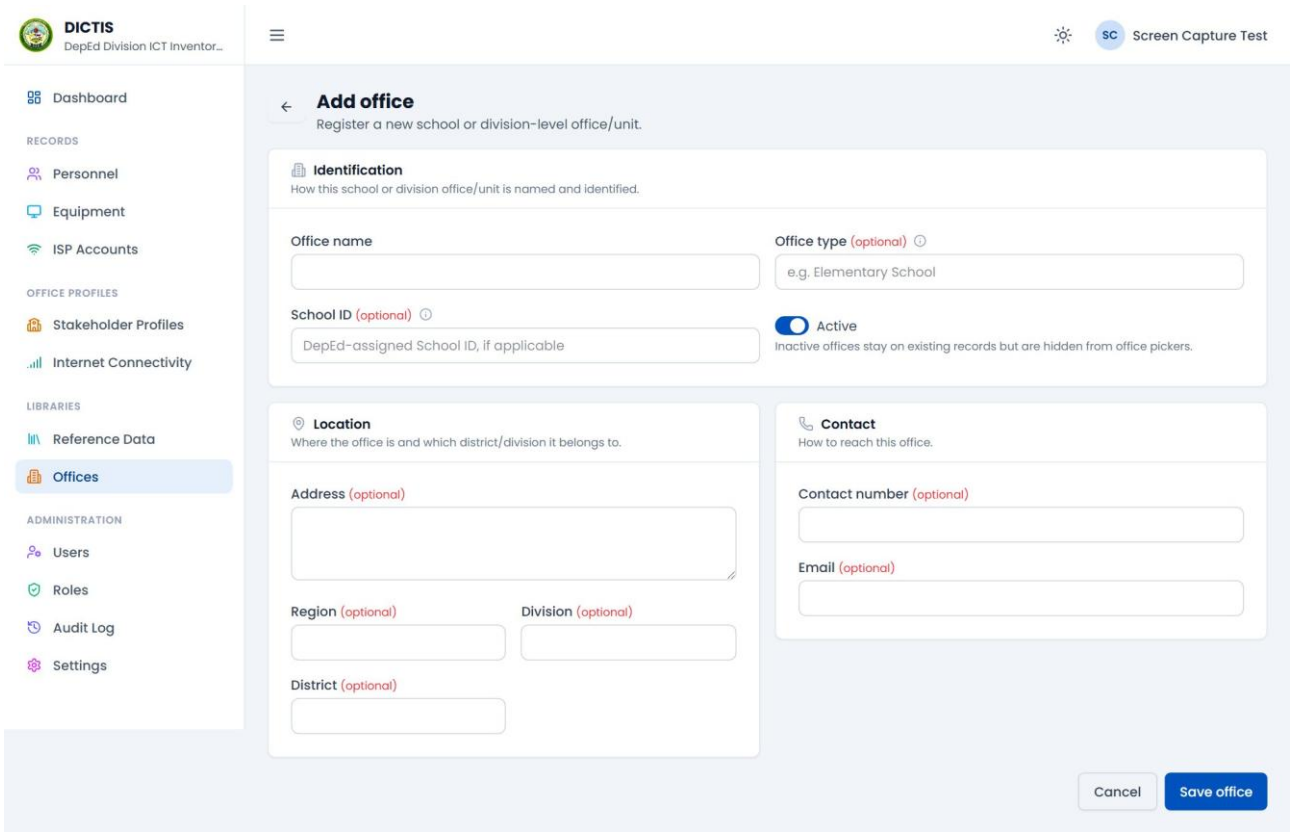


Figure 47. Add office

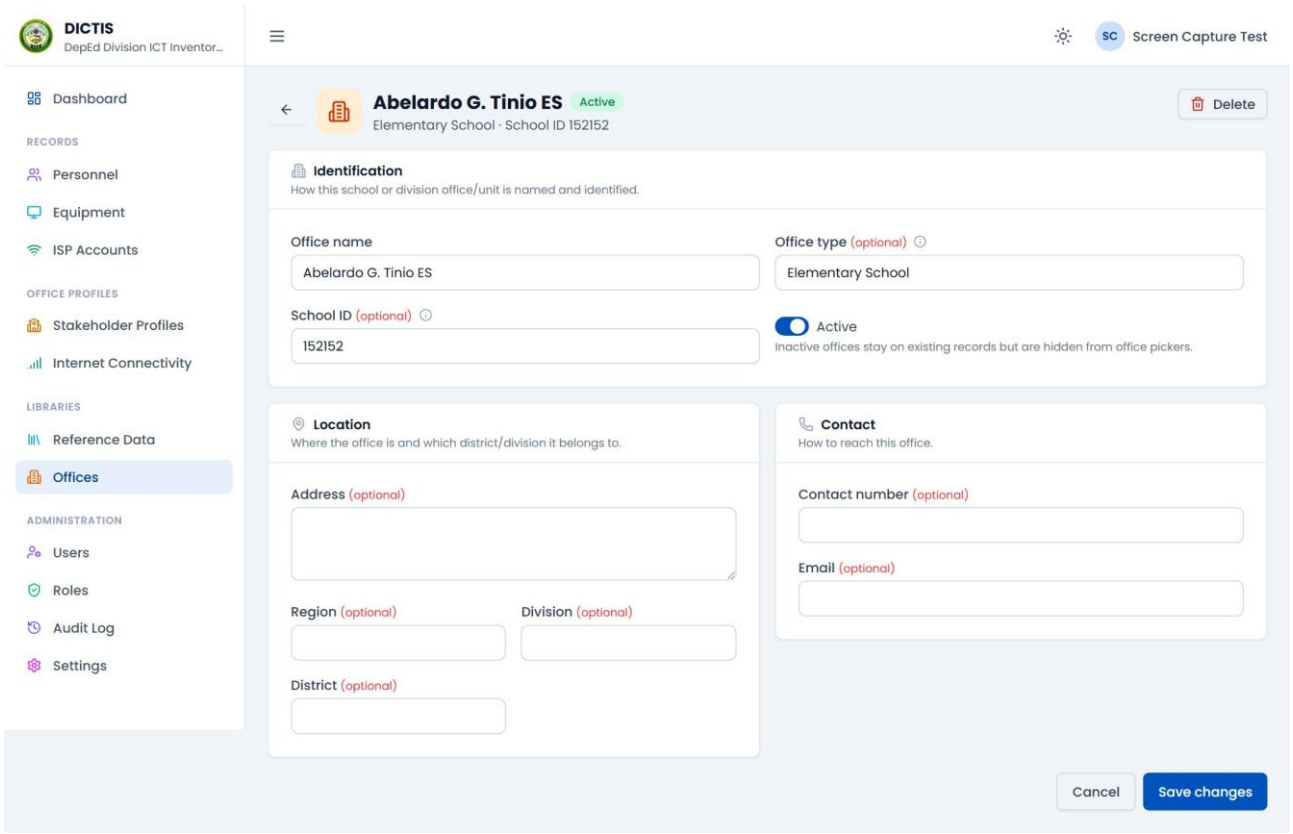


Figure 48. Edit office

An office used by user accounts, ISP accounts, stakeholder profiles or connectivity surveys cannot be deleted; deactivate it instead.


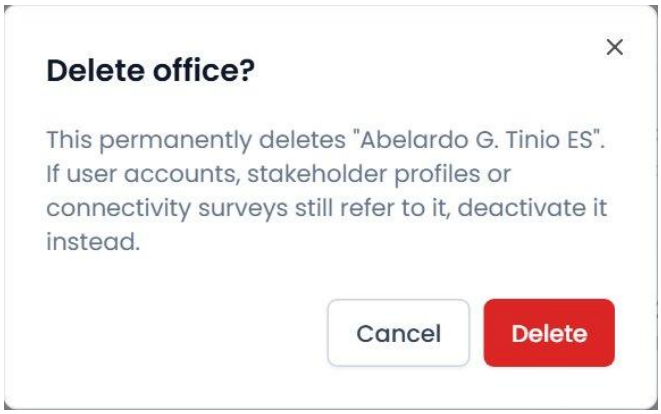


Figure 49. Delete office confirmation

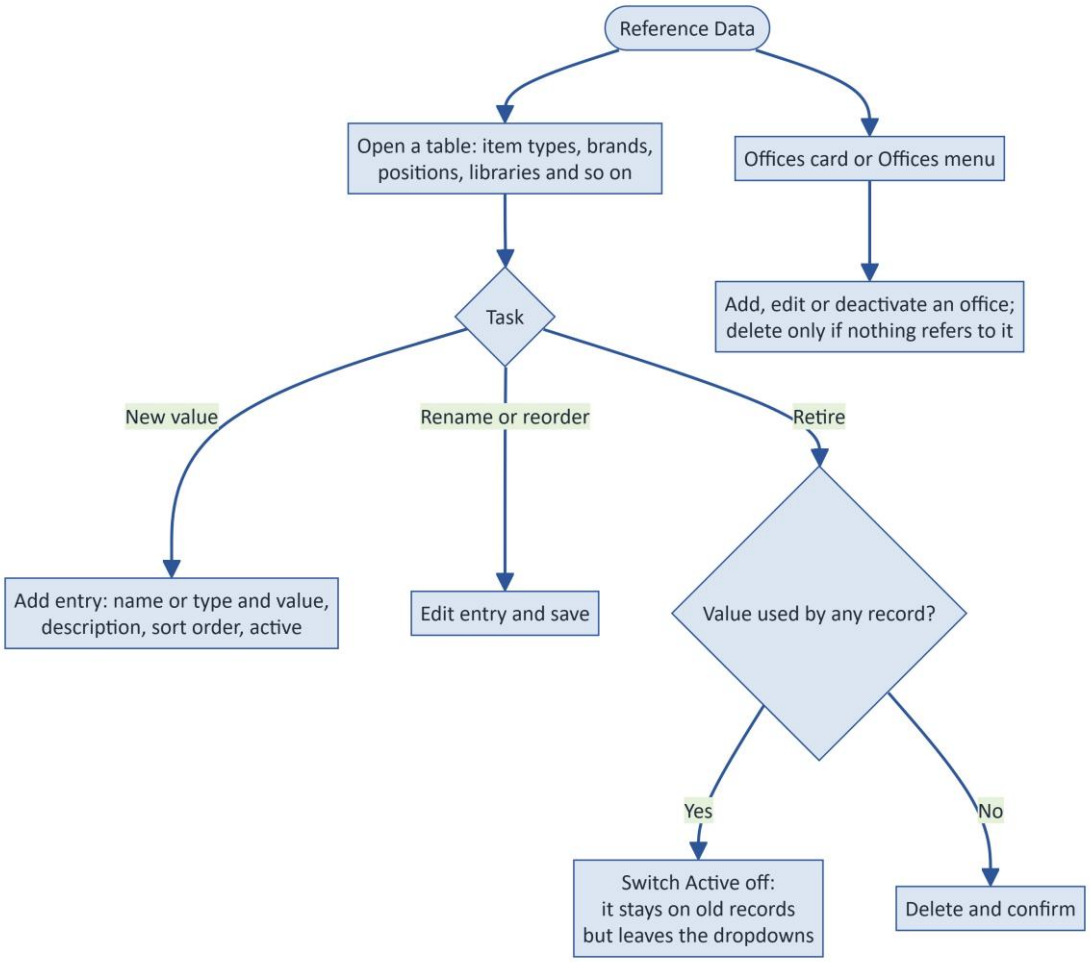

Flowchart 7. Maintaining reference data and offices

10. Administration

10.1 Users (Figures 50-52)

Menu: **Administration > Users**

Accounts come from PRIME: new active PRIME accounts appear here automatically, and names, offices and employee numbers are kept in step with PRIME. There is no **New User** or delete. The list shows each user's role, office, employee number, 2FA status and whether the account is active. Filter by role, status and office.

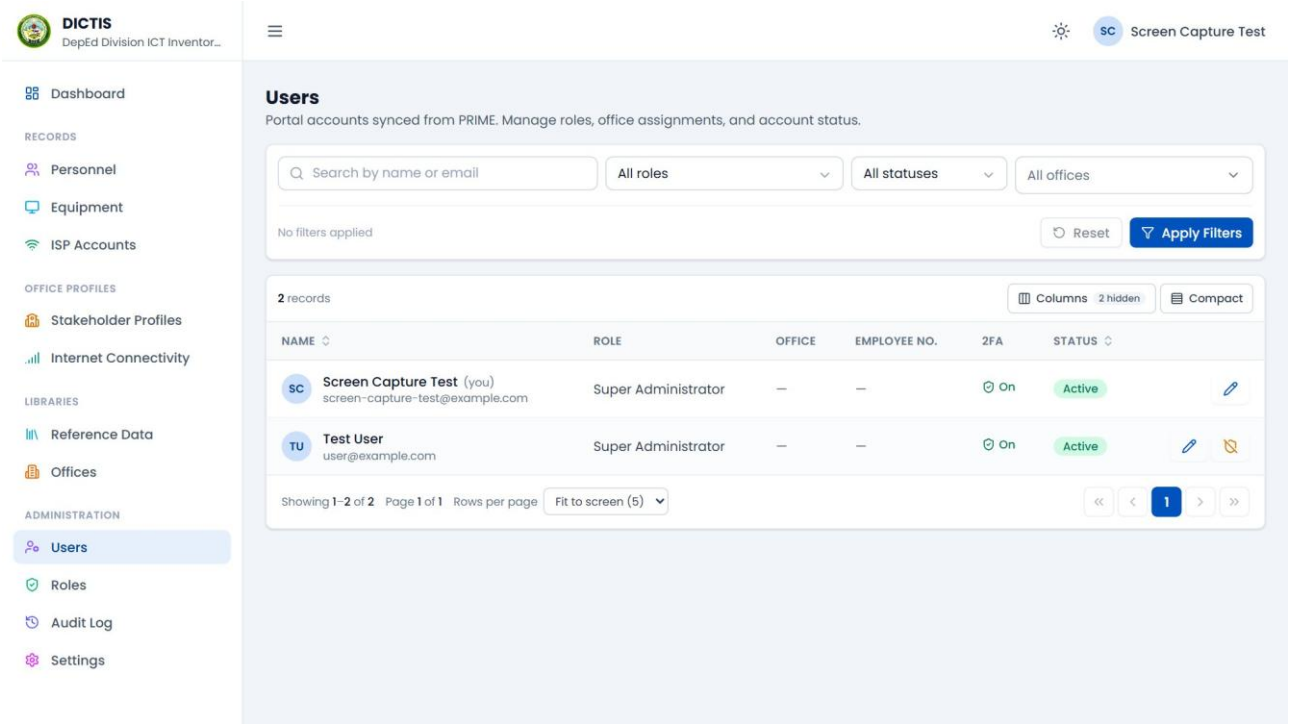


Figure 50. Users

Click the edit icon to choose the user's **Role** and switch **Active (can sign in)** on or off, then **Save Changes**. A user with no role cannot sign in. You can only assign roles whose permissions and scope you hold yourself, and you cannot deactivate yourself.

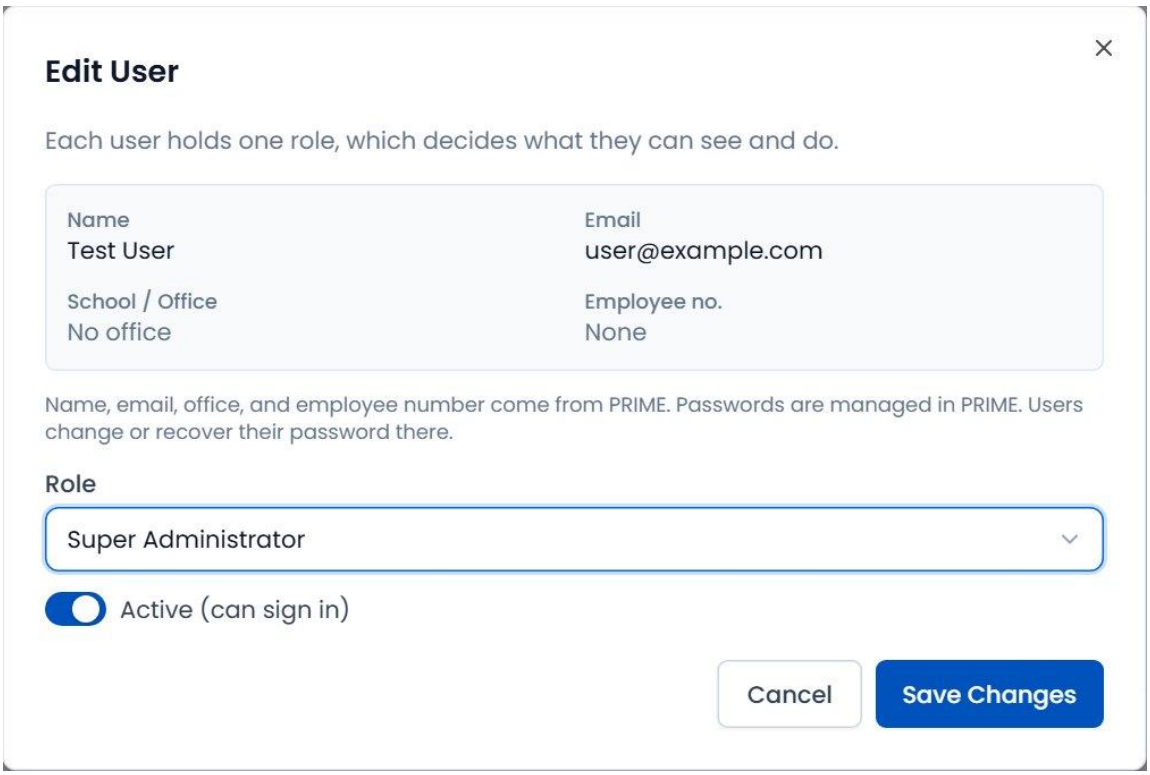


Figure 51. Edit User

When a user loses their phone, click **Reset two-factor authentication**, enter your own PRIME password and click **Reset 2FA**. The user sets up two-factor authentication again at their next sign-in, and their trusted devices are forgotten.

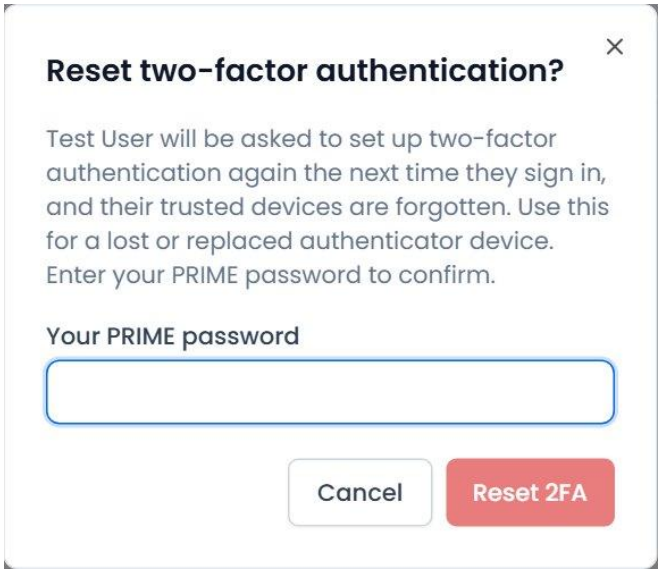


Figure 52. Reset two-factor authentication

10.2 Roles (Figures 53-56)

Menu: **Administration > Roles**

Lists roles with their description, data scope, number of permissions and number of users. Click **New Role**, enter the display label, the name (lowercase key), a description and the **Data scope**, tick the permissions (grouped by module; **Select all** and a search box help), then click **Create Role**.

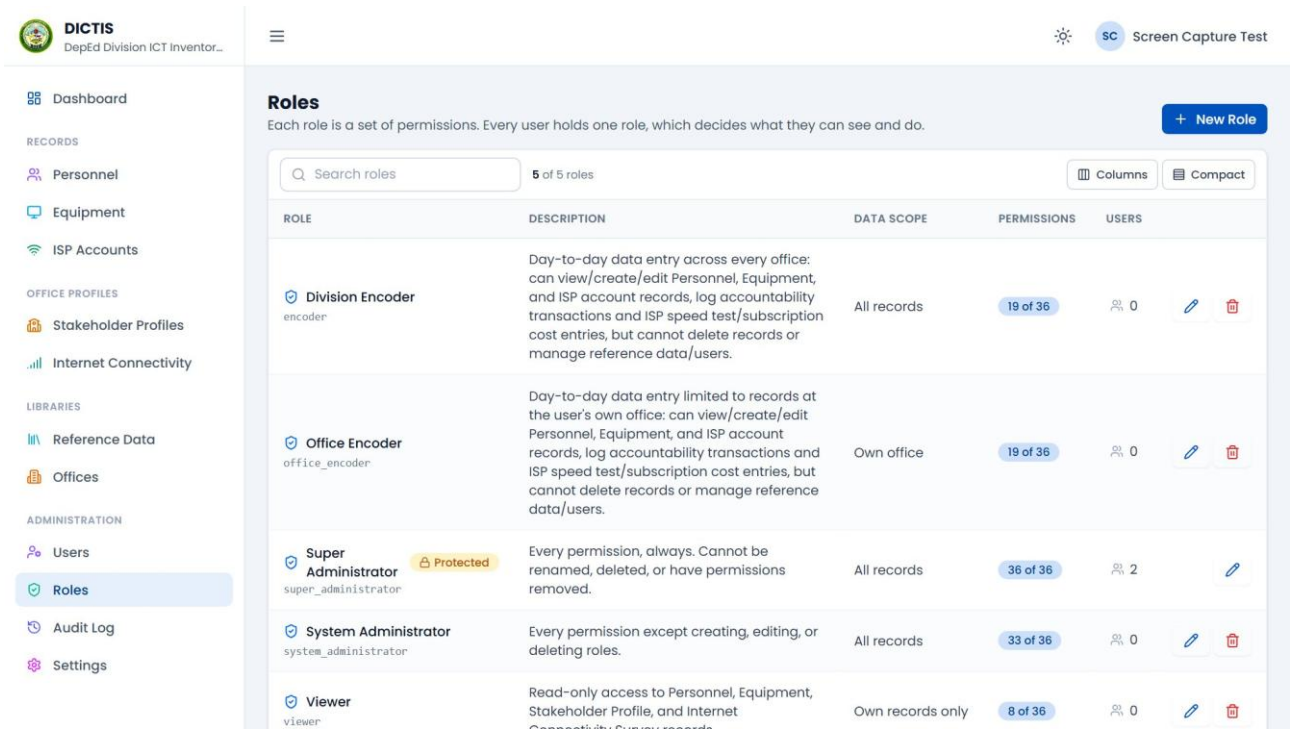


Figure 53. Roles

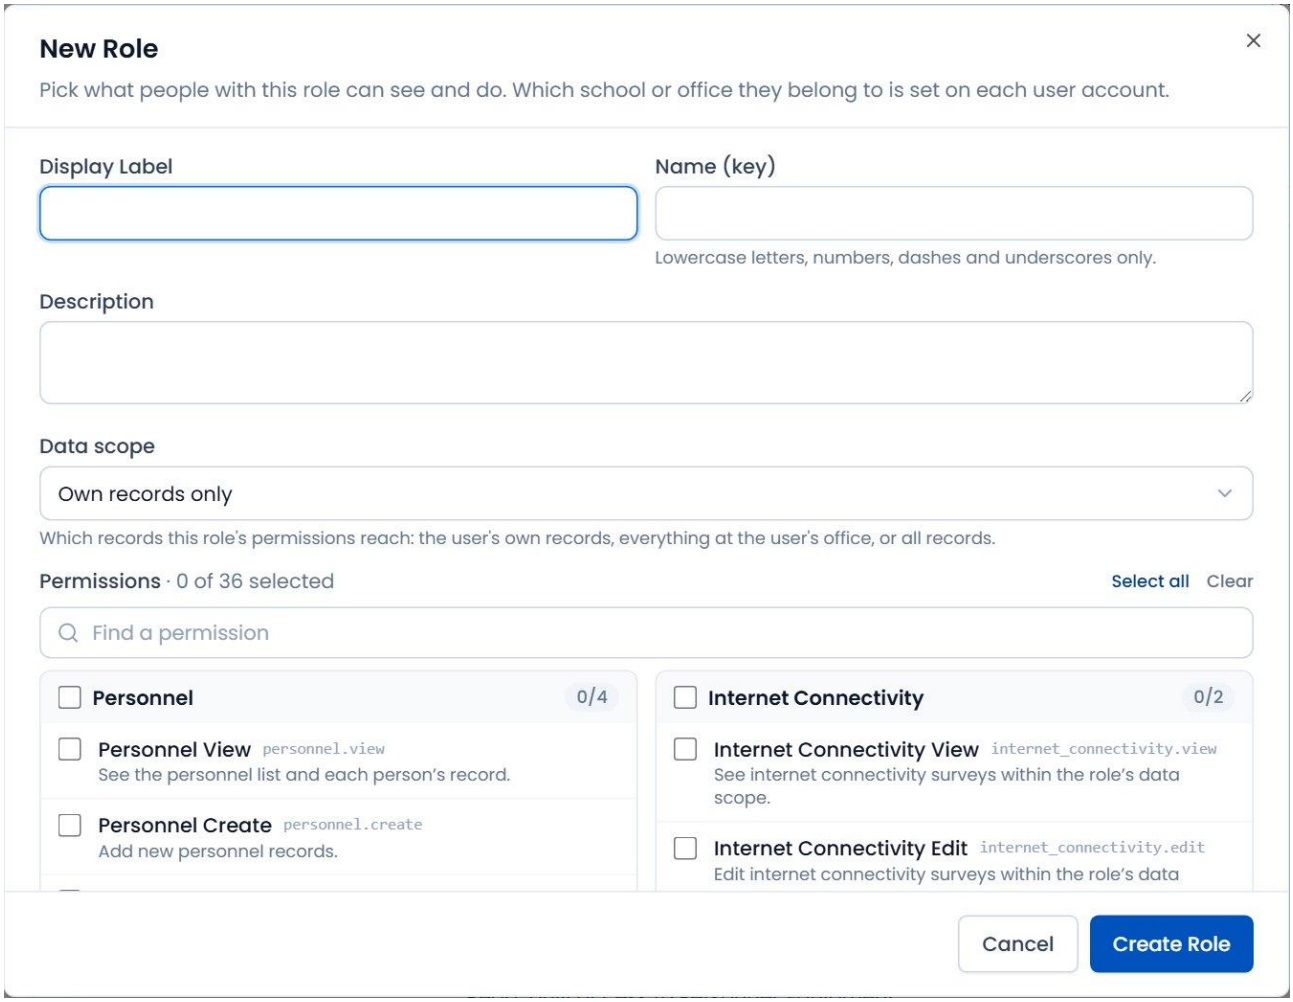


Figure 54. New Role

Use the edit icon to change a role. The Super Administrator role is protected: it always has every permission and reaches all records. You cannot grant permissions you do not hold, widen a role beyond your own scope, or remove the last way anyone can manage users and roles.

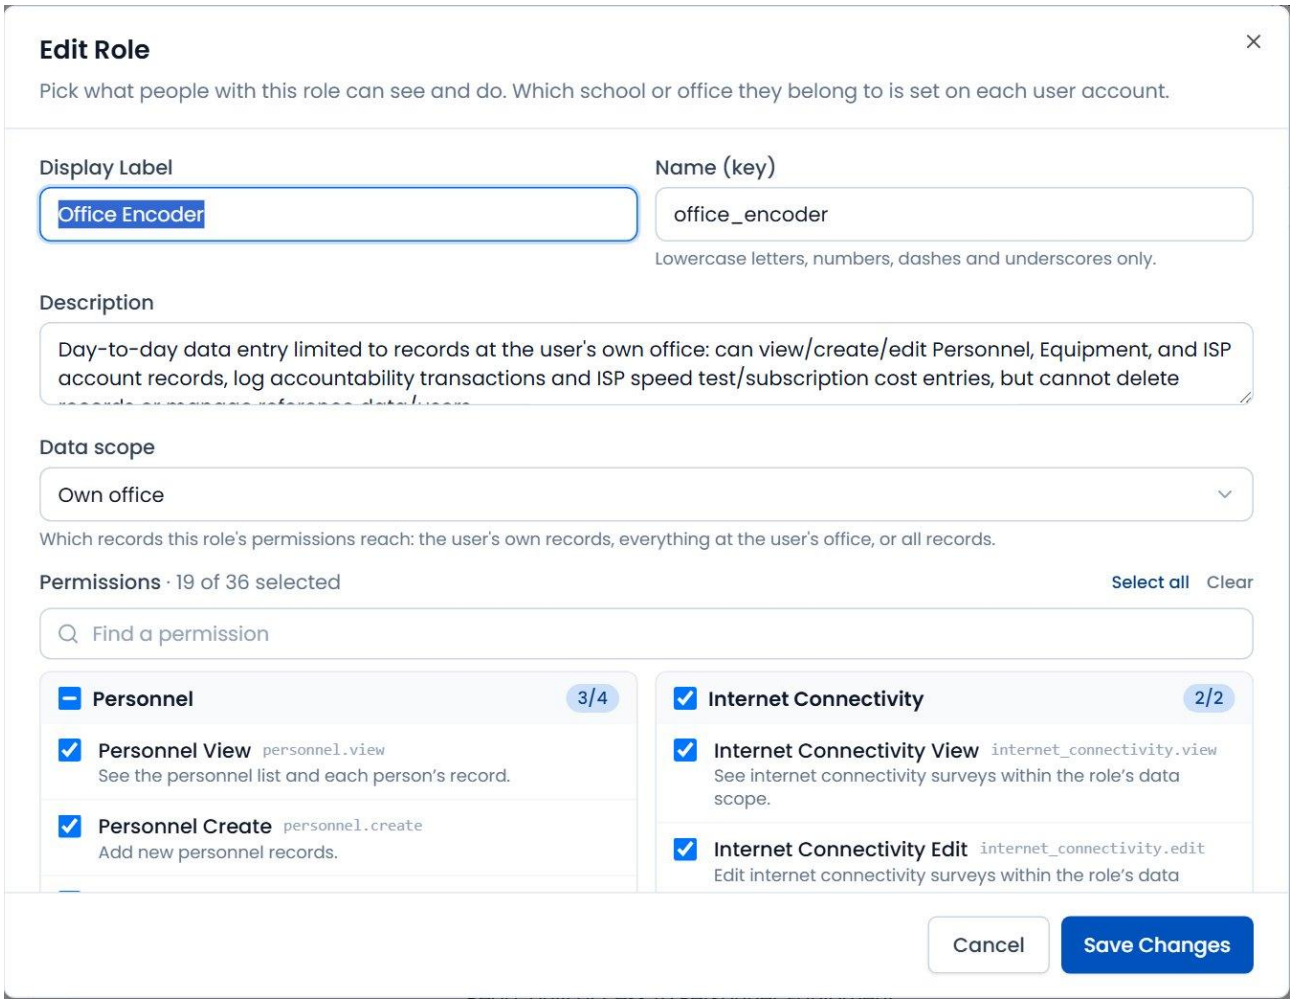


Figure 55. Edit Role

Delete asks you to confirm and cannot be undone. A role still assigned to users cannot be deleted.


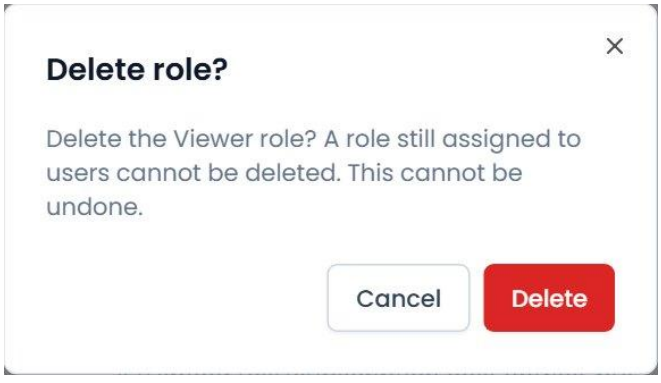


Figure 56. Delete role confirmation

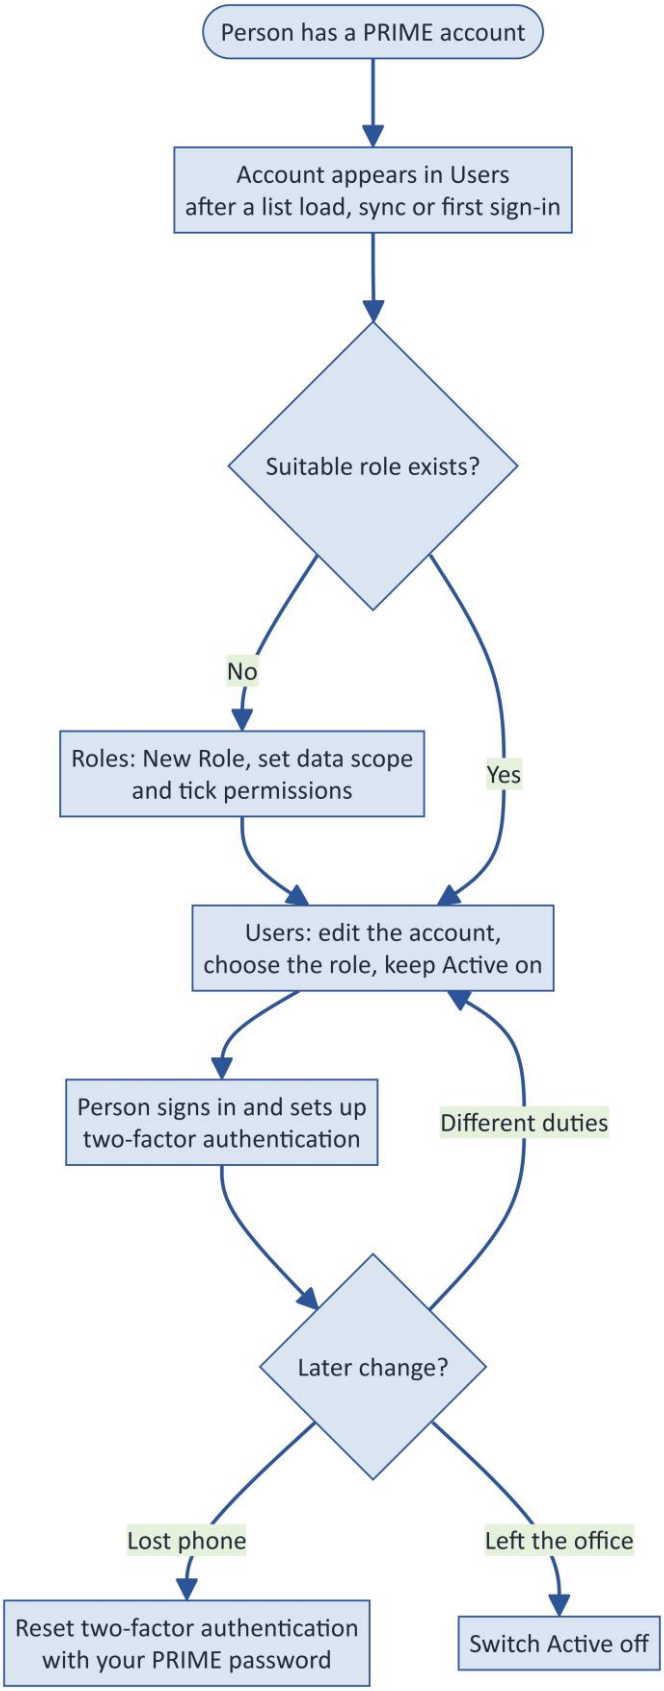

Flowchart 8. Managing users and roles

10.3 Audit Log (Figures 57-58)

Menu: **Administration > Audit Log**

A read-only record of every change: personnel, equipment and transactions, ISP accounts, offices, reference data, users and roles, sign-ins and denied attempts. Filter by text, action, record type, person and date range; applied filters appear as chips you can remove. Click a row to see the before and after values.

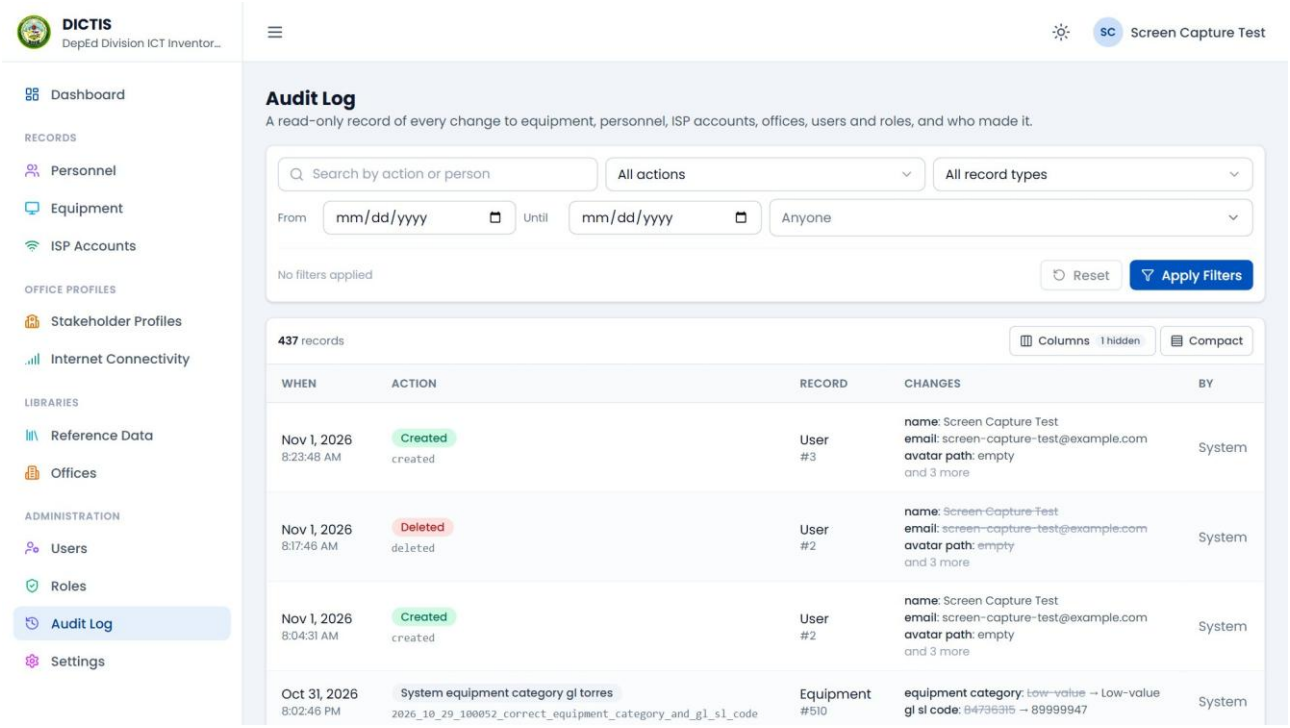


Figure 57. Audit Log

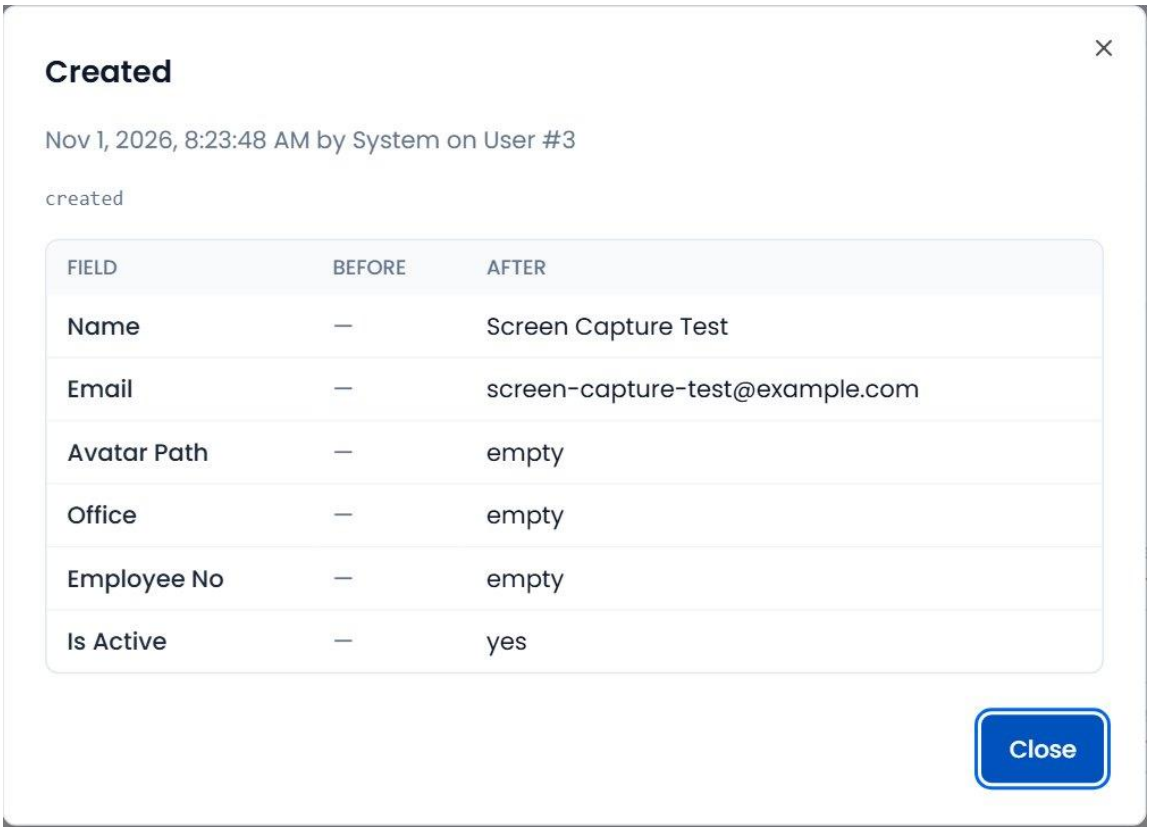


Figure 58. Audit log entry details

10.4 Settings (Figure 59)

Menu: **Administration > Settings**

Security and rate limits, each saved with its own **Save**: login attempts per minute, two-factor code attempts per minute, **Trusted device days** (0 to 30; 0 turns trusting off, and lowering it shortens existing trust at once) and **Idle sign-out** in seconds. The page also shows the **Laravel error log** and **Slow query log**, with refresh, download and clear.

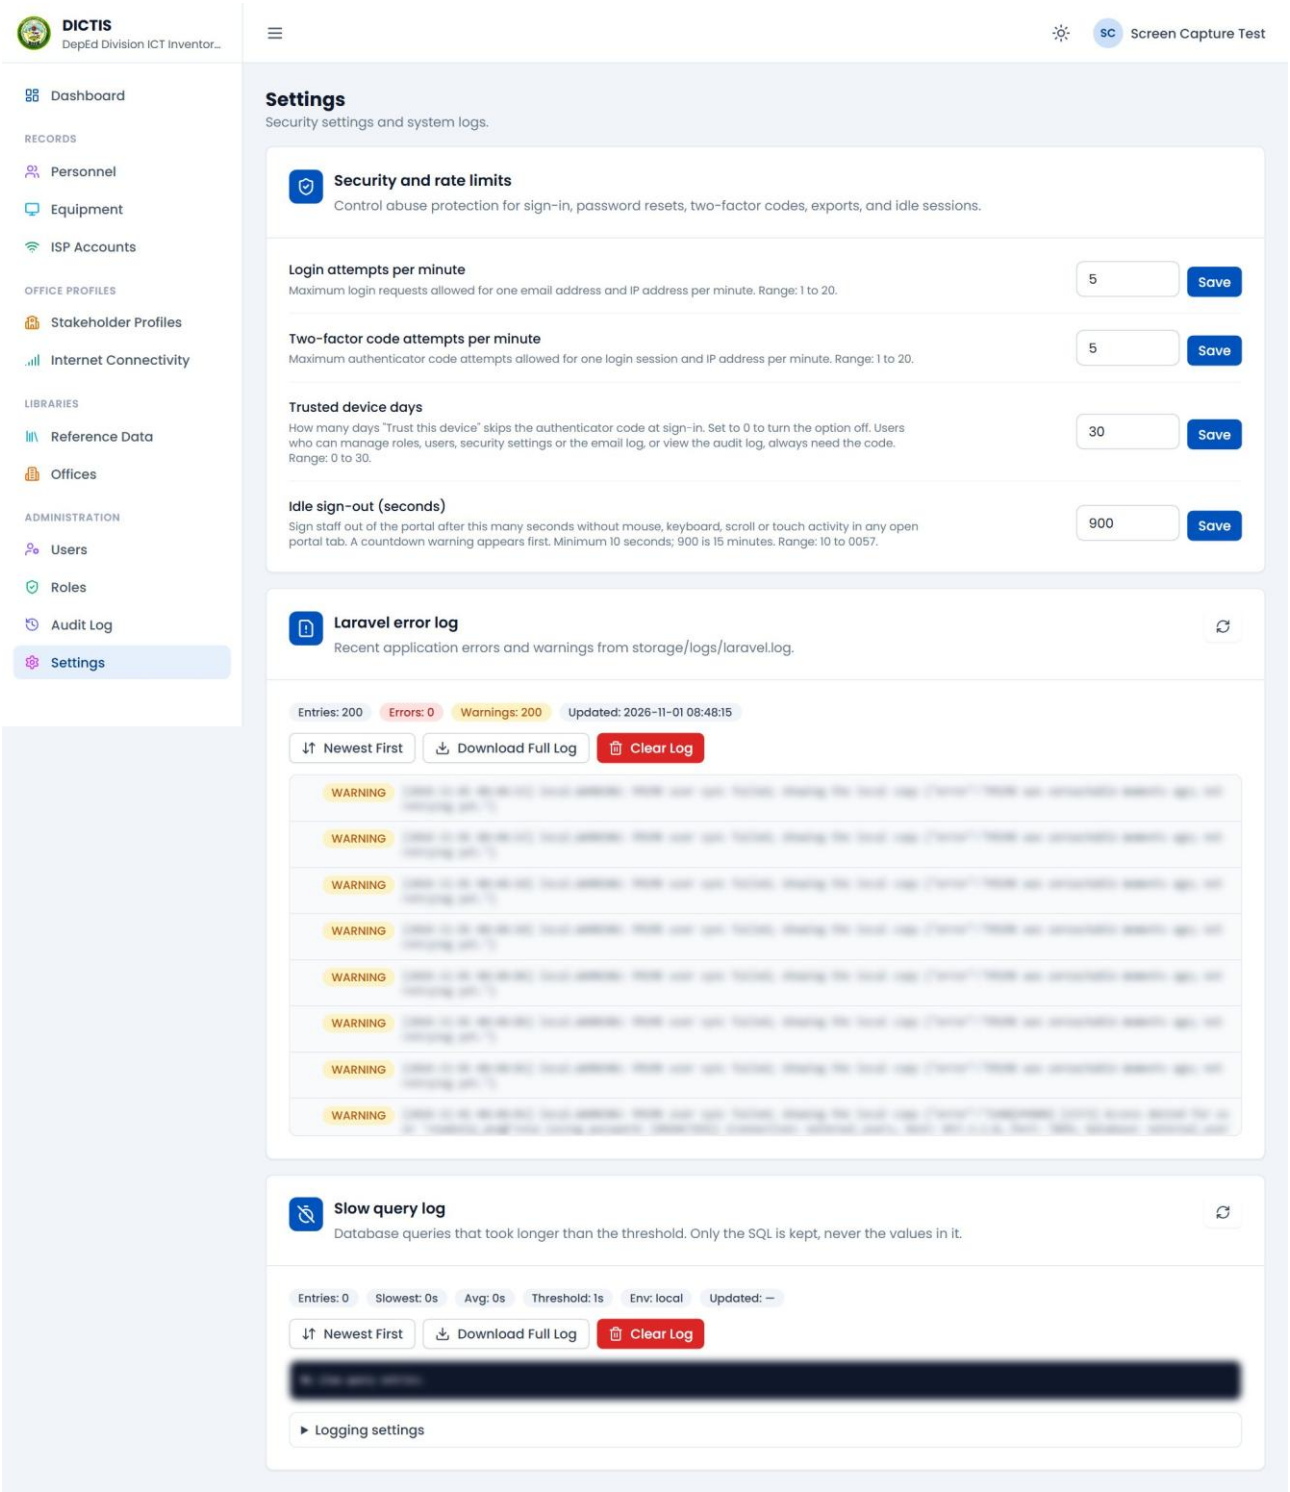


Figure 59. Settings

11. Your Profile

11.1 Profile settings (Figures 60-61)

Menu: **your name > Profile settings**

Profile photo: click **Choose photo**, crop it and click **Save photo** (JPG, PNG or WEBP). **Account details:** your name and email come from PRIME and are read-only.

Two-factor authentication: click **Regenerate recovery codes** and enter your PRIME password to get 8 new codes; the old ones stop working.

Trusted devices: lists the browsers you trusted, with when they were trusted, last used and when trust ends. Remove one, or click **Sign out all devices**.

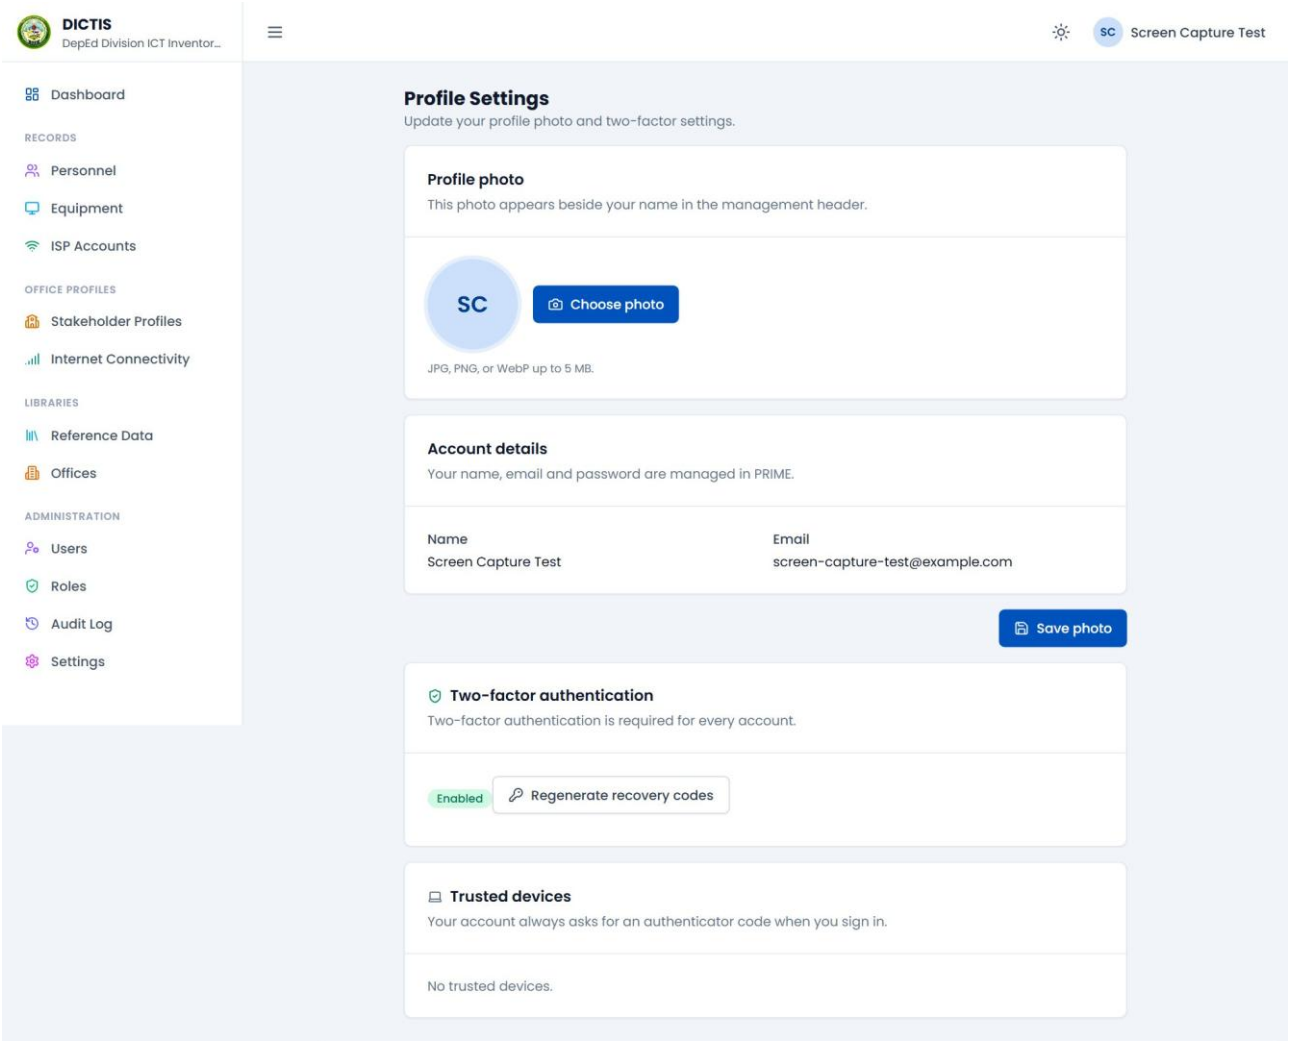


Figure 60. Profile Settings

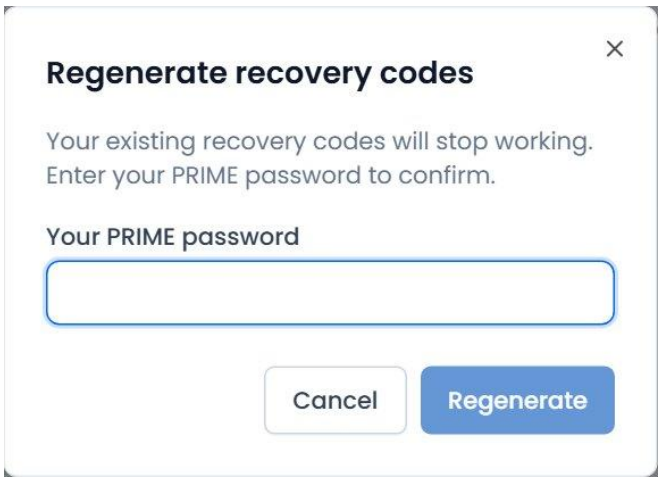


Figure 61. Regenerate recovery codes

12. Data Privacy and Security

DICTIS holds personal information of DepEd personnel (names, employee IDs, contact details, positions and assignments) and records of government property. It is designed to follow the Data Privacy Act of 2012 (RA 10173):

- **Sign-in through PRIME** with **mandatory two-factor authentication** for every account. Trusted devices are revocable, and never honoured for users who can change access or settings.
- **Least privilege:** granular permissions and data scope, so each user reaches only the actions and records their role needs.
- **Audit trail:** every change, transaction, sign-in and denied attempt is logged with who and when, and the log cannot be edited.
- **History is kept, not erased:** deletes hide records instead of destroying them, and accountability transactions are append-only.
- **Files are protected:** attachments are stored privately, type-checked, limited to 5 MB, and photos are stripped of location data.
- **Rate limits and idle sign-out** reduce password guessing and unattended sessions.

Your part: keep your PRIME password and recovery codes private, do not trust shared computers, log out when you leave, and encode only the data the forms ask for.

The screenshots in this manual show placeholder names, ID numbers and contact details in place of real personnel data.

13. Troubleshooting and FAQ

Problem or question	What to do
"Invalid credentials" at sign-in	Check your DepEd email and PRIME password. If they are right, your account may be deactivated in PRIME or DICTIS; contact an administrator.
"Your account doesn't have access to DICTIS yet"	An administrator must assign you a role in Users. Then sign in again.
Lost or replaced phone	Sign in with a recovery code, then set up again or regenerate codes from your profile. Without codes, ask an administrator to reset your two-factor authentication.
The 6-digit code is rejected	Make sure your phone's time is set automatically, and use the newest code. A code works only once.
I see fewer records than I expect	Your role's data scope limits what you reach (chapter 3). If your office or personnel link is missing, the dashboard shows a notice; ask an administrator to fix it in PRIME.
A menu item or button is missing	Your role does not include that permission. Ask an administrator.
"Choose someone within your access"	You can only name personnel within your data scope as accountable officer, end user or receiver.
The property number preview is blank	Set both the item type and the acquisition date. If it stays blank, the item type has no abbreviation; ask an administrator to add one in Reference Data.
I cannot change a property number	Property numbers are generated and permanent. Record the old number in Old property number.
A reference value or office cannot be deleted	It is still used by records. Deactivate it instead.
An upload is refused	Use PDF, JPG, PNG or WEBP files of 5 MB or less.
"Page not found"	The link is wrong, or the record is outside your data scope. Click Back to Dashboard (Figure 62).
I was signed out	DICTIS signs you out after a period without activity. Sign in again.




Figure 62. Page not found

14. Database Diagrams (ERD)

The diagrams show the main tables, their primary keys (PK), foreign keys (FK) and a few identifying columns. Lines connect a table to the tables that refer to it; the label is the referring column. Full column lists are in chapter 15.

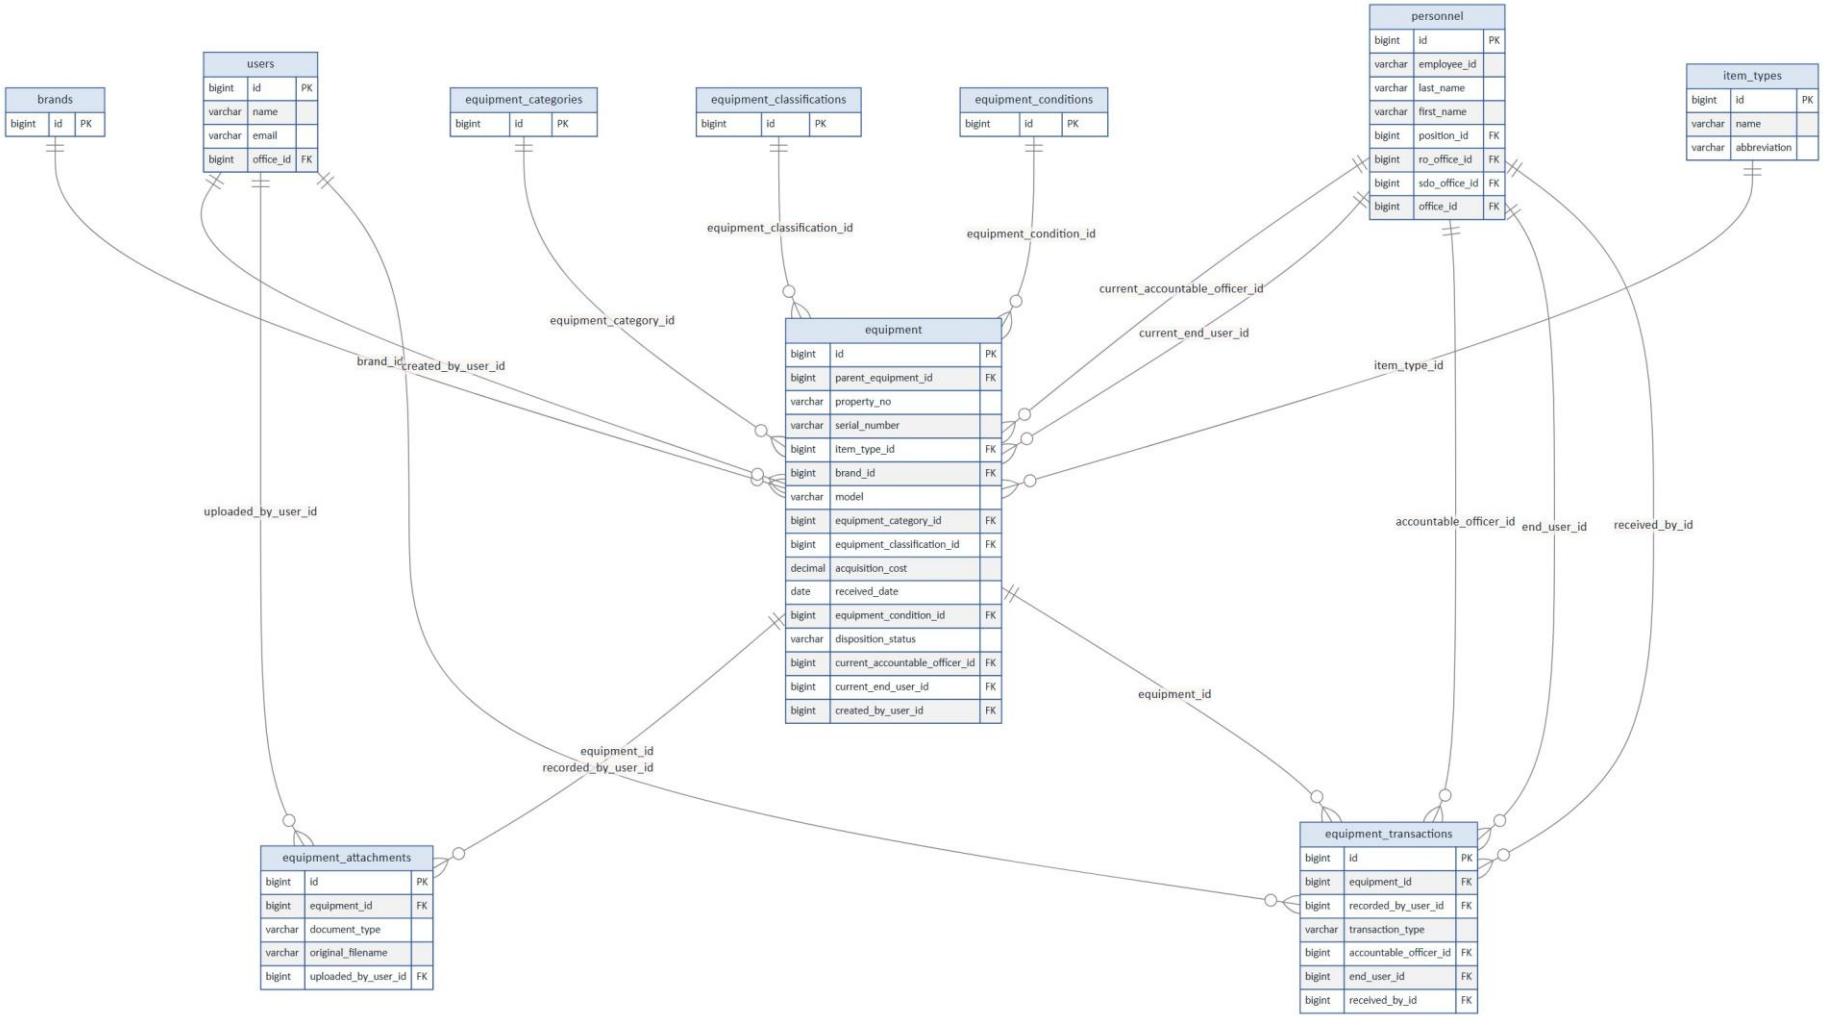


Diagram 1. Equipment, transactions and attachments

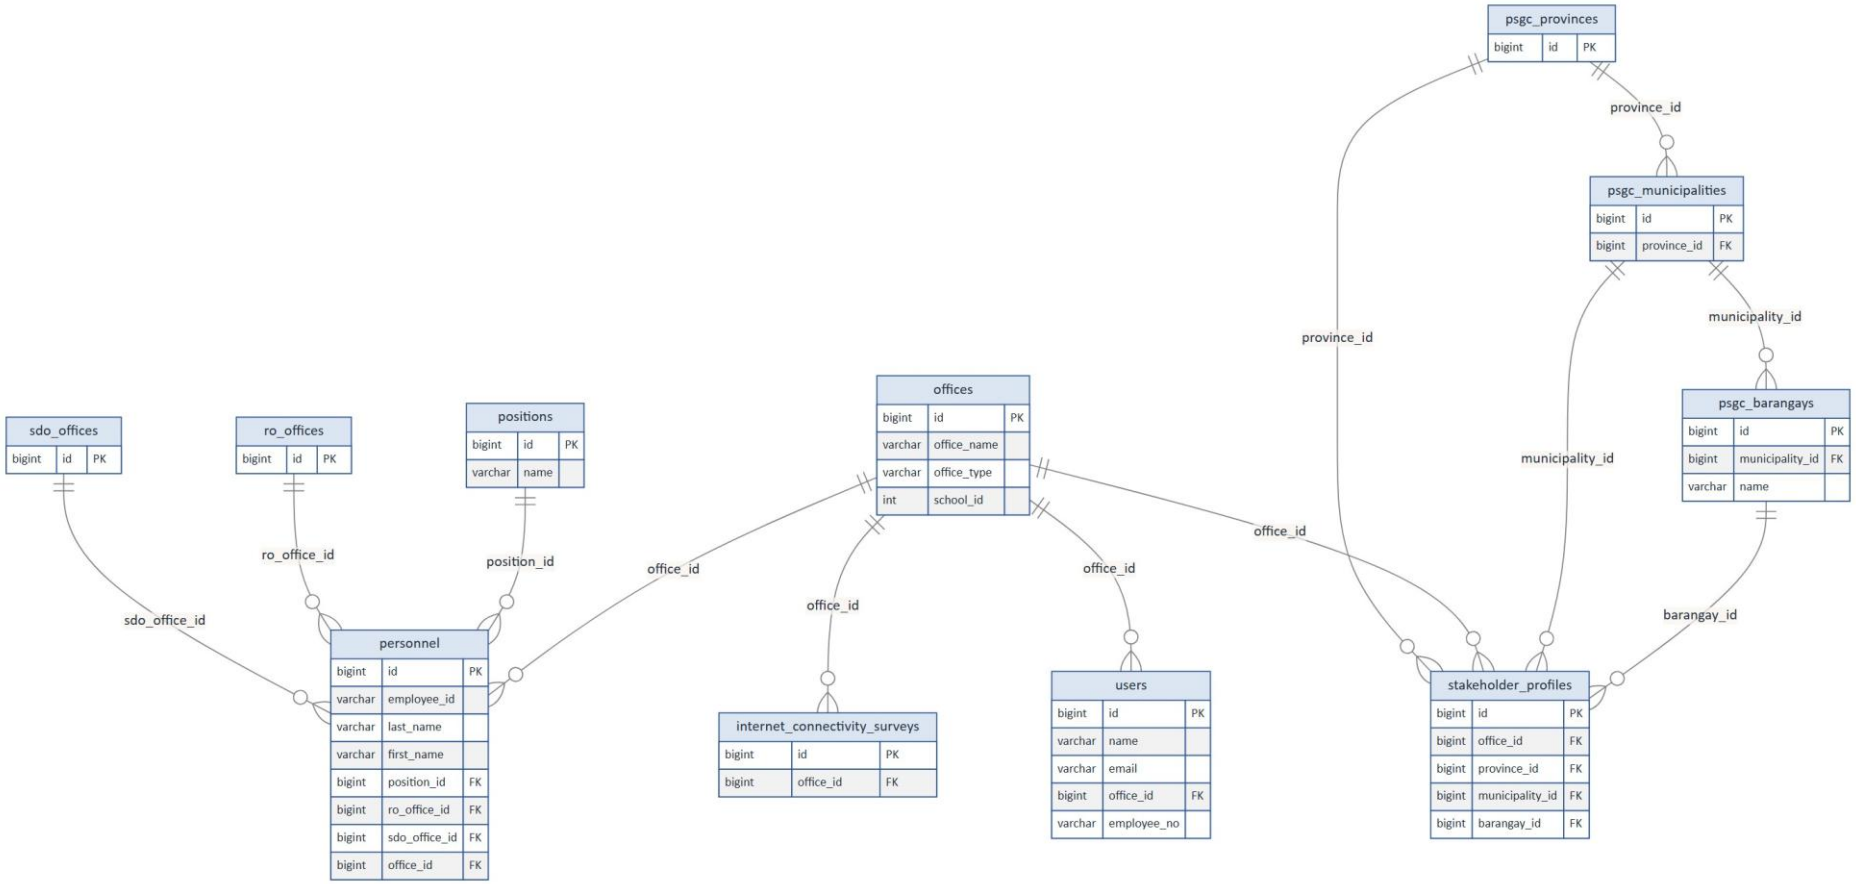


Diagram 2. Personnel, offices and office profiles

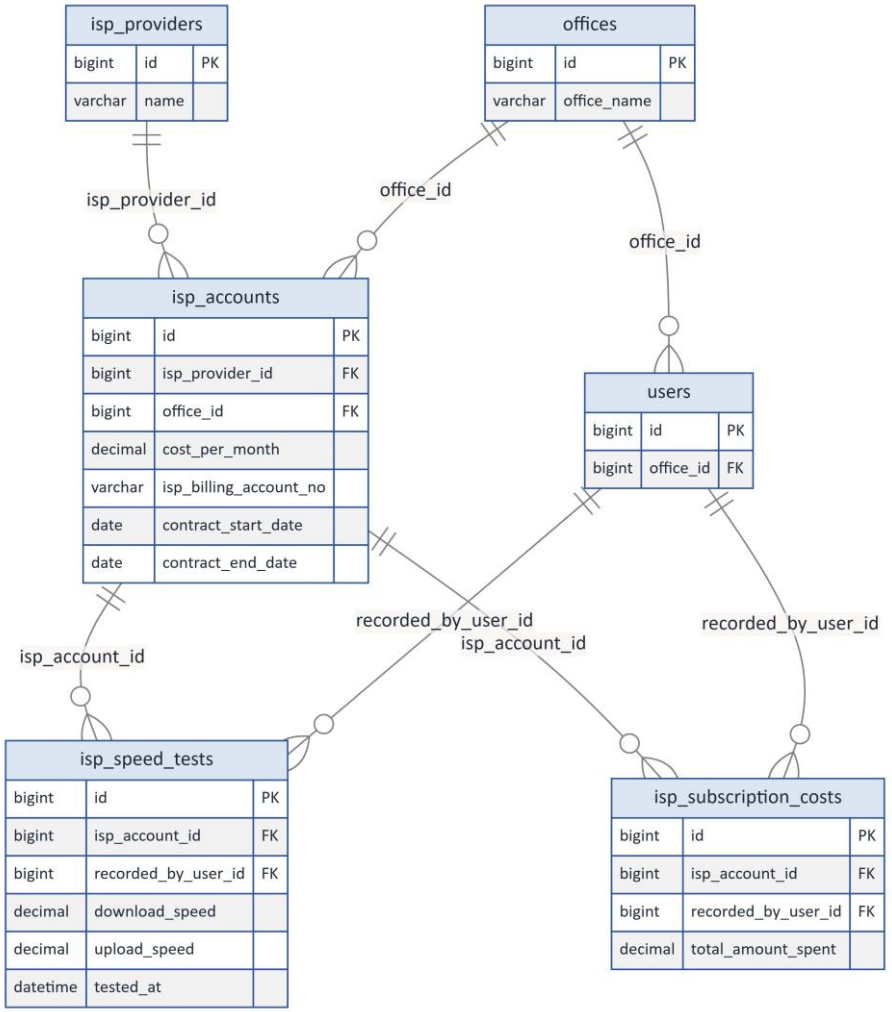


Diagram 3. ISP accounts

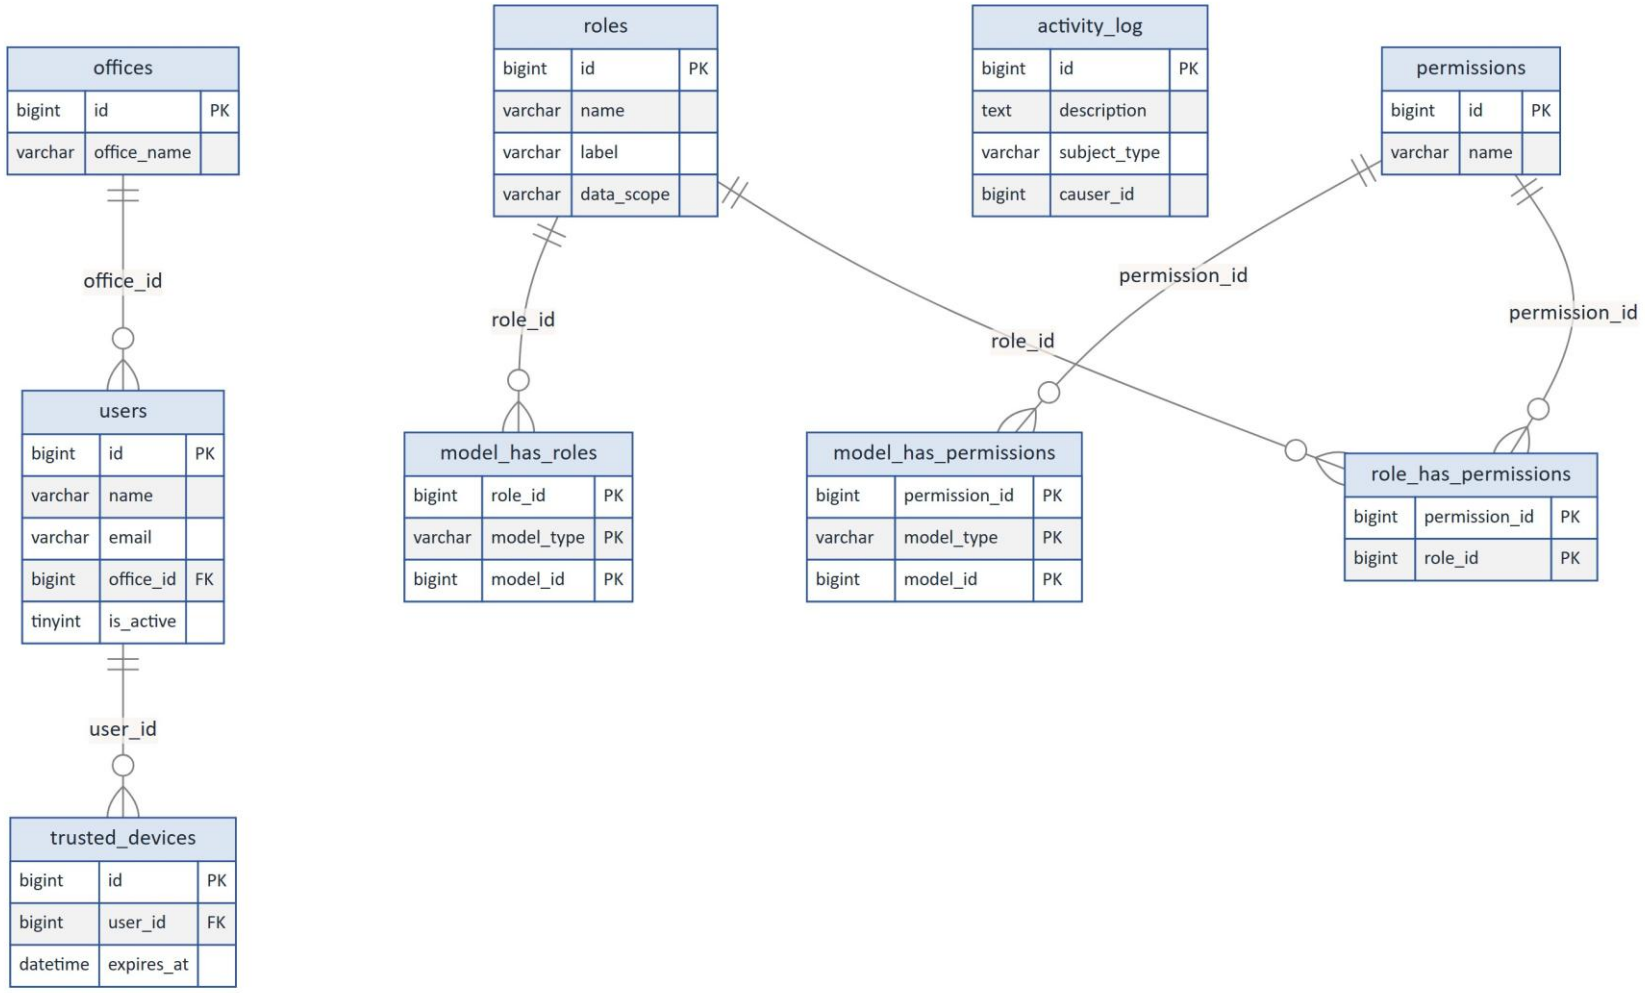


Diagram 4. Users, roles, permissions and audit

15. Data Dictionary

Each table lists its columns, data type, whether the column may be empty (Null) and what it holds. Every table also has the standard primary key **id** unless noted, and most have **created_at** and **updated_at**.

15.1 Users, roles and access

users

Accounts that can sign in. Name, email, office and employee number come from PRIME; roles, two-factor data and active status are kept here.

Column	Type	Null	Description
id	bigint(20)	No	Primary key.
name	varchar(255)	No	Name shown on screen.
email	varchar(255)	No	Email.
avatar_path	varchar(255)	Yes	Stored profile photo.
office_id	bigint(20)	Yes	Office from PRIME; decides which office the user reaches under an office-limited scope.
employee_no	varchar(50)	Yes	Employee number from PRIME; links the account to its personnel record.
email_verified_at	timestamp	Yes	When the email was verified.
password	varchar(255)	Yes	Empty for normal accounts (PRIME checks the password); set only for break-glass developer accounts.
is_active	tinyint(1)	No	Whether the account may sign in. Deactivate here to block someone PRIME still lists as active.
two_factor_secret	text	Yes	Encrypted authenticator secret.
two_factor_recovery_codes	text	Yes	Encrypted, hashed recovery codes.
two_factor_confirmed_at	timestamp	Yes	When two-factor authentication was set up.
remember_token	varchar(100)	Yes	Framework value for remembered sessions.
created_at	timestamp	Yes	When the row was created.
updated_at	timestamp	Yes	When the row was last changed.

roles

Roles an administrator can assign. Each role has a data scope and a set of permissions.

Column	Type	Null	Description
id	bigint(20)	No	Primary key.
name	varchar(255)	No	Internal key of the role (lowercase, for example office_encoder).
guard_name	varchar(255)	No	Framework value; always web.
label	varchar(255)	No	Role name shown on screen.
description	text	Yes	Optional description.
data_scope	varchar(10)	No	Which records the role reaches: own, school (Own office) or all.
created_at	timestamp	Yes	When the row was created.
updated_at	timestamp	Yes	When the row was last changed.

permissions

The fixed list of permissions (one per action), used by roles.

Column	Type	Null	Description
id	bigint(20)	No	Primary key.
name	varchar(255)	No	Permission key, for example equipment.create.
guard_name	varchar(255)	No	Guard name.
created_at	timestamp	Yes	When the row was created.
updated_at	timestamp	Yes	When the row was last changed.

model_has_roles

Which role each user holds.

Column	Type	Null	Description
role_id	bigint(20)	No	Links to roles.
model_type	varchar(255)	No	Kind of record (a user).
model_id	bigint(20)	No	ID of the user.

model_has_permissions

Permissions given directly to a user (not normally used; roles are preferred).

Column	Type	Null	Description
permission_id	bigint(20)	No	Links to permissions.
model_type	varchar(255)	No	Kind of record (a user).
model_id	bigint(20)	No	ID of the user.

role_has_permissions

Which permissions each role grants.

Column	Type	Null	Description
permission_id	bigint(20)	No	Links to permissions.
role_id	bigint(20)	No	Links to roles.

trusted_devices

Browsers a user chose to trust so the two-factor code is skipped for a period.

Column	Type	Null	Description
id	bigint(20)	No	Primary key.
user_id	bigint(20)	No	Links to users.
token_hash	varchar(64)	No	SHA-256 of the cookie token; the token itself is never stored.
user_agent	varchar(512)	Yes	User agent.
ip_address	varchar(45)	Yes	Ip address.

Column	Type	Null	Description
last_used_ip	varchar(45)	Yes	Last used ip.
last_used_at	timestamp	Yes	When last used.
expires_at	datetime	No	When the trust ends at the latest.
created_at	timestamp	Yes	When the row was created.
updated_at	timestamp	Yes	When the row was last changed.

activity_log

The audit trail: every create, update and delete, accountability transaction, sign-in event and denied attempt. Never edited or pruned.

Column	Type	Null	Description
id	bigint(20)	No	Primary key.
log_name	varchar(255)	Yes	Log channel name.
description	text	No	Event name, for example equipment.updated.
subject_type	varchar(255)	Yes	Kind of record the event is about.
subject_id	bigint(20)	Yes	ID of the record the event is about.
event	varchar(255)	Yes	Event.
causer_type	varchar(255)	Yes	Kind of actor (a user).
causer_id	bigint(20)	Yes	User who caused the event; empty for system jobs.
attribute_changes	longtext	Yes	Attribute changes.
properties	longtext	Yes	Before and after values and event details, including a snapshot of the actor.
created_at	timestamp	Yes	When the row was created.
updated_at	timestamp	Yes	When the row was last changed.

system_settings

Security settings edited on the Settings page (rate limits, trusted-device days, idle sign-out).

Column	Type	Null	Description
id	bigint(20)	No	Primary key.
key	varchar(255)	No	Key.
value	text	Yes	Value shown in dropdowns and stored on records.
type	enum('string','boolean','integer','json')	No	Which value list the row belongs to.
description	varchar(255)	Yes	Optional description.
created_at	timestamp	Yes	When the row was created.
updated_at	timestamp	Yes	When the row was last changed.

15.2 Personnel and offices

personnel

The division staff directory. Personnel are the accountable officers, end users and receivers of equipment.

Column	Type	Null	Description
id	bigint(20)	No	Primary key.
employee_id	varchar(255)	No	DepEd employee ID; unique.
last_name	varchar(255)	No	Last name.
first_name	varchar(255)	No	First name.
middle_name	varchar(255)	Yes	Middle name.
suffix	varchar(20)	Yes	Suffix.
full_name	varchar(500)	Yes	Full name.
oic	tinyint(1)	No	Whether the person is an officer-in-charge.
oic_office	varchar(255)	Yes	OIC office.
mobile_1	varchar(20)	Yes	Mobile 1.
mobile_2	varchar(20)	Yes	Mobile 2.
deped_email	varchar(255)	Yes	Deped email.
personal_email	varchar(255)	Yes	Personal email.
date_hired	date	Yes	Date hired.
non_deped_funded	tinyint(1)	No	Yes/No: non deped funded.
fund_source	longtext	Yes	Funding sources (list of library IDs) for non-DepEd-funded staff.
inactive	tinyint(1)	No	Separated from the division; hidden from the default list but kept with its history.
separation_date	date	Yes	Separation date.
separation_cause	varchar(255)	Yes	Cause of separation.
transferred_from	varchar(255)	Yes	Transferred from.
transferred_to	varchar(255)	Yes	Transferred to.
created_at	timestamp	Yes	When the row was created.
updated_at	timestamp	Yes	When the row was last changed.
deleted_at	timestamp	Yes	Set when the record is deleted; deleted records are hidden but kept for history.
position_id	bigint(20)	Yes	Links to positions.
ro_office_id	bigint(20)	Yes	Links to ro_offices.
sdo_office_id	bigint(20)	Yes	Links to sdo_offices.
office_id	bigint(20)	Yes	School or office the person belongs to.

offices

Schools and division offices/units. Personnel, users, ISP accounts and office profiles belong to an office.

Column	Type	Null	Description
id	bigint(20)	No	Primary key.
prime_department_id	int(10)	Yes	Prime department (ID).
office_name	varchar(255)	No	Office name.
office_type	varchar(100)	Yes	Office type.
school_id	int(10)	Yes	School (ID).
address	text	Yes	Address.

Column	Type	Null	Description
region	varchar(100)	Yes	Region.
division	varchar(100)	Yes	Division.
district	varchar(100)	Yes	District.
contact_number	varchar(50)	Yes	Contact number.
email	varchar(255)	Yes	Email.
is_active	tinyint(1)	No	Whether the value is active and offered in forms.
created_at	timestamp	Yes	When the row was created.
updated_at	timestamp	Yes	When the row was last changed.

15.3 Equipment

equipment

The ICT asset register: one row per item, with its property number, specifications, acquisition, status and current holders.

Column	Type	Null	Description
id	bigint(20)	No	Primary key.
parent_equipment_id	bigint(20)	Yes	Desktop this peripheral is currently bundled with.
property_no	varchar(255)	Yes	Generated property number AC-YYYY-IT-ABV-NNNNNN; peripherals add -001, -002.
old_property_no	varchar(255)	Yes	Property number used before DICTIS, if any.
serial_number	varchar(255)	Yes	Serial number.
item_type_id	bigint(20)	No	Links to item_types.
uom	varchar(255)	No	Uom.
brand_id	bigint(20)	No	Links to brands.
model	varchar(255)	Yes	Model.
specifications	text	Yes	Specifications.
non_dcp	tinyint(1)	No	Yes when the item is not from a DepEd Computerization Program package.
dcp_package	varchar(255)	Yes	DCP package.
dcp_year	year(4)	Yes	DCP year.
equipment_category_id	bigint(20)	No	Links to equipment_categories.
equipment_classification_id	bigint(20)	No	Links to equipment_classifications.
gl_sl_code	varchar(255)	Yes	General/subsidiary ledger code, set from the cost.
uacs	varchar(255)	Yes	UACS object code.
acquisition_cost	decimal(12,2)	Yes	Acquisition cost in pesos; decides High-value (50,000 and above) or Low-value.
received_date	date	Yes	Received date.
estimated_useful_life	smallint(5)	Yes	Estimated useful life.
mode_acquisition	varchar(255)	No	Mode acquisition.
source_acquisition	varchar(255)	No	Source acquisition.
donor	varchar(255)	Yes	Donor.

Column	Type	Null	Description
source_fund	varchar(255)	No	Source fund.
allotment_class	varchar(255)	No	Allotment class.
pm_plan	varchar(255)	Yes	Pm plan.
equipment_location	text	Yes	Equipment location.
non_functional	tinyint(1)	No	Yes when the item does not work.
equipment_condition_id	bigint(20)	No	Links to equipment_conditions.
disposition_status	varchar(255)	No	Disposition, for example Normal or For disposal.
remarks	text	Yes	Remarks.
qr_code	varchar(255)	Yes	URL encoded in the QR label.
under_warranty	tinyint(1)	No	Yes/No: under warranty.
end_warranty_date	date	Yes	End warranty date.
supplier	varchar(255)	Yes	Supplier.
current_accountable_officer_id	bigint(20)	Yes	Current accountable officer, set by the latest transaction.
current_end_user_id	bigint(20)	Yes	Current end user, set by the latest transaction.
used_by	varchar(255)	Yes	Who uses it: Learner, Teacher, Teaching-Related or Non-Teaching.
created_by_user_id	bigint(20)	Yes	User who registered the item.
created_at	timestamp	Yes	When the row was created.
updated_at	timestamp	Yes	When the row was last changed.
deleted_at	timestamp	Yes	Set when the record is deleted; deleted records are hidden but kept for history.

equipment_transactions

The permanent accountability history of each item. Rows are only added, never edited or deleted.

Column	Type	Null	Description
id	bigint(20)	No	Primary key.
equipment_id	bigint(20)	No	Links to equipment.
recorded_by_user_id	bigint(20)	Yes	User who logged the transaction.
transaction_type	varchar(255)	No	Kind of transaction, for example Beginning Inventory or Transfer.
accountable_officer_id	bigint(20)	Yes	Links to personnel.
end_user_id	bigint(20)	Yes	Links to personnel.
received_by_id	bigint(20)	Yes	Links to personnel.
date_assigned_accountable_officer	date	Yes	Date assigned accountable officer.
date_assigned_end_user	date	Yes	Date assigned end user.
date_received_new_accountable	date	Yes	Date received new accountable.
supporting_documents1	varchar(255)	Yes	Supporting documents1.
or_si_dr_iar_no	varchar(255)	Yes	OR/SI/DR/IAR document number.
supporting_documents2	varchar(255)	Yes	Supporting documents2.
par_ics_rrsp_rs_wmr_no	varchar(255)	Yes	PAR/ICS/RRSP/RS/WMR document number.
created_at	timestamp	Yes	When the row was created.

Column	Type	Null	Description
updated_at	timestamp	Yes	When the row was last changed.

equipment_attachments

Scanned documents and photos attached to an equipment record.

Column	Type	Null	Description
id	bigint(20)	No	Primary key.
equipment_id	bigint(20)	No	Links to equipment.
document_type	varchar(255)	No	Document type.
document_no	varchar(255)	Yes	Document number.
original_filename	varchar(255)	No	Original filename.
disk	varchar(255)	No	Disk.
path	varchar(255)	No	Location of the file on private storage.
mime_type	varchar(255)	No	Mime type.
file_size	int(10)	No	File size.
file_hash	char(64)	No	SHA-256 of the stored file.
uploaded_by_user_id	bigint(20)	Yes	Links to users.
created_at	timestamp	Yes	When the row was created.
updated_at	timestamp	Yes	When the row was last changed.

15.4 ISP accounts

isp_accounts

Internet service subscriptions: provider, plan, cost, contract and coverage.

Column	Type	Null	Description
id	bigint(20)	No	Primary key.
isp_provider_id	bigint(20)	No	Links to isp_providers.
office_id	bigint(20)	Yes	Links to offices.
cost_per_month	decimal(10,2)	No	Monthly cost in pesos.
isp_billing_account_no	varchar(255)	No	ISP billing account number.
package_purchased_inclusion	text	No	Package purchased inclusion.
school_area_coverage	varchar(255)	No	School area coverage.
min_speed	decimal(8,2)	Yes	Min speed.
max_speed	decimal(8,2)	Yes	Max speed.
subscriber_speed_upload	decimal(8,2)	Yes	Subscriber speed upload.
subscriber_speed_download	decimal(8,2)	Yes	Subscriber speed download.
subscription_type	varchar(255)	No	Subscription type.
isp_connection_type	varchar(255)	No	ISP connection type.
contract_start_date	date	Yes	Contract start date.
contract_end_date	date	Yes	Contract end date.
inactive_contract	tinyint(1)	No	Whether the contract is no longer active.

Column	Type	Null	Description
purpose_of_subscription	varchar(255)	No	Purpose of subscription.
mode_of_acquisition	varchar(255)	No	Mode of acquisition.
source_of_acquisition	varchar(255)	No	Source of acquisition.
donor	varchar(255)	Yes	Donor.
fund_source	varchar(255)	No	Fund source.
number_access_points_linked	int(10)	Yes	Number access points linked.
locations_access_points	text	Yes	Locations access points.
number_admin_area_covered	int(10)	Yes	Number admin area covered.
rate_connectivity_admin_areas	varchar(255)	Yes	Rate connectivity admin areas.
number_classrooms_covered	int(10)	Yes	Number classrooms covered.
rate_connectivity_classroom	varchar(255)	Yes	Rate connectivity classroom.
overall_signal_quality	varchar(255)	No	Overall signal quality.
rate_isp_service	tinyint(3)	Yes	Rate ISP service.
created_at	timestamp	Yes	When the row was created.
updated_at	timestamp	Yes	When the row was last changed.
deleted_at	timestamp	Yes	Set when the record is deleted; deleted records are hidden but kept for history.

isp_speed_tests

Speed test readings logged against an ISP account.

Column	Type	Null	Description
id	bigint(20)	No	Primary key.
isp_account_id	bigint(20)	No	Links to isp_accounts.
recorded_by_user_id	bigint(20)	Yes	Links to users.
download_speed	decimal(8,2)	No	Download speed.
upload_speed	decimal(8,2)	No	Upload speed.
ping	int(10)	Yes	Ping.
tested_at	datetime	No	When the test was run (Manila time).
signal_quality	varchar(255)	No	Signal quality.
rate_isp_service	tinyint(3)	Yes	Rate ISP service.
created_at	timestamp	Yes	When the row was created.
updated_at	timestamp	Yes	When the row was last changed.

isp_subscription_costs

Actual and projected contract or budget periods of an ISP account.

Column	Type	Null	Description
id	bigint(20)	No	Primary key.
isp_account_id	bigint(20)	No	Links to isp_accounts.
recorded_by_user_id	bigint(20)	Yes	Links to users.
contract_start_date	date	Yes	Contract start date.

Column	Type	Null	Description
contract_end_date	date	Yes	Contract end date.
total_amount_spent	decimal(12,2)	Yes	Total amount spent.
contract_projected_start_date	date	Yes	Contract projected start date.
contract_projected_end_date	date	Yes	Contract projected end date.
total_projected_expenditure	decimal(12,2)	Yes	Total projected expenditure.
created_at	timestamp	Yes	When the row was created.
updated_at	timestamp	Yes	When the row was last changed.

15.5 Office profiles

stakeholder_profiles

One profile per office: governance, location, key personnel, accessibility and community context.

Column	Type	Null	Description
id	bigint(20)	No	Primary key.
office_id	bigint(20)	No	Links to offices.
governance_level	varchar(255)	Yes	Governance level.
ro	varchar(255)	Yes	RO.
sdo	varchar(255)	Yes	SDO.
school_district	varchar(255)	Yes	School district.
school_name	varchar(255)	Yes	School name.
school_id	varchar(255)	Yes	School (ID).
province_id	bigint(20)	Yes	Links to psgc_provinces.
municipality_id	bigint(20)	Yes	Links to psgc_municipalities.
legislative_district	varchar(255)	Yes	Legislative district.
barangay_id	bigint(20)	Yes	Links to psgc_barangays.
street	varchar(255)	Yes	Street.
notes_corrections	text	Yes	Notes corrections.
notes_recent_development	text	Yes	Notes recent development.
mobile_1	varchar(20)	Yes	Mobile 1.
mobile_2	varchar(20)	Yes	Mobile 2.
landline	varchar(20)	Yes	Landline.
chief_name	varchar(255)	Yes	Chief name.
chief_position	varchar(255)	Yes	Chief position.
chief_email	varchar(255)	Yes	Chief email.
chief_mobile	varchar(20)	Yes	Chief mobile.
admin_staff_name	varchar(255)	Yes	Admin staff name.
admin_staff_position	varchar(255)	Yes	Admin staff position.
admin_staff_email	varchar(255)	Yes	Admin staff email.
admin_staff_mobile	varchar(20)	Yes	Admin staff mobile.
network_administrator_name	varchar(255)	Yes	Network administrator name.

Column	Type	Null	Description
longitude	decimal(10,7)	Yes	Longitude.
latitude	decimal(9,7)	Yes	Latitude.
nearby_institutions	longtext	Yes	Nearby institutions.
nearby_institutions_other	varchar(255)	Yes	Nearby institutions other.
travel_time_to_center_minutes	int(10)	Yes	Travel time to center minutes.
access_paths	longtext	Yes	Access paths.
transportation_options	longtext	Yes	Transportation options.
transportation_other	varchar(255)	Yes	Transportation other.
transportation_difficult	tinyint(1)	Yes	Yes/No: transportation difficult.
considered_very_remote	tinyint(1)	Yes	Yes/No: considered very remote.
remote_context_notes	text	Yes	Remote context notes.
gidca	tinyint(1)	Yes	Yes/No: gidca.
lms	tinyint(1)	Yes	Yes/No: lms.
community_engagement	longtext	Yes	Community engagement.
community_context_remarks	text	Yes	Community context remarks.
submitted_at	datetime	Yes	When the profile was submitted (Manila time).
transaction_type	varchar(255)	Yes	Transaction type.
created_at	timestamp	Yes	When the row was created.
updated_at	timestamp	Yes	When the row was last changed.

internet_connectivity_surveys

One connectivity survey per office: ISP availability, mobile signal, coverage and electricity.

Column	Type	Null	Description
id	bigint(20)	No	Primary key.
office_id	bigint(20)	No	Links to offices.
has_isp_in_area	tinyint(1)	Yes	Yes/No: has ISP in area.
available_isps	longtext	Yes	Available isps.
available_isps_other	varchar(255)	Yes	Available isps other.
mobile_signal_types	longtext	Yes	Mobile signal types.
has_mobile_data_connectivity	tinyint(1)	Yes	Yes/No: has mobile data connectivity.
mobile_data_quality	varchar(255)	Yes	Mobile data quality.
subscribes_to_isp	tinyint(1)	Yes	Yes/No: subscribes to ISP.
subscribed_isps	longtext	Yes	Subscribed isps.
insufficient_bandwidth_explanation	text	Yes	Insufficient bandwidth explanation.
coverage_areas	longtext	Yes	Coverage areas.
coverage_areas_other	varchar(255)	Yes	Coverage areas other.
dict_free_wifi_recipient	tinyint(1)	Yes	Yes/No: dict free wifi recipient.
dict_free_wifi_rating	tinyint(3)	Yes	Dict free wifi rating.
has_sufficient_bandwidth	tinyint(1)	Yes	Yes/No: has sufficient bandwidth.
no_subscription_reason	text	Yes	Number subscription reason.

Column	Type	Null	Description
has_electricity_source	tinyint(1)	Yes	Yes/No: has electricity source.
electricity_sources	longtext	Yes	Electricity sources.
primarily_solar_powered	tinyint(1)	Yes	Yes/No: primarily solar powered.
frequent_brownouts	tinyint(1)	Yes	Yes/No: frequent brownouts.
rooms_other_use	int(10)	Yes	Rooms other use.
created_at	timestamp	Yes	When the row was created.
updated_at	timestamp	Yes	When the row was last changed.

15.6 Reference data

item_types

Kinds of equipment (Laptop, Desktop (package), Printer, ...). The abbreviation is used in property numbers.

Column	Type	Null	Description
id	bigint(20)	No	Primary key.
name	varchar(255)	No	Name shown on screen.
abbreviation	varchar(3)	Yes	Three-character code used in property numbers, for example LPT.
description	text	Yes	Optional description.
dashboard_group	varchar(255)	Yes	Dashboard card the item type is counted under.
sort_order	int(10)	No	Order in dropdowns; lower numbers first.
is_active	tinyint(1)	No	Whether the value is active and offered in forms.
created_at	timestamp	Yes	When the row was created.
updated_at	timestamp	Yes	When the row was last changed.

brands

Equipment brands and manufacturers.

Column	Type	Null	Description
id	bigint(20)	No	Primary key.
name	varchar(255)	No	Name shown on screen.
description	text	Yes	Optional description.
sort_order	int(10)	No	Order in dropdowns; lower numbers first.
is_active	tinyint(1)	No	Whether the value is active and offered in forms.
created_at	timestamp	Yes	When the row was created.
updated_at	timestamp	Yes	When the row was last changed.

equipment_categories

High-value or Low-value, set automatically from the acquisition cost.

Column	Type	Null	Description
id	bigint(20)	No	Primary key.

Column	Type	Null	Description
name	varchar(255)	No	Name shown on screen.
description	text	Yes	Optional description.
sort_order	int(10)	No	Order in dropdowns; lower numbers first.
is_active	tinyint(1)	No	Whether the value is active and offered in forms.
created_at	timestamp	Yes	When the row was created.
updated_at	timestamp	Yes	When the row was last changed.

equipment_classifications

Equipment classifications, with default UACS code and useful life.

Column	Type	Null	Description
id	bigint(20)	No	Primary key.
name	varchar(255)	No	Name shown on screen.
description	text	Yes	Optional description.
default_gl_sl_code	varchar(255)	Yes	Retired; the GL-SL code now follows the cost.
default_uacs	varchar(255)	Yes	UACS code filled in on new equipment.
default_useful_life	smallint(5)	Yes	Useful life (years) filled in on new equipment.
sort_order	int(10)	No	Order in dropdowns; lower numbers first.
is_active	tinyint(1)	No	Whether the value is active and offered in forms.
created_at	timestamp	Yes	When the row was created.
updated_at	timestamp	Yes	When the row was last changed.

equipment_conditions

Physical condition values (Serviceable, Unserviceable, ...).

Column	Type	Null	Description
id	bigint(20)	No	Primary key.
name	varchar(255)	No	Name shown on screen.
description	text	Yes	Optional description.
sort_order	int(10)	No	Order in dropdowns; lower numbers first.
is_active	tinyint(1)	No	Whether the value is active and offered in forms.
created_at	timestamp	Yes	When the row was created.
updated_at	timestamp	Yes	When the row was last changed.

positions

Personnel positions.

Column	Type	Null	Description
id	bigint(20)	No	Primary key.
name	varchar(255)	No	Name shown on screen.
description	text	Yes	Optional description.
sort_order	int(10)	No	Order in dropdowns; lower numbers first.

Column	Type	Null	Description
is_active	tinyint(1)	No	Whether the value is active and offered in forms.
created_at	timestamp	Yes	When the row was created.
updated_at	timestamp	Yes	When the row was last changed.

ro_offices

Regional office divisions.

Column	Type	Null	Description
id	bigint(20)	No	Primary key.
name	varchar(255)	No	Name shown on screen.
description	text	Yes	Optional description.
sort_order	int(10)	No	Order in dropdowns; lower numbers first.
is_active	tinyint(1)	No	Whether the value is active and offered in forms.
created_at	timestamp	Yes	When the row was created.
updated_at	timestamp	Yes	When the row was last changed.

sdo_offices

Schools Division Office divisions/units.

Column	Type	Null	Description
id	bigint(20)	No	Primary key.
name	varchar(255)	No	Name shown on screen.
description	text	Yes	Optional description.
sort_order	int(10)	No	Order in dropdowns; lower numbers first.
is_active	tinyint(1)	No	Whether the value is active and offered in forms.
created_at	timestamp	Yes	When the row was created.
updated_at	timestamp	Yes	When the row was last changed.

isp_providers

Internet service providers.

Column	Type	Null	Description
id	bigint(20)	No	Primary key.
name	varchar(255)	No	Name shown on screen.
description	text	Yes	Optional description.
sort_order	int(10)	No	Order in dropdowns; lower numbers first.
is_active	tinyint(1)	No	Whether the value is active and offered in forms.
created_at	timestamp	Yes	When the row was created.
updated_at	timestamp	Yes	When the row was last changed.

equipment_libraries

Small value lists for equipment and ISP forms (units of measure, disposition status, sources of funds, ...), grouped by type.

Column	Type	Null	Description
id	bigint(20)	No	Primary key.
type	varchar(64)	No	Which value list the row belongs to.
value	varchar(255)	No	Value shown in dropdowns and stored on records.
description	text	Yes	Optional description.
sort_order	int(10)	No	Order in dropdowns; lower numbers first.
is_active	tinyint(1)	No	Whether the value is active and offered in forms.
created_at	timestamp	Yes	When the row was created.
updated_at	timestamp	Yes	When the row was last changed.

personnel_libraries

Small value lists for personnel forms (name suffixes, causes of separation, funding sources), grouped by type.

Column	Type	Null	Description
id	bigint(20)	No	Primary key.
type	varchar(64)	No	Which value list the row belongs to.
value	varchar(255)	No	Value shown in dropdowns and stored on records.
description	text	Yes	Optional description.
sort_order	int(10)	No	Order in dropdowns; lower numbers first.
is_active	tinyint(1)	No	Whether the value is active and offered in forms.
created_at	timestamp	Yes	When the row was created.
updated_at	timestamp	Yes	When the row was last changed.

stakeholder_libraries

Small value lists for the stakeholder profile (governance levels, nearby institutions, access roads, ...), grouped by type.

Column	Type	Null	Description
id	bigint(20)	No	Primary key.
type	varchar(64)	No	Which value list the row belongs to.
value	varchar(255)	No	Value shown in dropdowns and stored on records.
description	text	Yes	Optional description.
sort_order	int(10)	No	Order in dropdowns; lower numbers first.
is_active	tinyint(1)	No	Whether the value is active and offered in forms.
created_at	timestamp	Yes	When the row was created.
updated_at	timestamp	Yes	When the row was last changed.

connectivity_libraries

Small value lists for connectivity (connection types, signal quality, coverage areas, ...), grouped by type.

Column	Type	Null	Description
id	bigint(20)	No	Primary key.
type	varchar(64)	No	Which value list the row belongs to.
value	varchar(255)	No	Value shown in dropdowns and stored on records.
description	text	Yes	Optional description.
sort_order	int(10)	No	Order in dropdowns; lower numbers first.
is_active	tinyint(1)	No	Whether the value is active and offered in forms.
created_at	timestamp	Yes	When the row was created.
updated_at	timestamp	Yes	When the row was last changed.

15.7 Geographic reference (PSGC)

psgc_provinces

Provinces from the Philippine Standard Geographic Code (Region III).

Column	Type	Null	Description
id	bigint(20)	No	Primary key.
code	varchar(9)	No	Code.
name	varchar(255)	No	Name shown on screen.
created_at	timestamp	Yes	When the row was created.
updated_at	timestamp	Yes	When the row was last changed.

psgc_municipalities

Cities and municipalities (PSGC).

Column	Type	Null	Description
id	bigint(20)	No	Primary key.
code	varchar(9)	No	Code.
province_id	bigint(20)	No	Links to psgc_provinces.
name	varchar(255)	No	Name shown on screen.
created_at	timestamp	Yes	When the row was created.
updated_at	timestamp	Yes	When the row was last changed.

psgc_barangays

Barangays (PSGC).

Column	Type	Null	Description
id	bigint(20)	No	Primary key.
code	varchar(9)	No	Code.
municipality_id	bigint(20)	No	Links to psgc_municipalities.
name	varchar(255)	No	Name shown on screen.

Column	Type	Null	Description
created_at	timestamp	Yes	When the row was created.
updated_at	timestamp	Yes	When the row was last changed.

15.8 System tables

Tables used by the framework rather than by the screens in this manual:

Table	Purpose
cache	Laravel cache store (settings, PRIME sync markers, rate-limit counters).
cache_locks	Locks that stop two processes doing the same job at once.
jobs	Queued background jobs waiting to run.
job_batches	Groups of queued jobs.
failed_jobs	Background jobs that failed, kept for review.
migrations	Which database changes have been applied.
sessions	Signed-in browser sessions.
password_reset_tokens	Framework table; unused, because passwords are managed in PRIME.
personal_access_tokens	Framework table for API tokens; unused by the web app.
email_messages	Log of emails sent by the system.