MM-DOCS

This project is used to produce all forms of documentation for the service using Markdown and other repository friendly markup languages.

The documentation is created using the mm-docs docker bundle:

- https://github.com/majkinetor/mm-docs

Features

- Write documentation in extended Markdown, HTML, PlantUML and other markup languages
- Beautiful responsive design using material theme
- Navigational bar, TOC, search, internationalization, and various rich presentation functionalities
- Rich diagrams and interface mockups using PlantUML
- Macros can be written in python
- PDF export for each page or full site
- Live reload during editing
- GitLab/GitHub repository connection for editing within a browser
- Automated AppVeyor build and deploy to GitHub pages using Ubuntu image
- Cross platform for hosting and development

Prerequisites

- Docker
- PowerShell (optional, developer friendliness)
    - Invoke-Build module

Quick start

To edit documentation:

- Clone/use new project template
- Add new documents somewhere in the `source\docs` hierarchy.
- Add document path to TOC (file: `source\mkdocs.yml`; yaml key: `nav`) to make page visible in the navigation section, otherwise, the page is available via direct link.

Start development server - run in PowerShell `Invoke-Build Run`. The command is syntax sugar for running docker containers. To build static site run `Invoke-Build Build`.

This is a footer page, edit in footer.md

Document Information	
Source path	index.md
Last Change Date:	2020-04-09 02:45:59 +0200

Build time: 2020-11-24 13:29:33

Demonstration page

mm-docs demonstration page.

For more details about included tools see:

- Mkdocs
- Mkdocs Material Extensions
- PlantUML
- MathJax
- Jinja

Customization

- Color palettes
- Language
- Extending theme

Text

Unicode: Мислим дакле постојим

Basic effects

Output	Code
Bold text	`**Bold text**` or `__Bold text__`
Italic text	`*Italic text*` or `_Italic text_`
~~Strike Through~~	`~~Strike Through~~`
Colored text	`==Colored text==`
`Inline code`	`` `Inline code` ``

Hotkeys

Output	Code
`Enter`	`++enter++`
`PgDown`	`++"PgDown"++`
`Non Existent Key`	`++"Non Existent Key"++`

Links, footnotes and comments

Links

Output	Code
An inline-style link	`[An inline-style link](https://www.google.com)`
An inline-style link with title	`[An inline-style link with title](https://www.google.com "Google's Homepage")`
Reference-style link	`[Reference-style link][arbitrary reference text]` `[arbitrary reference text]: https://www.mozilla.org`
Relative reference to a repository file	`[Relative reference to a repository file](../about/overview)`
Numbers for reference-style link definitions	`[Numbers for reference-style link definitions][1]` `[1]: http://slashdot.org`
Use the link text itself	`Use the [link text itself]` `[link text itself]: http://www.reddit.com`

Magic links and emails: turned to links as recognized

Output	Code
http://www.google.com	`http://www.google.com`

Output	Code
majkinetor@gmail.com	`majkinetor@gmail.com`
www.google.com	`www.google.com`

Footnotes

```
A text with a short footnote[^short]
[^short]: https://en.wikipedia.org/wiki/Note_(typography)
```

A text with a short footnote[1]

```
A text with a long footnote[^long]
[^long]:
    Lorem ipsum dolor sit amet, consectetur adipiscing elit. Nulla et euismod
    massa, nec semper lorem quam in massa.

    ```
    code
```

A text with a long footnote[2]

Comments

```
The text contains 2 comments bellow this line which should not be visible.
[comment]: # (Developed using Visual Studio Code with plantuml extension: cinst
visualstudiocode; code --install-extension jebbs.plantuml)
[comment]: # (PlantUML version may influence diagrams. This document is developped with
1.2017.15: cinst plantuml --version 1.2017.15)
```

The text contains 2 comments bellow this line which should not be visible.

Citations

> Lorem ipsum dolor sit amet, consectetur adipiscing elit. Nulla et euismod nulla. Curabitur feugiat, tortor non consequat finibus, justo purus auctor massa, nec semper lorem quam in massa. Inline:
>
> > Lorem ipsum dolor sit amet, consectetur adipiscing elit. Nulla et euismod nulla. Curabitur feugiat, tortor non consequat finibus, justo purus auctor massa, nec semper lorem quam in massa.
> >
> > ```
> > code in citations
> > ```
```

> Another citation line

HTML

HTML is allowed without restrictions:

Some big text

Critic and comments

Here is some ~~*incorrect*~~ Markdown. I am adding this here. Here is some more ~~text that I am removing~~text. And here is even more text that I am adding. ~~-~~Paragraph was deleted and replaced with some spaces.

~~-~~

Spaces were removed and a paragraph was added.

And here is a comment on some text/* This works quite well. I just wanted to comment on it. */. Substitutions ~~is~~are great!

General block handling:

~~• test remove~~

~~• test remove~~

• test add

• test add

Emoji

List of emoji codes

- `:tada:` 🎉
- `:jack_o_lantern:` 🎃
- `:alien:` 👽
- `:robot_face:` 🤖
- `:smile:` 😄
- `:heart:` ❤️
- `:thumbsup:` 👍

💜 ❗ 🕐🚜🐔👺

Lists

Ordered list

1. List item 1
2. List item 2
    a. List item 2.1
    b. List item 2.2
        i. List item 2.2.1
        ii. List item 2.2.2
    c. List item 2.3
3. List item 4

Unordered, mixed

- List item 1
- List item 2
    - List item 2.1
    - List item 2.2
        a. List item 2.2.1
        b. List item 2.2.2
    - List item 2.3
- List item 4

Tables

Col1	Col2
row1.1	row1.2
row2.1	row2.2-1 row2.2-2

Plantuml

Add `plantuml` in a block code header to set code section as PlantUml source. Use `format` to specify output type:

```
```plantuml format="svg"
title PlantUml Demo
left to right direction
skinparam packageStyle rectangle
actor customer
actor clerk
rectangle checkout {
  customer -- (checkout)
  (checkout) .> (payment) : include
  (help) .> (checkout) : extends
  (checkout) -- clerk
}
```
```

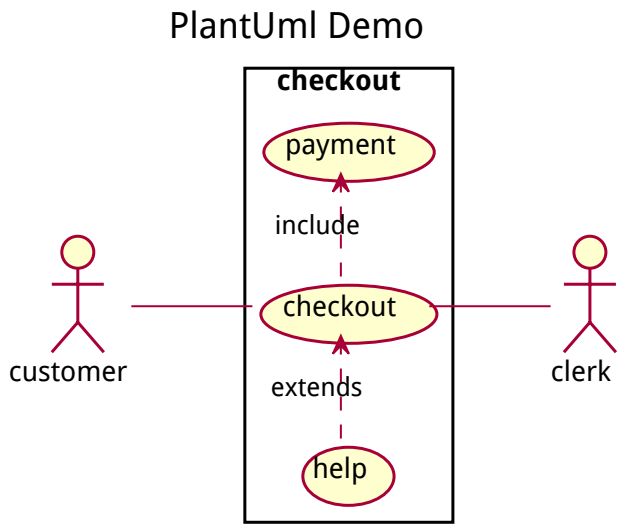

MathJax

The block code:

```
```
$$
\frac{n!}{k!(n-k)!} = \binom{n}{k}
$$
```
```

\frac{n!}{k!(n-k)!} = \binom{n}{k}

`Inline math expressions: $p(x|y) = \frac{p(y|x)p(x)}{p(y)}$`

Inline math expressions: p(x|y) = \frac{p(y|x)p(x)}{p(y)}

NOTE:

- This doesn't render corretly in PDF output, see this issue for explanation.

Admonition

More info

Note

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Nulla et euismod nulla. Curabitur feugiat, tortor non consequat finibus, justo purus auctor massa, nec semper lorem quam in massa.

Collapsed closed

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Nulla et euismod nulla. Curabitur feugiat, tortor non consequat finibus, justo purus auctor massa, nec semper lorem quam in massa.

Collapsed open

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Nulla et euismod nulla. Curabitur feugiat, tortor non consequat finibus, justo purus auctor massa, nec semper lorem quam in massa.

Extreme danger

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Nulla et euismod nulla. Curabitur feugiat, tortor non consequat finibus, justo purus auctor massa, nec semper lorem quam in massa.

```
some code
```

Some citation

Code Highlight

More info

```
import tensorflow as tf
```

With tabs:

Bash PowerShell PlantUML C C++ C#

```bash
#!/bin/bash

echo "Hello world!"
```

Abbreviations

The following are defined in single file, `_inc\abbr.md` and included on each page.

- IT, XML, JSON

Smart symbols

- `(tm)` ™
- `(c)` ©
- `c/o` ℅
- `+/-` ±
- `-->` →
- `<--` ←
- `<-->` ↔
- `=/=` ≠
- `1/4` ¼
- `1st` 1st

Task list

- [x] Lorem ipsum dolor sit amet, consectetur adipiscing elit
- [x] Curabitur elit nibh, euismod et ullamcorper at, iaculis feugiat est
- [ ] Vestibulum convallis sit amet nisi a tincidunt
  - [x] In hac habitasse platea dictumst
  - [ ] Praesent sed risus massa
- [ ] Nulla vel eros venenatis, imperdiet enim id, faucibus nisi

Custom span class

Adding custom HTML classes to span elements.

Syntax: `!!<class names>|<text to be wrapped>!!`.

The following example uses css from the custom_css file, classes `color-yellow` and `backgrond-blue`:

- `I love !!color-yellow background-blue|cookies!!` - I love cookies

Macros

More details.

Variable from config	`extra.version = 0.1`
Variable from this page	`acme = Acme Company Ltd`
Macro (defined in `main.py`)	`bar(1) = 9.3` - `barbaz(3) = 9`
Python variable (defined in `main.py`)	`baz = John Doe`
Dictionary variable from config	`company.name = Acme`

Jinja templates

You can do all the work you want with Jinja2, including defining pure macros, conditionals and for loops:

```
{% macro input(name, value='', type='text', size=20) -%}
  <input type="{{ type }}" name="{{ name }}" value="{{ value}}" size="{{ size }}">
{%- endmacro %}

{% input('username') }}
{% input('password', type='password') }}
```

Includes

You may use the include directive from jinja2, directly in your markdown code e.g.:

```
## Paragraph
{%include 'snippet.md' %}
{%include 'html/content1.html' %}
```

The root directory for your included files is in `docs_dir`.

You can also include parts of the file.

Environment variables

Environment variables can be used inside of configuration file `mkdocs.yaml`.

```
site_name: !!python/object/apply:os.getenv ["CI_PROJECT_PATH"]
repo_url: !!python/object/apply:os.getenv ["CI_PROJECT_URL"]
repo_name: !!python/object/apply:os.getenv ["CI_PROJECT_PATH"]
```

This is a footer page, edit in footer.md

Document Information	
Source path	demo.md
Last Change Date:	2020-10-04 23:18:23 +0200

Build time: 2020-11-24 13:29:33

1. https://en.wikipedia.org/wiki/Note_(typography)
2. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Nulla et euismod massa, nec semper lorem quam in massa.

   ```
   code
   ```

Variables

Variables

Context

[(0, 'Page', "Page(title='Home', url='/mm-docs-template/')"), (1, 'Page', "Page(title='Demonstration', url='/mm-docs-template/demo/')"), (2, 'Page', "Page(title='Variables', url='/mm-docs-template/vars/')"), (3, 'Page', "Page(title='Revision', url='/mm-docs-template/revision/')")]

Page

Variable	Type	Content
file	*File*	**page** [*Page*], src_path = 'vars.md', abs_src_path = '/docs/source/docs/vars.md', name = 'vars', dest_path = 'vars/index.html', abs_dest_path = '/docs/source/site/vars/index.html', url = 'vars/'
title	*str*	'Variables'
parent	*NoneType*	None
children	*NoneType*	None
previous_page	*Page*	Page(title='Demonstration', url='/mm-docs-template/demo/')
next_page	*Page*	Page(title='Revision', url='/mm-docs-template/revision/')
_Page__active	*bool*	False
is_section	*bool*	False
is_page	*bool*	True
is_link	*bool*	False
update_date	*str*	'2020-11-24'
canonical_url	*str*	'https://majkinetor.github.io/mm-docs-template/vars/'
abs_url	*str*	'/mm-docs-template/vars/'
edit_url	*str*	'https://github.com/majkinetor/mm-docs-template/edit/master/source/docs/vars.md'

markdown	*str*	"## {{ page.title }}\n\n### Context\n\n{{ context(navigation) }}\n\n### Page\n\n{{ context(page) | pretty }}\n\n### Config\n\n{{ context(config) | pretty }}\n\nFrontmatter var - foo: {{ page.meta.foo }}\n\n{% include 'footer.md' %}"
content	*NoneType*	None
toc	*list*	[]
meta	*dict*	title = 'Variables', foo = 'bar'

Config

Variable	Type	Content
config_file_path	*str*	'/docs/source/mkdocs.yml'
site_name	*str*	'MM-DOCS'
nav	*list*	[{'Home': 'index.md'}, {'Demonstration': 'demo.md'}, {'Variables': 'vars.md'}, {'Revision': 'revision.md'}]
pages	*NoneType*	None
site_url	*str*	'https://majkinetor.github.io/mm-docs-template/'
site_description	*str*	'MM-DOCS Template'
site_author	*str*	'majkinetor'
theme	*Theme*	Theme(name='material', dirs=['/usr/lib/python3.6/site-packages/material', '/usr/lib/python3.6/site-packages/mkdocs/templates'], static_templates=['sitemap.xml', '404.html'], language='en', direction=None, features=['navigation.expand', 'navigation.instant'], palette={'primary': 'White'}, font={'text': 'Roboto', 'code': 'Roboto Mono'}, icon=None, favicon='assets/images/favicon.png', include_search_page=False, search_index_only=True)
docs_dir	*str*	'/docs/source/docs'
site_dir	*str*	'/docs/source/site'
copyright	*str*	'© majkinetor 2019'
google_analytics	*NoneType*	None
dev_addr	*Address*	Address(host='0.0.0.0', port=8000)
use_directory_urls	*bool*	True

repo_url	*str*	'https://github.com/majkinetor/mm-docs-template/'
repo_name	*str*	'GitHub'
edit_uri	*str*	'edit/master/source/docs/'
extra_css	*list*	['_css/extra.css', '_css/pdf.css']
extra_javascript	*list*	['https://cdnjs.cloudflare.com/ajax/libs/mathjax/2.7.0/MathJax.js?config=TeX-MML-AM_CHTML']
extra_templates	*list*	[]
markdown_extensions	*list*	['toc', 'tables', 'fenced_code', 'admonition', 'footnotes', 'codehilite', 'meta', 'abbr', 'sane_lists', 'def_list', 'attr_list', 'pymdownx.betterem', 'pymdownx.caret', 'pymdownx.critic', 'pymdownx.inlinehilite', 'pymdownx.magiclink', 'pymdownx.mark', 'pymdownx.superfences', 'pymdownx.smartsymbols', 'pymdownx.tabbed', 'pymdownx.tasklist', 'pymdownx.tilde', 'pymdownx.keys', 'pymdownx.details', 'pymdownx.emoji', 'pymdownx.arithmatex', 'markdown_include.include', 'plantuml_markdown', 'mdx_custom_span_class']
mdx_configs	*dict*	**toc** [*dict*], **pymdownx.betterem** [*dict*], **pymdownx.tasklist** [*dict*], **markdown_include.include** [*dict*], **plantuml_markdown** [*dict*]
strict	*bool*	False
remote_branch	*str*	'gh-pages'
remote_name	*str*	'origin'
extra	*SubConfig*	{'url_prefix': None, 'version': 0.1, 'company': {'name': 'Acme'}}
plugins	*PluginCollection*	**search** [*SearchPlugin*], **exclude** [*Exclude*], **pdf-export** [*PdfExportPlugin*], **macros** [*MacrosPlugin*]

Frontmatter var - foo: bar

This is a footer page, edit in footer.md

Document Information

Source path	vars.md
Last Change Date:	2020-11-24 11:23:24 +0100

Build time: 2020-11-24 13:29:33

Revisions

Build Date: 2020-11-24 13:28:58

View revision.json

Date	Path	Comment
2020-10-04 23:18:23 +0200	demo.md	
2020-11-24 11:23:24 +0100	vars.md	
2020-04-09 02:45:59 +0200	_inc/footer.md	not found
2020-11-24 11:23:24 +0100	about/overview.md	
2020-04-09 02:45:59 +0200	_inc/abbr.md	not found
2020-04-09 02:45:59 +0200	index.md	