

String Theory — Unified Documentation

Built 2026-09-25 15:02 · [String Theory README](#) ↗

Table of contents

- 1. [Apollo Editor](#)
 - 2. [Art Station](#)
 - 3. [Credit Hoarder](#)
 - 4. [Fusion](#)
 - 5. [Group Therapy](#)
 - 6. [ISRC Scout](#)
 - 7. [Mammoth](#)
 - 8. [Platform check](#)
-

Apollo Editor

UI and tools for advanced adding and editing of a MusicBrainz release.

- Install: [stable](#) or [latest](#)
 - Or via bundle: [String Theory](#)
- [Changelog](#)
- [View users](#)

When you add a release, each track's artist may be set as **plain text with no MBID**, and the recordings are unset. Linking them one by one — searching, picking, occasionally splitting *A feat. B* into two credits — is the slowest part of adding a release. Apollo Editor does the whole tracklist and recording set in one pass and lets you apply the confident matches with one click.

It replaces the native **Tracklist** and **Recordings** editors with two clean, consistent tables with dozens of features. It also makes the **Release Information** tab more functional by suppressing help bubbles and moving external icons to the right column. When adding new releases, the **Duplicates** tab provides a similarity check.

Each takeover is optional and you can flip back to the native editor at any time with the **Original / Apollo** switcher button.

Features

- **Tracklist** — clean artist-picker table with confidence highlighting, change-all-matching scope, split/alias-aware credits, track actions, reordering and keyboard navigation.
- **Recordings** — side-by-side *Track* ↔ *Recording* comparison with per-row confidence, character-level diff highlighting, and a suggestion/ISRC-aware recording picker.
- **Matching** — one-click auto-match of artists, recordings and the release label, using the whole release group, with configurable tolerance.
- **Tools** — configurable **Tools** bar (choose/reorder, icon or text, hover-flyout params) plus extra tools, and Revert/Clear for one track or all.
- **Release Information** — Markdown annotation editor, external links in a right column with a dead-link checker, and a front-cover thumbnail.
- **Duplicates** — a red→green **Similarity** score per existing release, expandable to a track-by-track comparison.
- **Customization** — resizable columns, alternate row colours, grid, layouts and match tolerance.
- **Original / Apollo switcher** — every takeover is optional; flip back to the native editor at any time.

Release Information

Settings: *Modify Release information*

Beautification of native page, external links redesign, markdown annotation editor, release cover and array batch removal tools.

Release

Tracklist

Recordings

✓ Finish

The Vibe! The Ultimate Rare Grooves Series, Volume 3: Samba Funk, MPB & Other Illicit Brazilian ...

× Cancel

◀ Prev

Next ▶

RELEASE INFORMATION

Title: e 3: Samba Funk, MPB & Other Illicit Brazilian Groove

Artist: Various Artists

Release group: The Vibe !, Volume 3

☐ Copy the release title to the release group

Type: To edit types, please edit the release group.

Status: Official

Language: Portuguese

Script: Latin

EXTERNAL LINKS

<https://www.amazon.fr/gp/product/B00029BP3K>

ASIN

<https://www.discogs.com/release/4940701>

Discogs

all 2 OK

Check links

FRONT COVER

RELEASE EVENT

Date: 2004 - MM - DD

Country: France

Add release event

Label: BMG France

Cat. No: 82876 579292

Add label

Barcode: 828765792929

☐ This release does not have a barcode

Packaging:

ADDITIONAL INFORMATION

Disambiguation:

Original

- **External links** moved to a right column with a **dead-link checker**
 - **Right-click** a favicon/type to edit it.
 - **Add link (+)** stays a compact **[+]** until clicked, then reads *Paste one or more links*: it accepts **several links at once** and mines URLs out of whatever you paste including full HTML, sorting out duplicates, and setting a link type
- **Markdown annotation editor** in *Additional information*.
- A **front-cover thumbnail** is positioned under the external links, linking to the release's cover-art page
- Batch removal of array elements - date and labels - using right click on (x) button
- Help bubbles removed

Tracklist

Settings: *Modify Tracklist*

Extremely fast and confident artist matching via multiple mechanisms, advanced tool setup, detailed highlighting, reverting inputs etc.

Release

Tracklist

Recordings

✓ Finish

The Vibe! The Ultimate Rare Grooves Series, Volume 3: Samba Funk, MPB & Other Illicit Brazilian Gr...

× Cancel

◀ Prev

Next ▶

TOOLS

Resize columns

Aa

Sentence

Keep uppercased

Keep Roman

S&R

5 links

Change

all matching tracks

Match

TRACKLIST

CD

#	Title	Artist	Length	Match
1	Glorioso santo antônio	Antônio Carlos e Jocafi	3:38	set
2	Bala com bala	João Bosco	2:19	set
3	Bobeira	Edson Frederico	3:11	set
4	Chica=chica=boom=chic	Rolando Faria	4:54	set
5	Ou bola ou búlica	Luiz Antonio	2:16	set
6	Dimensions (feat. Ivan Lins)	Tamba Trio	4:36	set
7	Demônio de guarda	Gay Vaquer	3:49	set
8	Tiro cruzado	Ivan Lins	2:11	set
9	Água de beber	Antonio Carlos Jobim	4:49	set
10	Mirandolina	Míucha	2:45	set
11	Cravo e canela	Aquarius	2:24	set
12	Berimbão	Luiz Antonio	5:48	set
13	Mestre bimba	Burnier & Cartier	2:58	set
14	Futebol de bar	Banda Black Rio	2:34	set

Add 1 track(s)

Antônio Carlos e Jocafi

Antônio Carlos e Jocafi (Brazilian duo)

João Bosco

João Bosco de Freitas Mucci

Edson Frederico

Edson Frederico Barbosa Cavalcante

Rolando Faria

Antônio de Pádua Vieira da Costa (Brazilian composer and lyricist)

Tamba Trio

Tamba Trio

Gay Vaquer

Gay Vaquer

Ivan Lins

Lins

Antonio Carlos Jobim

Jobim, A. Carlos Jobim, Jobim, A.C. Joachim...

Míucha

Helolisa Maria Buarque de Hollanda

Aquarius

(Brazilian group)

Luiz Antonio

Antônio de Pádua Vieira da Costa (Brazilian composer and lyricist)

Burnier & Cartier

Burnier & Cartier

Banda Black Rio

Various Artists add compilations to this artist

Jayme Marques

Johann Sebastian Bach German Baroque period composer & musician

Tamba Trio

The E-Street Band

Cesar Mariano & Cia.

[unknown] Special Purpose Artist - Do not add releases here, if possible.

Cartier

Cartier

+ Add medium

- **Auto match artist** based on release group, Discogs URL or name

String Theory — Unified Documentation · 3/73

- **Artist selection**
 - Picker with a **confidence** highlight
 - Option to apply pick to **all matching tracks or a single one** (the [Change](#) in toolbar)
 - **Ctrl-click** a search result to set that artist on every unresolved track
 - Paste an **MBID or a MusicBrainz artist URL** to resolve straight to that artist
 - **Create** unresolved artist (in the background) with multiple fields pre-set (sort, type, external link)
 - **Hover actions**
 - **Split** an artist with a **join-phrase selector**
 - **Delete** split artist
 - **Reorder** artist within split
 - **Aliases** and disambiguation shown in search results and selection
 - **Artist type** icon with a direct link to the artist
 - **Discogs links checking** (with option *Discogs artist link matching*) with quick actions to add them
 - **N unresolved artist** badge with click that positions to the first one
- **Tracks**
 - **Hover actions** - Split & Guess case - left-click to apply to a single track, right-click to apply to every track
 - **Reorder** tracks within a medium with the **::** handle — audio tracks among audio tracks, data tracks among data tracks (a drag never crosses the boundary; the **↓/↑** buttons do that).
 - **Data tracks** — **↓** on a track moves it *and everything below it on that medium* into the data section; **↑** on a data track moves it *and every data track above it* back. Both are in the move column, on hover. Not offered on a disc-ID medium, which MusicBrainz doesn't allow.
 - **Keyboard navigation**
- [Tools](#) toolbar with native and new tools
- **Highlighting**
 - Changed tracks (left border color)
 - Artist instances in the tracklist
 - All changed artists after picker
 - Pending changes (recordings, artists)
 - [Enlarge Punctuation](#)
 - [Join-phrase spacing](#)
 - Split and splittable tracks
 - Tracks that "Guess case" can affect
- **Expand all media** when release has them collapsed
 - left-click expands single media
 - right-click expands all media
- Table appearance customization: layout, alternate row colors, grid lines
- Pregap, data track and disc id support
- Revert/Clear all inputs

Recordings

[Settings](#): *Modify Recordings*

Side-by-side *Track* ↔ *Recording* comparison with a confidence circle per row and inline highlighting of the fields that differ.

Release

Tracklist

Recordings

✓ Finish

The Vibe! The Ultimate Rare Grooves Series, Volume 3: Samba Funk, MPB & Other Illicit Brazilian Gr...

✕ Cancel

◀ Prev

Next ▶

Various Artists (2 versions)

Cutoff

near

⚡ Match

Track			Recording			
#	Title	Artist	Length	Title	Artist	Length
1	Glorioso Santo Antônio	Antônio Carlos e Jocáfi (Brazilian duo)	3:38	Glorioso Santo Antônio	Antônio Carlos e Jocáfi (Brazilian duo)	3:38
2	Bala Com Bala	João Bosco	2:19	Bala Com Bala	João Bosco	2:19
3	Bobeira	Edson Frederico	3:11	Bobeira	Edson Frederico	3:11
4	Chica-Chica-Boom-Chic	Rolando Faria & Luiz Antonio	4:54	Chica-Chica-Boom-Chic	Rolando Faria & Luiz Antonio (Brazilian composer and lyricist)	4:51
5	Ou bola ou bûlica			Ou bola ou bûlica	Tamba Trio	2:12
6	Dimensions			Dimensions	Gay Vaquer	4:36
7	Demônio de guarda			Demônio de guarda	Ivan Lins	3:47
8	Tiro Cruzado			Tiro Cruzado	Antonio Carlos Jobim & Miúcha	2:09
9	Água de beber			Água de beber	Aquarius (Brazilian group) & Luiz Antonio (Brazilian composer and lyricist)	4:46
10	Mirandolina			Mirandolina	Burnier & Cartier	2:45
11	Cravo e Canela			Cravo e Canela	Banda Black Rio	2:21
12	Berimbão			Berimbão	Jayme Marques	5:44
13	Mestre Bimba			Mestre Bimba	Tamba Trio	2:58
14	Futebol de Bar			Futebol de Bar	Cesar Mariano & Cia.	2:34

Mirandolina - Burnier & Cartier

2:45

ISRC: BRB067400174

appears on: The Vibe! The Ultimate Rare Grooves Series, Volume 3: Samba Funk, MPB & Other Illicit Brazilian Grooves

Mirandolina

+

SUGGESTIONS

Mirandolina

2:45

by Burnier & Cartier

appears on: The Vibe! The Ultimate Rare Grooves Series, Volume 3: Samba Funk, MPB & Other Illicit Brazilian Grooves

SEARCH RESULTS

show all

Mirandolina

2:42

by Burnier & Cartier

appears on: Brazilution edição 5.3

- **Auto match artist** based on release group or name and Cutoff settings
- **Recording picker**
 - MusicBrainz suggestions, free-form search, linked "appears on" releases and confidence highlights
 - Paste a **recording MBID** or a MusicBrainz recording URL into the search field
 - Paste an **ISRC** (with or without separators) to resolve it via MusicBrainz — a single match links immediately, several are listed to choose from
- **Update track and recording**
 - **Track to recording** — right-click a recording Title/Artist cell (applied on commit)
 - **Recording to track** — right-click a track Title/Artist cell (applied immediately)
- **Highlighting**
 - **Enlarge Punctuation**
 - **Join-phrase spacing**
- **Expand all media** — a release with many media loads with most collapsed; left-click expands single media, right-click all of them
- **Unset a link from the row** — hover a recording and click + to drop the link; the track then creates a **new recording** on submit. It sits in the first position on the right, with ↶ (revert to the page-load link) beside it.
- Revert/Clear all inputs
- Video recordings show a small video-camera marker **before** the name, so videos are easy to spot down a column of ragged titles

Duplicates

Settings: *Modify Duplicates*

When release is added, MusicBrainz's **Duplicates** tab lists existing releases you might want to *base your release on* (which means that tracklist and recording mapping will be reused). Apollo augments that native table with **Similarity** attribute.

Add release

Release

Duplicates

Tracklist

Recordings

The Vibe! The Ultimate Rare Grooves Series Vol. 03 Samba Funk, MPB & Other Illicit Brazilian Groo...

Various Artists

Cancel

Prev

Next

Similar releases

Based on the information you have provided, we have found the following similar release to already exist in MusicBrainz. If you wish to base your release on an existing release, select it below.

	Release	Similarity	Artist	Format	Tracks	Date	Country	Label	Catalog#	Barcode
☐	The Vibe! The Ultimate Rare Grooves Series, Volume 3: Samba Funk, MPB & Other Illicit Brazilian Grooves	64%	Various Artists	CD	14	2004	FR	BMG France	82876 579292	828765792929
Pos	Release title	Release artist	Len	Seeded title	Seeded artist	Len				
#1	CD									
1	Glorioso Santo Antônio	Antônio Carlos & Jocafi	3:38	Glorioso Santo Antônio	Antônio Carlos & Jocafi	3:35				
2	Bala Com Bala	João Bosco	2:19	Bala Com Bala	João Bosco	2:16				
3	Bobeira	Edson Frederico	3:11	Bobeira	Edson Frederico	3:09				
4	Chica-Chica-Boom-Chic	Rolando Faria & Luiz Antonio	4:54	Chica-Chica-Boom-Chic	Rolando & Luiz Antonio / Les Etoiles	4:51				
5	Ou bola ou búlica	Tamba Trio	2:16	Ou Bola Ou Búlica	Tamba Trio	2:14				
6	Dimensions	Gay Vaquer	4:36	Dimensions	Gay Vaquer	4:34				
7	Demônio de guarda	Ivan Lins	3:49	Demônio De Guarda	Ivan Lins	3:47				
8	Tiro Cruzado	Antonio Carlos Jobim & Miúcha	2:11	Tiro Cruzado	Miúcha & Antonio Carlos Jobim	2:08				
9	Água de beber	Aquarius Y Luiz Antonio	4:49	Água De Beber	Brasil Aquarius Y Luiz Antonio	4:47				
10	Mirandolina	Burnier & Cartier	2:45	Mirandolina	Burnier & Cartier	2:43				
11	Cravo e Canela	Banda Black Rio	2:24	Cravo E Canela	Banda Black Rio	2:22				
12	Berimbau	Jayme Marques	5:48	Berimbau	Jayme Marques	5:46				
13	Mestre Bimba	Tamba Trio	2:58	Mestre Bimba	Luiz Eça, Bebeto & Hélcio Milito / Tamba Trio	2:56				
14	Futebol De Bar	Cesar Mariano & Cia.	2:34	Futebol De Bar	Cesar Mariano & Cia.	2:34				
☐	The Vibe! Vol. 3	14% tracks	Various Artists	Digital Media	11	2004-10-19	XW	RCA Victor		828765792929
☒	Do not use any of the above releases as a starting point									

- A **Similarity** column scores how closely each existing release matches the one you're entering — a folded-title ratio, softened by an **artist** mismatch ($\times 0.75$) and a **track-count** gap
- Click a score** to expand a **track-by-track comparison** beneath the row: each track's *Release* (the existing release) vs *Seeded* (what you're entering) **artist**, **title** and **length**, grouped by medium and with [detailed highlighting](#).

The score is computed from the data shown in the native row (no extra requests); the comparison fetches the existing release's tracklist on demand when you open it.

Annotation editor

Settings: *Modify annotations with Markdown*

Edits the [annotation](#) as **Markdown** with a live preview. It runs both in the release editor's *Additional information* section and on the standalone **Edit annotation** page for all supported entities.

Edit annotation

Please note that any content submitted to MusicBrainz will be made available to the public under [open licenses](#), do not submit any copyrighted text here!

Changelog:

Enter edit

Annotation:

Preview

Clear

?

History

Copyright

...

Copyright: © 2004 Viêt Tân Studio

© 2004 Viêt Tân Studio

...

Notes

- **Some** songs misstyped

- [24 Giờ 7 Ngày](https://musicbrainz.org/release/91942cbc-c2af-4b7b-943b-9a5f55dc3633) Comes with *35 page* booklet

Copyright

Copyright: © 2004 Viêt Tân Studio

© 2004 Viêt Tân Studio

Notes

■ Some songs misstyped

■ 24 Giờ 7 Ngày Comes with 35 page booklet

Toolbar options

- Preview** — a live split view: editor on the left, the annotation rendered updating in real time on the right
- Clear** — remove all markup from text area
- Markup** — switch between editing as Markdown and the MusicBrainz markup
- Help** — hover for a syntax and shortcut cheatsheet.

- **Maximize** — expand the editor to fill the screen (Esc restores)
- **History** — the annotation's previous versions; select one to display its rendered annotation, with a ↶ **revert** button that loads that version back into the editor with markup reconstructed from the rendered HTML

Editing

- **Unnamed MusicBrainz entity links are named automatically** — MB `[url] / [url]`, Markdown `[]()`, or a bare URL get the entity name (fetched from the API).
- **Enter** continues the current list; **Tab** on a selection makes a bullet list (Tab again → numbered, again → bullet...); **Shift+Tab** removes the list marker.
- **Ctrl/Cmd+B / +I** bold/italic — wraps the selection, or surrounds the word under the cursor.
- All edits are **undoable** (Ctrl+Z).

The Markdown ↔ MB conversion covers links, bold/italic, headings, nested bullet/numbered lists, fenced ````` ↔ 8-space code, rules, and encodes a non-link `[x]` so MusicBrainz doesn't read it as a broken link.


Tools

Apollo supports all native tools and adds new ones:

1. Native tools: [Track parser](#), Swamp, Reorder, Guess feat, [Guess case](#)
2. [Search & Replace](#)
3. [Pattern parser](#)
4. [Length parser](#)
5. [Merge & split mediums](#)
6. [Resize columns](#)
7. [External tools](#)

Customization

Native tools are hidden and replaced by a configurable **Tools** bar. It is highly customizable, supports all native tools, some 3rd party tools and adds few new ones.

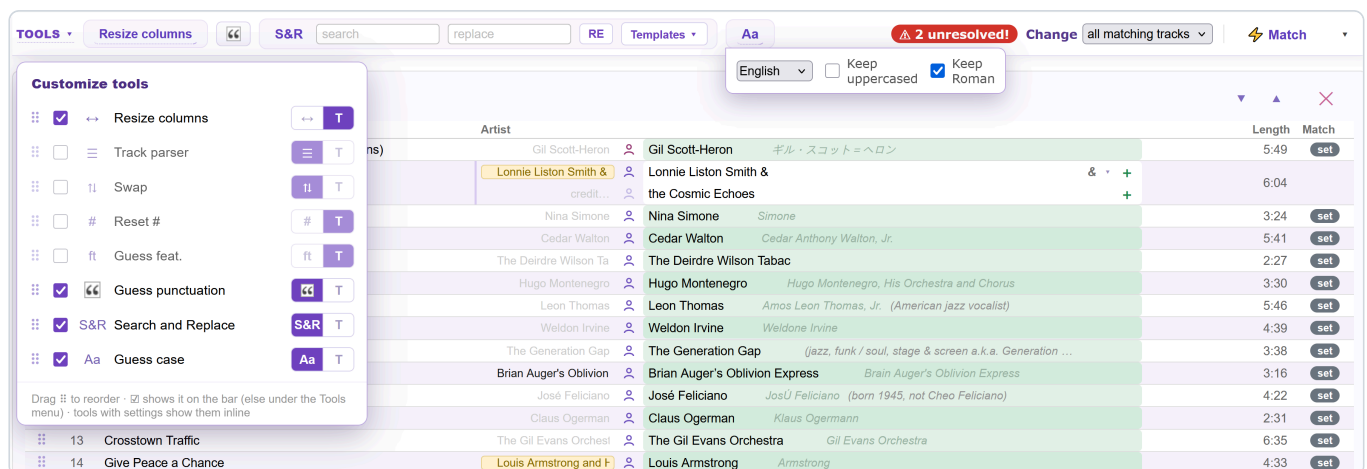

The **Tools** ▾ label opens a menu of the tools that *haven't* been put on the bar. Picking a tool from that menu uses it right away; a tool with parameters joins the bar **for the current session** so its controls are reachable — it returns to the menu next time (use Customize to keep it). Parameterless tools (e.g. *Guess feat.*) just fire on click.

Customization lets you:

- **Show tool on the bar** — select which tools sit on the bar and leave the rest in the **Tools** ▾ menu

- **Reorder** — drag the handle to set the order
- **Icon / text** — toggle the `[icon]` and `[text]` segments to show either or both

Tip

Collapsing a tool's parameters — right-click a tool's name to collapse it to just the name (dotted underline); its parameters then **fly out on hover** (and stay open while you're typing in them). Right-click again to pin them back inline. The collapsed/expanded choice is remembered per tool.

Search & Replace

Search a string within track titles and replace it. Clicking the tool name starts a fresh session with the current options applied and the fields cleared. Save common patterns under a name and reuse them from the ★ popup. Last 5 historic items are saved automatically. Each saved pattern row has hover actions: ⌘ add/remove it in a chain, ✎ rename, ✕ delete.

- **Chains** — combine several saved patterns into a named **chain** that runs them all in one click, in order (e.g. *All Quotes* = *Quotes* then *Single quote*). Use + **Add chain** to create one, then ⌘ on a pattern to add it (a pattern can belong to several chains).
- **Default** — mark one pattern **or** chain as the default with ☉; it's shown highlighted in the list and is applied automatically the first time you open the Tracklist in a session (with the usual "N titles replaced" toast).
- **Import / Export** — the button in the popup header opens a JSON view of your saved patterns + chains + the default marker (history excluded); paste and ✓ **Import** to replace the set. The **History** section (recent patterns) is collapsed by default — click it to expand.

S&R

RE

★

+ Save current

+ Add chain

Import/Export

CHAINS			
⌘ Default	Dash → Quotes → Single Quote		☉ ✎ ✕
SAVED			
Dash	-	-	RE
Quotes	"(.+?)"	"\$1"	RE
Single Quote	'	'	
HISTORY			

Resize Columns

Set column sizes to predefined variants (Fit, Centered, Default).

Pattern parser

Fill a medium's tracklist from pasted text using a **pattern**. Type a pattern, paste the list, review the live preview, apply. Like the native parser it **opens seeded with the current tracklist** (using pattern `#. T - A (L)`), so you can also use it to bulk-edit what's already there.

PATTERN PARSER

Medium 1

Pattern

#_(T) - A (L)

×

Freeze matched

#. T

#. T - A (L)

T L

A - T

A - T (L)

T L

split: first

Paste tracklist (13 lines)

PATTERN	RAW	#	ARTIST	TITLE	LENGTH
default	1 Ndzirombi (Conflict Monger) - Zig Zag Band (5:21)	1	Zig Zag Band	Conflict Monger	5:21
default	2 Chenaimoyo (Pure Heart) - Zig Zag Band (5:32)	2	Zig Zag Band	Pure Heart	5:32
default	3 Mangaingai (Glitterings) - Zig Zag Band (5:02)	3	Zig Zag Band	Glitterings	5:02
default	4 Tsvarakadenga (Beautiful Girl) - Zig Zag Band (5:18)	4	Zig Zag Band	Beautiful Girl	5:18
default	5 Nyamutamba Nevamwe (Play with Others) - Zig Zag Band (5:03)	5	Zig Zag Band	Play with Others	5:03
default	6 Ndoita Ripi Zano? (What Advice Can You Give Me?) - Zig Zag Band (5:09)	6	Zig Zag Band	What Advice Can You Give Me?	5:09
default	7 Ndarimano (I Am Alive) - Zig Zag Band (7:28)	7	Zig Zag Band	I Am Alive	7:28
default	8 Rudo Rwemari (The Love of Money) - Zig Zag Band (5:20)	8	Zig Zag Band	The Love of Money	5:20
default	9 Pfumo Reropa (Spear of Blood) - Zig Zag Band (5:55)	9	Zig Zag Band	Spear of Blood	5:55
default	10 Gomo Ramasare (Masare's Mountain) - Zig Zag Band (4:28)	10	Zig Zag Band	Masare's Mountain	4:28
# T - A (L)	11 Mercy - Zig Zag Band (6:28)	11	Zig Zag Band	Mercy	6:28
default	12 Mudzimu Mukuru (Great Ancestral Spirit) - Zig Zag Band (4:28)	12	Zig Zag Band	Great Ancestral Spirit	4:28
default	13 Hombiro (Mischievous Baboon) - Zig Zag Band (5:04)	13	Zig Zag Band	Mischievous Baboon	5:04

13 matched · 0 unmatched → 13 tracks

Apply 13 → Medium 1

Tokens

The following tokens can be used in constructing pattern (case sensitive):

Token	Meaning
#	Track number
T	Title
A	Artist
L	Length
M	Medium
-	Separator
_	Skip noise

Anything else is a literal, whitespace is elastic, and a separator (- - - / :) matches any one of the set (so # A - T also parses an en-dash or slash). A capital letter is a token only when it stands alone; prefix with \$ to force it (Track: \$T) or to spell one out. Text fields split on the **first** separator (A - T → artist = up to the first -, title = the rest) — flip the **split: first / last** toggle to split on the last instead.

Examples:

- #. T → 1. So What
- # A - T (L) → 1 Miles Davis - So What (9:22)
- # A - T (_ → drops a trailing (original edit) .

Slices

For delimiter-free fixed-width text.

A token can carry a 1-based char range — T[6-] (6th char to end), T[6-20] , T[-5] (first 5), T[~3-] (last 3) — or a [from:to] form that runs from from up to (excluding) the first to character. from is a position or a character; to is a character:

- #[1:.] = position 1 to the first . (12. Title → 12), also #[1:-] , #[1:]
- L[:)] = from the first (to the first) (So What (9:22) → 9:22)

- Prefix a character with `~` for the **last** occurrence instead of the first — `L[~(:)]` on `Hide Me (Bop remix) - Stillhead (4:20)` still finds the real length (`4:20`), where plain `L[:)]` would grab the title's own `(Bop remix)` first

The preview is one row per pasted line: a **match dot** (green = matched · amber = matched via a per-row pattern · red = no match), the raw text, and the extracted **# / artist / title / length**. A messy line can get its **own pattern** in the row's `pattern` cell without disturbing the rest. **Apply** writes only the fields the pattern produced (so a title-only pattern won't touch lengths); its ▾ **menu** applies a single field (only titles / artists / lengths / #s) or adds the missing tracks first when you pasted more lines than the medium has.

Freezing


For a tracklist where no single pattern fits every line, 🗑 **Freeze matched** locks the current pattern onto every row that's still on `«default»` and already matches — those rows keep that pattern from then on. Then adjust the pattern to solve more rows and freeze again; repeat until everything's matched, without the earlier fixes coming undone.

For a one-off messy line you don't want to write a pattern for, **select the span** in its **raw** cell — a little bar pops up (`# · A · T · L · X`); click a field to bind that span to it (it writes a `T[a-b]`-style slice into the row's pattern), or `X` to clear the row. Both the main pattern box and each row's pattern cell carry a small `X` to clear them.

Length parser

Fill a medium's track **lengths** from any text — the native track parser wants a specific format, but lengths copied off a site (Bandcamp, foobar2000, ...) rarely fit (track numbers land on their own lines, etc.). It **greps every duration out of the text** and lets you review the result before writing anything.

After invoking a tool, several options are offered:

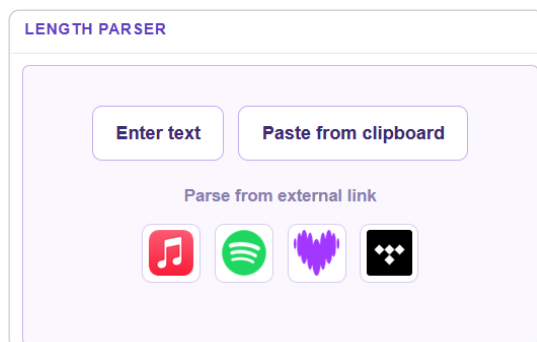

- **Enter text** — type or paste a tracklist into the box.
- **Paste from clipboard** — reads the clipboard directly.
- **Parse from external link** — a **favicon per page linked on the release**; click one and it **fetches that page and reads its text right away** (no extra picker step). It narrows to the smallest part of the page that still holds at least a full tracklist's worth of durations, so nav/player/footer noise is skipped (e.g. it pulls all 20 lengths straight off a Bandcamp album page). When you Apply, the **source URL is added to the edit note**. (If a favicon can't load, it falls back to a clickable hostname chip.)

Once you've picked a source, a < **Sources** button in the header returns you to the chooser — handy when a fetched page has no parsable text (e.g. Spotify) and you want to try another link:

Sources
LENGTH PARSER
Medium 1

01

Intro

Martín Mañas

Ciudad de la Alquimia

02:46

Writer: Martín Mañas

02

Lobo Solitario

Martín Mañas

Ciudad de la Alquimia

02:46

Writer: Martín Mañas

03

La

La

1. Intro 2:46 + ×
2. Lobo Solitario 2:46 + ×
3. Rayos de Sol 3:20 + ×
4. Para Que Me Veas Mal 1:50 + ×
5. Tu Aura 2:40 + ×
6. Desorientado 2:02 + ×
7. SpaceX 2:37 + ×
8. Blancanieves 2:12 + ×
9. Era Digital 4:03 + ×
10. Me Afectan 3:14 + ×
11. Castillo Celestial 2:02 + ×
12. ¿Que Me Pasa Hoy? 1:47 + ×
+ add length

12 lengths ↔ 12 tracks · from external link
Apply 12 to Medium 1

Whichever source, it detects everything shaped like a time — `5:50` , `1'23"` , `1'23"` , `1:02:03` — and **ignores** track numbers, titles, years and other noise. The detected times appear as an **editable list**, each next to the track it will fill (item 1 → track 1, ...). Because alignment is by order:


- **×** deletes a row (everything below shifts up);
- **+** on a row inserts a length below it (everything shifts down) — for a duration the parser couldn't see (e.g. a single-digit-seconds `1:2`); **+ add length** appends;
- click a value to **edit** it.

Invalid times (e.g. `99:99`) are highlighted red and surface a **prominent badge in the panel header** — they **must be fixed or deleted**, and **Apply** stays disabled until the list is clean. A counter shows *N lengths* ↔ *M tracks*. **Apply** writes the lengths to the medium's tracks in order (nothing is written until then; **Esc** cancels, **Ctrl+Enter** applies). The panel is **centred, draggable by its header, and resizable**; on a multi-medium release, pick the medium in the header.


Merge & split mediums

Restructure the mediums without redoing the tracklist by hand. Both tools keep every track's **title, length, artist credit and recording** and reset the track numbers.

Merge mediums — all 14 one-track media of a release ticked, about to become one medium:

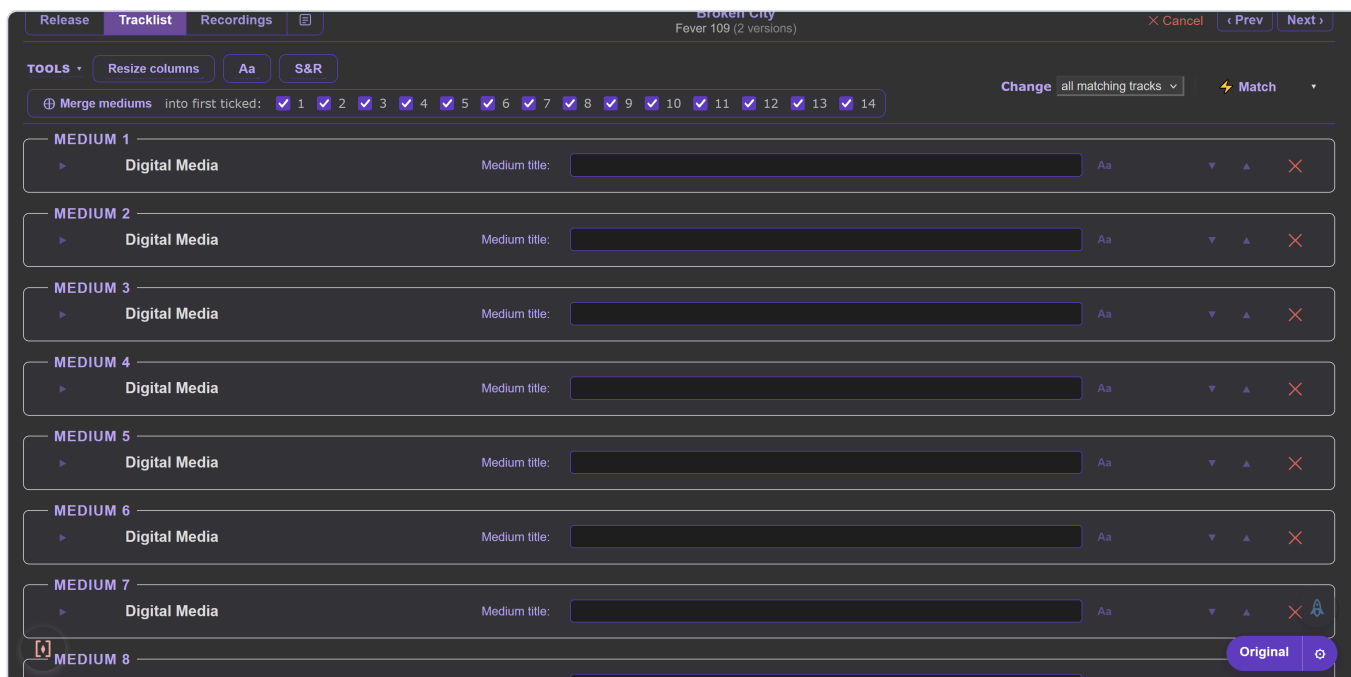

Split medium — pick the medium and the track the new medium starts at:

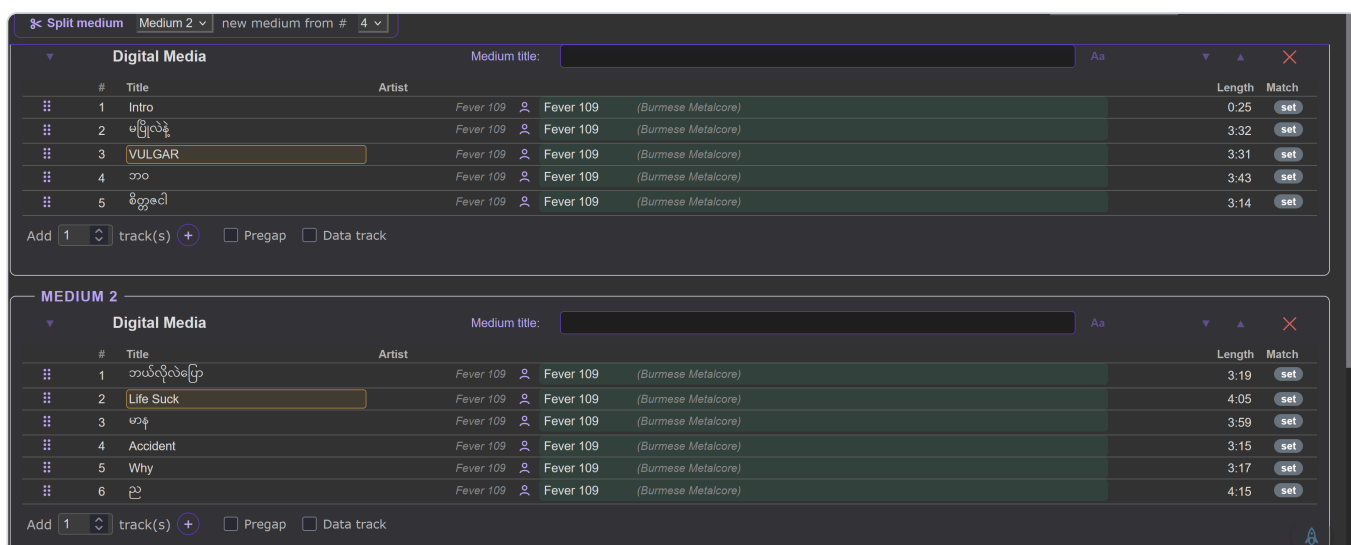

- **Merge mediums** — tick the mediums to merge (all are ticked by default); they all go into the **first ticked** one, in medium order, and the others are removed. Tick a subset to merge only some of them (e.g. **2** and **4**).
- **Split medium** — pick the medium and the track the **new medium starts at**; that track and everything after it move to a new medium, inserted right after the original, with the same format. Later mediums shift down by one.

Picking either tool from the **Tools** ▾ menu only shows its controls; it runs when you click its name. Nothing is submitted: review the result and enter the edit as usual.

What MusicBrainz records is what doing it by hand produces: an *Edit medium* (tracks added, existing recordings reused) plus a *Remove medium* per merged-away medium, or an *Add medium* for a split. The moved tracks get new track MBIDs; the recordings don't change. For editors without auto-edit privileges, *Remove medium* waits for votes, so until it passes the release briefly shows the old mediums next to the merged one.

A medium with a disc ID is refused: MusicBrainz locks its tracklist.

External tools

Those tools need 3rd party userscript:

- **Guess punctuation** — runs kellnerd's [guess-unicode-punctuation](#) (curly quotes, dashes, ellipses...) over the release.
Requires that script installed — the tool only appears when it is.

Tools integration

Apollo can surface a fire-and-forget button that *another* userscript adds to the page, so you can use it without leaving the Apollo view. Such a tool behaves like any built-in one: it shows in the **Tools** ▾ menu and in **Customize...**, where you can pin it to the bar, reorder it, and choose icon/text (the choice persists). It only appears while the providing script is present. Two ways in:

Recognised buttons — Apollo adopts a known button *unmodified*, matched by its visible text (e.g. **Guess punctuation** above). Adopting another is a one-line registry entry in Apollo.

Convention (for script authors) — tag any element `class="apollo-tool"` and Apollo offers it, no Apollo change needed:

```
<button class="apollo-tool" data-apollo-label="My tool" data-apollo-icon="★">...</button>
```

- `data-apollo-label` (*optional*) — menu/button label (falls back to the element's text).
- `data-apollo-icon` (*optional*) — a short text glyph **or** a `data: / http(s)` image URL (rendered as a small image); default .
- `data-apollo-id` (*optional*) — stable id for the saved bar/menu placement (falls back to the element's `id`, then a slug of the label).

Activating either kind **clicks the element**, then Apollo re-reads the tracklist so its grid reflects the change. This fits tools that are **parameterless or pop their own settings on click** (e.g. a Track parser); tools that need their controls rendered *inline* in Apollo's bar aren't supported.

Matching

Apollo can automatically match unresolved **artists** and **recordings**. Both work the same way: a *Match* button, a per-row **confidence**, and the single best candidate applied automatically while anything uncertain is left out.

If *Auto-match on start* is enabled in the [settings](#), matching will be automatically started on entering add/edit release page.

Artist matching

Apollo resolves each unmatched track artist in stages, most-confident first:

1. **Releases from same release group** — it pulls the per-track credits (with MBIDs) from other versions of the album and matches by track title. Other editions usually credit the same songs to the same artists, so this resolves most cases at the highest confidence — especially various-artists compilations.
2. **Exact identity (name or alias)** — an alias is just an alternative name, so name and alias are resolved by **one** check: the artist is linked confidently only when **exactly one** MB artist carries the credited string as its name *or* an alias. This is alias-aware, mirroring MusicBrainz's own [duplicate-artist](#) check — so a name that is *also* another artist's alias counts as **ambiguous** and is left for you to pick, not guessed. The badge shows **NAME** or **ALIAS** to say which matched (same confidence either way). It also catches an exact name the fast search under-ranks below a look-alike (*Tee Vee* below *Tee-vee*) and an alias-only credit (*Don Abi* → the artist named *Abiodun*), neither of which the plain name index resolves on its own.
3. **Existing artist credits (co-occurrence)** — when there's *no* unique exact identity (a common name several artists share, a featured "Joni", "Eva", ...), Apollo asks MusicBrainz for a recording that credits that name **alongside an artist already known on this release** — a split co-artist or the release artist. If exactly one artist has been co-credited that way, it's the answer, applied with a magenta **CRED** badge. Only an exact credited-as / name hit counts — no fuzzy matching — and a tie is surfaced as candidates to pick from rather than guessed.

Anything none of these resolve is left as a low-confidence top candidate for you to confirm or change.

Each resolved artist is tagged by how it matched (release-group, exact name, exact alias, credit co-occurrence, pre-existing, or manual).

Confidence levels:

1.  Green colored artist box means the artist was matched confidently (release-group, unambiguous exact name or alias, or credit co-occurrence).
2.  White search box means artist is unresolved or low-confidence, for user to pick; these are what the "N unresolved" counter counts and what clicking that badge jumps to.

Discogs artist links

When the release carries a **Discogs link** (read from the page), Apollo uses it for artists — controlled by the *Discogs artist link matching* [setting](#) (on by default).

Match by URL

Before the name search, each track artist is matched by its Discogs URL (taken from the release's Discogs tracklist) against MusicBrainz's URL relationships — a strong, human-verified signal. A single linked MB artist is applied directly with a teal **DISC** badge; several linked artists are offered as candidates to pick from.

This includes **featured artists** split out of the title. Discogs credits them as an extra-artist (not a main track artist) whose role varies — *Featuring* on some releases, *Vocals / Backing Vocals / Rap / MC* on others — so Apollo reads **any performing role** (vocals, rap, voice, performer, narration...; not producers, remixers or instrumentalists) and matches a feat slot by its Discogs artist link, keyed to the slot's credited name, by title or (when titles differ but the track counts agree) by position. That link is often the only reliable bridge, since the split name is frequently just an alias of the MB artist.

Adding link

For a slot whose Discogs URL is known, the artist-type icon becomes an actionable Discogs icon when there's something to do — click it to act:

- unresolved slot → **teal** : creates the artist seeded with the Discogs link (same as );
- matched artist with **no** Discogs link → **teal** : adds it (opens the artist's edit form pre-seeded, confirmed on return);
- the Discogs URL already links a **different** MB artist (conflict) → **amber** : clicking still adds it to this artist, but you're warned which artist it currently points to;
- the artist already links a **different** Discogs page than the release credits (mismatch) → **amber** : the tooltip names both pages, and clicking adds the release's link to the artist anyway. A mismatch often means the wrong artist was matched, so it's worth a look first.
- **Badge.** A teal  **N links** badge in the toolbar counts the artists whose Discogs link needs attention — **missing + mismatched** (the tooltip breaks it down). It stays until they're resolved; each click steps to the next such track and focuses its credit field. Adding a link updates every track crediting that same artist at once.

Already-linked artists are verified for free via MusicBrainz's internal entity endpoint, so the rate-limited URL lookup only runs for artists actually missing a link — a fully-linked release is near-instant. Clearing or reverting all artists doesn't trigger a re-check (it runs again when you Match).

Recording matching

Apollo fetches **every recording in the release group in one request**, indexes them by title, and matches each track **locally** — choosing the highest-confidence candidate (title + artist + length). It only falls back to a per-track MusicBrainz lookup for the tracks the release group can't satisfy. A full release therefore matches in roughly one fetch rather than one request per track.

Matching by duplicates (position + similarity). A title-only match misses when editions word the same track differently (*Salongo Part 1* vs *Salongo, Pt. 1, Part 1* vs *Pt 1*). So when the title match doesn't clear the cutoff, Apollo also looks at the **same position** across the release's other editions — and, if those come up short, across releases MB holds under the *same title + artist* in **other release groups** (possible duplicates). A candidate from that slot links only when its title is **similar enough** to the track (≈60% by edit distance, or one contained in the other) *and* its length agrees — so a differently-worded duplicate resolves while an unrelated song that merely shares a slot in a divergent edition does not. It reads each edition's tracklist by position in one request and only reaches outside the RG when the editions don't answer.

Credited as values on track and recording don't influence matching.

Confidence levels:

Color	Meaning	Description
	Exact	All fields are the same
	Tolerance	Matches within tolerance defined in settings
	Near	A single field differs, or the length gap is 3–15s (a near-miss)
	Low	Two fields differ or the length gap alone is >15s (substantially wrong)
	Very low	All three differ and the length gap is >10s (almost certainly wrong)

The *Cutoff* option in the recording toolbar sets the acceptable confidence.

Updating tracks and recordings

When a track's title or artist differs from its linked recording, you can copy the track's value down to the recording (applied when you submit the release — the same as the native checkboxes). Right-click the recording-side **Title** or **Artist** cell:

Gesture	Action
Right-click	Toggle copy for that one cell
Ctrl + right-click	Toggle both fields (that differ) on the row
Alt + right-click	Toggle that field down the whole column (every differing row)
Ctrl + Alt + right-click	Toggle both fields on every row — the whole side of the table (#443)

While a copy is on, the cell previews  **New** followed by the recording's ~~original~~ value, struck through. Cells that offer a copy carry a subtle underline; a real mismatch stays red.

This mirrors MusicBrainz's **native** update checkboxes exactly — so a copy is offered whenever the native editor would show its checkbox, **including casing-only differences** that Apollo's match tolerance / *Ignore casing* setting would otherwise treat as a match. The tolerance settings still drive the confidence colouring; they no longer hide the copy. Right-clicking a recording cell with no difference does nothing (the browser's context menu is suppressed there).

The same gestures work on the **track side** too (setting the track from its recording), applied immediately. Because the two sides copy in opposite directions, **Ctrl + Alt** covers one side per gesture — run it once on a recording cell and once on a track cell to sweep the whole table.

Toolbar

Control	Default	What it does
Change	all matching tracks	Scope of every artist action (pick, <i>Credited as</i> , join, add/remove/reorder/split): apply to just the edited track, or propagate to every track sharing the same artist credit (whole-credit match, like MB's native "change all matching tracks")
 Match	—	Match all still-unresolved track artists or recordings (used when <i>Auto-match on start</i> is off)
▼	—	↶ Revert all — every track back to page-load state ✕ Clear all — empty all artists in tracklist or set new recordings
Tools	—	The tools you choose, each shown at its place on the bar. Tools you don't put on the bar live under the Tools ▼ menu, which also holds Customize...
Cutoff	 near	Matches only records at or above the chosen confidence level and leave other unmatched

Settings

Accessed using the  button on the interface switcher button **Original / Apollo**. Settings are saved via the userscript manager's own storage — covered by its backup/restore and cross-browser sync, unlike a plain browser localStorage save — and persist across releases.

General

If any of the following options is on, script replaces the native interface elements for the Apollo versions:

- [Modify Release Information](#)
- [Modify Tracklist](#)
- [Modify Recordings](#)
- [Modify Duplicates](#)
- [Modify annotations with Markdown](#)
- [Modify header and footer](#)
- [Zen editing](#)
- [Auto confirm release submissions](#)

Modify header and footer

Hide the native step-tab row and footer and show a compact step switcher instead.

Zen editing

Hides MusicBrainz header and footer for minimal distraction.

Hide everything above the Apollo nav bar - the site header, release title and entity tabs and the page footer — leaving just the Apollo interface.

The release title / artist (with version count) is shown in the navigation bar.

Auto confirm release submissions

When another site *seeds* the Add/Edit-release form, MusicBrainz shows a confirmation page before opening the editor; Apollo clicks its submit button so you skip that step (integrating [chaban's Auto click confirm form submission](#) script). Acts only on that seed-confirmation page; add `?skip_confirmation` to a seed URL to bypass it once.

The interface modifications (everything above except *Auto confirm*) are toggled on/off together using the switcher button.

Matching options

Option	Default	What it does
Auto-match on start	Off Off On On	Tracklist - Matches artists automatically when the page loads Recordings - Matches recordings automatically when the page loads Label - When the release's label name has exactly one exact MusicBrainz match, selects it automatically on load. Ambiguous names (e.g. <i>Columbia</i> → several labels) and names with no exact hit are left for you to pick Artist - Same for the release Artist field: a seeded/typed release artist with exactly one exact MusicBrainz match is selected automatically on load; ambiguous or no-hit names are left for you to pick
Discogs artist link matching	On	When the release has a Discogs link, match track artists by their Discogs URL (before the name search) and offer to add/create missing links
Length tolerance	5	Allow a length gap within N seconds (use <code>0</code> for exact)
Title tolerance	1	Allow up to N differing characters in the title (use <code>0</code> for exact)
Ignore casing	On	Case / accent / spacing-only differences don't count
Ignore punctuation	On	<i>&</i> → <i>and</i> , brackets, quotes, dashes and dots are stripped before comparing
Enable detailed highlighting	On	Highlights the exact differing characters

Enable detailed highlighting

Highlights the exact **differing characters** in a mismatching **title and artist** (including a casing- or punctuation-only difference the match would otherwise tolerate), instead of the whole field, and shades a **length mismatch** by how large the gap is (faint under a second → solid red past five).

For artists this works at two levels: a **different linked artist** is boxed whole, while a **credited-as** difference on the *same* artist (e.g. *DJ Vadim* vs *Vadim*) has just its differing characters highlighted — the link is kept and matching is unaffected (credited-as never influences matching), so you can see the difference without it being treated as a mismatch (#444).

Appearance

Applied to **both** tables (Tracklist and Recordings).

Option	Default	What it does
Row layout	normal	Row density: <code>compact</code> (tight) · <code>normal</code> · <code>cozy</code> (airy).
Alternate row colors	Off	Tints every other row (and deepens the matched-box green on alternate rows).
Show grid	Off	Toggle grid lines on rows and/or columns
Enlarge punctuation	3px	How much to enlarge confusable characters, in pixels (<code>0</code> = no enlargement; the invisible-char / missing-space markers still show under detailed highlighting)

Keyboard

Tracklist

Key	Description
Down, <ENTER>	focus cell in the next row
Up, SHIFT+ <ENTER>	focus cell in the previous row
Tab	focus cell in the next column
SHIFT+Tab	focus cell in the previous column

By default, moving between cells keeps the **caret column** where it was (clamped to the destination's length) instead of selecting the whole field — so you can keep typing or fix casing at the same spot rather than overwriting. Turn off **Keep caret position on row navigation** (gear → Appearance) to restore the old behavior, where arriving on a cell selects the whole field so the next keystroke replaces it.

Enlarge punctuation

When [detailed highlighting](#) is on:

- Every character that is confusable (a straight ' ' " " - , a curly ' ’ , an en/em dash) is **enlarged**.
- Every invisible character (a no-break or zero-width space, a tab etc.) is rendered as a **visible glyph** with a highlight — so a missing / wrong space can never hide.
- Tooltip shows its Unicode name and exact codepoint.

The *Appearance → Enlarge punctuation by N px* setting controls **only the enlargement size** — 0 means *no enlargement*, **not** off: the invisible glyphs and missing-space markers still show (they're part of detailed highlighting). To turn the marking off entirely, uncheck **Enable detailed highlighting** (#443).

On the **Tracklist** tab the **Title** can't be styled while it's an editable `<input>` , so it's shown as styled read-only text that **drops into the native input the moment you click or tab into it** — with the caret landing on the character you clicked, so positioning it takes one click and not two (#601).

Join-phrase spacing

A join phrase between two artists should have a space on both sides (" & "). Where one is **missing** a highlighted _ is drawn (Gandhabba &_Render), and a join phrase **missing entirely** between two artists shows _?_

Feature works on both the [Recordings](#) and the [Tracklist](#) artists where the join input is outlined and flagged.

Shares the *Enlarge punctuation* master switch (0 = off).

Join-phrase presets — keyboard (#419)

The join input's preset dropdown (▼) is fully keyboard-driven:

Key	Action
typing	opens the dropdown filtered to matching presets (fe → feat. / featuring), top hit pre-highlighted
↓ / ↑	open the list / move the highlight (wraps)
Enter	pick the highlighted preset (or commit the typed value when the list is closed)
Esc	close the list

Dark theme

Apollo supports dark theme that can be enabled via [Stylus](#):

The screenshot shows the Apollo application interface in dark theme. The 'Release' tab is active, displaying release information for 'Ar Puro' by 'Various Artists'. The interface includes sections for 'RELEASE INFORMATION', 'RELEASE EVENT', 'ADDITIONAL INFORMATION', 'EXTERNAL LINKS', and 'FRONT COVER'. The 'RELEASE INFORMATION' section contains fields for Title, Artist, Release group, Type, Status, Language, Script, Date, Country, Label, Cat. No., Barcode, and Packaging. The 'RELEASE EVENT' section includes Date, Country, and Label. The 'ADDITIONAL INFORMATION' section has fields for Disambiguation and Annotation. The 'EXTERNAL LINKS' section lists various streaming and purchase links. The 'FRONT COVER' section displays the album cover art.

The screenshot shows the Apollo application interface in dark theme, displaying the 'Tracklist' tab for 'The Soul of Congo - Treasures of the Ngoma label (1948-1963)' by 'Various Artists'. The interface includes a 'TOOLS' bar with options like 'Resize columns', 'Guess case', 'S&R', 'Default', 'Pattern parser', and 'Length parser'. The main table lists tracks with columns for track number, title, artist, and duration. A context menu is open over the 'Fylla, Micky, Théo' track, showing options like '&', 'feat.', 'ft.', 'featuring', 'and', 'vs.', 'x', 'with', 'presents', and 'set'.

Track	Title	Artist	Duration	Set
26	Monique Wa Baba	Léon Bukasa	3:05	set
27	Makutano Ya Chinkolobwe	Léon Bukasa	2:54	set
28	Chérie Melanie	Léon Bukasa	2:57	set
29	Bertha Roho Mbaya	Albino Kalombo	3:08	set
30	Tuntanyi Tunua Mbamba	Léon Bukasa	2:56	set
31	Penepene	Tino Baroza	3:01	set
32	Louise Mungambule	Léon Bukasa	3:02	set
33	Kobeta Mwasi Te	Léon Bukasa	2:54	set
34	Omba Likita	Franck Lassan	3:06	set
35	Esperencia	Orchestre Beguen Band	2:59	set
36	Bango Oyo	Fylla, Micky, Théo	3:00	set
37	Rumba Ya Matoko Na Bandumba	Maquina Loca	3:00	set
38	Josephine	Maitre Colon Gentil	2:55	set
39	Eloko Nini Bakosala	Camille Feruzi	2:53	set
40	Eloko Ya Moninga Kotia Motema Te	Mysterieux Jazz	2:43	set
41	Umbanzilanga Mumayela	Delafance	2:58	set
42	Kamungule	Beguen Band	2:58	set
43	Anna Yaya	Dumana	2:58	set
44	Taumani Accompana	Dynamic Jazz	2:58	set

Persistence


These are remembered automatically as you use the UI:

- **Column widths** — drag a column border to resize; reset/auto-fit via the **Resize Columns** tool.
- **Suggestions collapsed** — the picker remembers whether its *suggestions* section is collapsed.
- **Tools bar** — which tools are on the bar, their order, each tool's icon/text choice, and whether its parameters are collapsed.
- **Apply mode**, **Cutoff**, and all dialog options above — saved on change.

Art Station

A cover/event-art editor for MusicBrainz: one gallery to view, group, sort, reorder, retype, comment, remove, download, and source a release's cover and event art — all staged, then applied on **Enter edit**.

- Install: [stable](#) or [latest](#)
 - Or via bundle: [String Theory](#)
 - [picker](#) helper script: [install](#)
- [Changelog](#)
- [View users](#)

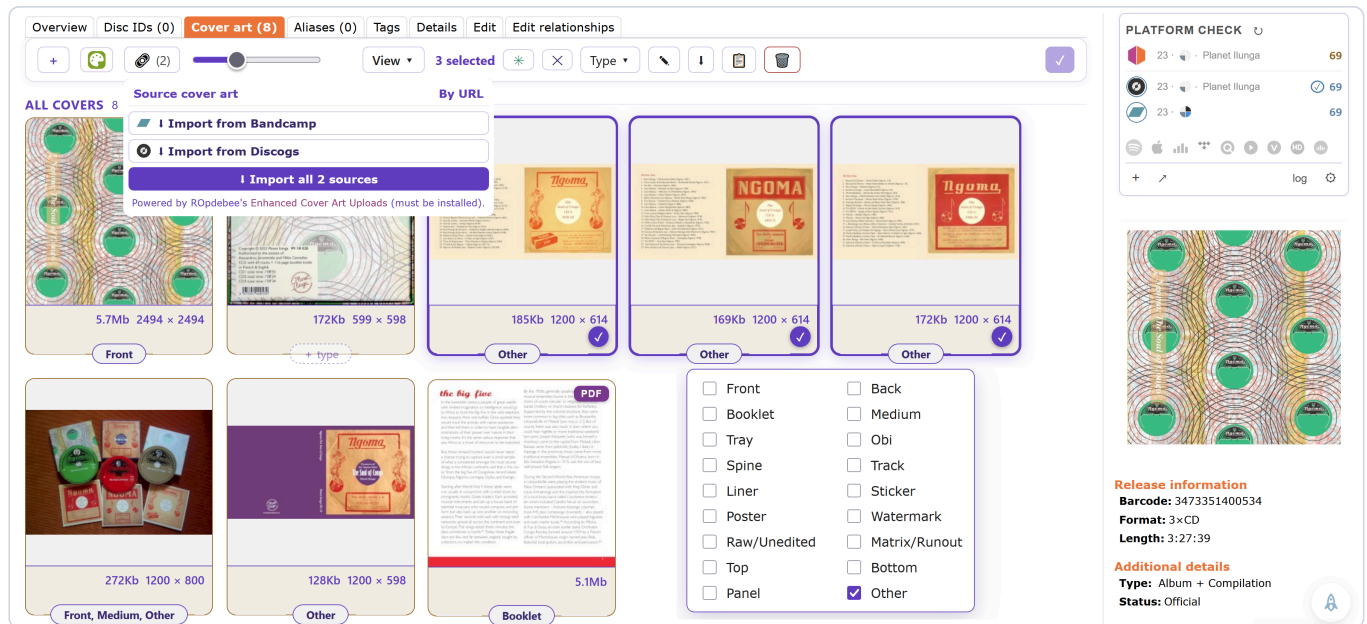


It runs on a release's **Cover art** tab and an **Event art** tab, replacing the native list with a gallery. The gallery is the staged state, and **Enter edit** makes MusicBrainz match it.


Features

- **Gallery** — adjustable thumbnail size, grid or detailed view, group by [type](#), and sort by position / type / dimensions / newest.
- **Reorder** by dragging a single cover or a whole selection together.
- **Select** with right-click or right-drag.
- **Single or bulk actions** — set type, set comment, remove, download (zip) and reports, on one cover or the whole selection.
- **Add images** — file drop, **Ctrl+V a URL anywhere** (Enhanced Cover Art Uploads), MH Covers, and reverse-image search.
- **Full-screen viewer** — navigate, zoom, mouse-follow pan, slideshow, set type/comment, delete.
- **File names ⇌ types** — cover types and file names round-trip, so a downloaded archive re-adds with types intact.
- Parallel operations on final commit

Group by type view:

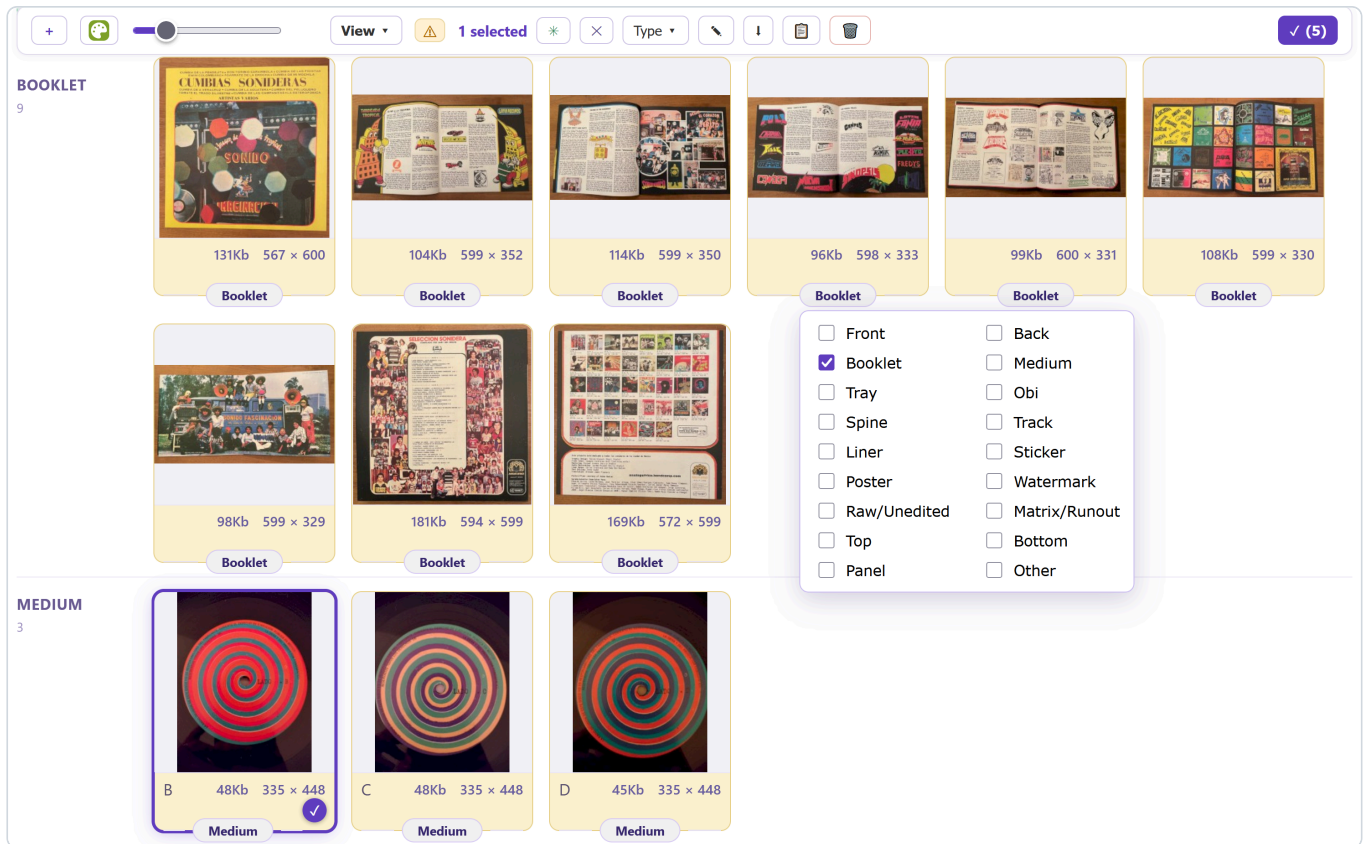

Detailed view (supports Mammoth in comment section):

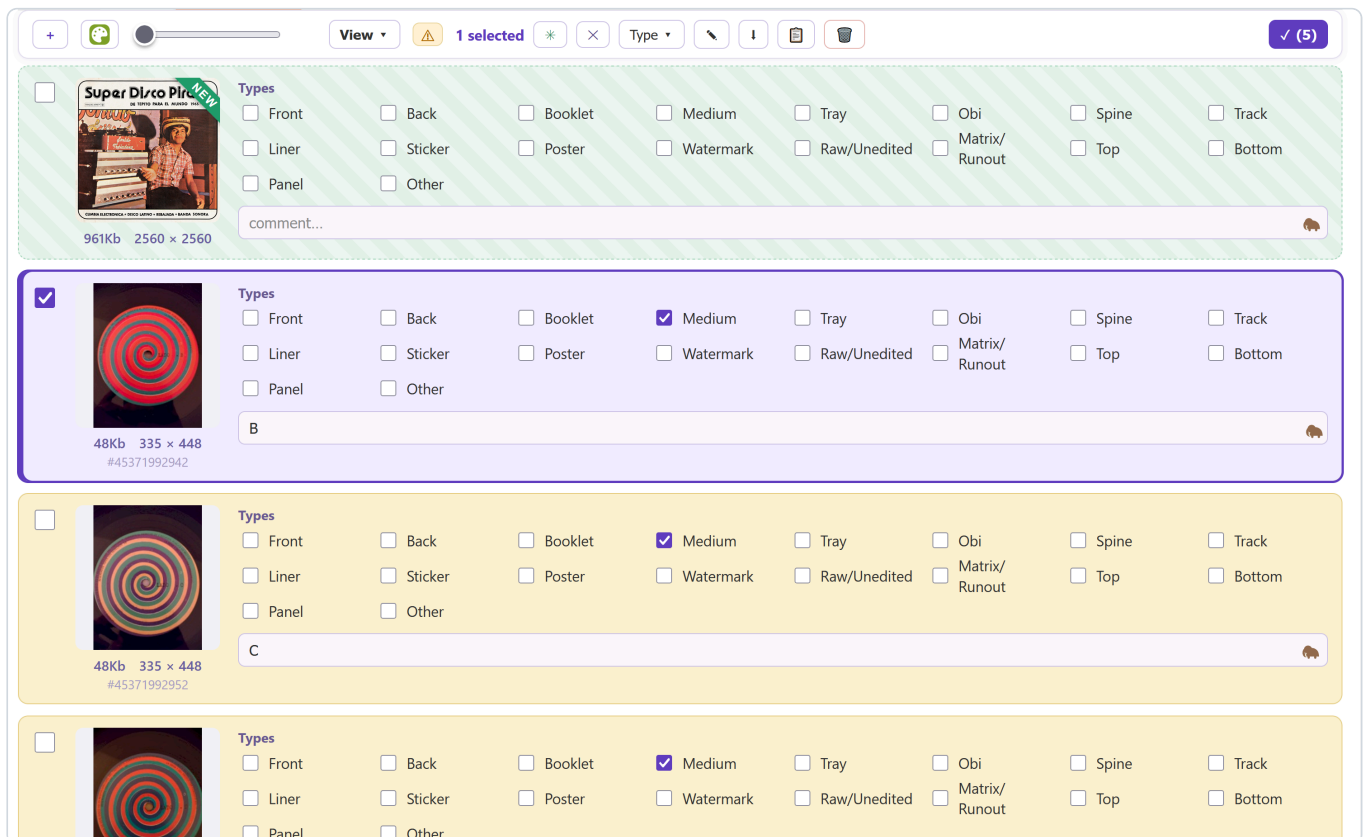

Single or bulk actions

Works on one cover or the whole selection:

- **Set type** — tick checkboxes for one or more types, or **right-click a type to set only that one and close**.

- **Set comment** — auto-focuses the next comment field on `<ENTER>`.
- **Remove** — mark for removal.
- **Download** — as a zip archive, files named by type so they round-trip (see [File names ⇌ types](#))
- **Reports** in HTML or Markdown — inline, captioned, or a detailed table (position · type-named file · resolution · size) that doubles as the archive `README.md`.

Add images

- **File drop** — choose local files and upload to the Cover Art Archive in parallel; the **type is guessed from the file name** (see [File names ⇌ types](#)).
- **Folder upload** (#359) — drop a **folder** on the gallery, or **Shift-click** the drop zone to browse one. It stages the folder's image/PDF files recursively, but bounded: **one level of subfolders deep** and up to **100 files** (a stray huge tree can't flood the gallery).
- **ZIP upload** (#604) — drop a **.zip** on the gallery (straight from the browser's download bar is fine) or pick one with the file browser. It is unpacked in the browser and staged like a dropped folder, with the same bounds. An **Art Station download** (#240) restores each cover's exact **types and comment** from its file name, so *download all covers here, drop the zip on another release* copies them over. Other zips get the usual [file-name type guess](#). Stored and deflate archives are supported; encrypted and ZIP64 ones are skipped with a message.
- **URL link** — uses [Enhanced Cover Art Uploads](#) (must be installed) to fetch covers from Discogs, Apple, Spotify, Bandcamp... The `URL (N)` toolbar button opens a panel listing every source this release offers — its linked platforms plus any [registered providers](#) — with one **↓ Import from ...** per source and an **↓ Import all N sources** below them. **Right-click the button** to run *Import all* straight away without opening the panel (#558); with nothing to import it opens the panel instead, where **By URL** still is. **Ctrl+V a URL anywhere on the gallery** and it is imported straight away — no button, no dialog, and no browser permission prompt, because a paste *gesture* carries its own data (#554). Pastes aimed at an input (the URL box, a comment field, anything contenteditable) are left to that input.
- **MH Covers** — pick a cover and it drops into the gallery as a staged new cover.
- **Reverse-image search** (the 🔍 on each cover) — look for a higher-resolution copy on Yandex / Google Lens / TinEye / Bing. With the optional [Art Station Picker](#) companion installed, click the better copy on the results (or any site reachable from there) and it's sent straight back into the gallery.
- Fresh covers shown faster than the native UI.

Full-screen viewer

- Arrow keys for navigation (left/right) and zoom (up/down), with zoom level remembered.
- **Mouse-follow pan** — when zoomed, just move the mouse to pan across the image (no click-and-drag). On by default; toggle in **Setup**.
- Slideshow.
- Set comment and type.
- `<Delete>` key to remove the image.

See [Shortcuts](#) for the full key/mouse list.

File names ⇌ types

Cover types and file names round-trip, so a downloaded archive can be re-added later with types intact.

On add (drop / pick / source) — when an image has no type, it's guessed from the file name (toggle in ⚙️ setup):

Type	Name contains
Front	front , folder , cover , frontal , recto
Back	back , rear , verso
Booklet	booklet , inlay , insert
Medium	cd , disc , disk , vinyl , medium , label , side a/b/...

The following types are matched by their name:

- Release: tray , obi , spine , sticker , liner , poster , matrix , runout , track , top , bottom , raw , unedited , watermark
- Event: flyer , ticket , setlist , banner , program , schedule , map , logo , merch

Matching is word-boundaried and order-aware, so `back cover` → **Back** (not Front) and an album titled *Super Disco Pirata* → no type.

File names in download archive

Each file is named

- `<NN> <type1>,<type2>,...<typeN> <comment>.<ext>`

where `none` is used where no type is given

Example: `09 front,sticker Front cover with the sticker.jpg`.

Comment memory (Mammoth)

The comment field in the **detailed view** carries the `mmth-pin` class, so if you also run [Mammoth](#), its **baby field-memory** attaches to it automatically — a small `□` pin lets you save and recall past comments (key `art-station-comment`). No configuration; it's Mammoth's [documented cross-userscript convention](#). Art Station's own `comment...` preset list still works independently when Mammoth isn't installed.

Applying changes

Every change is staged. **Enter edit** opens a panel that lists the pending operations and submits them as real MusicBrainz edits — remove, retype/comment, reorder and new-image uploads — each crediting *Art Station* in the edit note.

- Edits, removes and uploads all run in **parallel** (upload + register per image); a single **reorder** edit runs **last** and sets the final order, so register order doesn't matter. If a run has failures, **Repeat** re-runs just the failed ops — and re-runs the reorder too, so a retried upload still lands in place.
- A shared **edit note** and **make votable** apply to every edit.
- While a run is in progress the dialog can't be dismissed by clicking outside, and leaving the page warns first — so edits are never silently cut off. Use **Cancel** to abort.
- The panel is **resizable** from its bottom-right corner and **remembers the size** you leave it at, per dialog ([#595](#)). Clicking the backdrop still closes it, but only when the click *starts* there — dragging the resize corner, or a text selection, out past the edge no longer counts as clicking outside.
- **Automatically repeat failures** (⚙️ setup, **on** by default, up to **10 minutes or 10 times**) — when a commit finishes with failures, Art Station re-runs *just the failed operations* by itself until they succeed or the allowance runs out ([#566](#)). Uploads to the Internet Archive have been unreliable, and a failed booklet is expensive to redo by hand.
 - It stops at whichever limit comes first. The gap between attempts starts as the window spread over the allowance (10 min / 10 tries = one a minute) and **backs off as attempts pile up** — doubling from the 10th, tripling from the

100th — so a server that has already refused ten times isn't asked again at the same cadence. (Backoff shape borrowed from [Anakunda's MB Auto-retry on upload to CAA error](#), via chaban-mb.)

- A footer row of its own beneath the buttons shows the attempt, the countdown, how much of the window is gone and how many operations are still failing. **Repeat** still works and goes immediately; **Close** stops the countdown.
- **Upload timeout** (⌚ setup, default **10 minutes**, max 120) — how long one file may take to reach the Internet Archive before Art Station gives up. It used to be a fixed 5 minutes, which a 50–100MB PDF booklet could outlast when the Archive was slow, failing here while MusicBrainz's own uploader (which sets no timeout at all) got through ([#560](#)). Raise it if you upload large booklets. The failure message names the limit it hit, so it's clear when this is what happened.

Plugin API

Another userscript can register its own cover/event-art **provider** — it appears as an `⬇ Import from <name>` button in the **Source** popover, alongside the built-in ECAU platforms, and its images stage into the gallery like any other. This lets a site-specific script (e.g. one that's already logged in to a fan site) do the fetch with its own session and hand the bytes to Art Station.

```
window.ArtStation?.registerProvider({
  name: 'SpringsteenLyrics',          // required – the button label
  id: 'springsteen',                  // optional – de-dupe key (defaults to name)
  icon: 'https://example.com/favicon.ico', // optional – badge favicon (a missing/404 one is fine)
  match: 'springsteenlyrics.com',      // optional – string | string[] | RegExp | (url)=>boolean
  async run(ctx) {
    // ctx = { mbid, entity:'release'|'event', artist, title, url, link, links }
    // link = the first release/event external link your `match` hit (links = all of them)
    const html = await fetchWithYourSession(ctx.link);
    return [
      { url: 'https://.../front.jpg', types: ['Front'], comment: '' },
      // or { dataUrl }, or { blob, source } – see below
    ];
  }
});
```

- `match` gates the button: it only shows when the release/event actually links a matching URL, and those link(s) are passed to `run()` as `ctx.link` / `ctx.links`. Omit `match` and the button always shows.
- `run(ctx)` returns one item or an array of items. Each item is `{ types?, comment? }` plus **one** image source:
 - `url` or `dataUrl` — Art Station fetches/decodes it in its own realm (most robust; prefer this).
 - `blob` (or `file`) — bytes your script fetched itself (e.g. behind an authenticated session). Also include `source` (the image URL) so Art Station can re-fetch if a cross-sandbox blob can't be used directly.
- Works on both **release cover art** and **event event art** — the button, matching and `ctx.entity` are entity-aware.
- If a manager isolates `window` between userscripts, register via the event fallback instead: `document.dispatchEvent(new CustomEvent('artstation:register-provider', { detail: provider })).`
- When Art Station isn't installed, `window.ArtStation` is simply absent, so the `?.` call is a no-op.

Shortcuts

Gallery:

Key	Action
<code>Ctrl+V</code>	import the URL on the clipboard (#554) — anywhere on the gallery, no prompt

Gallery (when a cover is focused — arrow to it first):

Key	Action
← → ↑ ↓	move the cursor between covers
Enter	open the focused cover full-screen
Space	select / deselect the focused cover
Delete	mark the focused cover for removal (undo in the grid)

Full-screen viewer:

Key	Action
← →	previous / next cover
↑ ↓	zoom in / out
Enter	edit the comment
D	download the original
Delete	mark the cover for removal
P	play / pause the slideshow
Esc	close (dismisses an open popover or comment edit first)

Mouse:

Gesture	Action
right-click the <code>URL (N)</code> button	import from all N sources at once, skipping the panel (#558)
right-click / right-drag	select / paint-select covers
scroll wheel over the size slider	resize thumbnails
hold right-click + scroll wheel (anywhere in the gallery)	resize thumbnails
full-screen, zoomed: move the mouse	pan the image (follow-pan; on by default — see Setup). Off → click-and-drag to pan
full-screen: scroll wheel	zoom toward the cursor


Notes

- [Development documentation](#)

Credit Hoarder

Import track and release credits from streaming and database providers into MusicBrainz relationships, with a review phase so you only ever seed entities that actually exist in MB.

- Install: [stable](#) or [latest](#)
 - Or via bundle: [String Theory](#)
- [Changelog](#)

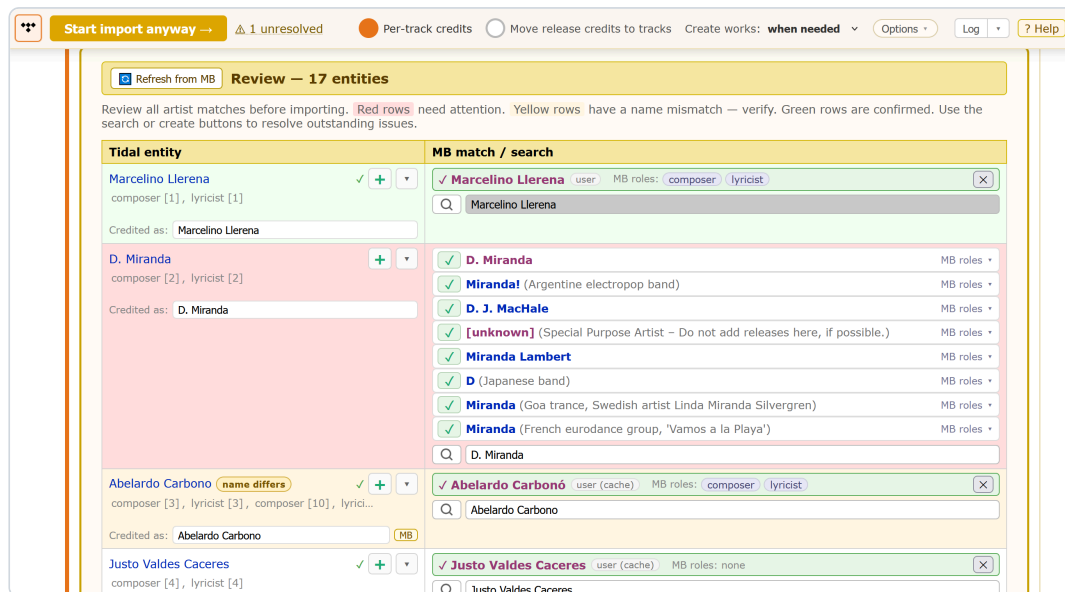

The script presents itself on the **Edit relationships** screen of a MusicBrainz release when there's something to import — a linked provider (or one [Platform Check](#) found), **or** track titles that name a remixer (the **Titles** source). On a release with neither it stays out of the way. Make sure to read [Style / Relationships](#) for the general guidelines.

Note

Credit Hoarder is the [multi-source](#) successor to the single-source [Discogs Importer](#)

Tip

Group Therapy adds general relationship-editor helpers — batch group-delete, hover-highlight, and copy/move credits between recordings, works and releases.

Workflow


1. CH fetches the provider's credits and gathers every entity (artists, labels, places), presenting them in the **Credit Review Table**.
 1. Each entity is matched by name and — where the provider exposes one — by its source URL.
 2. Perfect hits are auto-selected; ambiguous or non-existent entities are left for you to resolve or ignore.
2. Once the review table is confirmed, **Instant Fill** runs.
 1. Entities with a resolved MB ID are attached to the release or the track (per the options); the rest are skipped and reported in the log.
 2. Some relationships attach to the **work** rather than the recording; a missing work can be created automatically (per the *Create works* option). If the work doesn't exist and creation is off, the relationship is skipped and logged.
3. After any manual fixes, you confirm the MusicBrainz edit.

Features

- **Import bar** — pick a source (Discogs / Tidal / Qobuz / Deezer / Apple Music / Metal Archives / Titles) and the import options (per-track credits, move-to-tracks, create-works, dedup).
- **Credit Review Table** — confirm each source ↔ MusicBrainz match before dispatch: parallel lookup, inline search, auto-match, entity creation.
- **Instant Fill** — write the confirmed relationships into the MB relationship editor in one pass.

Import bar

The UI strip at the top of the page with the source picker, the option toggles, log output, a documentation link, and Copy-log buttons. Options are saved via the userscript manager's own storage — covered by its backup/restore and cross-browser sync — and persist across sessions.



- **Source picker** — an **Import credits:** label followed by one brand icon per source available on the release (Discogs, Tidal, Qobuz, Deezer, Apple Music, Metal Archives, and the title-derived **Titles** source). **Left-click** an icon to import from that source; **right-click** to open the source's page. Several sources can be run in one session — the edits stack and are submitted together.
- **All** (consolidated import) — shown when **more than one** source is available. Harvests every source, merges their credits into **one** de-duplicated review table (see [Consolidated import](#)), and dispatches once. Clicking any source icon (or **All** again) while a preflight/review is open cancels it and returns you to the picker.
- **Per-track credits** — import track-level artist credits in addition to release-level credits.
- **Move release credits to tracks** — move appropriate release-level credits down to all recordings (instruments, vocals, producer, mix, ...). Pre-existing release-level credits aren't moved.
- **Use works** — a master toggle plus a mode picker (#424):
 - **toggle off** — no work relationship is touched at all: nothing is created *and* nothing is attached to pre-existing works; skipped work-level credits are logged.
 - **create none** (default) — use only works that already exist; never create one. Work-only credits with no existing work are logged and skipped.
 - **create needed** — also create a work when a composer/lyricist/writer credit needs one.
- **Options**
 - **Equivalence sets** — skip a role when an equivalent role already exists on the target (writer ≡ composer).
 - **Duplicate roles** — skip a role when the target recording already has the same role (regardless of attributes / dates / tasks).

Credit Review Table

A single-row-per-entity table for confirming source ↔ MusicBrainz matches before dispatch.

Row state is conveyed by colour:

-  auto match
-  user selected
-  name differs — resolved via URL but the MB name doesn't match the source (worth verifying)
-  needs attention — not resolved

Source-URL link state (for providers that expose an artist URL — Discogs, Tidal; not Qobuz or Deezer) appears as a single chip per row:

-  source URL already linked

-  add the source link — click opens MB's edit page pre-filled
-  linked to a different MB entity

Efficiency features:

- **Parallel lookup** — all artists, labels and places are checked against MB through a shared throttle.
- **Cache** — resolved source ↔ MB MBID mappings persist across sessions and are checked first; each record shows a badge with how it was originally resolved (`name` / `url` / `name+url` / `user`). Sources that expose a per-credit URL (Discogs, Tidal) cache globally by that URL; **name-only** credits (Qobuz, Deezer, the title-derived remixers) cache **per release** — keyed by the release and the name — so re-running the same release reuses your picks without a bare name leaking a resolution onto a different release.
- **Inline MB search** — a live search field on every row; type a name or paste an MBID / MB URL.
- **Auto-match** — name search and source-URL lookup run in parallel; auto-resolution only when trustworthy:
 - **Both agree** on the same MB entity → resolved with high confidence.
 - **Only one side** returns a hit → auto-accepted only when strong (unique exact-name match OR a direct source↔MB URL relation).
 - **They disagree** → left unresolved for manual review.
- **Entity creation**
 -  opens MB's create page pre-filled (name, sort name, type, source URL); after save the tab closes itself and the row auto-selects the new entity. Right-click does it in the background.
 -  opens advanced creation options (where the provider supports it, e.g. Discogs): set disambiguation by the role or from text selected in the source profile, take the real name from the source profile.
- **Refresh from MB** —  deletes the existing cache and re-resolves every entity against fresh MB data.
- **Credited as** — a per-entity override that sets `entity1_credit` on every dispatched rel for that entity (if the entity already exists in relationships, the most common *credited as* value is used). Helper buttons **[MB]** and **[source]** set the value to the MB or source name quickly.
- **Split** — shown on an artist whose name combines several people (`&` , `and` , `feat.` , `ft.` , `vs.` , `with` , `x` , `,` , `;` — the same separators as Apollo's split). One click replaces the row with one row per artist, each carrying the original's roles; a shared surname is expanded, so *George & Ira Gershwin* becomes *George Gershwin* + *Ira Gershwin*. Each part is matched from the original row's candidates (or an MB name search) and auto-confirmed on a single exact-name match. Split rows get no source-link chip — the duo's page belongs to neither artist.
- **MB roles** — each artist's header carries an **MB roles** toggle; clicking it fetches that artist's existing MB relationship categories (`producer` , `mix` , `mastering` , `instrument` , ...) as tags, so you can sanity-check the source role against the artist's known roles. On request only (one extra request per artist), cached for the session.
- **Preflight diagnostics** — a collapsed `<details>` block below the main log with a per-worker / per-request trace, for when something feels slow.

Consolidated import

Triggered by  **All** when a release has more than one source. Instead of running each provider separately and resolving the same people over and over, it harvests every source, merges the results into a **single** review table, and dispatches once.

- **De-duplication happens twice.** First before resolution — identical credits (same entity, role, attributes and track position) collapse to one row, so the same person credited by Tidal *and* Qobuz isn't resolved twice. Then after resolution — rows are merged by MB entity (MBID), and an unresolved credit is folded into a resolved row of the **same name** when that name resolves to exactly one MBID.
- **Typo tolerance.** An unresolved credit that is a tight, length-guarded edit-distance typo of a **uniquely-resolved** name is folded onto that MBID (e.g. *Mark Barott* → *Mark Barrott*). Short names get no fuzz, and a typo that's ambiguous between two resolved names is left alone.
- **Source column.** The leftmost column shows a brand badge per provider that credited the row — **coloured** when that provider supplied an artist URL (click it to open the provider page), **greyed** when the credit was name-only. So you can

see at a glance that, say, *Alan Morrallee* came from both Tidal and Qobuz.

- **Add all links.** When a merged row carries artist URLs from several providers, the  add-link button shows the count and seeds **every** provider URL into MB's edit page at once (extras can be trimmed in MB's dialog); creating a new artist likewise seeds all of them.
- **Edit note** records the real sources, e.g. `Source: Import all (Tidal, Qobuz, Deezer)`.
- The **Log** ▾ menu gains **Copy all** — the combined harvest JSON for the whole run.

	Mabinuori Kayode Idowu vocal Credited as: Mabinuori Kayode Idowu	✓ + ▾	✓ Mabinuori Kayode Idowu name+url (cache) MB roles ▾ Mabinuori Kayode Idowu
 	Dur-Dur Band (name differs) writer [3], composer [3], lyricist [3] Credited as: Dur-Dur Band (MB)	✓ + ▾	✓ Dur-Dur Band (Somali disco group) url (cache) MB roles ▾ Dur-Dur Band
 	Ndiouga Dieng writer [10], composer [10], lyricist [10] Credited as: Ndiouga Dieng	✓ + ▾	✓ Ndiouga Dieng name+url (cache) MB roles ▾ Ndiouga Dieng
	Jason Jaknunas & Pierre Chrétien producer [1], producer [2], producer [3], producer... Credited as: Jason Jaknunas & Pierre Chrétien	+ ▾	✓ Jason Jaknunas MB roles ▾ ✓ Pierre Chrétien (Souljazz Orchestra, Canada) MB roles ▾ ✓ Various Artists (add compilations to this artist) MB roles ▾ ✓ Philippe Chrétien (Swiss saxophonist & pianist) MB roles ▾ ✓ Johann Sebastian Bach (German Baroque period composer & musician) MB roles ▾ ✓ The E Street Band MB roles ▾ ✓ [unknown] (Special Purpose Artist – Do not add releases here, if possible.) MB roles ▾ ✓ Pierre Boulez (composer and conductor) MB roles ▾ ✓ Pierre Degeyter (Belgian socialist & composer) MB roles ▾ ✓ Jason Webley MB roles ▾ Jason Jaknunas & Pierre Chrétien

Instant Fill

The dispatch-based, zero-dialog import. Idempotent — skips relationships that already exist on the target or were dispatched earlier in the same session.

- Release-level: labels, places, company credits, release artists, ...
- Tracklist: instruments, vocals, task attributes, ...
- Work-level: lyrics, composer, writer (with work auto-creation per the chosen *Create works* option), ...
- Detailed statistics in the edit note. When several sources are run on one release before submitting, each source's stats **stack** under one shared header (newest on top, one block per source). A credit a previous source already staged is reported as *already added this session* — distinct from *already in MB* — so e.g. Discogs shows "10 added" and a following Tidal run shows "2 added, 4 already added this session" rather than a misleading combined total.

Diagnostics

The log panel records every step. The log menu offers **Copy log** (includes the raw source data), **Copy without JSON**, and per-provider raw/parsed copies (**Copy Discogs / Tidal / Qobuz / Deezer / Apple**) for filing issues — each labelled by the source it came from.

Providers

Providers differ in how rich their credits are and — crucially — whether they expose a stable **artist identity** that resolves to MB exactly, or only a **name** that has to be searched and confirmed.

Provider	Credits exposed	Artist identity	How it's fetched	Auth
Discogs	Fulllest — performers + instruments, engineering, production, artwork, mastering, ...	Discogs artist IDs → exact MB resolution via URL relationships	Discogs API	none
Tidal	Per-track: Producer, Mixing/Recording/Sound Engineer, Composer, Lyricist, Writer, Orchestrator, (Music) Publisher. Plus release-level credits from the Info tab — instruments, vocals, conductor, artwork, etc.	Tidal artist IDs on ~99% of credits → exact MB resolution via URL relationships	companion harvest in an anonymously-opened <code>tidal.com/album/<id>/credits</code> tab (per-track and the Info tab's "Additional Credits"), relayed back cross-tab	none
Qobuz	Composer, Lyricist, Producer, Publisher, performers	mostly names only , but via <code>album/get</code> the composer (and main artist) carry a Qobuz artist id → an <code>open.qobuz.com/artist/<id></code> link for exact resolution / addable "streaming" link; the other roles have no id in the API, so they resolve by MB name search + your review	authenticated <code>album/get</code> when signed in to Qobuz via Platform Check (reliable, geo-independent, and the source of the composer id); otherwise the server-rendered store page (names only)	optional Qobuz login — makes the fetch reliable and unlocks the composer artist link
Deezer	Composers only — the per-track "Composers" line (co-writers comma-separated)	names only — resolved by MB name search + your review (Deezer exposes no artist id for composers, and often abbreviates: "E. Davis", "Richards")	the album page HTML (<code>deezer.com/us/album/<id></code>) server-renders the composer line — a single unauthenticated page fetch (the public JSON API exposes no songwriter credits)	none
Apple Music	Per-track roled credits — Composer, Songwriter/Writer, Lyricist, Producer, Mixing/Recording Engineer, Arranger, Vocals (#435)	names only — Apple's credits carry no artist URL, so they resolve by MB name search + your review , like Deezer/Qobuz	the anonymous Apple <code>amp-api</code> catalog (<code>/songs/<id>/credits</code>) — no login; older/indie tracks may expose no credits. Legacy iTunes links (<code>itunes.apple.com/.../album/id...</code>) are recognized as the same album (#436)	none
Metal Archives	Full lineup — performers + instruments (band & guest/session), work credits (Songwriting→composer, Lyrics→lyricist, Arrangements→arranger), and other-staff (recording/mixing/mastering, producer, artwork/design/photography). Guitars/Bass default to	Metal Archives artist IDs → exact MB resolution via URL relationships (the "other databases" link)	companion harvest in a background <code>metal-archives.com/albums/.../<id></code> tab — a real browser clears the Cloudflare challenge, the static lineup tables are read and relayed back cross-tab (same mechanism as Tidal)	none

Provider	Credits exposed	Artist identity	How it's fetched	Auth
	electric ; splits are scoped per band			
Titles	Remixers only , derived from the release's own track titles — no external provider	names only — resolved by MB name search + your review	reads the track titles already on the MB release	none

The **Titles** source parses remixer credits straight from the track-title disambiguation convention, for releases where the remix is named in the title but no provider lists it. A track titled *Song (Artist Remix)*, *Track (KiNK Dub)*, *Tune (Tom Moulton Mix)* or *Cut (Remixed by Someone)* contributes a **remixer** relationship for that recording. Only the reliable *named-remix* convention fires — anonymous descriptors like *(Extended Mix)*, *(Radio Edit)*, *(Original Mix)* or a bare *(Remix)* (edits/versions of the original, not a remix by a named artist) are ignored, and *(Mixed by ...)* is left alone (that's an engineer). It's offered (its own icon in the source row) only when the titles actually contain a named remix, probed when the page loads. Everything still goes through the review table before it's committed. Because these remixers carry no source URL, your review picks for them are cached **per release** (keyed by the release and the parsed name) — so re-running the Titles source on the same release reuses your matches instead of re-asking, while a bare name like *Friends* never leaks a resolution onto a different release.

It's a heuristic over a naming convention, so it won't catch every wording (an unusual phrasing, or a remix named after the *track* rather than an artist) — anything it misses you add by hand as usual. The entity-name tooltip shows the full source title, which helps when the parser had to trim part of a name (e.g. *Europa 51* → *Europa*).

Notes & limitations:

- **Artist identity is the dividing line.** Discogs and Tidal carry per-credit artist IDs, so most credits resolve to the exact MB artist automatically. **Qobuz is mostly names-only** — its `album/get` exposes an artist id only for the **composer** and **main artist** (→ an `open.qobuz.com/artist/<id>` link, exact resolution), while every other role is names-only and lands in the review table for you to confirm. **Deezer and Apple Music are names-only** across the board. Provider-specific helpers that depend on a source profile (e.g. pulling a real name / disambiguation from a Discogs profile) only apply to that provider.
- **Coverage varies by release and region.** A provider only appears when the release is linked to it (or Platform Check found it); Tidal/Qobuz catalogues are licensing- and region-dependent.
- **Tidal release-level credits (Info tab).** Many Tidal releases list their credits once for the whole album (on the Info tab → "Additional Credits") rather than per track — some have *no* per-track credits at all. The harvest reads both, so these albums import too. Release-level recording credits (producer, instruments, vocals, ...) are pushed to every track when **Move release credits to tracks** is on; artwork/mastering stay at release level.
- **Qobuz position anchoring.** Qobuz's *page* repeats empty credit blocks, so scraped credits are matched to tracks by the page's real track-number markers, not element order. The authenticated `album/get` path (when you're signed in to Qobuz via Platform Check) sidesteps this entirely — its per-track `performers` are 1:1 with tracks and keyed by track number — and is preferred whenever the token is present.
- **Metal Archives (Cloudflare + lineup).** The album page is behind Cloudflare, so — like the Tidal harvest — it opens in a brief **background tab** where a real browser clears the challenge, then reads the static **Band / Guest-session / Other-staff** tables. Credits are album-level with optional per-track `(track N)` qualifiers: **band & guest** performance/work credits become per-track rels (whole tracklist, or just the qualified tracks); **other-staff** (producer/engineering/artwork/...) are release-level. On a **split**, credits are scoped to each band's own tracks. Guitars/Bass default to **electric guitar / bass guitar** unless a detail says otherwise. Guest/session performers get the **guest** attribute. When you create a new artist, the Metal Archives URL is seeded on the form.

Role mapping (streaming providers)

Provider role	MusicBrainz relationship
Composer, Lyricist, Writer, Orchestrator	work rel (works are created on demand, as in the Discogs flow)
Producer, Mixing Engineer (→ <i>mix</i>), Recording Engineer (→ <i>recording</i>), Sound Engineer (→ <i>sound</i>)	recording rel
Assistant Mixing / Recording / Sound Engineer	same recording rel as above, with the MB assistant attribute ticked (MB has no separate "assistant engineer" relationship)
Instruments, Vocals, Background Vocals, Conductor (release-level)	recording rel (resolved through the shared instrument/role tables, same as Discogs)
Artwork (release-level)	release rel (artwork)
Music Publisher	label → work publishing rel — the publisher is resolved as an MB label (by name) and linked to each track's work. <code>Copyright Control</code> placeholder is dropped
Current Distributor	label → release distributed rel — the distributor is resolved as an MB label (by name)

Tidal roles surfaced in the log but **not** imported: *Primary/Main/Featured Artist* and *Record Label* (the release's own artist credit / label, set elsewhere, not a relationship); and *Mastering Engineer* (artist→recording mastering is deprecated in MB — mastering belongs at release level), *Sound Editor*, *Studio Personnel* (no clean MB target). All appear in the skipped list so nothing is silently dropped.

Shortcuts

Key	Action
<code>Enter</code>	run the search, confirm artist popup
<code>Esc</code>	close artist popup

Notes

- [Development documentation](#).

Fusion

A merge assistant for MusicBrainz recordings: gather a pool of candidates, let auto-match group the likely duplicates, adjust by hand, then submit every merge directly in the background

- Install: [stable](#) or [latest](#)
 - Or via bundle: [String Theory](#)
- [Changelog](#)
- [View users](#)

POOL 272

filter the pool...

Ayr — Bicep
(no release) +1 more · 5:00
GBCFB1700236 · 5bf4da91...

Darwin (Beatless in Space version) — Bi...
Bicep Presents Throne of Blood · track 1 · 5:09
6566121d...

Choux — Bicep
(no release) +1 more · 5:59
DEU671101444 · 690a1e38...

Apricots — Bicep
Kontor Sunset Chill 2021 · track 5 · 3:16
1fbee125...

D-Mil (club) — Bicep & Midland
D-Mil · track 1 · 5:57
GBVHV0800424 · 5783bcfc...

Celeste — Bicep
(no release) · 4:55
US23A8831879 · 6f6dc2f22...

Chroma 004 Rola — Bicep
Ninja Tune 2024 Sampler CD · track 4 · 4:49

GROUPS 12 25 recordings

click a group to make it current · ready to merge

▼ Collapse all

CLEAR: all merged

2 CHROMA 010 BRILLO

ISRC AcoustID Length Title Artist

★ CHROMA 010 BRILLO

Bicep CHROMA 000 · track 9 +1 more 4:31 GBCEB2401361 4a13a558...

#	Title	Length	Track artist	Release title	Release artist	Release group type	Country/Date	Label	Catalog#
1	CHROMA 010 BRILLO	4:31	Bicep	CHROMA 010	BICEP	EP · Digital Media	XW 2025-06-04	CHROMA	CHROMADNL010
9	CHROMA 010 BRILLO	4:31	Bicep	CHROMA 000	Bicep	Album · Digital Media	XW 2025-11-14	CHROMA	CHROMADNL000

CHROMA 010 BRILLO

Bicep CHROMA 010 · track 1 4:31 - 4a13a558...

#	Title	Length	Track artist	Release title	Release artist	Release group type	Country/Date	Label	Catalog#
1	CHROMA 010 BRILLO	4:31	Bicep	CHROMA 010	Bicep	Single · Digital Media	XW 2025-06-04	CHROMA	CHROMADNL010

3 CHROMA 001 HELIUM

ISRC AcoustID Length Title Artist

★ CHROMA 001 HELIUM

Bicep CHROMA 000 · track 1 +2 more 4:47 GBCEB2380784 f1a0999b...

CHROMA 001 HELIUM

Bicep CHROMA 002 L.A.V.A. · track 2 4:47 - f1a0999b... 7e8c7ea3...

CHROMA 001 HELIUM

Bicep CHROMA 003 · track 3 4:47 - f1a0999b...

12 groups · 12 ready · 272 in pool · 143/297 ISRC · 197/297 AcoustID

Merges submit directly in the background — no MB merge page involved

Merge All (12) →

Features

- **Pool / Groups review UI** — every candidate recording starts in the left-hand **Pool**; drag one into the right-hand **Groups** column, double-click a pool card to add it straight to the *current* group, or select a pool card then click a group to add it. A recording only ever lives in one place at a time.
- **Auto-match** — scans the pool and groups likely duplicates automatically using multiple signals: shared ISRC, shared AcoustID, length within a configurable tolerance, and title/artist similarity (typo-tolerant — a one-letter difference). A **Cutoff** selector controls how strict the combination has to be: *strict* (identifiers only), *normal* (default — identifiers, or title+artist+length together), *loose* (identifiers, or title+length alone, artist not required). Re-running Auto-match only touches whatever is still in the pool, so it never undoes a group you built by hand.
- **Full manual control** — return a recording from a group back to the pool (↔, shown on hover so it can't be clicked by accident), remove it from the group *and* the pool entirely (X), or build a brand-new group yourself. The merge **target** (the recording that survives) always sits at the top of the card with a gold ★; hover any other row and click its ★ to make that one the target instead — no separate column needed, the row's shaded background says which one it is. Click a group's header to make it the "current" group for double-click-adds and empty-space drops. 🗑 on a group deletes it — its members go back to the pool, nothing is lost — and **Clear board** does the same for every group at once.
- **Flexible seeding** — opens with a pool already populated from wherever you launched it:
 - **Release page** — that release's own recordings, plus a "Load recordings from RG edition" dropdown to pull in another edition from the same release group.
 - **Release group page** — every recording across every release in the group in one go.
 - **Recording page** — just that one recording, to start building a merge from scratch.
 - **Artist → Recordings tab** — the artist's *entire* recording catalogue via the search API, not just the page you're looking at (MB paginates that table at 100 rows; Fusion pulls all of them, up to a 2000 safety cap).

- Any page: paste a recording, release, or release-group MBID/URL into the input — it is added on paste, no button to press. A release or release-group URL pulls in every recording it contains.
- **Video recordings are never mixed with audio** — a video recording gets a 🎬 marker everywhere it appears, and merging one with an audio recording is refused, hard, at every entry point (Auto-match, drag, double-click, select+click) — no signal, not even a shared ISRC, overrides this.
- **Direct background merges** — a group's **Merge** ↗ button (or the footer's **Merge All**, which drives every ready group, several at once) submits the merge itself, the same two real MusicBrainz endpoints MB's own merge page uses (`/recording/merge_queue` → `/recording/merge`), with an edit note auto-composed from whichever signals matched. No tab opens, no MB UI is shown.
- **Shared identifiers are colour-coded** — within a group card, any ISRC or AcoustID held by two or more members is tinted, with a different colour per distinct shared value, so which rows actually agree is obvious at a glance. A value only one member has stays plain.
- **Per-merge edit note** — the 📝 in a group's title turns the whole card into a note editor; the button is tinted purple when a custom note is set. A custom note replaces the auto-generated reason line; Fusion's attribution footer is always appended.
- **Options and log** — the ⚙ menu holds settings (length tolerance, AcoustID enrichment on/off, always-request-a-vote) plus a **Log** button opening activity log window

How matching works

Auto-match treats two recordings as the same group when either:

- they share an **ISRC**, or
- they share an **AcoustID**, or
- their **title** and **artist credit** are both similar *and* their **length** is within tolerance (5 seconds by default) — title similarity tolerates small typos (edit-distance based), not just exact word overlap, or
- with the **loose** cutoff, title+length alone (no artist match required).

Length alone is never enough to group two recordings — it's supporting evidence only, combined with title (and usually artist). A group formed from ISRC or AcoustID is marked **HIGH** confidence; a group formed only from title+length/title+artist+length is marked **MEDIUM**. Groups you build by hand (drag/select, not Auto-match) are marked **MANUAL** and still show their signal chips for reference, since a merge you intend deliberately doesn't need to justify itself the same way an automatic one does.

This mirrors MB's own [How To Merge Recordings](#) guidance — matching "acoustic content", not incidental metadata — while staying honest that Fusion's signals are a heuristic, not a guarantee: always glance at the group before merging.

Submitting merges

Fusion never uses MB's own merge review page. Clicking **Merge** on a group (or **Merge All** for every ready group) drives the same two endpoints MB's own "select recordings → merge" flow uses, directly:

1. `GET /recording/merge_queue?add-to-merge=<id>&add-to-merge=<id>...` — queues the group's recordings server-side.
2. `POST` back to the resulting `/recording/merge` form with the chosen target and an edit note.

This is a normal MusicBrainz edit like any other — it goes through your account exactly as if you'd used MB's own merge page, and if your account isn't an auto-editor (or "**Always require a vote**" is on in Fusion's options) it enters the voting queue rather than applying immediately. Fusion doesn't change that; it only removes the "click through several MB pages to get there" part.

Group Therapy

Batch operations and various helpers on the MusicBrainz *Edit relationships* page.

- Install: [stable](#) or [latest](#)
 - Or via bundle: [String Theory](#)
- [Changelog](#)
- [View Users](#)

Note: [Uncheck checkboxes with Esc](#) is a valuable companion script.

Features

- Batch delete role, entity, both
- Copy/move credits from recording to recordings, work to works, release to release, release from/to recordings
- Consolidate release-level credits across an entire release group (matrix + one-click apply)
- Match recordings to existing works (ISRC + ranked title search) and stage the *performance* relationships
- Parse unstructured credit text into release relationships, with a small pattern DSL
- Set a date across a release's credits — a picker to choose the date and which credits get it
- Highlight role or entity everywhere and show tooltip with overall counts
- Works on existing and newly-added relationships
- Right-click entity to open its editor


Batch delete

Right-click a relationship's **(x)** button for a menu that removes a whole group in one go, each option showing how many it will remove:


- *Remove this one*
- *Remove "<role>" — all tracks*
- *Remove "<target>" — everywhere*
- *Remove "<role>" + "<target>"*

Each option shows its **blast radius** — the count and which tracks (or the release) it touches, e.g. *guitar — all tracks (14) · tracks 1–12*.

If you've **selected recordings/works** (ticked their checkboxes), the group options are **scoped to just those** — so *Remove "guitar"* removes it only from the selected recordings, and the menu notes the scope.

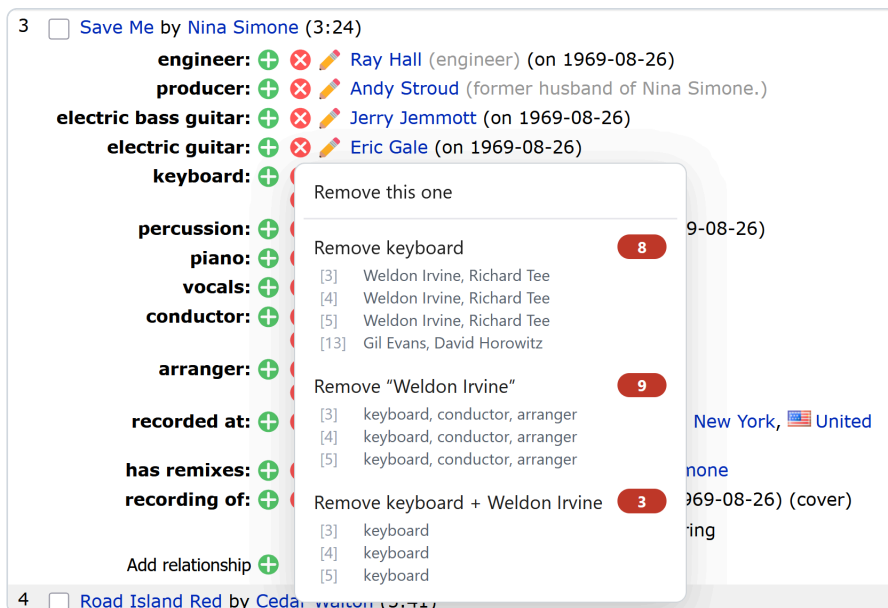

It works exactly the same on works:

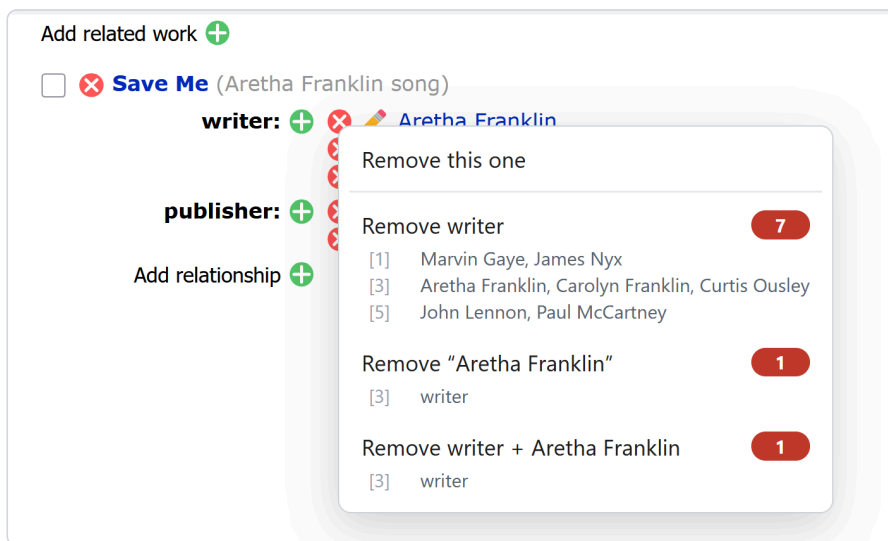

Copy / Move

Select the destination recordings (MB's own recording checkboxes) — **or none, which means every other track** — then

From recording/work

Right-click the source recording's checkbox for a menu (its header shows which tracks you're copying to):

- *Copy* — duplicate this recording's credits onto every destination recording, updating any it already has
- *Move* — the same, then remove them from the source.

Right-click a work's checkbox to copy/move that work's own credits (writer, composer, lyricist, ...) onto the selected works.

The menu lists each credit with a **checkbox** (all on by default) — untick any you don't want to copy. To pick roles fast:

- **Right-click a credit** selects only that role (e.g. just the composers); **Shift-right-click** adds a role to the current selection.
- Hover a credit for two buttons that **select destination tracks by that credit**: **[A]** ticks every track crediting that **artist** (in any role), **[R]** every track crediting that artist **in the same role** — so you can, say, copy a credit onto exactly the tracks that already feature that performer.

Copy/Move act on the selected credits and the currently-ticked destinations (recomputed live), and the count updates as you go.

3 ☐ [Save Me by Nina Simone \(2:24\)](#)

COPY TO TRACKS 4-5

- ☒ [engineer] Ray Hall
- ☒ [producer] Andy Stroud
- ☒ [electric bass guitar] Jerry Jemmott
- ☒ [electric guitar] Eric Gale
- ☒ [keyboard] Weldon Irvine
- ☒ [keyboard] Richard Tee
- ☒ [percussion] Roger "Montego Joe" Sanders
- ☒ [piano] Nina Simone
- ☒ [vocals] Nina Simone
- ☒ [conductor] Weldon Irvine
- ☒ [conductor] Nina Simone
- ☒ [arranger] Weldon Irvine
- ☒ [arranger] Nina Simone
- ☒ [recorded at] RCA Studio A

Copy 14

Move (remove here)

4 ☒ [Red Land Red by Cedar Walton \(5:12\)](#)

Add relationship 

5 ☒ [Get Back by The Deirdre Wilson Tabac \(2:27\)](#)

recording of:    [Get Back](#) (cover)

☐ These relationships have a specific ordering

Add relationship 

Set dates

If the relationship you right-click carries a **date period** (e.g. a *recorded at* "" with a date), the copy menu also offers **Set dates from (D1 → D2)...** That date only **seeds** a picker — the tool no longer depends on the rel you invoked it from, so you're free to change it.

The **date picker** (#398) lists every datable credit on the **selected tracks** (ticked recordings, or all tracks if none are ticked) as a **track** → **credits** tree, so you pick exactly what gets the date:

- **Header** — an editable **begin / end date** (YYYY , YYYY-MM , or YYYY-MM-DD) and **ended** checkbox, seeded from the rel you clicked.
- **Roles** — a remembered list (persisted across sessions) that drives the **default tick**: any credit whose role is on the list starts checked. **Right-click a credit's role** to add it to the list; **click a chip** to drop it.
- **Credits** — tick any credit by hand (the roles list is only the starting point); a **track checkbox** toggles all of its credits. Already-dated credits are shown greyed with their existing date.
- **Apply** stamps the header date onto every ticked, still-undated credit. Nothing is submitted — the edits land in the editor for you to review and save.


Note

Fills blanks only — it can't overwrite or remove a date. MusicBrainz's editor reducer merges a relationship update and keeps any existing non-empty date, so a date sent through it is only applied where there was none (which is why already-dated credits are shown but left unchanged). Overwriting or clearing a date would require driving MB's own edit dialog (which we deliberately don't do). See [#385](#) for the details.

From release

The  **Copy from release...** opens a picker to choose one of **release group's** other releases. It then shows a **checklist** of that release's release-level credits (artists + labels, with credited-as, attributes and dates); pick which to copy onto this release (MB merges any it already has).

Format-aware cleansing — since the source may be a different edition, credits whose role doesn't suit **this** release's format start **unselected**, so you don't carry a vinyl-only production credit onto a digital edition.

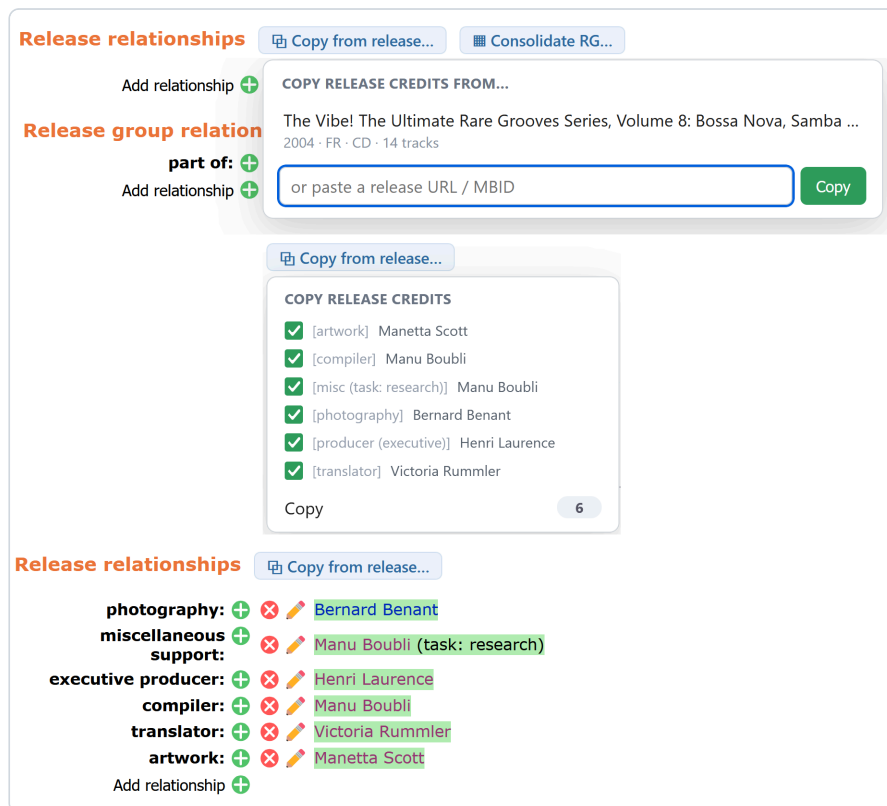

Release ↔ recordings (Vertical)

The **Vertical**: section in the toolbar copies credits between the release and its own recordings, with two icon buttons:

- **↑ Release → recordings** — copy (or **Move**) the selected release-level credits onto its recordings, or all if none are selected. Release/packaging roles that don't belong on a recording (liner notes, compiler, mastering, artwork, design, photography, manufactured, pressed/printed, publishing, ®/©, ...) start **unselected**
- **↓ Recordings → release** — collect the recordings' credits onto the release as a **union** across all tracks (deduped by role + artist), each row showing the **track range** it covers.

Both menus carry a **track field** using the same selector syntax as the text parser's Scope (`1,3` , `5-7` , `2:4` , `2:*` , `all`) — typing `1,3` beats ticking two boxes, and the menu says which tracks it matched before you copy anything. Empty means *ticked*, or *all* for **↑** and *all tracks* for **↓**.

Each credit's link type is mapped to the **destination's entity type by name** (e.g. artist-recording *producer* ↔ artist-release *producer*); a role with no equivalent for that entity is skipped and counted. **Move** also removes the source rels. As always,

nothing is submitted — the changes land in the editor for you to review and save.

Release Group Consolidation

The **Consolidate RG...** button (next to *Copy from release...*) can spread release-level credits across **every** release in the group at once. It reads all the releases in parallel and builds a **role × release matrix**: one row per distinct credit, one column per release — labelled A, B, C... with a compact **format badge** (Digital / Vinyl / CD / Cassette) — and a green cell wherever the credit already exists.

- **Select** what to add: click a **cell** to toggle it, a **column-header letter** to select every addable credit for that release, or **Auto select** for the whole matrix (**Clear** resets). Credits that are format-specific for a release (e.g. *lacquer cut* on a CD) are held back and shown as **•** — click to force one in.
- The footer shows the plan (*N additions across M releases*). **Apply** creates them as real relationship edits — one batched submission per target release (auto-applied if you're an auto-editor, else queued), each carrying a **detailed edit note** that lists every added credit under the Group Therapy signature.

This is **release-level only** (recordings are already shared across a group). It uses MB's internal edit API, so the additions are submitted directly rather than staged in the editor.

Consolidate release-level credits across the group

RELEASES IN THIS GROUP — CLICK TO ADD/REMOVE A COLUMN

A CD The Skeletal Essences of Afro Funk 1969-1980

B D The Skeletal Essences of Afro Funk, Vol. 3: 1969-1980 · 2013

C LP The Skeletal Essences of Afro Funk 1969-1980 · 2013

D D The Skeletal Essences of Afro Funk 1969-1980 · 2013

paste release URLs / MBIDs to add them to the matrix...

ROLE	ENTITY	A	B	C	D
		CD	D	LP	D
compiler	Samy Ben Redjeb	A	B	C	D
copyright	Analog Africa	A	B	C	D
design	Frédéric Thiphagne	A	B	C	D
liner notes	Augustine Yéhouénou	A	B	C	D
liner notes	Michel Vink	A	B	C	D
manufactured	Optimal Media GmbH	A	•	C	•
mastered at	Osiris Studio	A	B	C	D
mastering	Michael Graves	A	B	C	D
phonographic copyright	Analog Africa	A	B	C	D

Auto select

Clear

25 additions across 3 releases

Apply

With more than 10 releases in a group you must pick releases to be consolidated manually.

Consolidate release-level credits across the group

RELEASES IN THIS GROUP — CLICK TO ADD/REMOVE A COLUMN

- [A](#) [D](#) The K&D Sessions (DJ mix) ↗
- [B](#) [CD](#) The K&D Sessions™ (Black G-Stone symbol on cover, glass mastered at Duplico 2000) ↗
- [C](#) [CD](#) The K&D Sessions™ (10 Tracks instead of 11 on Part Two) · 1998 ↗
- [D](#) [CD](#) The K&D Sessions™ (White G-Stone symbol on cover) · 1998 ↗
- [E](#) [CD](#) The K&D Sessions™ (Black G-Stone symbol on cover) · 1998 ↗
- [F](#) [LP](#) The K&D Sessions™ · 1998 ↗
- [G](#) [D](#) The K&D Sessions™ · 2014 ↗
- [H](#) [D](#) The K&D Sessions™ (25th Anniversary Edition) · 2024 ↗
- [I](#) [CD](#) The K&D Sessions™ (25th Anniversary Boxset Edition) · 2024 ↗

paste release URLs / MBIDs to add them to the matrix...

ROLE	ENTITY	B CD	D CD	E CD	F LP	I CD
compiler	Kruder & Dorfmeister	-	-	E	-	-
manufactured in	Portugal	-	-	E	-	-
manufactured	Sonovis "SNV CD"	-	-	E	-	-
mix-DJ	Kruder & Dorfmeister	-	-	E	-	-
mix-DJ	Kruder & Dorfmeister	-	-	-	F	-

[Auto select](#) [Clear](#) nothing selected [Apply](#)

Work matching

The **© Match works...** button links each recording on the release to an existing MusicBrainz work, so a release of standards or a hits compilation **reuses** the works that already exist instead of creating duplicates. It opens a review table — one row per recording, track on the left, matched work on the right.

Match recordings to works

— type —

lyrics language...

...

matched 36 tracks [Cutoff](#) [near](#) [1 unresolved](#) [Match](#)

Track			Work	
#	Title	Artist	Work	Writers
1.1	Beat It	Michael Jackson	Beat It	Michael Jackson 🎵 Michael Jackson, Fall Out Boy feat. John Mayer, Fall Out Boy
1.2	Hungry Like the Wolf	Duran Duran	+ new work: Hungry Like the Wolf	Andy Taylor, John Taylor, Simon Le Bon 🎵 Duran Duran, Hole, Reel Big Fish
1.3	The Power of Love	Huey Lewis & the News	+ new work: The Power of Love	Huey Lewis, Johnny Colla,
1.4	Uptown Girl	Billy Joel	Uptown Girl	by Billy Joel Current: Uptown Girl — Billy Joel ↗
1.5	Flashdance...What a Feeling	Irene Cara	Uptown Girl	— Billy Joel · 🎵 Billy Joel, Westlife, Me First and the Gimme Gimmes ↗ Uptown Girl · 🎵 The Beths ↗ Uptown Girl — Justin Keller, Colin Dean, Jaz Dixon · 🎵 Radio Birds ↗
1.6	Footloose	Kenny Loggins	Uptown	— Barry Mann, Cynthia Weil · 🎵 The Crystals, Bette Midler, Little Eva ↗ Uptown — Prince · 🎵 Prince, Crystal Waters, Ida ↗ Uptown Girls — Jan Leyers, Joey Balin · 🎵 Soulsisters, Soulsister ↗
1.7	Overnight Success	Teri DeSario	Girl From Uptown	· 🎵 Michael Schenker Group ↗ Uptown — Hugh Cornwell, Jean-Jacques Burnel, Dave Greenfield · 🎵 The Stranglers ↗ Uptown (Die Art) — Makarios, Christoph Heinemann · 🎵 Die Art ↗ Uptown — Bobby Gillespie, Gary Mounfield, Martin Duffy · 🎵 Primal Scream ↗

[+ New work for unresolved](#) 35 works to add

The hard part is disambiguation — a bare title like *Beat It* matches many works. Two signals drive it:

- **ISRC** — recordings that share an ISRC almost always share a work; an `/isrc` lookup returns those works (an MB text *search* can't), the strongest signal when ISRCs are present.
- **Work autocomplete** — MB's own `/ws/js/work` endpoint (the one the native *Add relationship* → *Work* field uses). It returns the writers, work type, disambiguation, and **how many recordings already use each work**. Candidates are ranked by **exact-title match**, then by **popularity** — so *Beat It* resolves to Michael Jackson's work (100+ recordings) over the same-named covers. Exactness ignores a descriptive trailing parenthetical, so *Take My Breath Away (love theme from "Top Gun")* still matches the work *Take My Breath Away*.

Each row gets a **confidence dot**:

Dot	Meaning
blue	ISRC-confirmed — a sibling recording with the same ISRC links this work
green	unique title — the only work with exactly this title
yellow	dominant — exact title and clearly the most-recorded work, but other same-titled works exist
red	ambiguous — several plausible works, often wrong; check it

Available options:

- **Cutoff** — confidence level (persisted)
- **Match** — selects every row at and above the current cutoff (disabled while matching runs)
- (per row) — opens a picker to **search** works (writers + type shown per candidate), **paste a work MBID/URL**, or **+ create a new work**.
- **+ New work for unresolved** — creates a new work (named after the track) for every recording still unmatched
- **Clear all** — removes all work associations in the review table (in the ▾ menu next to Match)

Apply dispatches all associated works into the relationship editor, where they show up in MB's **pending edits** — the script never submits; you review and **save** yourself.

Text parser

The **Text parser...** button ([#522](#)) turns unstructured credit text — liner notes, a Bandcamp/Discogs credits block, or a release's own annotation — into release-level relationships. Same idea as [Apollo's](#) pattern-based track parser, adapted for credits.

Text parser

Load annotation

R: A[,&]

×

R: A

×

A - R[,]

×

R - A

×

A: R

Scope: Release

▼ Paste credit text

Produced by: Gabriel Aldama
Coproducted by: Jean-Phi Goncalves & Francois Plante
Recording, mix & mastering @ Studio D.A.Q.
Recorded by: Eric Lauzon
Mixed by: Borza Ghomeski, Eric Lauzon & Gabriel Aldama
Pre-mastering: CRISTO
Final mastering: Borza Ghomeski
Photo: Shannon Hanssen

PATTERN	RAW LINE		ROLE	ARTIST	→ ROLE	→ ARTIST	
R: A[,&]	Produced by: Gabriel Aldama	×	Produced by	Gabriel Aldama	producer	search	artist?
R: A[,&]	Coproducted by: Jean-Phi Goncalves & Francois Plante	×	Coproducted by	Jean-Phi Goncalves	search	Jean-Philippe Goncalves	role?
R: A[,&]	Coproducted by: Francois Plante	×	Coproducted by	François Plante	search	François Plante	role?
R[,&] @ A	Recording, mix & mastering @ Studio D.A.Q.	×	Recording	Studio D.A.Q.	recording	search	artist?
R: A[,&]	Recorded by: Eric Lauzon	×	mix	Studio D.A.Q.	mix	search	artist?
R: A[,&]	Recorded by: Eric Lauzon	×	mastering	Studio D.A.Q.	mastering	search	artist?
R: A[,&]	Mixed by: Borza Ghomeski, Eric Lauzon & Gabriel Aldama	×	Recorded by	Eric Lauzon	recording	search	artist?
R: A[,&]	Mixed by: Borza Ghomeski, Eric Lauzon & Gabriel Aldama	×	Mixed by	Borza Ghomeski	mix	search	artist?
R: A[,&]	Mixed by: Eric Lauzon	×	Mixed by	Eric Lauzon	mix	search	artist?
R: A[,&]	Mixed by: Gabriel Aldama	×	Mixed by	Gabriel Aldama	mix	search	artist?
R: A[,&]	Pre-mastering: CRISTO	×	Pre-mastering	CRISTO	mastering	search	artist?
R: A[,&]	Final mastering: Borza Ghomeski	×	Final mastering	Borza Ghomeski	mastering	search	artist?
R: A[,&]	Photo: Shannon Hanssen	×	Photo	Shannon Hanssen	photography	search	artist?

13/13 matched

Resolve all

Apply

Paste text (or click **Load annotation** to pull the release's latest annotation straight into the box) and type a **pattern**:

- R: E — Mastering: Nick Robbins
- E - R — Nick Robbins - Mastering
- E[,] - R[,] / R[,] - E[,] — Cameron Allen - Flute, Tenor Saxophone splits the role text on commas (and [, and] also splits on the word "and"), turning one line into several rows — one per role, same entity. Splitting *both* sides is more general than picking just one: a side with no comma is simply a no-op split, and a comma on both sides produces every (role, entity) combination — Producer, Mixer - Alice, Bob becomes 4 rows. R: E[,] does the same split on a colon-separated line — Published by: Warner Chappell, Sony Music Publishing becomes two rows, same role. [&] splits on & instead of a comma — R: E[&] for Graphic Design: Ricardo H Fernandes & Yacine Blaeich (needs surrounding whitespace, so a real name like "AT&T" isn't split mid-word).
- A line can also hold **several credits at once**, separated by ; — Guitar: Alice; Bass: Bob becomes two rows.

E stands for **entity** — the credited name can resolve to either an artist, label or place, decided per row (see below), not fixed by the pattern.

A **legal/copyright notice line** is recognized automatically by its marker — no pattern is used — and produces one row per notice found. Recognized markers: ©/(C)/copyright, ®/(P)/phonographic copyright, licensed to / licensed from / under exclusive license to/from, distributed by, marketed by (and marketed and distributed by, which fires both). A year right after the marker is optional and, if there are several ("1994, 1996"), it's dropped rather than guessed at which one applies. A single year is applied as **both** the begin and end date, so MB renders the relationship as "in 2021" rather than "from 2021 to present" — a notice year is a point in time, not an open range. That is [MB's own guideline](#) for these relationship types: "When a year is specified (as in "© 2015 Naxos Rights US, Inc."), use that year as both the begin and end date." Multiple holders on one line — © 2012 Shady Records/Aftermath Records/Interscope Records — split into one row per holder (on / or | ; a piece has to look substantial enough on its own to count, so real names like "SA/NV" aren't chopped in two). Ordinary credits and notice lines can be pasted together in the same block.

A line that packs **two different holders under two different markers** — Copyright: Albarika Stores BV under exclusive license to Acid Jazz Acquisitions — is auto-split into two separate lines (one marker each) the moment you paste it or load an annotation, so each holder ends up correctly separated instead of both rows sharing the same undifferentiated text. This only runs once, right after the paste/load — it won't fight you while you're editing by hand afterward.

Every entity resolves as an **artist**, **label**, or **place** decided per row: a role that only exists for one entity (e.g. *published* is label-only, there's no artist-release equivalent at all) forces the picker to use that entity automatically, with no toggle offered. A role that exists for multiple entities (e.g. *copyright* which exists for both artist and label), or doesn't resolve at all yet, defaults to a **label** but auto-detects as an **artist** when the name matches one of the release's own credited artists (the usual reason the ambiguity comes up — a self-released artist crediting themselves).

Every parsed line gets its own preview row, tinted by status (amber = matched but not fully resolved, red = the pattern didn't match at all, plain = ready). Role/entity auto-resolve where unambiguous — including a fuzzy fallback ("mastered by" finds "mastering", "compiled" finds "compiler"), a specific-instrument fallback, and a score-based tie-break when MB returns more than one exact name match but one is a clearly better result (e.g. a distinctly higher search-relevance score than a same-named duplicate/bootleg entry). Use ⚡ **Match** at the top of the window to run auto-resolution.

Where a role/entity isn't resolved, a **search** link opens a picker (search, paste an MBID/URL, or "+" to create a new artist/label right from the search box). For an already-resolved entity specifically, a left click reopens the picker while a **right click opens the entity itself** in a new tab. When the same name appears on several rows (e.g. one person credited with four different instruments), a normal click on a search result resolves **every row sharing that text** — right-click a result to resolve only the row you clicked ([#544](#)).

Pasting an MBID or URL resolves it immediately — there is nothing to choose between, so no result row appears to click. The + button creates the missing artist/label with its name, sort name and type pre-filled and an edit note attributing

the creation; **right-click +** opens it as a real background tab (the created page posts its MBID back, as Credit Hoarder does), so a run of unresolved names can be fired off and picked up as each one lands. Whatever is in the **search box** is what gets created — trim a **(suffix)** off the name before pressing + and the trimmed name is used.

The role picker is keyboard-navigable: type to filter, **↑/↓** to move (**PgUp/PgDn**, **Home/End** to jump), **Enter** to take the highlighted role, **Esc** to cancel.

Each line can be fixed up without leaving the table: a **pattern override** applies just to that line, its **raw text is directly editable** (writes back into the pasted text above), and **X** removes the line entirely (from both the table and the source text). The window has a **maximize** button and **drag-resizable columns**.

Scope at the bottom-left of the window decides where the credits land: the **Release** (default), or specific **Recordings**. Choosing Recordings reveals a track selector taking any mix of:

you type	you get
3 or A1	the track with that number, as shown in the editor
5-7	tracks 5 through 7
1,3	just those
2:4 / 2:4-6	track 4 (or 4–6) on medium 2 — a colon, so 2-4 can only ever mean a range
2:*	every track on medium 2
all	every track
(empty)	the tracks ticked in the editor

A plain number that matches no position shown in the editor is taken as the **Nth track** — so on a vinyl, whose positions read **A1 / B2**, a liner note's "tracks 1, 2, 4" still finds **A1**, **A2** and **B1**. A position that exists literally always wins, so nothing on a CD changes.

The roles offered follow the scope too: artist→recording and artist→release are different link-type vocabularies in MusicBrainz (a recording has no "booklet editor", a release has no "video appearance"), so switching scope re-matches the roles. The edit note records where the credits went — *Parsed 2 credits from text to 2 recordings (tracks 1, 3)* — so a reviewer can tell which tracks a batched edit touched.

Apply stages the resolved rows as real relationships in the editor and closes the tool — nothing is submitted; you review and save yourself. If the text came from **Load annotation**, an **Apply & clear annotation** button also appears: it applies, then opens the release's own annotation editor pre-cleared so you can review and submit removing the now-redundant free text in one more click.

The pasted text and every resolution made so far are remembered for as long as the page stays open — closing and reopening the tool picks up where you left off, but a real page reload starts fresh.

 beside the pattern box (*Freeze matched*) pins the current pattern onto every line that still uses the default pattern *and* already matches it, so you can then try a different pattern on what is left without disturbing them — the same idea as Apollo's own freeze.

Deliberately single-line-only: multi-line/grouped-block credit formats aren't parsed.

Credits that name their own tracks

Liner notes scope credits in the text itself — "Aloula Basil: Lead vocals (tracks 2,6,9)". With **Tracks: auto** (the default, beside Scope) that clause is read, removed from the role text and used as **that row's** destination; every other row still follows **Scope**. So a block where most credits are album-wide and a few name tracks applies in **one** run.

Recognized: (tracks 1,2,4) , (track 3) , (trk 4) , [tracks 1-3] , a trailing on tracks 2, 6 and 9 , and bare forms with no *track* word at all — (2,6,9) , (A1, B2) , or just (1) , the shortest way to name one track. The **tracks** column shows what each row resolved to before you apply anything, and the edit note names both destinations — *Parsed 14 credits from text — 9 on the release and 5 to tracks 2, 4, 6, 9 named in the credit text.*

A clause only counts when **every** number in it is a real track on this release, which is what keeps (2003) a year rather than a track list — no list of things-to-ignore is involved, and anything unrecognized simply stays release-level.

One line carries **one** track list. Martin Cradick: Mandolin (tracks 1,2,4,7,8), Guitar (tracks 3,5,6,8,9). has two, so nothing can tell which role owns which — the row says **Δ split line** and stays release-level until you split it into one role per line. **Tracks: off** restores the old behaviour, where Scope alone decides for every row.

Replace role

Right-click a credit's **pencil** to get **Replace role ... (#470)**. Two scopes, mirroring the x-menu's:

- **Replace role "writer" ...** — every credit with that role
- **Replace "writer" for "X" ...** — that role only where the far end is that one artist

Both narrow to the **ticked recordings/works** when you have a selection, and act on everything when you don't. Pick the new role from a searchable list of the link types MusicBrainz actually accepts for that entity pair; roles you've used recently float to the top.

The motivating case ([community request](#)): an all-instrumental jazz release whose works are all credited *writer* when they should be *composer* — tick the works, right-click one writer credit, replace, done.

MusicBrainz has no bulk "change relationship type", so this is a remove + re-add of the same pair under the new type. Like everything else here it only stages the change in the relationship editor — you review and **save** yourself.

Note

Attributes don't carry over. They belong to a specific link type (a *drums (drum set)* attribute means nothing on *composer*), so MusicBrainz would reject or silently drop them. Credits that had attributes are counted in the confirmation toast so you know which ones to look at, rather than being quietly mangled.

Highlight

Hover any entity name or role label to light up every matching occurrence on the page (existing rels blue/white, newly-added blue/yellow), with a tooltip showing the count and which tracks / the release it appears on, e.g. 48x · tracks 1–12.

☐ **Give Peace a Chance**

lyricist:    John Lennon (The Beatles)

composer:    John Lennon (Lennon, John (The Beatles)

publisher:    Blackwood Music (3x · tracks 5, 14) —12-30)

  Northern Songs Ltd.

  Sony/ATV Music Publishing LLC (1995–2020)

  Sony/ATV Tunes LLC (ASCAP)

Edit note

When (and only when) you actually **use** Group Therapy on a page, it stamps MB's edit-note field with a signature line and, under it, an accumulating list of what it did — e.g. *Copied 2 credits from track 1 to tracks 2–5, Removed guitar (14)*. Any note already in the field is preserved, the signature is written once, and identical action lines aren't repeated.

Consolidated 8 release-level credits across the release group onto this release:

- compiler — Duncan Brooker
- copyright — K7 Music GmbH
- design — Matt Thame
- instrument technician — Colin Young
- mastered at — The Carvery
- misc — Duncan Brooker
- misc — Quinton Scott
- phonographic copyright — K7 Music GmbH

Group Therapy* by majkinetor v2026.7.3.172727 - <https://github.com/majkinetor/musicbrainz-usersc...>

Settings

Open the **settings** popover from the toolbar. Every option is remembered per-browser (via the userscript manager).

Option	Default	What it does
Hide help text	on	Hides MusicBrainz's two help paragraphs at the top of the edit-relationships page.
Hide native batch tools	off	Hides MusicBrainz's own batch-tools table (<code>#batch-tools</code>).
Auto-match on start	off	Opens the work matcher and runs matching automatically when the page loads.
Auto-match on open	off	When you open the work matcher, runs matching automatically (otherwise it opens unresolved and you click ⚡ Match).
Uncollapse media on start	off	On load, clicks MusicBrainz's Expand all mediums so every medium's tracks are reachable during the fill phase (MB collapses mediums past the first few). Expanding a large release takes a moment.

Shortcuts

Where	Action
right-click a relationship's ×	open the group-delete menu
right-click a recording's checkbox	copy / move its credits to the ticked recordings (or all tracks if none ticked)
right-click a work's checkbox	copy / move that work's credits (writer/composer/...) to the ticked works
right-click an entity name (artist / work / label / place / ...)	open that relationship's edit dialog (invokes its pencil) — a bigger target than the small edit icon
right-click a credit's + / pencil	copy scoped to that role / that one credit
right-click a dated rel's pencil → <i>Set dates from...</i>	open the date picker — pick date + credits across the selected tracks
right-click a credit in the copy list	select only that role · Shift adds a role to the selection
[A] / [R] on a credit (hover)	select all tracks crediting that artist · in the same role
hover an entity name / role label	highlight all matches + show a count tooltip

Under the hood

Group Therapy drives MusicBrainz's own relationship editor: it reads each relationship straight off the rendered rows (via their React state) and writes changes through MB's reducer — the same mechanism [Credit Hoarder](#) uses to dispatch

credits.

The small MB-editor dispatch helper is **bundled directly into this single file** rather than shared as a separate module, so Group Therapy stays a one-file, dependency-free userscript. If that helper is ever extracted into a standalone library for both scripts to import, it will live **outside** either userscript and be documented on its own.

ISRC Scout

Shows the release's existing ISRCs and lets you fill in the missing ones from several sources. Finds and manages external links of the recordings.

- Install: [stable](#) or [latest](#)
 - Or via bundle: [String Theory](#)
- [Changelog](#)
- [View users](#)

The screenshot shows the ISRC Scout application interface. The main window displays a table of tracks with columns for #, TRACK, ISRC: LINKED, ISRC: NEW, LINKS: LINKED, and LINKS: NEW. A modal window titled "SoundExchange — Djugudé Fidalgo Obi Francis — Super Mama Djombo" is open, showing search results for ISRCs. The modal includes a search bar, a list of results with ISRC numbers and track details, and buttons for "Delete ISRC", "Edit note", and "Submit to MusicBrainz (1 ISRC)".

Features

- **ISRC badge** showing how many are missing
- **ISRC** — a per-track table of existing/new ISRCs with live validation
 - **Import sources** — fill the missing ISRCs from several providers
 - **Delete existing ISRCs** in bulk
 - **Per-track helpers** — per-row provider lookup with metadata match checks and highlighting
 - **Submit to MusicBrainz** — one-time OAuth, then submit straight from the editor
- **Links** — find and add streaming / store links to recordings (Deezer, Tidal, Beatport, Volumo, Qobuz, Bandcamp, Apple Music, SoundCloud, Spotify), and see every other provider a recording already links to.
 - Find links based on release external links and ISRCs
 - **Batch ending or removing** link relationship
- Using release group external links and [Platform Check](#) links

Providers

ISRC Scout has **two independent provider systems** — a provider can support one without the other:

1. **ISRC import** — bulk-fills the missing ISRCs on the release from a provider.
2. **Per-track links** — resolves a per-track provider URL and offers it in the **Add** column of the Links tab.

Provider	ISRC import	Per-track link	How the link resolves
Deezer	✓	✓	by ISRC — global by-ISRC lookup, works on any release
Tidal	✓	✓	by ISRC — official API (baked-in app token), any release
Beatport	✓	✓	by album — the Beatport tracklist (id + ISRC), matched by ISRC
Volumio	✓	✓	by album — the Volumio album JSON (id + ISRC), matched by ISRC
Bandcamp	–	✓	by album — album page track list, matched by position + title
Apple Music	✓	✓	by album — the amp-api album tracklist (id + ISRC) read anonymously (token from the web-player JS, no login); ISRC import matched by position, per-track link from the <code>1d+json</code> . Legacy iTunes links (<code>itunes.apple.com/.../album/id...</code>) are recognized as the same album
SoundCloud	✓	✓	by set — the release's SoundCloud set (playlist) is the album; each track's <code>publisher_metadata.isrc</code> is read anonymously from api-v2 (public <code>client_id</code> from the web-player JS, no login), matched by position. A bare track URL is handled too, as a single-track release. The per-track link (free streaming) is the track's permalink, matched by position + title. Distributed sets also carry the release barcode (<code>upc_or_ean</code>), which Scout logs (it doesn't set barcodes — that's Platform Check's job)
HDtracks	✓	–	download store — no per-track pages to link
SoundExchange	✓	–	metadata search only; returns no addable URL
Spotify	✓	✓	by album — the token-free <code>open.spotify.com/embed/album/<id></code> page ships the ordered tracklist (<code>__NEXT_DATA__</code>); per-track link (free streaming) matched by position + title. ISRC import is still via ISRC Hunt (which never exposes the track id)
Qobuz	✓ ¹	✓ ¹	¹ needs a Qobuz login in Platform Check (album/get is session-gated). ISRCs matched by position; per-track link is the id-only <code>open.qobuz.com/track/<id></code> , matched by ISRC

Important

Album-based providers (everything except Deezer/Tidal) need the release's album link — either already in MB, or one [Platform Check](#) found by barcode, or a URL you paste yourself.

Warning

Album imports map tracks **by position**, trusting the link — provider titles legitimately diverge (`(feat. ...)` , remaster suffixes), so title mismatches alone don't block anything. But each position-matched fill is checked against the MB track **length** (>10 s off ⇒ probably a different recording): suspicious fills stay filled but get an **amber input + tooltip**, a log warning per row and an `⚠ N implausible` count in the summary. A linked album with **more tracks than the release** is called out as a likely wrong link/edition before the fills even finish. Verify amber rows (e.g. right-click the row's ISRC lookup) before submitting.

Beyond these, the Links tab's **Linked** column also **shows every other provider a recording already links to** (YouTube, Amazon Music, or any host by its name) — even ones ISRC Scout can't add. It can't *add* those, but it **can end / remove** them (that acts on the existing relationship). See [other linked providers](#).

Qobuz auth in Platform Check

Qobuz per-track ISRCs live behind the session-gated `album/get` endpoint — sign in once under **Platform Check** → ⚙️ **Setup** → **Auth** → **Qobuz account** and Scout reads the shared token. Without it, the Qobuz button stays hidden.

Qobuz is also the one provider that geo-blocks anonymous access (it takes a VPN to create the account). Once you're registered and logged in, geo-blocking is no longer a factor.

ISRC badge


An **ISRC** button is injected next to the release title, showing how many tracks already have an ISRC (✓ 12/12) or pulsing pink when some are missing (⚠ 9/12). Click it to open the editor.

ISRC editor

A table of every track with its existing ISRCs and an input for the new one. Live validation flags invalid (red), duplicate (orange), and good (green) values. The footer shows how many will be submitted.

Import sources

Header toolbar lists available ISRC import sources for the current release. Sources can be generic or depend on appropriate external links and can additionally come via custom URL.

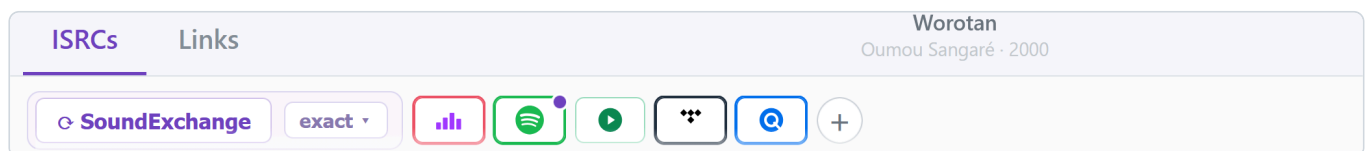

On above screenshots there are 3 types of sources represented by provider icon markings:

1. With border - from external links in release
2. No border - from [Platform Check](#) (must be installed)
3. Blue dot - from release group (with [option](#) *Use providers from the whole release group*)

Circled providers are from the release, non circled from Platform Check, and blue dot in right upper corner represents provider from the release group.

Button (+) lets you import from an URL — paste any album URL to import from it, even when the release has no such link.

Button	Source	Auth	Notes
 SoundExchange	SoundExchange	none	Searches each track by title/artist, shows candidate ISRCs per row, auto-fills confident matches into empty fields. Searches are capped at 30 at a time so SoundExchange doesn't block us — remaining tracks show a <i>"Not searched — click to load the next 30"</i> message; click any one to continue.
Deezer	<code>api.deezer.com</code>	none	Enabled when the release has a Deezer album relationship. Fetches each track's ISRC and maps by disc/position (title fallback). Deezer needs one request per track , so imports are capped at 50 tracks per batch (a <i>"Deezer N/M — click to fetch the next 50"</i> prompt continues) to avoid spamming Deezer on huge releases.
Spotify	<code>isrc.mollamusicgroup.com</code> or <code>isrchunt.com</code>	none	Enabled when the release has a Spotify album relationship. Delegates to molla or ISRC Hunt (chosen in ⚙ Setup), which do the Spotify lookup server-side — see Spotify
Beatport	<code>beatport.com</code> release page	none	Enabled when the release has a Beatport relationship. Beatport is Cloudflare-walled, so a direct cross-origin fetch is always blocked — instead the script opens the release in a brief background tab where the page (which the script also runs on) reads the ISRCs out of the embedded <code>__NEXT_DATA__</code> and hands them back, then the tab closes. Results are cached, so a repeat import (or one after you've simply visited the page yourself) is instant.
Tidal	<code>openapi.tidal.com</code>	app token (baked in)	Enabled when the release has a Tidal album relationship. Uses Tidal's official API with a built-in client-credentials app token (catalog access, no user login); maps each track's ISRC by disc/track number.
Volumo	<code>volumo.com/api/v1</code>	none	Enabled when the release has a Volumo relationship (or one Platform Check found via barcode). Clean unauthenticated API — one call returns every track's ISRC; no Cloudflare/token. Link-only, like the others.
HDtracks	<code>hdtracks.azurewebsites.net/api/v1</code>	none	Enabled when the release has an HDtracks relationship (or one Platform Check found via barcode). Clean unauthenticated, CORS-open API — one <code>/album/<id></code> call returns every track's ISRC inline; no per-track fan-out, no token. The album id is a 24-char ObjectId; a barcode/UPC (e.g. from a legacy <code>valbum_code</code> rel) is resolved to it via search first.
Apple Music	<code>music.apple.com</code> amp-api	none	Enabled when the release has an Apple Music relationship (or one Platform Check found). Reads the anonymous amp-api album tracklist (bearer

Button	Source	Auth	Notes
			token lifted from the web-player JS, no login) and maps each track's ISRC by position. Legacy <code>itunes.apple.com/.../album/id...</code> links are recognized as the same album.
SoundCloud	<code>api-v2.soundcloud.com</code>	none	Enabled when the release has a SoundCloud set relationship (a bare track URL works as a single-track release). Reads each track's <code>publisher_metadata.isrc</code> anonymously from api-v2 (public <code>client_id</code> lifted from the web-player JS, no login), mapped by position. Distributed sets also carry the release barcode (<code>upc_or_ean</code>), which Scout logs (it doesn't set barcodes — that's Platform Check's job).
Qobuz	<code>www.qobuz.com/api.json/0.2</code>	login	Enabled when the release has a Qobuz relationship (or one Platform Check found) and you're signed in to Qobuz under Platform Check → ⚙ Setup → Auth. One <code>album/get</code> call (with the shared token) returns every track's ISRC; matched by position. A barcode/UPC is resolved to the album id via <code>album/search</code> (zero-padded). Session-gated — see above.

Platform Check links

A Platform Check link that PC **withheld for a barcode/format mismatch** is **not** used here by default (#314). In principle an ISRC identifies a *recording* and is independent of the release's barcode/format — but a barcode mismatch can equally mean PC matched the **wrong release** (e.g. a 1-track Beatport single by a same-prefixed artist), whose ISRCs would be wrong. To deliberately read ISRCs from a barcode/format-mismatched edition anyway, enable ⚙ **[Setup] → Ignore Platform Check link confidence**. Genuine content mismatches (wrong track count, etc.) are always skipped, and an in-MB link or a custom URL you paste yourself is unaffected.

Spotify

Spotify's own ISRC API needs a paid developer account, so the lookup goes through a service that does it **server-side** with its own credentials. Pick one in ⚙ **Setup → Spotify ISRC source**; if one is down or rate-limited, switch to the other (#603).

- **molla** (default) — one `POST /api/spotify` with the album link returns every track's ISRC as JSON. It gives album order only, no track or disc numbers. When its track count matches the release, ISRCs are mapped by position across all media; otherwise they're placed by title/artist match only, and tracks that don't match stay empty. Its Spotify quota is shared by every molla user, so a burst can hit a temporary rate limit; Scout reports it and a retry a minute later works.
- **ISRC Hunt** — the script fetches `isrchunt.com/spotify/importisrc?releaseId=<album url>`, scrapes the HTML table of ISRCs, and maps them by disc and position.

Beatport

Beatport release pages embed the full tracklist — including each track's ISRC — in their `__NEXT_DATA__` hydration JSON, but the site is behind Cloudflare, so a `GM_xmlHttpRequest` from MusicBrainz is always challenged. To get around that the script **also runs on** `beatport.com/release/*`: when you import, it opens the release in a background tab, the in-page copy reads the ISRCs from `__NEXT_DATA__`, stashes them in shared storage for the MusicBrainz tab, and the tab closes itself. Tabs you (or Platform Check) open are harvested too but left open. Harvested ISRCs are cached per release.

Tidal

Uses Tidal's official API (`openapi.tidal.com`) with a baked-in client-credentials app token — app-level catalog access, so **no Tidal login is needed**. It reads `/albums/{id}/relationships/items` , taking each track's ISRC from the included track resources and the disc/track number from the relationship metadata.

Per-track helpers

5

Pepper Pot
Count Machuki

none

USCNC1200298

+1

SX

✓ Pepper Pot · Count Machuki
Pepper Pot · Randy'S Music Group, Inc.

USCNC1200298

Pepper Pot · Count Machuki

refine search / more...

SX

SoundExchange

Deezer

Tidal

6

Ain't It Groovey
Buster Pearson

none

—

+1

SX

GB5KW1800760 Ain't It Groovey · The Buster Pearson band · 1973 · 2:56 · Trojan 50: The Rare and Unreleased · Trojan Records · 2018-08

CAP8Y1700006 Love Ain't It · Leanne Pearson · 2018 · 193:00 · Pull It Off · Leanne Pearson · 2018-09

GBARL0800001 She Ain't My Baby · Buster · 1978 · 3:02 · Buster 2 · Sony Music CG

GBQRF1022569 Ain't Misbehavin' · Buster Williams · 2010 · Ain't Misbehavin' · Vanilla OMP

USGZ20819260 Ain't Misbehavin' · Buster Williams · Dreams Come True · Essential Media Group LLC

refine search / more...

7

Children Get Ready
The Versatiles

none

GBUM71205640

+1

SX

✓ Children Get Ready · The Versatiles · 1968 · 2:58
More Monkey Business · Trojan Records · 2017-08

GBUM71205640

Children Get Ready · The Versatiles · 1968 · 2:58 · More Monkey Business · Trojan Records · 2017-08

- **+1** — fill with the previous track's ISRC incremented by one.
- **ISRC lookup**
Displays track metadata from the ISRC provider. It takes the ISRC in the row (entered or existing) and looks it up **on the selected provider**, showing that track's metadata (title · artist · length, mismatches highlighted) next to the row. It's menu lets you choose an available provider: SoundExchange (default) plus every other provider available for the release. Picking one re-skins **all** per-track buttons to that provider's icon (global for the release, not remembered). **Right-click** a button to inoke on all tracks. Providers with a global by-ISRC endpoint (**SoundExchange, Deezer, Tidal**) work on any release; the album-based ones (**Beatport / Vولو / HDtracks / Qobuz / Apple Music / SoundCloud**) read the release's album (so they need its link, in MB or found by Platform Check) and match by ISRC.
- **🔍 search on SoundExchange**
Open a panel where you can tweak the title/artist/release + exact toggles for SX. The panel has a **Search on SoundExchange** ↗ link that runs the same query on the SoundExchange website.

To avoid overloading ISRC providers, lookup is not called automatically as you type or when values are imported from provider or set via **+1**. A field is verified on provider only when you **unfocus a manually-typed ISRC**, press the row's **ISRC lookup** button, or run the bulk **🔍 SoundExchange** search (as values picked from a SoundExchange without extra request). If SoundExchange shows a captcha or rate limit error, it is shown in the toolbar. Resolve captcha manually to continue.

Match checks & highlighting

Every ISRC result is checked against the MB track and **mismatching fields are highlighted in red** (wavy underline, with a tooltip):

Field	Check
Title	word-set match (tolerates a couple of extra words, e.g. a version suffix)
Artist	word-set match either direction
Year	the recording year must be ≤ the MB release year (+1) — a later recording can't be the source of release's ISRC
Length	flagged when it differs from MB by > 10 s ; MB's length is shown inline (⚡ m:ss) for comparison

A result that passes all checks is the **best** match (blue, auto-filled when the field is empty); a length-only disagreement is a **warn** (yellow); a title/artist/year disagreement drops it out of the auto-fill running entirely.

Deleting existing ISRCs

Check the box next to any existing ISRC and click **Delete checked**. Deletion goes through the MusicBrainz recording-edit form using your logged-in session (ISRC removal isn't a WS2 operation), and each removal is verified via the web service. Creates normal "Remove ISRC" edits — so you must be logged into musicbrainz.org.

Bulk / Export

- **Paste** one ISRC per line in track order (blank line skips a track), or target specific tracks: `3=USABC1234567` , `USABC1234567` | `1.3` (medium.track), or `1.3 USABC1234567` .
- **Apply to empty fields** / **Apply (overwrite)**.
- **Export text** (one per line) / **Export JSON** (`{ recordingMBID: "ISRC" }`) — copied to clipboard.

Links

ISRC Scout also adds **streaming / store links to recordings** in the background. The **Links** tab shows two columns per track:

- **Linked** — what the recording already links to on MusicBrainz (brand-coloured icon per provider). This includes **every** provider it links to, not just the ones ISRC Scout can add — see [other linked providers](#) below.
- **Add** — links found but not yet on MB.

ISRCs

Links1 missing

Next Stop Soweto: Township Sounds From the Golden Age of Mbaqanga

Various Artists · 2010

Find links

#	TRACK	LINKED	ADD
11	Emuva African Swingsters	2:33	
12	Umaduna Omnyama Ubhekitshe Namajongosi	2:43	
13	Mr J.S. Mpanza Lucky Strike Sisters	2:16	
14	Sikhwele Aba-Lilizeli	2:55	
15	Soul Chakari Reggie Msomi & His Hollywood Jazz Band	2:45	
16	Jabulani Balaleli (Part 2) Amaqawe Omculo	2:44	
17	Nomacala Piston Mahlathini & The Queens	2:45	
18	10 to 11 Sammy Boy	2:22	
19	Awufuni Ukulandela Na? Izintombi Zesi Manje Manje	2:26	
20	Iza Wena (Happy Africa) [unknown]	2:40	

20 tracks · 74 links · 1 track with none · 44 to add

Edit note

Submit to MusicBrainz (44 links)

Providers

Provider	How it resolves	MB link type
Deezer, Tidal	by ISRC — a global by-ISRC lookup, so it works on any release whose tracks have ISRCs	free streaming / streaming
Beatport, Volumes	by album — the release's Beatport/Volumes album carries every track's ISRC (and id), so the per-track URL is matched by ISRC. Both are download stores → <i>purchase for download</i>	purchase for download
Qobuz	by album — <code>album/get</code> (with the shared Platform Check login token) carries every track's ISRC + id; the per-track link is the id-only <code>open.qobuz.com/track/<id></code> , matched by ISRC. Needs the Qobuz login	purchase for download
Bandcamp, Apple Music	by album page — the release's Bandcamp/Apple album link lists every track URL, matched to the tracklist by position + title (a title mismatch is skipped, never guessed)	free streaming / streaming
SoundCloud	by set — the release's SoundCloud set (playlist) lists every track's permalink, matched by position + title ; a bare track URL is handled as a single-track release	free streaming

A provider is offered for a track only when it's resolvable (Deezer/Tidal need that track's ISRC; Beatport/Volumes/Bandcamp/Apple/SoundCloud need the release's album link) or the recording is already linked to it.

Other linked providers

The **Linked** column also surfaces **every other provider a recording already links to** — Spotify, Qobuz, YouTube, SoundCloud, Amazon Music (each with its name/colour), or any other host shown with a generic globe by its hostname — so you see the full picture of a recording's links in one place, even for providers ISRC Scout can't resolve.

ISRC Scout **can't add** these (there's no per-track resolve path for them), but **ending and removing act on the relationship that's already there** — that's a plain edit by URL, no resolve needed — so they get the **same end / remove actions** as the providers it manages: **right-click** toggles *ended*, **middle-click** removes, with the usual `Ctrl` (whole track) / `Alt` (that provider everywhere) modifiers. Only the **Add** column is unavailable for them (once removed, ISRC Scout can't offer it back). (*Spotify and Qobuz have no anonymous ISRC→track URL, so per-track adding isn't possible; they appear here only when already linked.*)

Dead links aren't offered. Deezer keeps an ISRC→track mapping even after it pulls the audio, so a by-ISRC lookup can return a track that no longer streams anywhere (Deezer reports it as unreadable, available in zero countries). Find links treats such a track as not found, so it won't offer a broken link to add.

Finding & adding

-  **Find links** resolves every track on the available providers and lights up the **Add** column with what's addable (a coloured icon = found, not yet linked). Providers resolve **in parallel** (each with its own light rate-limiting), and the album-based ones (Bandcamp / Apple Music) fetch the album page just once — so a full release resolves in a few seconds rather than one request at a time.
- On an **Add** icon: **left-click** opens the provider track · **right-click** adds it · **Ctrl + right-click** adds every link on that track · **Alt + right-click** adds that provider across all tracks.  **Add links** in the footer adds everything found at once.
- Adds happen **in the background** via MusicBrainz's internal edit API over your **logged-in session** — no OAuth needed (unlike ISRC submission); auto-applied if you're an auto-editor, otherwise queued. The edit note matches ISRC Scout's standard format.

Ending & removing

On a **Linked** icon, **left-click** opens the provider track. **Right-click toggles the relationship's *ended* flag** — use it when a release is taken down and its streaming links no longer resolve ([MB style](#)); an ended link is shown **faded**, and right-clicking it again reverts it. **Ctrl + right-click** ends the whole track, **Alt + right-click** ends that provider everywhere.

Actual **removal** is on **middle-click** (right-click's modifiers already scope the *ended* toggle): **middle-click** removes that link · **Ctrl + middle-click** removes all on the track · **Alt + middle-click** removes that provider everywhere.

These end / remove actions work on **any** linked provider — including the [other linked providers](#) ISRC Scout can't add — since they act on the relationship already on MusicBrainz, not on a resolved candidate.

Use providers from the whole release group (option)

Releases in a release group are often split by platform (one edition carries the Deezer link, another Spotify/Tidal, another Bandcamp). Since the recordings are shared,  → **"Use providers from the whole release group"** (off by default) fills in any provider link the current edition is missing from its **sibling releases** — for both ISRC import and track links. A small **purple dot** marks links pulled this way, with a tooltip naming the sibling release.


Submitting

ISRC submission to MusicBrainz **requires OAuth**:

1. In the editor click  **Setup** → **Authorize**. A MusicBrainz tab opens, approve, done.
2. Fill in ISRCs, click **Submit to MusicBrainz**.

Credentials and tokens are stored in the userscript's local storage (`GM_setValue`). **Sign out** in Setup clears the stored token.

Settings

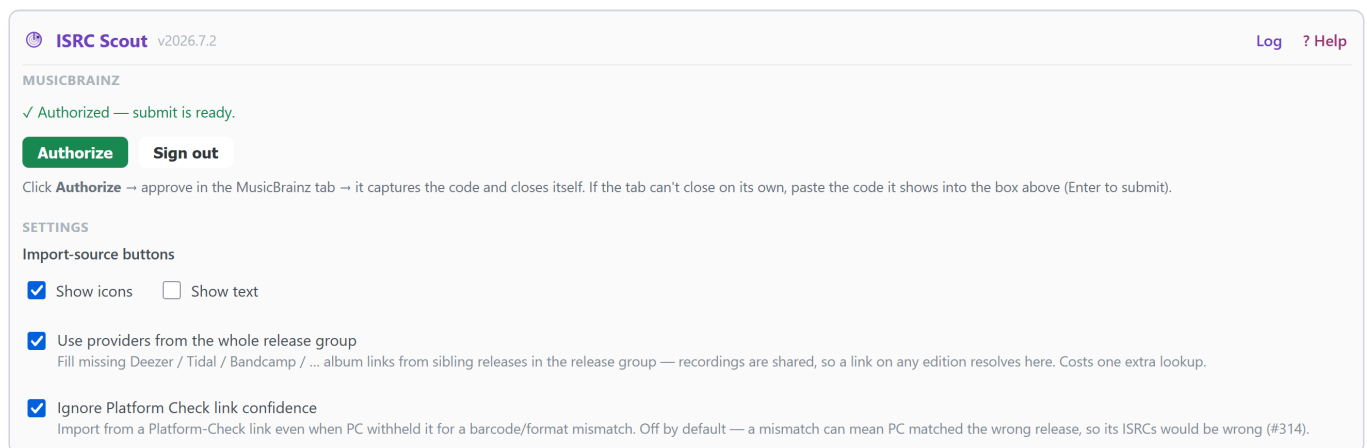

- Authorize on MusicBrainz
- Import-source buttons: show icons/text
The import-source buttons can show as brand icons, text labels, or both (defaults to icons, to keep the toolbar compact).
- Use providers from the whole release group
Fill provider links from releases in the release group — recordings are shared, so a link on any edition resolves here. Costs one extra lookup.
- Ignore Platform Check link confidence
Import from a Platform-Check link even when PC withheld it for a barcode/format mismatch. Off by default — a mismatch can mean PC matched the wrong release, so its ISRCs would be wrong (#314)

Shortcuts

Keyboard, in the editor / Links modal:

Key	Action
Esc	Close the open sub-panel/popup, else the modal (ignored while typing in a field)
Esc	Close the SoundExchange search panel
Enter	Submit the focused Add link URL / code input, or run the SoundExchange search

Modifier-clicks on the **Links tab** Add / Linked icons (see [links tab](#) for the full description):

Click	Add column	Linked column
left-click	—	Open the provider track
right-click	Add that one link	Toggle <i>ended</i> on that link (faded when ended; right-click reverts)
Ctrl / ⌘ + right-click	Add every link on that track	End every link on that track
Alt + right-click	Add that provider across all tracks	End that provider across all tracks
middle-click	—	Remove that one link
Ctrl / ⌘ + middle-click	—	Remove every link on that track
Alt + middle-click	—	Remove that provider across all tracks

Notes

Qobuz — the full investigation

#353 / #201

Qobuz's public catalogue API (www.qobuz.com/api.json/0.2/...) has two relevant endpoints:

- `album/search` (album-level: `upc` , `label` , `year` , `tracks_count`) — **works anonymously** with the web-player `app_id 712109809` . This is all [Platform Check](#) needs to *locate/verify* a Qobuz release.
- `album/get` — the **only** endpoint that carries per-track `isrc` (and roled `performers`). It is **geo-gated, not session-gated** (#418 corrected the original conclusion):
 - **from a country Qobuz serves**, `app_id 712109809` returns `200` with full `tracks.items[]` (`isrc` + `performers`) **anonymously** — no cookies, no token (verified from a HAR capture in #418).
 - **from anywhere else**, the same anonymous request → `404 "No result matching given argument"` for *every* album id — even ids `album/search` just returned. The anonymous API resolves catalogue visibility by **request IP**; the original #353 investigation ran from a non-Qobuz country, which made it look session-gated.
 - the other web `app_id 798273057` → `401 "User authentication is required"` regardless.
 - **with a logged-in** `user_auth_token` (header `X-User-Auth-Token`) → `200` from anywhere: the login's real contribution is the **account's region**, not authentication.
- The **store page HTML has zero ISRCs** — so there's no anonymous scrape fallback.

So ISRC Scout prefers the session when you're logged in (one request, any country) and works anonymously otherwise (#418) — in Qobuz countries no login is needed at all, and a stale session falls back to the anonymous path. [Platform Check](#) owns the login (email + password → `user_auth_token` , password sent as an MD5 digest and **never stored**)

and shares the token via the `mbtools:qobuz` `localStorage` key on the MB origin — exactly how the Beatport token is shared. ISRC Scout reads that token for the ISRC import here; Credit Hoarder reads the same token for roled Qobuz credits.


Other Qobuz gotchas:

- **Brutal rate-limiting** — a few requests and it `429` s; honour `Retry-After` .
 - **Barcode padding** — Qobuz stores the UPC as the 13-digit EAN with a **leading zero** (`0199257198605`), so a barcode-first `album/search` must try the zero-padded form (#354).
 - The slug-less `open.qobuz.com/album/<id>` form that an MB rel often carries is an **SPA shell** with no data; the album id is the last path segment either way.
-

Mammoth

Mammoth keeps your reusable edit notes in a compact panel **beside** the edit-note field on every edit form, and remembers the ones you submit. Mammoth babies let you remember values, add quick buttons, and configure defaults for any form field.

- Install: [stable](#) or [latest](#)
 - Or via bundle: [String Theory](#)
- [Changelog](#)

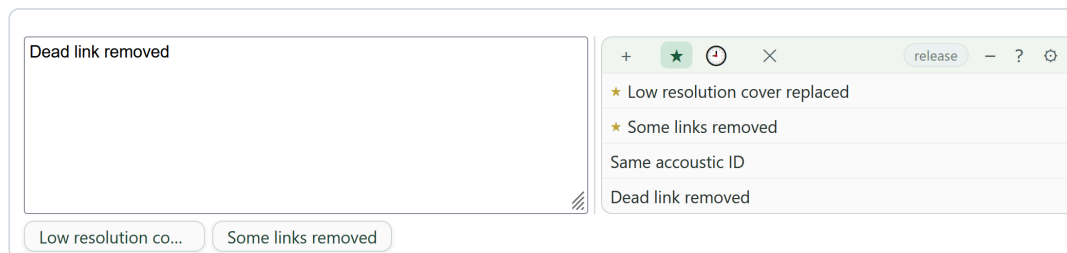

Features

- **Saved notes** — save, pin as quick-buttons, search, sort and reorder edit notes.
- **Mammoth babies** — the same save/reuse on other controls with **custom fields** by CSS selector.
- **Per-type notes** — keep saved notes and history separate per edit-note type (release / artist / recording...).
- **History** — remembers the last N submitted edit notes, newest-first and de-duplicated.
- **Import / export** — batch load/export notes per input type; entity fields (Artist/Label) keep their MBID so a re-import resolves the real entity (see [Settings](#)).
- **Replace or Insert** — left-click does your default, right-click the other; append skips a line already present (see [Shortcuts](#)).
- **Compact** — one-line rows, full note on hover; choose how many show before the list scrolls.
- **Resizable** — the edit-note field is widened and centered; drag the separator to resize
- **Minimized mode** — collapse the panel to a small icon; hover to peek, click to pin; remembered across pages.

Saved notes

- + saves the current text; in **History**, ★ on a row moves it to saved notes. Reorder by **drag** (the ☰ handle on the right, shown on hover) and delete with 🗑️.
- **Note search** — narrows the list to notes containing the typed phrase (see [Shortcuts](#) for keys).
- **Quick buttons** — click ★ on a saved note to pin it as a button below the input field.
- **Sort** — **Manual** (drag & drop, default), **Most used** or **Recent**.

Mammoth babies

A small 📌 pin sits in each field; click it to recall values you've saved for that field (stored per field, shared across releases). The built-in fields — catalogue №, label, artist, status, language, script, country, type, and task fields — are **seeded into the Babies config**, so you can edit, disable, or re-add them (↶ **Defaults**) exactly like your own.

Title:   

Artist:   **Edit**

Release group:

Type:

Status: 

Language:

Script:

RELEASE EVENT

Date: - - Country:  

Label:   Cat. No:  

Barcode:

☐ This release does not have a barcode

Packaging: 

The pin opens a compact panel with a toolbar:

-  - save the current value; entity fields (Label, Artist) save the selected MBID, so a recalled value resolves the real entity; custom fields do not save MBID automatically but can be added manually by editing a note (MBID remains hidden from menu and buttons).
-  - clear the field

Note actions:

-  pins a value as an always-visible **button under the field**
-  marks one entry as the **default** (auto-fills the field when it's empty)
-  delete note
-  drag to reorder

Pinned buttons wrap to new rows, labelled with the value truncated to the configured length — see **[Settings] - "Button label length"**:

Use the following fields to enter artist name variations and multiple artist collaborations. See the [Artist Credit](#) documentation for more information.

Preview: **Various Artists** &

Artist in MusicBrainz:   **Artist as credited:** **Join phrase:**   

Add artist credit 

Custom fields

The built-in babies cover several native controls, but you can put a  on **any** field on **any** MusicBrainz page — open  → **Babies** tab and **+ Add field**:

Mammoth v2026.7.10.231154
Help

Settings
Babies
Import / Export

+ Add field
Defaults
JSON

input.tag-input	Tags	5	1	☒	↵	1
#tc-anno-mdinput	Markdown	px	lvl	☐	↵	0
div.search-container form input#headerid-query	Search	px	lvl	☒	↵	1
div.instrument .autocomplete2 input	Instrument	px	3	☐	↵	0
div.autocomplete2.relationship-target input	Artist	px	2	☐	↵	0
input[id^="catno-"]	Catalog numbe	px	lvl	☐	↵	0
#primary-type	Primary type	px	lvl	☐	↵	0
#packaging	Packaging	px	lvl	☐	↵	0
#status	Status	px	lvl	☐	↵	0
#language	Language	px	lvl	☐	↵	0

Column	Meaning
Selector	The field's CSS selector (Inspect the element → <i>Copy selector</i>). Comma-separate several selectors to cover more than one field with a single row. A live <i>matches N / bad selector</i> readout tells you if it's right.
Label	The popover title, and the identity of the field: two fields with the same label share one saved list .
px	Nudge the pin left/right by N pixels, to clear a field's own icon or arrow (optional).
lvl (deltav)	Where the pinned-button bar attaches. 0 (default) = floats below the field (absolute — can overlap UI beneath it). N > 0 = injected in the document flow right after the field's Nth ancestor, so it takes real space and pushes the UI below it down. Bump it until the buttons sit cleanly (e.g. the artist row's autocomplete wrapper is usually 1 – 2).
↵ (submit)	On recall, submit the field's form ~200 ms after the value is set — commits a tag, runs a header search, etc. (like pressing Enter). Select it only on fields whose form is safe to submit on recall.

Changes apply live (the page is re-scanned), and your list is remembered across sessions. Works on `<input>` , `<select>` , and `<textarea>` .

Resolving autocompletes: on an entity autocomplete (artist, instrument, ...), save the value **with its MBID** appended — e.g. `handclaps b8d84cec-...` — and recalling it resolves the real entity (MB reads the id straight from the pasted text, no search needed).

Fields that commit on Enter (tags, search): Check the row's ↵ box (or JSON `"submit": true`) and recall **submits the field's form** ~200 ms after filling it, exactly like clicking its submit button. Works for the tag box (`<form id="tag-form">`) and the header search.

The `{ }` JSON button (top-right of the section) switches the editor to a JSON text box — the same list as an editable, copy-pasteable blob, so it doubles as **export** (copy the box) and **import** (paste + **Apply**). Keys: `selector` (required), `label` , `deltax` , `deltav` , `submit` , `mbid` , and `enable` ; trailing commas and empty `{ }` entries are tolerated:

```
[
  { "selector": "div.instrument div.autocomplete2 input", "label": "Instrument", "deltax": 16 },
  { "selector": "input[id^=\"label-\"]", "label": "Label", "mbid": true },
  { "selector": "input.tag-input", "label": "Tags", "submit": true }
]
```

`enable` defaults to `true`; set `"enable": false` (or click the  toggle that appears when you hover a row) to **disable** a field — it's kept in the list (shown dimmed) but gets no pin. Handy for switching a built-in off without deleting it.

`mbid` is **JSON-only** (no column in the grid). It enables entity-MBID capture and is meaningful **only on the built-in Label and Artist fields** — there it reads the release editor's model so a saved value keeps the real entity; on any other field it does nothing (falls back to text). It's shipped on for those two built-ins; you normally won't set it yourself.

Settings

Accessed using the  button.

 Mammoth v2026.6.27

[? Help](#)

Settings

Import / Export

EDIT NOTE SETTINGS

☒ Scope per resource

☒ Hide help text

☐ Show note search

Sort saved notes

Manual

Default click action

replace

☒ Insert empty line when appending

Items shown

8

History size

10

GENERAL

☒ Show mammoth babies

Button label length

19

Setting	Default	Notes
Scope per resource	off	Keep notes separate per edit-note type (release / artist / ...).
Hide help text	off	Hides MusicBrainz's help paragraphs above the field.
Default click action	replace	What a left-click does (replace , or append). Right-click does the other.
Insert new line when appending	on	Append a blank line before note.
Show note search	off	Show the search box above the note list (for big lists).
Sort saved notes	Manual	Manual (drag order), Most used , or Recent .
Button label length	24	Character length of the pinned quick-buttons' labels (4–80), for both the main and baby pins.
Items shown	6	How many list rows to render before the list scrolls.
History size	10	How many submitted notes to remember (1–50).
Show mammoth babies	on	Field memory on other controls (catalog №, label, artist, status...). Toggles on/off live.

The  window has three tabs: **Settings** (above), **Babies** (the built-in + your own baby fields), and **Import / Export** (paste to import many notes, or **Export all** — with a *1 note per line / empty line separates notes* toggle that applies both ways).

Using Mammoth from another userscript

Integration is done by convention:

- Panel: any `textarea.edit-note` on the page gets the full Mammoth panel automatically.
- Baby: use `class="mmth-pin"`

Mammoth enhances **any** `textarea.edit-note` **on the page**, not just MusicBrainz's own — a `MutationObserver` picks up fields added dynamically too. So another userscript that has its own edit-note field (e.g. [Art Station](#)'s "Enter edit" dialog) can host the full Mammoth panel **with no API and no changes to Mammoth**:

1. **Give your edit-note field** `class="edit-note"`. Mammoth wraps it (`.mmth-wrap`) and attaches the saved-notes / history panel.

```
<textarea class="edit-note"></textarea>
```

2. **History capture is automatic** if your submit button matches Mammoth's heuristic — a document-wide click on a button whose text starts with `enter edit` / `submit` / `add edit` / `save`, or that has class `submit`, records the field into history.
3. **You own the layout**. Mammoth lays the field out beside a ~300px panel (`.mmth-side`) with a drag splitter (`.mmth-vsep`); scope your own CSS to fit it into your container — e.g. hide the splitter and give the wrap a bottom margin inside a modal:

```
#your-dialog .mmth-wrap { margin: 0 0 12px; max-width: none; gap: 10px; }  
#your-dialog .mmth-vsep { display: none; }
```

To get a Mammoth baby on your own field, add the `mmth-pin` class:

```
<input class="mmth-pin" data-mmth-key="my-cat-no" data-mmth-label="Catalogue №">
```

- `data-mmth-key` (optional) — storage key; fields sharing a key share their saved values. Omit it and Mammoth derives one from the element's id/name/label (`keyFor`, :996).
- `data-mmth-label` (optional) — the popover title.
- `data-mmth-dx="<px>"` (optional) — nudge the pin (e.g. past a custom affordance).

The popover always carries a filter box for the saved values. `Ctrl` / `Cmd` + `,` while the field is focused opens the popover at the field, with the filter focused; `↑` / `↓` move and `Enter` picks.

Works on `<input>`, `<select>`, `<textarea>`. Stored under its own key `mammoth-fields:data` (separate from edit-note history).

Shortcuts

In the edit-note field (and Mammoth's panel):

Key	Action
Ctrl / ⌘ + Enter	Submit the edit (clicks the page's <i>Enter edit</i> / submit button)
Ctrl / ⌘ + ↑ / ↓	Cycle through your saved notes, replacing the field
Ctrl / ⌘ + B	Wrap the selection — or the word at the caret — in bold markup
Ctrl / ⌘ + I	Wrap the selection — or the word at the caret — in <i>italic</i> markup
Ctrl / ⌘ + ,	Focus the note search box

On a saved-note row or a pinned quick-button:

Action	Result
click	apply with your default (replace / append)
right-click	apply the other way
Ctrl / ⌘ + click	replace the field and submit the edit (parity with Ctrl / ⌘ + Enter)


In the note search box:

Key	Action
↑ / ↓	Move the highlighted match
Enter	Apply the highlighted match (or the first if none)
Esc	Clear the search

Platform check

Find URLs for a particular MusicBrainz release on online platforms, verify track counts, surface label / year / format alongside. Automatically matches releases/candidates while respecting bar codes, formats and other release data.

- Install: [stable](#) or [latest](#)
 - Or via bundle: [String Theory](#)
- [Changelog](#)
- [View users](#)

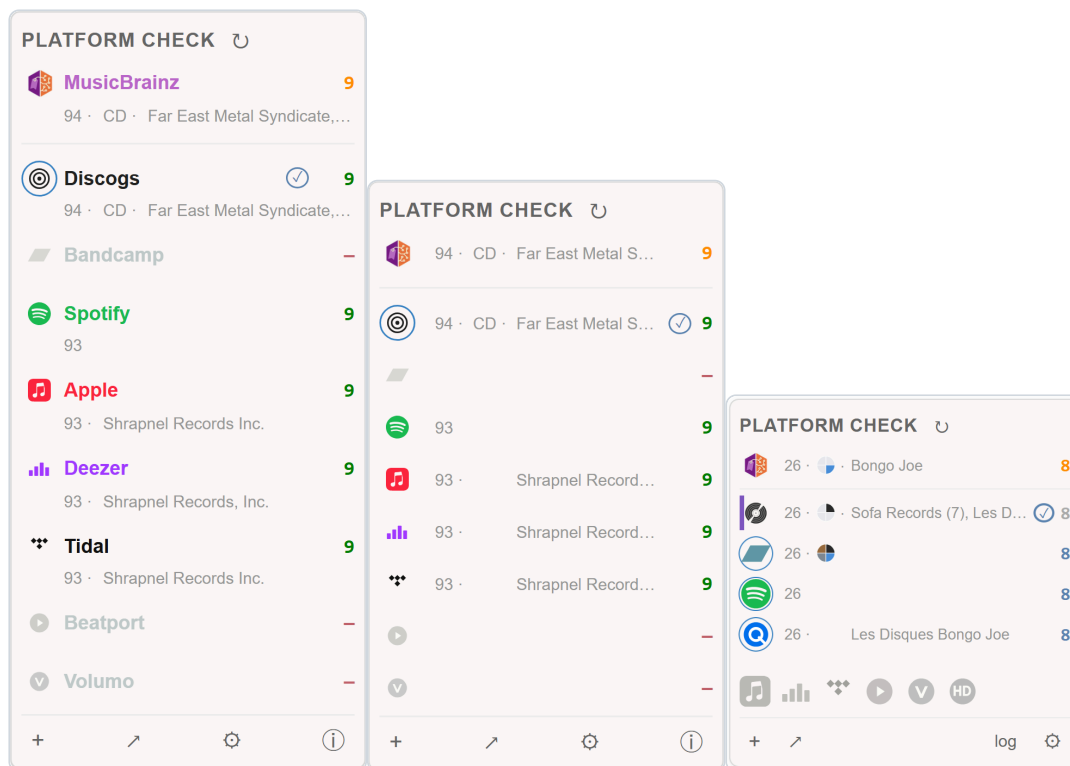

Features

- **Multiple platforms** supported with customizable position and visibility
- **Header info** — MB's release year, format, label and track count in the dashboard header
- **Insert links to release** — open the release's edit page and insert one or all confirmed platform links
- **Open all found** — open each confirmed platform page not yet in MB in its own tab (plus the Discogs master)
Mismatches and unverifiable links are skipped. (*Watch for pop-up blocking.*)
- **Options** — detailed appearance, authentication, link confidence settings etc.
- **Diagnostic log** — per-source filter chips to isolate a single platform's chain

Overview

The userscript runs on `musicbrainz.org/release/*` and tries to locate each release on a supported set of [platforms](#). When the release already has a platform URL in MB's URL relationships it is used directly. Otherwise, it falls back to a chain of sources — platform APIs, Wikidata, then generic web search.

Once a URL is settled, the script fetches the platform's metadata (track count, year, label, format where available) and shows it alongside the MB-side numbers so you can see at a glance whether a candidate looks right. Results are cached per release so revisiting a page does no outbound traffic until you click [↻](#).

Link availability is determined by the icon and text color:

Color	Meaning
Colored	link found
Gray	link found but details do not match
Faded	link not found
Circled	link exists in MB relationships

Matched links that are not already associated (colored & not circled) can be **inserted to the release** (or release group with Discogs) by opening its *edit* page and populating one or more links:

1. Left click

1. Title - Open link if found, open search for provider if not found (use [↗] button in the footer to open all)
2. Icon - Open the release editor with the link(s) queued, ready to review and **Enter edit** (use [+] button in the footer to add all)

2. Right click

1. Title - Open search for provider
2. Icon - Add the link(s) **silently in the background**: an inactive tab opens, submits the edit itself, and closes when done — you never leave the panel (#464)

The  /icon add opens a **new tab** by default so the panel stays put; setup option **"Add links in a new tab"** turns that off, so it navigates the current tab instead (#464). Either way, **right-click** always adds in the background regardless of that setting.

A right-click  can have **two** edits in flight, because they land on different entities: the platform links go onto the **release**, and the **Discogs master** goes onto the **release group**. Both are backgrounded and both close themselves when they commit (#559) — previously only the release half was, and the release-group editor was left open in a focused tab. That is why the script also runs on `/release-group/*` pages: the tab has to be able to close itself after MusicBrainz redirects there. Nothing else happens on a release-group page — the dashboard only ever mounts on a release.

Setup option **Compact unmatched providers** keeps the panel tidy, every provider **starts compact** — a strip of dimmed brand icons at the bottom — and **risers into a full row only when it's a clean match**. Everything else stays in the strip: not-found *and* found-but-mismatched providers (a different barcode/format — a *different release*), the latter keeping a subtle **amber ring** so that "found but wrong" signal isn't lost. Click a strip icon to run that platform's search. **Discogs and Bandcamp always keep their full rows** (matched or not), since they carry the format/reference detail.

Barcode matching

When the MB release has a barcode, providers that support a barcode lookup try it **first** for an exact match before any text search.

This avoids the ambiguity of title/artist search when a barcode is available, and prefers the *exact* edition over a Wikidata/search match that may be a different barcode. Platforms index the same GTIN under different zero-paddings (a 12-digit UPC-A, a 13-digit EAN with a leading , a 14-digit form), so when the exact-barcode lookup misses, it is retried with the other paddings (by adding leading zeros which do not change GTIN) before falling back to search (#354). A returned album's own barcode is verified against the query where the API exposes it, since Deezer occasionally hands back an unrelated album for a barcode it doesn't have (#356).

MusicBrainz treats a different barcode as a different release, so a found link with a mismatching barcode is the wrong entity per the [URL style guidelines](#).

Platform Check now (#182):

- Captures the found item's barcode where the provider exposes it and, when it differs from MB's, marks the row with a **subtle amber bar on the left edge** — the barcode itself is shown only in the row tooltip + the diagnostic log.
- Resolves the exact-barcode **Spotify** album through **Wallstream** (`q=upc:<barcode>`), since Spotify has no other unauthenticated UPC route (#602, replacing SAMBL).
- Has a setup option "**Check barcodes for link confidence**"
 - **if they exist** — withhold from `+ / ↗` only links whose barcode is *known and differs*.
 - **strictly** — only add *barcode-confirmed* links, i.e. also withhold links whose barcode can't be checked (Apple/Spotify, which don't expose a UPC).
 - The left-bar indicator shows known mismatches regardless of this setting.
 - A **withheld** link (by either the barcode or format check) is shown **grayed out and non-clickable** — like any other mismatch.
 - The **Discogs master** is exempt from barcode/format withholding (#416): it goes onto the MB **release group**, which spans every edition's format and barcode — it only requires the Discogs release to be a confirmed (`✓`) match.

Format matching

MusicBrainz treats a different format as a different release, so a digital-store link doesn't belong on a CD/Vinyl release per the same [URL guidelines](#). Only **Bandcamp** and **Discogs** expose a real format; every other provider is a digital-only storefront, so an absent format counts as **Digital**.

Platform Check has a setup option "**Use format for link confidence**" (on by default, in *if they exist* mode) with two modes (#182):

- **if they exist** — withhold from `+ / ↗` only links whose format is *known and incompatible* with the MB release (e.g. a Spotify/Apple/Tidal link on a CD release)
- **strictly** — also withhold links whose format can't be determined
- A **violet bar on the left edge** marks incompatible rows while the option is on (digital-on-physical is common enough to be noise otherwise). Bandcamp/Discogs editions that *include* MB's medium (e.g. Bandcamp "Digital, CD" on a CD release) are compatible and pass.

Each release's format is shown as a compact **4-quadrant circle**: Vinyl (top-right), Cassette (top-left), CD (bottom-left), Digital (bottom-right). The present family/families are coloured and the full format is in the tooltip. Any format collapses to those four (optical discs — DVD/SACD/Blu-ray — fold into CD), and a multi-format Discogs/Bandcamp match becomes one glyph instead of a long text list. Switch to text using **Setup** → **Appearance** → **Format marker: Text**.

Platforms

Provider	Barcode	Track count	Wikidata	Login
Discogs	capture	✓	—	—
Bandcamp	capture	✓	—	—
Spotify	lookup	✓	P2205	—
Apple Music	lookup	✓	P5121	—
Deezer	lookup	✓	—	—
Tidal	✓	✓	P4577	baked-in token
Qobuz	✓	✓	—	optional ¹
Beatport	—	✗	P11312	optional ²
Volumio	✓	✓	—	—
HDtracks	✓	✓	—	—
SoundCloud	capture	✓	—	—

Barcode legend: ✓ = barcode-first lookup **and** the found item's barcode captured for confidence · lookup = barcode-first lookup only (found barcode not exposed) · capture = no barcode search, but the found barcode is captured · — = neither.

¹ **Qobuz login** (⚙ Setup → Auth) makes verification use `album/get` — reliable track count + **barcode** — instead of the geo-flaky, 429-throttled store-page scrape. The same token is shared with **ISRC Scout** (ISRC import) and **Credit Hoarder** (roled credits). Only the token is stored, never your password. Qobuz is **the one provider that geo-blocks anonymous access** (in some regions even account registration needs a VPN) — but that's *anonymous*-only: once registered and signed in, the token works from your normal connection, region regardless.

² **Beatport login** (⚙ Setup → Auth) enables verified Beatport matching (and the `+` insert), and lets ISRC Scout import Beatport ISRCs.

Provider details

Each provider is resolved by a **method** chain, tried in order: the existing **MB** URL relationship → an exact **barcode** lookup → the provider's **local search** (LS — its API/site search) → a generic **global search** (GS — DuckDuckGo / Brave with a `site: query`).

Discogs

- **API** — `api.discogs.com`
 - Search: `/database/search?q=`
 - Album: `/releases/<id>` (track count)
 - Barcode: `/database/search?barcode=<UPC>` (barcode-first); found barcode captured from the release's `identifiers`
- **Local search**: Discogs API search
- **Global search**: —
- **Track verify**: Discogs API release detail
- **Wikidata cross-ref**: —
- **Login**: —
- **Method**: MB → barcode → LS

- **Notes:**

- **Format-aware** — when MB's format is CD, the first attempt looks for a CD release so a vinyl entry can't shadow an existing CD one; if that returns nothing it retries without the format filter.
- Checks whether any Discogs **master** is already linked on MB's **release group**.
- Exposes a real **format** and always keeps its full row.

Bandcamp

- **API** — none (page-scraped)
 - Search: — (uses site search / GS)
 - Album: JSON-LD + `og:description`
 - Barcode: capture-only via `TralbumData.current.upc` (in the `data-tralbum` attribute, not the JSON-LD); no barcode search
- **Local search:** `bandcamp.com/search?q=`
- **Global search:** DuckDuckGo / Brave
- **Track verify:** JSON-LD + `og:description` ("N track album") — see hidden-tracks note
- **Wikidata cross-ref:** —
- **Login:** —
- **Method:** LS → GS
- **Notes:**
 - **Hidden tracks (#183)** — bonus tracks can be *download-only* (not in the streaming player). JSON-LD `numTracks` counts only the streamable ones; the `og:description` "N track album" carries the real total. PC reports that true total, logs how many are hidden, and marks the count with a small superscript ⁿ (hover for "N download-only track(s) hidden from streaming").
 - **Barcode (#194)** — hand-entered and **often absent** (withheld only in *strict* mode). Per [Harmony](#) the digital `current.upc` can coincide with a **physical package's** barcode — when it does it's **ignored** (logged), not used.
 - Exposes a real **format** and always keeps its full row.

Spotify

- **API** — none for catalog (GS + embed)
 - Search: — (no unauthenticated catalog search)
 - Album: `/embed/album/<id>` HTML parse
 - Barcode: no unauthenticated UPC route of its own — the barcode-exact album comes from **Wallstream**
- **Local search:** —
- **Global search:** DuckDuckGo / Brave (`site:open.spotify.com/album/`)
- **Track verify:** `/embed/album/<id>` HTML parse
- **Wikidata cross-ref:** P2205
- **Login:** —
- **Method:** Wallstream barcode lookup, then Wikidata, then GS
- **Notes:**
 - [Wallstream](#) (`/api/spotify/isrc?q=upc:<barcode>`) proxies Spotify's catalog search. Spotify matches only the barcode exactly as it stored it, leading zeros included, so the MB barcode is tried as-is and then zero-padded to 12, 13 and 14 digits, first hit wins (#602). A miss or error falls through to Wikidata and web search.

Apple Music

- **API** — iTunes (`itunes.apple.com`)
 - Search: `itunes.apple.com/search?term=`
 - Album: `itunes.apple.com/lookup?id=<ID>`

- Barcode: `itunes.apple.com/lookup?upc=<UPC>` (barcode-first; retried with other zero-paddings, #354). The found barcode is **not** exposed, so no capture for confidence.
- **Local search:** iTunes Search API
- **Global search:** —
- **Track verify:** iTunes Lookup API
- **Wikidata cross-ref:** P5121
- **Login:** —
- **Method:** barcode → LS
- **Notes:**
 - Digital-only storefront (format counts as Digital).

Deezer

- **API** — `api.deezer.com`
 - Search: `/search/album?q=`
 - Album: `/album/<id>`
 - Barcode: `/album/upc:<UPC>` (barcode-first; retried with other zero-paddings, #354). The returned album's barcode is verified against the query, since `album/upc:` occasionally hands back an unrelated album (#356).
- **Local search:** Deezer API search
- **Global search:** —
- **Track verify:** Deezer API album detail
- **Wikidata cross-ref:** —
- **Login:** —
- **Method:** barcode → LS
- **Notes:**
 - Barcode used for lookup + sanity-check, but the found value isn't surfaced as a dashboard capture.

Tidal

- **API** — `openapi.tidal.com/v2` (baked-in client-credentials app token — catalog access, **no user login**)
 - Search: `/searchResults`
 - Album: `/albums/<id>` (count / year / label)
 - Barcode: `/albums?filter[barcodeId]=<UPC>` (barcode-first; found barcode captured)
- **Local search:** Tidal API search
- **Global search:** —
- **Track verify:** Tidal API album detail
- **Wikidata cross-ref:** P4577
- **Login:** baked-in app token (no user login)
- **Method:** barcode → LS

Qobuz

- **API** — catalogue API `www.qobuz.com/api.json/0.2` with the web player's `app_id` (712109809)
 - Search: `album/search` (works **anonymously**)
 - Album: `album/get` — track count, year, label, **UPC** — **session-gated** (401/404 anonymously, #353), so login-only
 - Barcode: `album/search?query=<UPC>` (barcode-first, exact; zero-padded too, #354); UPC captured from `album/get`
- **Local search:** Qobuz API search
- **Global search:** DuckDuckGo / Brave (last resort)

- **Track verify:** `album/get` (**login**) → store-page scrape fallback (track count from per-track add-to-cart markers — the page duplicates every track row, so `track__info` blocks can't be counted directly — plus JSON-LD name/year, label link, `og:title` artist). The log names the source: *Verified via API album/get vs store page*.
- **Wikidata cross-ref:** —
- **Login: optional** — signed in, verification uses `album/get` (reliable count + UPC); the shared token also powers ISRC Scout's Qobuz ISRC import and Credit Hoarder's roled Qobuz credits. Qobuz geo-blocks *anonymous* access only (footnote ¹).
- **Method:** MB → barcode → LS → GS
- **Notes:**
 - Throttles aggressively — the scraper does one `Retry-After` retry and leaves a row retryable rather than caching a false miss.
 - **Format** is absent (digital-only).

Beatport

- **API** — official **v4** (`api.beatport.com/v4`), login-gated
 - Search: — (site is **Cloudflare-walled**, so pages can't be fetched to verify)
 - Album: — (unverifiable without login)
 - Barcode: —
- **Local search:** —
- **Global search:** DuckDuckGo / Brave (`site:beatport.com/release/` , best slug-vs-title match)
- **Track verify: unverifiable** (Cloudflare-walled) — a search-found link is surfaced as an **unverified** match (`?`) and excluded from the `+` insert and `↗` open-all.
- **Wikidata cross-ref:** P11312
- **Login: optional** — enables verified matching + the `+` insert, and lets ISRC Scout import Beatport ISRCs.
- **Method:** MB → Wikidata (P11312) → GS
- **Notes:**
 - The one provider that can't self-verify without a login.

Volumo

- **API** — `volumo.com/api/v1` (clean, unauthenticated JSON — no Cloudflare/token)
 - Search: `/search?query=`
 - Album: `/albums/<id>` (track count)
 - Barcode: `/album_by_icpn/<UPC>` (barcode-first, exact; found barcode captured)
- **Local search:** Volumo API search
- **Global search:** —
- **Track verify:** Volumo API album detail
- **Wikidata cross-ref:** —
- **Login:** —
- **Method:** MB → barcode → LS
- **Notes:**
 - MB doesn't auto-classify `volumo.com` , so the `+` insert force-sets the **purchase for download** type.
 - ISRC Scout can import a Volumo release's ISRCs from the link this finds.

HDtracks

- **API** — `hdtracks.azurewebsites.net/api/v1` high-resolution store API (clean, unauthenticated, CORS-open — no Cloudflare/token)
 - Search: `/albums/search?q=`

- Album: `/albums/search?q=` (track count from the search result)
- Barcode: `/albums/search?q=<UPC>` (barcode-first, exact; found barcode captured)
- **Local search:** HDtracks API search
- **Global search:** —
- **Track verify:** HDtracks API album detail
- **Wikidata cross-ref:** —
- **Login:** —
- **Method:** MB → barcode → LS
- **Notes:**
 - Canonical URL is `https://www.hdtracks.com/#/album/<id>`; the thousands of legacy MB rels (`valbum_code=<UPC>` , slug-id, artist page) are recoverable by barcode.
 - No dedicated HDtracks link type ([MBS-9023](#)), so the `+` insert force-sets **purchase for download** (id 74).
 - ISRC Scout can import an HDtracks release's ISRCs from the link this finds.

SoundCloud

- **API** — the anonymous `api-v2.soundcloud.com` (public `client_id` lifted from the web-player JS — no login)
 - Resolve: `/resolve?url=<set|track>` → the playlist (track count + track ids) or a single track
 - Tracks: `/tracks?ids=` → each track's `publisher_metadata` (barcode, `p_line` label)
 - Barcode: **link-derived** — read from the linked set/track, not searched (see note)
- **Local search:** `/search/playlists?q=` (title + track-count verified before trusting a set)
- **Global search:** —
- **Track verify:** set/track count vs MB
- **Wikidata cross-ref:** —
- **Login:** —
- **Method:** MB → LS
- **Notes:**
 - Unlike every other provider, SoundCloud **can't be searched by barcode** — the release UPC lives per-track inside the set (`publisher_metadata.upc_or_ean` , the same value across the set on distributed releases; self-uploads omit it). So it's link-derived, like Bandcamp's capture: when the release links a SoundCloud set/track, its barcode is read and fed to the barcode-confidence check. Only a barcode the **whole set agrees on** is trusted (a mixed-UPC compilation yields none).
 - Both a **set** (playlist → the album) and a bare **track** URL (a *single-track release*) are recognized; a track resolves to a 1-track release.
 - ISRC Scout imports a SoundCloud set's per-track ISRCs and links from the same set (and the single ISRC/link for a track release).

Settings

Platform Check v2026.7.3.220039 [? Help](#)

Platforms >

Authentication >

LINK CONFIDENCE

☒ Use **formats** if they exist ▾

☒ Use **barcodes** if they exist ▾

APPEARANCE

Platform

☒ Icon Size 23

☐ Name Size 11

☒ Compact **unmatched** providers

MB marker ☒ Circle ☐ Glow

Format marker ☒ Circle ☐ Text

Layout

Rows ☒ 1 row ☐ 2 rows

Gap row 4 col 4

Close

Keep background-add tabs awake

Right-clicking + adds links in a background tab that submits and closes itself. Firefox throttles timers in a background tab — to one step per second, and to as much as fifteen once the tab has spent its execution budget.

A tab that is **playing audio** is exempt from that throttling, so this setting plays an inaudible tone — 30Hz at gain 0.0008, below anything a speaker will reproduce.

Off by default, and it **needs a browser permission you have to grant yourself**: on a MusicBrainz page, padlock icon → *Autoplay* → **Allow Audio**. Without it Firefox blocks the tone, the setting does nothing at all, and the Log says so:

```
background add: +1.5s keep-awake audio state=suspended – BLOCKED by the autoplay
policy, so this setting is doing nothing.
```

With it, the same line reads `state=running`.

Shortcuts

Key	Action
Esc	Close the open modal/dialog

String Theory — by majkinetor