



AVPro Video

Advanced video playback for Unity



- ⦿ Easy to use
- ⦿ High performance
- ⦿ **Battle tested** in professional productions
- ⦿ VR, 360 audio, Hap, NotchLC, subtitles & more



For full documentation, visit the [AVPro Video Developer Portal](#)

Table of Contents

Articles

About

Introduction

What's New

Features

Requirements

Download

Asset Files

Usage

Installation

Quick Start

Loading Media

Demos

Shaders

Core Features

Streaming

Transparency

AR/VR/XR

Subtitles

Video Capture

Content Protection

Seeking & Playback Rate

Ultra Features

360 Audio

Hap Codec

NotchLC Codec

Content Protection

Components

Media Player

Media Reference


Apply To Material

Apply To Mesh

Update Multipass Stereo

- Display IMGUI
- Display UGUI
- Audio Output
- Audio Channel Mixer
- Playlist Media Player
- Subtitles UGUI
- Extension Components
 - Apply To VFX Graph
 - Timeline Playables
- Platform Notes
 - Windows
 - Android
 - macOS
 - iOS/iPadOS/tvOS
 - UWP
 - WebGL
- Supported Media

Introduction

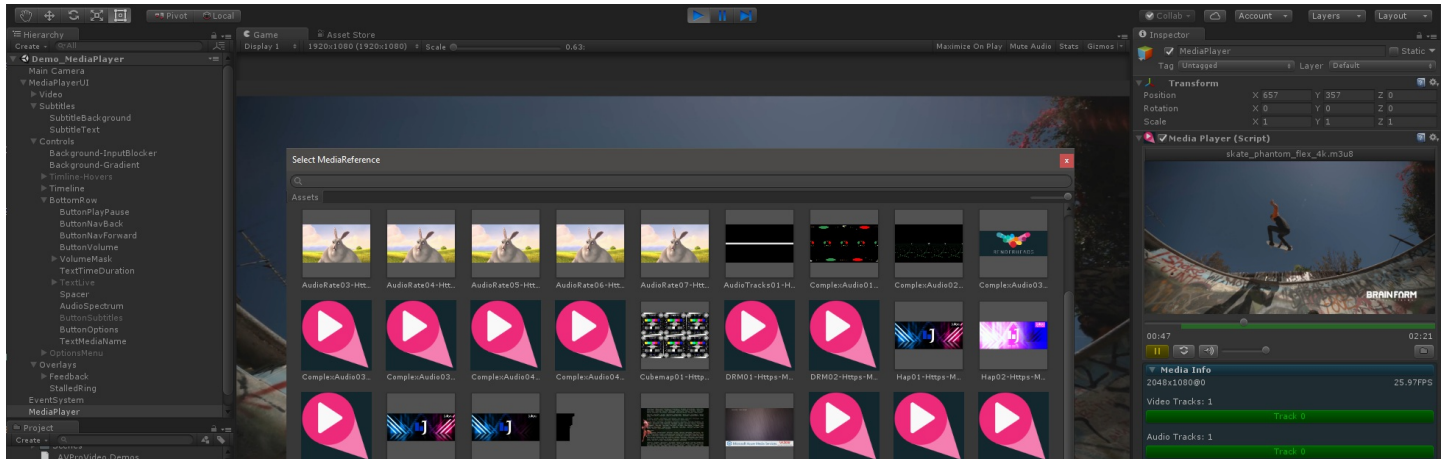

AVPro Video is a powerful cross-platform video playback plugin for [Unity](#) created by [RenderHeads](#)

We created this plugin primarily for use with our internal projects. At RenderHeads we create interactive installations for events and educational games for museums, so video playback is an important aspect of our work. We found that the built-in video functionality in Unity didn't cater to many of the use cases we had, so since 2012 we have been building video related plugins for Unity.

AVPro Video is the latest in a series of video playback plugins and it leverages the specific features of the different platforms it supports, while at the same time being easy to use and highly performant.

What's New

What's New in AVPro Video 2.0

For a quick and easy comparison, some of the main differences compared to the previous AVPro Video 1.x plugin are summarised in this table:

| | AVPRO VIDEO 2.0 | AVPRO VIDEO 1.X |
|--|------------------------------|-----------------|
| First released | 2021 (January) | 2016 (February) |
| New Features | | |
| Direct3D 12 support | Yes ¹ | No |
| NotchLC codec support on Windows | Yes ^{2,} | No |
| Stereo metadata video on Windows | Yes | No |
| Stereo packing detection | Yes | No |
| Unity audio playback on Android | Yes | No |
| Multi-track support | Yes | No |
| Subtitle track support | Yes | No |
| Frame-based time methods | Yes | No |
| Asset-based media (MediaReference) | Yes | No |
| Edit-mode media playback | Yes | No |
| Apple Silicon architecture support | Yes | No |
| Improved Features | | |
| Low overhead macOS/iOS/tvOS plugin | Yes | No |
| Support for modern Unity features (VfxGraph, Timeline etc) | Yes | No |
| Upgraded to latest APIs (ExoPlayer, Audio 360, Hap etc) | Yes | No |
| YCbCr optimisation support on macOS | Yes | No |
| ASync Hap codec on Windows | Yes ² | No |
| Adaptive streaming support | Advanced | Basic |
| Content protection support | Advanced ² | Basic |

| | AVPRO VIDEO 2.0 | AVPRO VIDEO 1.X |
|--|-------------------------|-----------------|
| Deprecated Features | | |
| Legacy Windows XP | No | Yes |
| Legacy Windows Phone | No | Yes |
| Legacy Unity 4.x support | No | Yes |
| Legacy Unity 5.x support | No | Yes |
| Legacy Unity 2017.x support | No | Yes |
| WebGL support | No ³ | Yes |
| PlayMaker actions included | No | Yes |
| NGUI component included | No | Yes |
| Asset Changes | | |
| New Ultra Edition for advanced users | Yes ² | No |
| macOS, iOS and tvOS plugins combined into a single edition | Yes | No |

Why update to AVPro Video 2.0?

Modernised

- Now with support for D3D12
- Upgraded to using latest APIs for best modern features support, eg ExoPlayer, Hap, Facebook Audio 360
- New WinRT player on Windows
- Shaders and scripts upgraded to use modern Unity features

Workflow improvements

- Edit-mode media playback allows media to be played without running the scene
- New MediaReference asset type allows easy defining of media

Audio improvements

- Android can now play audio back to Unity
- Windows supports 16 channel PCM audio
- Demo MediaPlayerUI includes audio spectrum visualisation

Powerful streaming options

- New option to force adaptive stream to start at the highest bitrate on Android and Windows (using WinRT API).
- New WinRT has improved streaming support
- macOS, iOS and tvOS expose options for specifying the preferred max bitrate and resolution
- Android exposes new options for controlling buffering behaviour

Better integration with Unity features

- Ready-to-use components for integration with the Unity features:

- Timeline / Playables
- Shader Graph
- Visual Effect Graph
- SRP / HDRP / UWP
 - The new texture resolver option makes it easier to integrate with other shaders /features/components

Timed Text

- Subtitles support
- ~~ID3 / metadata support~~ (planned)

Long awaited features

- Stereo videos now work correctly on Windows without having to remove metadata
- Frame-centric methods
- Multiple video and audio track support
- Textures now persist between video loads, allowing for a better visual experience and less resource reallocation (WinRT only currently)

Improved Demos

- Fewer demos, but higher quality
- Focused on helping people get started with common use cases

Better Components

- MediaPlayer can now play media without having to enter Play mode, improving workflow
- Many MediaPlayer UI improvements

Better Code

- The C# code has been refactored to give a cleaner and easier to work with API
- Scripts are now organised using assembly definition (asmdef) files, for improved modularity, better interoperability with modern Unity features, and reduce compile time

Documentation improvements

- Manual and scripting documentation completely updated
- Changed from PDF to HTML

Continued support and development

- Expect the same high level of support and longevity you've come to expect from other RenderHeads products
- New features will continue to be added, with customer feature requests taken into high consideration
- Customer support will continue to be a top priority, just as it always has been
- Just as we have done before, we will continue maintaining the product through to new versions of Unity

Better content protection options ²

- Encrypted video via AES-128 HLS (now also supported on Windows via WinRT API)
- Custom HTTP headers (now also supported on Windows via WinRT API)

Professional Codec Support ²

- Hap codec support on Windows now supports Media Foundation API, with faster non-blocking loading
- New 10-bit NotchLC codec support on Windows

Legacy Removal

- Legacy support removed we can focus on the modern features
- Removed support for Unity 4.x, Unity 5.x and Unity 2017.x
- Windows
 - Removed support for legacy Windows Metro (Phone and 8.1)
 - Removed support for Windows XP

- macOS
 - Minimum version changed to 10.12
 - Dropped OpenGL support
- iOS / tvOS
 - Dropped 32-bit support
 - Dropped OpenGL ES support
 - Minimum version changed to 11.0

¹ Direct3D12 support requires minimum Unity 2019.3

² Only in the Ultra Edition

³ WebGL plugin still included, but we do not support it (see [WebGL platform notes](#))

Features

A summary of the features:

- Compatibility
 - Unity 2018.x - 2020.x and above supported
 - Cross-platform with versions for iOS, tvOS, macOS, Android, Windows, UWP
 - Optional fallback to Unity's VideoPlayer (coming soon)
 - Graceful fallback for unsupported platforms
- Easy to use
 - One API for all supported platforms
 - Easy to use, drag and drop components
 - Scriptable API
- Powerful features
 - Playback of local files, URL files and adaptive streaming formats
 - VR support (mono, stereo, equirectangular and cubemap)
 - Transparency support (native and packed)
 - Linear and Gamma colour spaces supported
 - 8K video support (on supported hardware)
 - Streaming bitrate controls (coming soon)
- Advanced features
 - Encrypted video playback via AES HLS
 - Custom HTTP headers for secure playback
 - Support for industry codecs such as Hap, Hap Alpha, Hap Q and Hap Q Alpha (supporting 16K+)
- Highly optimised
 - GPU video decoding
 - Optimised native Direct3D, OpenGL and Metal support
 - Focus on minimal garbage generation
- Extensible
 - Components for IMGUI, Unity UI (and maybe NGUI later)
 - Components for Timeline/Playables, Shader Graph, Visual Effect Graph
 - Support for SRP (UWP / HDRP) (coming soon)
- Well supported
 - Free watermarked trial version available ([download here](#))
 - Good documentation
 - Public [issue tracker](#)

Requirements

System Requirements

Unity

- 2018.x, 2019.x, 2020.x

Platforms

- Apple
 - macOS 10.13 and above, 64bit only, Metal only
 - iOS 11.0 and above, 64bit only, Metal only
 - tvOS 11.0 and above, Metal only
- Microsoft
 - Windows 7, 8, 8.1, 10 and above (x86 and x86_64)
 - Universal Windows Platform (UWP) 10 (x86 and x86_64, ARM and ARM64)
 - Direct3D 11 and 12
- Android
 - Android 4.3.0 (Jelly Bean, API level 18) and above (ARM7, ARM64 and x86)
 - OpenGL ES2 and OpenGL ES3

Platforms not Supported

- Linux desktop
- Tizen
- Lumin (Magic Leap)
- Samsung TV
- Game Consoles (XBox*, PS4 etc)

** Xbox One may be supported using the UWP build option. We have not tested this though.*

VR / AR / MR / XR Headsets Supported

Android

- Oculus Rift Go
- Oculus Gear VR
- Oculus Quest
- Oculus Quest 2
- HTC Vive Focus
- Gear VR
- Google Cardboard
- Google Daydream
- Pico Goblin & Neo
- Lenovo Mirage Solo

Windows Desktop

- HTC Vive
- HTC Vive Pro
- HTC Vive Cosmos
- Valve Index

- Oculus Rift
- Oculus Rift S
- StarVR

Windows UWP

- Microsoft Hololens
- Microsoft Hololens 2
- Samsung Odyssey
- Asus
- HP
- Acer
- Lenovo Explorer
- Dell Visor

Downloads, Editions & Upgrades

Free Trial Version

1. Fully featured watermarked trial versions can be downloaded here: <https://github.com/RenderHeads/UnityPlugin-AVProVideo/releases>
2. Once the .unitypackage file has been downloaded, follow the [installation instructions](#).

Purchase

All editions of AVPro Video can be purchased via the Unity Asset Store:

- [Core Edition](#) (core features for all platforms)
 - [Core Windows Edition](#) (core features for Windows and UWP platform)
 - [Core Android Edition](#) (core features for Android platform)
 - [Core macOS/iOS/tvOS Edition](#) (core features for Apple platforms)
- [Ultra Edition](#) (advanced features for all platforms)
- Enterprise Edition (for larger companies with multiple sites/offices/subsidiaries)

Editions

We've made several editions of AVPro Video available so you can pick the one that's best for your project:

| | TRIAL EDITION | CORE WINDOWS EDITION | CORE ANDROID EDITION | CORE MACOS/IOS/TVOS EDITION | CORE EDITION | ULTRA EDITION | ENTERPRISE EDITION |
|----------------------|------------------|----------------------------|----------------------------|-----------------------------------|-----------------|------------------|-----------------------|
| Platforms | | | | | | | |
| Windows standalone | Watermarked | Yes | Watermarked | Watermarked | Yes | Yes | Yes |
| Windows UWP | Watermarked | Yes | Watermarked | Watermarked | Yes | Yes | Yes |
| macOS standalone | Watermarked | Watermarked | Watermarked | Yes | Yes | Yes | Yes |
| iOS | Watermarked | Watermarked | Watermarked | Yes | Yes | Yes | Yes |
| tvOS | Watermarked | Watermarked | Watermarked | Yes | Yes | Yes | Yes |
| Android | Watermarked | Watermarked | Yes | Watermarked | Yes | Yes | Yes |
| Core Features | | | | | | | |
| All Core features | Yes | Yes | Yes | Yes | Yes | Yes | Yes |

| | TRIAL EDITION | CORE WINDOWS EDITION | CORE ANDROID EDITION | CORE MACOS/IOS/TVOS EDITION | CORE EDITION | ULTRA EDITION | ENTERPRISE EDITION |
|-------------------------------|--------------------------|----------------------------|----------------------------|-----------------------------------|-----------------------|-----------------------|----------------------------|
| Ultra Features | | | | | | | |
| Hap Codec ¹ | Watermarked | Watermarked | Watermarked | Watermarked | Watermarked | Yes | Yes |
| NotchLC Codec ² | Watermarked | Watermarked | Watermarked | Watermarked | Watermarked | Yes | Yes |
| Custom Http Headers | Yes | No | No | No | No | Yes | Yes |
| AES-128 HLS | Yes | No | No | No | No | Yes | Yes |
| Spatial Audio | Yes | No | No | No | No | Yes | Yes |
| Other | | | | | | | |
| Support Priority | Normal | Normal | Normal | Normal | Normal | High | Very High |
| Multi-site license | N/A | No | No | No | No | No | Yes |
| Price | Free | \$200 | \$200 | \$200 | \$400 | \$800 | \$5000 |
| Link | Download | Store | Store | Store | Store | Store | Contact Us |

¹ Hap Codec only supported on Windows and macOS platforms.

² NotchLC Codec only supported on Windows platform.

Upgrade Paths

In many cases a developer may own one edition and as their needs increase may need the features of other editions. To cater for this we have set up some upgrade paths on the Unity Asset Store to make this cost effective:

| FROM: | CORE WINDOWS EDITION | CORE ANDROID EDITION | CORE MACOS/IOS/TVOS EDITION | CORE EDITION | ULTRA EDITION |
|--------------------|----------------------------|----------------------------|-----------------------------------|-----------------|------------------|
| Upgrading to: | | | | | |
| Core Edition | \$200 | \$200 | \$200 | . | . |
| Ultra Edition | . | . | . | \$400 | . |
| Enterprise Edition | . | . | . | \$4600 | \$4200 |

Owners of AVPro Video 1.x

IMPORTANT

AVPro Video 2.x has many API changes, so upgrading a project from AVPro Video 1.x is not recommended or should be done carefully at least. There are also feature differences between version 1.x and 2.x which are summarised in the table on the [What's New](#) page.

There are also **discounted** upgrade paths available (for a limited time) for owners of the retired product **AVPro Video 1.x**:


| FROM: | WINDOWS EDITION | ANDROID EDITION | MACOS EDITION | IOS EDITION | TVOS EDITION | FULL EDITION | ENTERPRISE EDITION |
|-----------------------------|-----------------|-----------------|---------------|-------------|--------------|--------------|--------------------|
| Upgrading to: | | | | | | | |
| Core Windows Edition | \$100 | . | . | . | . | . | . |
| Core Android Edition | . | \$100 | . | . | . | . | . |
| Core macOS/iOS/tvOS Edition | . | . | \$100 | \$100 | \$100 | . | . |
| Core Edition | \$300 | \$300 | \$300 | \$300 | \$300 | \$200 | . |
| Ultra Edition | . | . | . | . | . | \$600 | . |
| Enterprise Edition | . | . | . | . | . | . | \$3000 |

Future Updates

We plan to continue supporting this product until the next major version. This will include bug fixes, new features and improvements.

The product will be supported for around 2 years and then replaced with the next major version around January 2023. We feel that being open about our strategy for upgrades is beneficial to developers planning their projects.

Asset Files

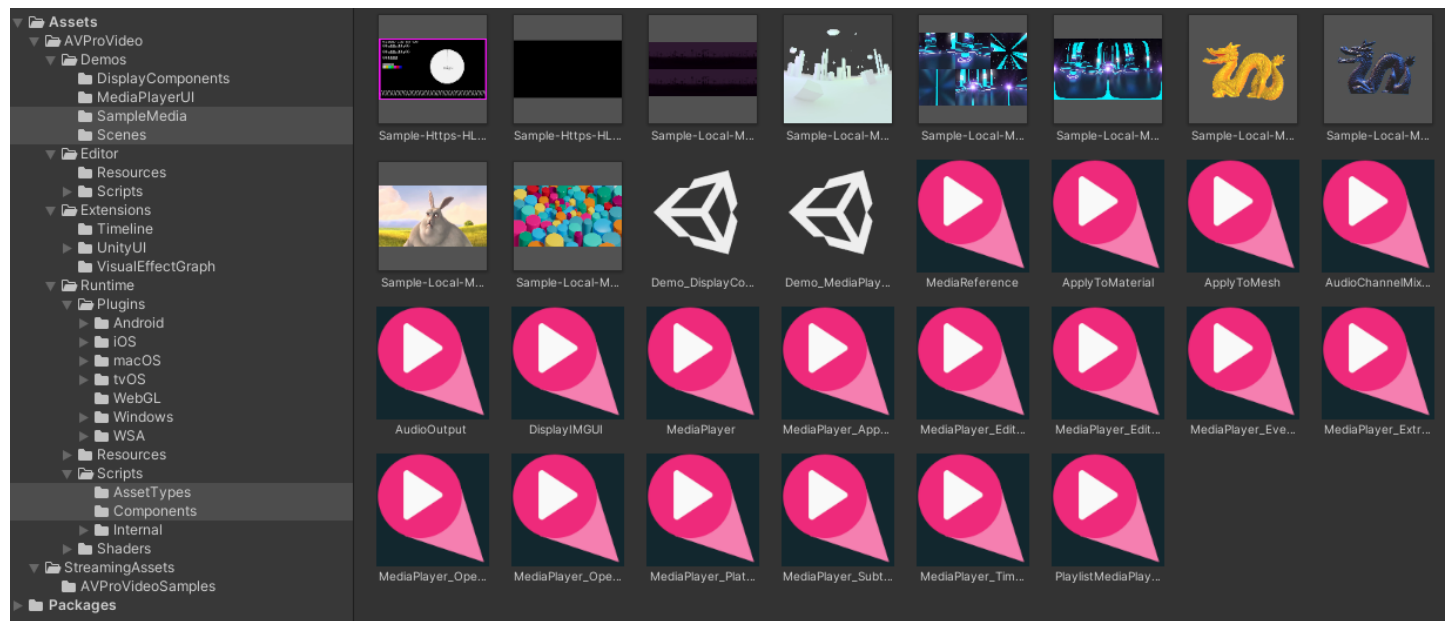

The AVPro Video asset package contains files organised into 5 major folders:

1. Runtime Folder
2. Extensions Folder
3. Demos Folder
4. Editor Folder
5. StreamingAssets Folder

Runtime Folder

This folder contains the primary elements of AVPro Video. It builds to the AVProVideo.Runtime assembly.

- **Plugins/**

Contains all native plugin files

- **Scripts/**

- **AssetTypes/**

ScriptableObject for defining media

- **Components/**

Monobehaviour Components

- **Internal/**

Internal code that is not usually modified by users

- **Resources/Textures**

Textures used by the NullMediaPlayer and always included in builds

- **Shaders/**

This base folder contains all the optional shaders which will be stripped out if they are not used. It also contains the important .cginc file shared by all shaders

- **Resources/**

Internal shaders that are always included in builds

Extensions Folder

This folder contains files for supporting other packages, Unity extensions or other assets.

- **Timeline/**

Adds support for the Playables Timeline feature

- **UnityUI/**

Adds support for displaying video to Unity's UI system

- **VisualEffectGraph/**

Adds support for sending video to Unity's VFX graph

Demos Folder

This folder contains several examples scenes showing how to use some of the components included with AVPro Video. This folder builds to its own assembly and is optional.

- **MediaPlayerUI/**

Complete scripts and shaders for a fully functional advanced UI for media playback.

- **SampleMedia/**

MediaReference asset files for the sample media (local files and streaming URLs)

- **Scenes/Demo_MediaPlayer.unity**

A comprehensive example scene playing back media with AVPro Video and using the MediaPlayerUI to help demonstrate features like subtitles, seeking, Unity audio, streaming etc.

- **Scenes/Demo_DisplayComponents.unity**

An example scene showing all of the different components used to display and manipulate videos.

- **Scenes/Demo_360Stereo.unity**

An example scene showing 360 equirectangular stereo video applied to a sphere.

Editor Folder

This folder contains editor-only scripts which are not usually modified by users. It builds to the AVProVideo.Editor assembly.

StreamingAssets Folder

This folder contains sample media files included for demonstration purposes that the demo scenes rely on. The contained AVProVideoSamples subfolder is optional and only used for our demo scenes.

Installation

Installation Steps

If you are installing from scratch:

1. Either download the latest trial version: <https://github.com/RenderHeads/UnityPlugin-AVProVideo/releases>
or
Purchase the latest version from the [Unity Asset Store](#)
2. Open your project in Unity
3. Import the unitypackage file into your Unity project by double-clicking the file
4. If prompted to upgrade some scripts click Yes

Upgrade Steps

If you are upgrading to a new version:

1. Close your Unity project
2. Open your project again and proceed to the next step immediately without running the scene or clicking on any AVPro Video components, as this can cause the plugin files to become locked
3. Import the unitypackage file into your Unity project by double-clicking the file
4. If prompted to upgrade some scripts click Yes

Watermarked Trial Version

If you are using a trial version of the plugin then you will see a watermark displayed over the video. The watermark is in the form of a "RenderHeads" logo that animates around the screen, or a thick horizontal bar that moves around the screen.

Installation & Watermark Troubleshooting

It's often a good idea to check that the correct version is reported after a plugin upgrade. You can check which version you have installed by adding an MediaPlayer component to your scene and clicking on the "About / Help" button in the Inspector for that component. The version number is displayed in this box.

The full version of AVPro Video has no watermarks for any platforms. If you use one of the platform specific packages (eg AVPro Video for iOS, or AVPro Video for Windows) then you will not see the watermark on the platform you purchased for, but you will see the watermark on the other platforms. For example if you purchased AVPro Video for iOS then you will still see the watermark in the Unity editor as this is running on Windows/macOS, but the videos played back when you deploy to your iOS device will be watermark-free.

Installing Multiple Single-Platform Packages

If you are not using the AVPro Video Core or Ultra package and instead have opted to purchase multiple individual Core single-platform packages then the installation must be done carefully, especially when upgrading to a new version.

If you have installed the iOS package then it will also contain plugins for all of the other platforms but with the watermark enabled. This means that if you then try to install another AVPro Video package it may not override the plugins correctly. Here is how to resolve this using the iOS and Android package as examples:

1. Open a fresh Unity instance (this is important as otherwise Unity may have locked the plugin files which prevents them from being upgraded)
2. Import the iOS package
3. Import the Android package, but make sure that you have the iOS native plugin file unticked (so that it is not overwritten) A

similar process can be applied for other package combinations.

List of native plugin files that need to be selectively chosen when replacing specific platforms:

- Android
 - Plugins/Android/AVProVideo.jar
- macOS
 - Plugins/AVProVideo.bundle
- iOS
 - Plugins/iOS/AVProVideo.framework
- tvOS
 - Plugins/tvOS/AVProVideo.framework
- Windows
 - Plugins/WSA/UWP/ARM64/AVProVideo.dll
 - Plugins/WSA/UWP/ARM64/AVProVideoWinRT.dll
 - Plugins/WSA/UWP/ARM/AVProVideo.dll
 - Plugins/WSA/UWP/ARM/AVProVideoWinRT.dll
 - Plugins/WSA/UWP/x86/AVProVideo.dll
 - Plugins/WSA/UWP/x86/AVProVideoWinRT.dll
 - Plugins/WSA/UWP/x86_64/AVProVideo.dll
 - Plugins/WSA/UWP/x86_64/AVProVideoWinRT.dll
 - Plugins/x86/AVProVideo.dll
 - Plugins/x86/AVProVideoWinRT.dll
 - Plugins/x86_64/AVProVideo.dll
 - Plugins/x86_64/AVProVideoWinRT.dll


Quick Start

Playing Media


A [MediaPlayer](#) component is always required and so should be the first component you add to your scene.

1. Create a GameObject with the MediaPlayer component by selecting from the menu

GameObject > Video > AVPro Video - MediaPlayer.

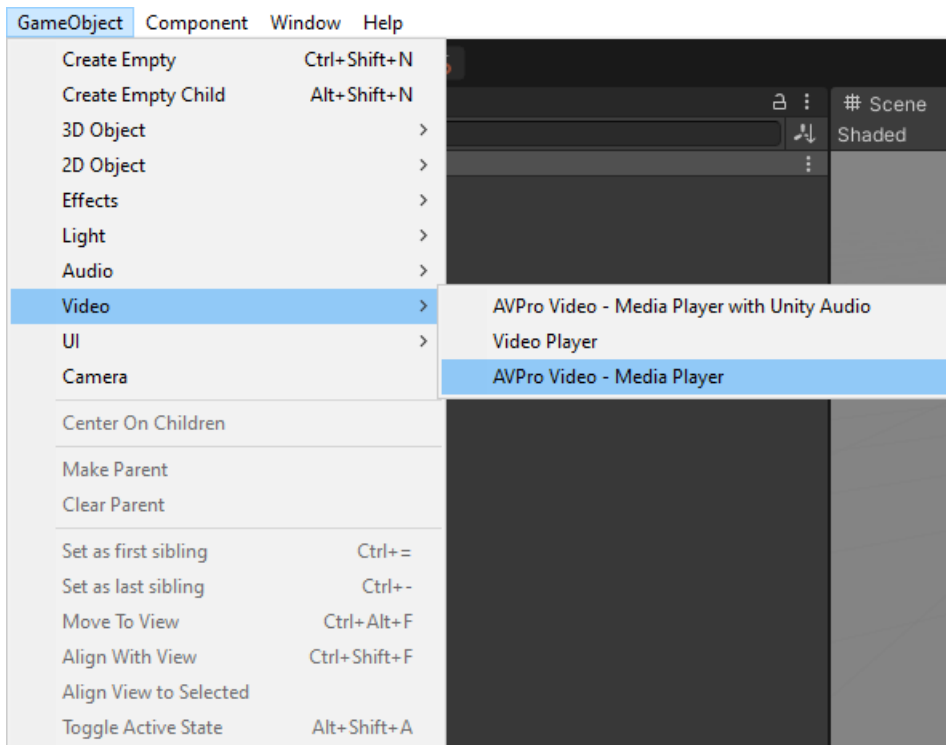

2. On the MediaPlayer component, set the media source via the `Settings > Source` section. Press on the folder button to browse for the media you want to play. See the [Loading Media](#) section for more information about this.

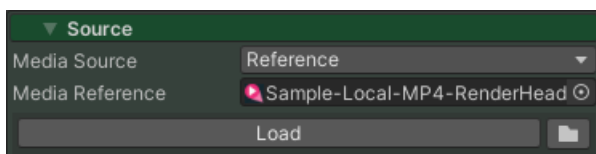

The MediaPlayer is set up to load and play your video, however it will not display yet (see below).

Displaying Video on the UI

The [DisplayUGUI](#) component is used to render the video to the UI.

1. Create your UI canvas by going to the menu `GameObject > UI > Canvas`.
2. Make sure the new Canvas GameObject is selected and then select from the menu `GameObject > UI > AVPro Video uGUI` to add the DisplayUGUI component.
3. Select the new GameObject and assign the `MediaPlayer` property to the MediaPlayer created above.
4. Play the scene to see your media displayed

Displaying Video on a Mesh

The [ApplyToMesh](#) component is used to render the video to a mesh.

1. Add a 3D mesh object to your scene (eg Quad) and move it so that it is visible by the main camera.

2. Add the `ApplyToMesh` components to a `GameObject` and assign the `Media` property to the `MediaPlayer` created above and the `Renderer` property to the `MeshRenderer` component.
3. Create a new material and assign it a suitable AVPro Video shader (eg `AVProVideo/Unlit/Opaque`).
4. In the `MeshRenderer` assign this new material to the `Materials Element 0` property.
5. Play the scene to see your media displayed on a mesh.

Demo Scenes


Read about the included [demo scenes](#) as these are also a good quick start reference for typical use-cases.

Loading Media

The location of media can be specified in two main ways:


1. Media Reference
2. Path

Media Reference

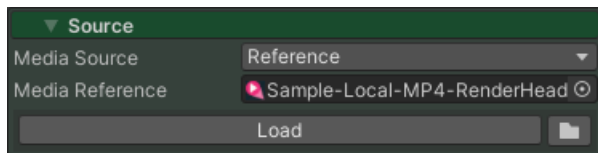

The [MediaReference](#) asset allows media to be specified and stored within Unity, media hints to be set (eg transparency and stereo) and referenced easily. This is the preferred way to specify media if the media is permanent.

Path

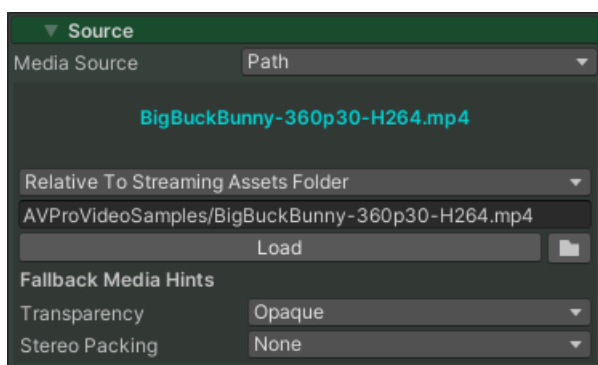

Alternatively a file path / URL can be specified directly in the MediaPlayer. This is suitable for media that isn't permanent and therefore isn't worth creating a MediaReference for. With this method the media hints need to be specified in the MediaPlayer.

Scripting

```
// Opening media via a MediaReference
MediaReference mediaReference = _myMediaReference;
bool isOpening = mediaPlayer.OpenMedia(mediaReference, autoPlay:true);


// Opening media URL via a Path
bool isOpening = mediaPlayer.OpenMedia(new
MediaPath("https://www.myvideos.com/stream.m3u8",MediaPathType.AbsolutePathOrURL), autoPlay:true);

// Opening local file media via a Path
bool isOpening = mediaPlayer.OpenMedia(new
MediaPath("myvideo.mp4",MediaPathType.RelativeToStreamingAssetsFolder), autoPlay:true);

// Changing the media hints for content loaded via Path
MediaHints hints = mediaPlayer.FallbackMediaHints;
hints.stereoPacking = StereoPacking.TopBottom;
mediaPlayer.FallbackMediaHints = hints;
```


Demos

Media Player UI Demo

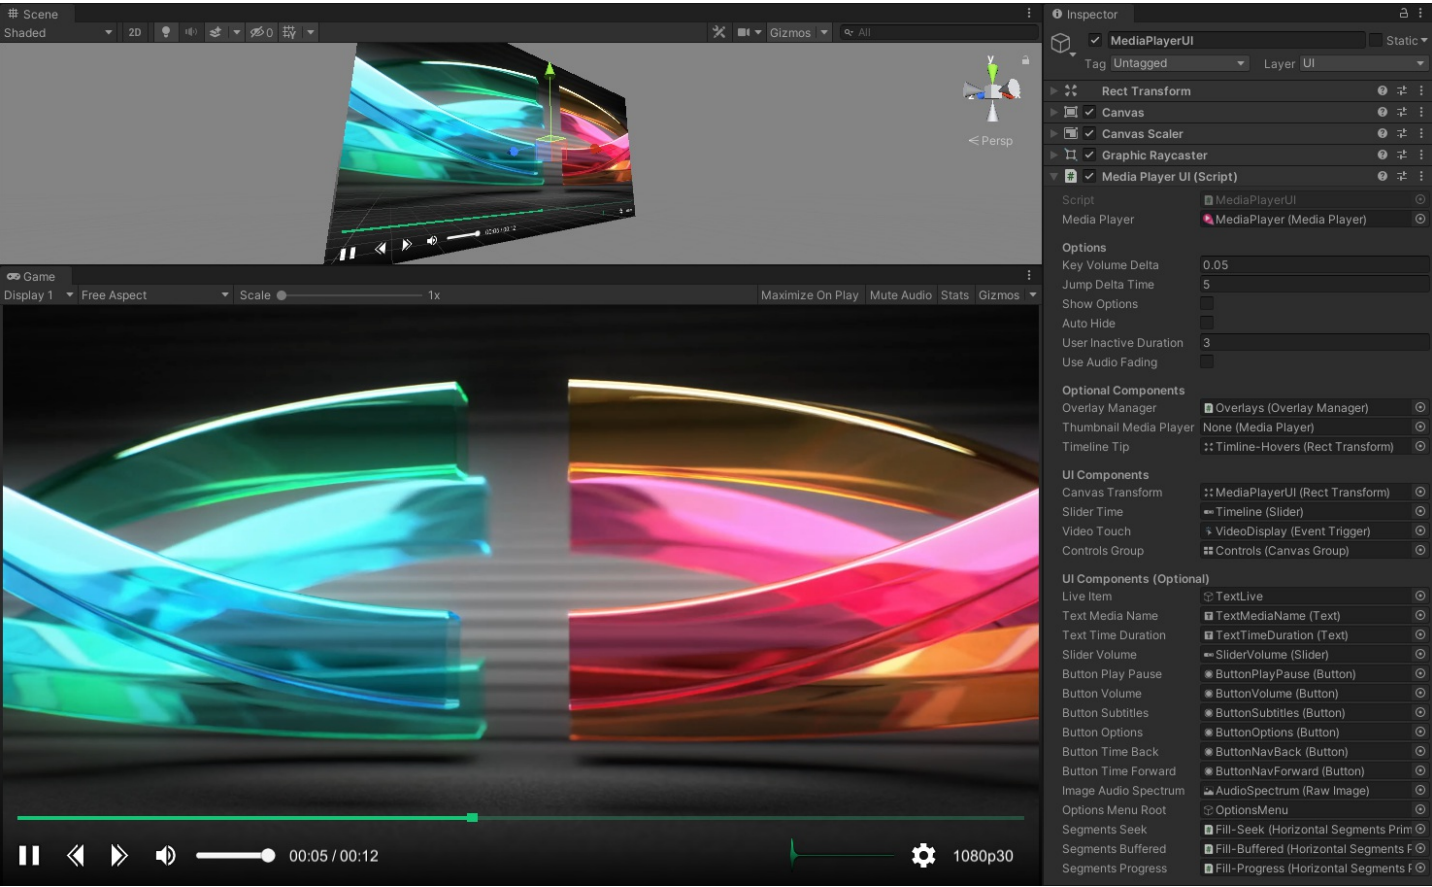


A comprehensive example scene playing back media with AVPro Video and using the MediaPlayerUI to help demonstrate features like subtitles, seeking, Unity audio, streaming etc.

Display Components Demo

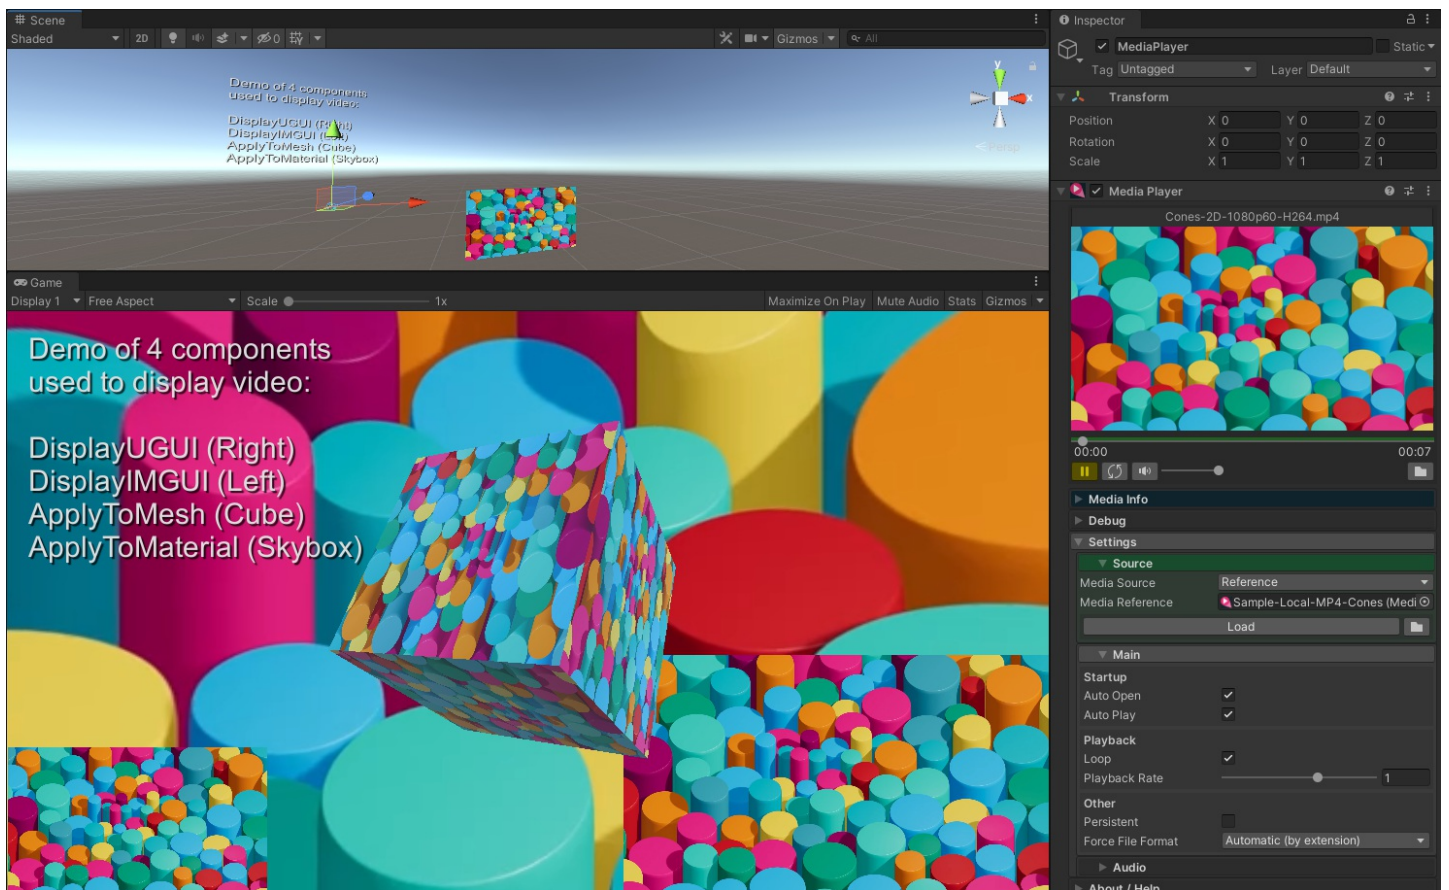

An example scene showing all of the different components used to display and manipulate videos (eg ApplyToMesh, DisplayUGUI etc). It also shows how to apply the video to a `Skybox`.


360 Stereo Demo

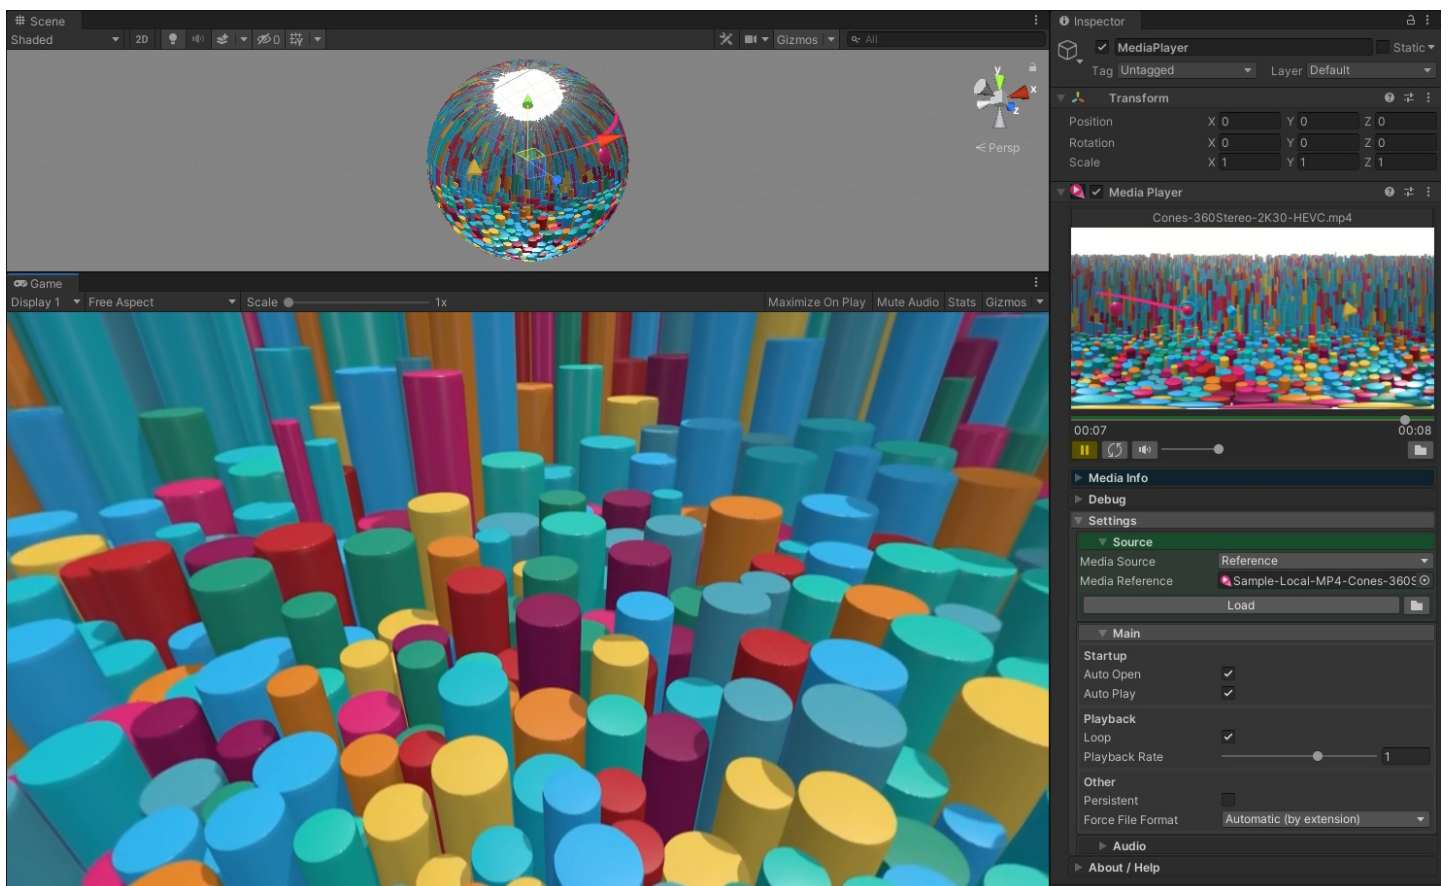

An example scene showing 360 equi-rectangular stereo video applied to a sphere. If no VR headset is available touch/mouse can

be used to rotate the camera view.

Shaders

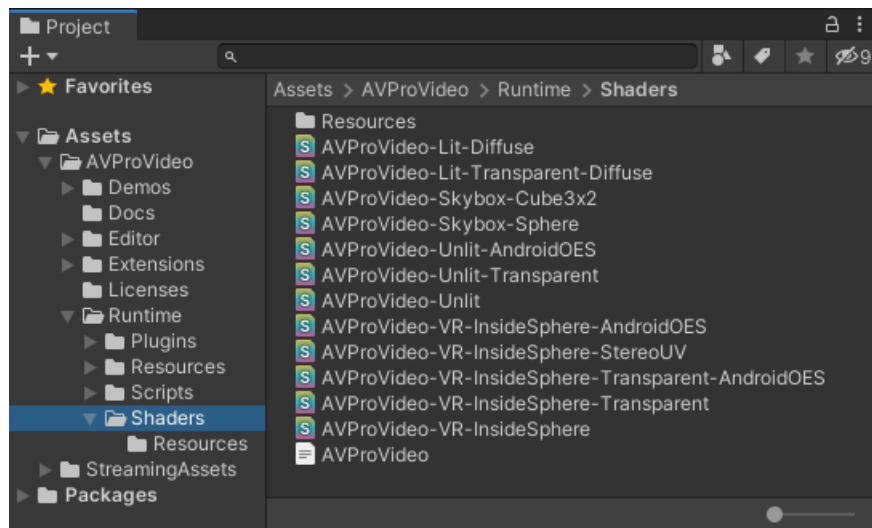

AVPro Video includes a number of shaders, most of which are used internally, but in some cases the user is required to use the appropriate shader.

Canvas Display

When displaying video on the Canvas via the [DisplayUGUI](#) component you don't have to worry about the shader being used. Internally this component will select the best AVPro Video shader to use.

Mesh Display

When using the [ApplyToMesh](#) or [ApplyToMaterial](#) component, you should make sure that the material uses one of the AVPro Video shaders. This is because the textures produced by the plugin need transforming to be displayed correctly (eg gamma adjustments, stereo resolving, alpha packing, vertical flipping on some platforms etc). Our shaders handle all of this automatically and without an extra resolve step which would add overhead.

NOTE

In the near future we plan to add a "Resolve" feature which will resolve the textures to a RenderTexture so that our shaders won't be required. This will be very useful for many cases, but it will be a small performance penalty due to the extra resolve step.

Unlit Shaders

For cases where lighting isn't needed:

- Unlit
 - Supports: Stereo, colour tint, fog
 - Unsupported: Lighting, transparency
- Unlit-Transparent
 - Supports: Stereo, colour tint, fog, transparency
 - Unsupported: Lighting
- Unlit-AndroidOES
 - Android OES mode only (it will fall back to the Unlit shader on non-Android platforms)
 - Supports: Stereo, colour tint
 - Unsupported: Lighting, transparency

Unlit VR Shaders

Very similar to the previous Unlit shaders, but with some extra functionality often used for 360 / 180 VR videos, and culling reversed to make the mesh (usually a sphere) visible from inside:

- VR-InsideSphere
 - Supports: Stereo, fog, Equi-rectangular 360 and 180 video layout
 - Unsupported: Lighting, transparency
- VR-InsideSphere-Transparent
 - Supports: Stereo, fog, Equi-rectangular 360 and 180 video layout, transparency
 - Unsupported: Lighting
- VR-InsideSphere-StereoUV
 - This is a special case, it's the same as VR-InsideSphere but uses a different texture coordinate set per eye. This is useful for custom layouts specified via UV coordinates
 - Supports: Stereo, fog, custom video layouts
 - Unsupported: Lighting, transparency
- VR-InsideSphere-AndroidOES
 - Android OES mode only (it will fall back to the VR-InsideSphere shader on non-Android platforms)
 - Supports: Stereo, fog, Equi-rectangular 360 and 180 video layout
 - Unsupported: Lighting, transparency
- VR-InsideSphere-Transparent-AndroidOES
 - Android OES mode only (it will fall back to the VR-InsideSphere shader on non-Android platforms)
 - Supports: Stereo, fog, Equi-rectangular 360 and 180 video layout, transparency
 - Unsupported: Lighting

Skybox Shaders

For cases where the video is to be applied to a Skybox:

- Skybox-Sphere
 - Supports: Stereo, Equi-rectangular 360 video layout
- Skybox-Cube3x2
 - Supports: Stereo, Cubemap 3x2 video layout

Lit Shaders

For cases where the video needs to be lit by the scene:

- Lit-Diffuse
 - Supports: Lighting, stereo, Colour tint
 - Unsupported: Transparency, fog
- Lit-Transparent-Diffuse
 - Supports: Lighting, transparency
 - Unsupported: Stereo, fog

NOTE

Materials using these lit shaders will not automatically update when upgrading to HDRP / UWP rendering pipelines.

Streaming

AVPro Video supports several streaming protocol depending on the platform:

| | WINDOWS | ANDROID | MACOS | IOS / IPADOS / TVOS |
|----------------------------------|----------------|----------------|-------|---------------------|
| HTTP Progressive | | | | |
| MP4 | ☐ | ☐ | ☐ | ☐ |
| Adaptive | | | | |
| HLS (m3u8) | ☐ ¹ | ☐ | ☐ | ☐ |
| MPEG-DASH (mpd) | ☐ ¹ | ☐ ⁴ | . | . |
| Microsoft Smooth Streaming (ism) | ☐ ¹ | . | . | . |
| Real-time | | | | |
| RTSP | ~ ² | ~ ⁵ | . | . |
| RTMP | ~ ³ | . | . | . |

¹ Requires Windows 10 for native support, or using DirectShow with suitable 3rd party filter (eg LAV Filters).

² Limited native support. Read Microsoft notes about support here: <https://docs.microsoft.com/en-us/windows/win32/medfound/supported-protocols>. Support seems improved from Windows 10 build 1803 onwards.

³ Only using DirectShow with suitable 3rd party filter (eg LAV Filters).

⁴ Using ExoPlayer API only.

⁵ Using MediaPlayer API only, but not fully featured.

HTTP Progressive Streaming

This form of streaming is probably the most widely supported. It is very similar to playing a local MP4 file, except that it is streamed from a network source. The HTTP server should support features such as byte range requests.

When encoding MP4 videos for streaming make sure they are encoded with the video header data at the beginning of the file. You normally do this by selecting "Fast Start" in QuickTime encoder, or use the "-movflags faststart" option in FFMPEG, Other encoders will have a similar option. To prepare an MP4 for streaming using FFMPEG you can use the following command:

```
ffmpeg -i %1 -acodec copy -vcodec copy -movflags faststart %1-streaming.mp4
```

Adaptive Streaming

Adaptive streaming such as HLS and MPEG-DASH are flexibly formats that support adaptive bit-rate selection and multiple audio, video and subtitle tracks. HLS is by far the most widely supported.

On certain platforms (Android and Windows 10) we allow setting a hint so that streaming will begin with the highest bit-rate. On

Apple platforms the player adheres to Apple's standard of starting with the first stream in the manifest file.

[AES-128 encrypted](#) HLS streams, and [custom HTTP headers](#) are supported in the Ultra Edition.

Real-time Streaming

Formats like RTSP/RTMP are designed for real-time streaming and are popular with live streaming cameras. As shown in the above table AVPro Video doesn't have strong support for these formats as they are not the focus of this plugin and most operating systems do not have good native support for them.

Live Streaming

Live HLS and MPEG-DASH streams are supported and will return a duration of +infinity.

```
// Detect a live stream
double duration = mediaPlayer.Info.GetDuration();
bool isLive = double.IsInfinity(duration);
```

Some live streams contain a seekable range so that the stream can be viewed from an offset from the live time. The seekable range should be queried to determine this.

```
// Get the seekable time range
TimeRanges seekable = mediaPlayer.Control.GetSeekableTimes();
Debug.Log("Seekable time: " + seekable.MinTime + " " + seekable.MaxTime);
```

Some HLS streams contain a program-time via the EXT-X-PROGRAM-DATE-TIME tag. This is supported on macOS, iOS, tvOS, Android (using ExoPlayer) and Windows 10 (using WinRT API). This can be queried in script:

```
// Get the stream date and time
System.DateTime time = mediaPlayer.Control.GetProgramDateTime();
if (time != DateTime.MinValue)
{
    Debug.Log("Valid time: " + time.ToString());
}
```

Windows

For best results with adaptive streams, select the WinRT video API (requires Windows 10) instead of the default Media Foundation. This will give better streaming performance and compatibility, especially for live streams. This will also allow you to select the option to begin streaming at the highest bit-rate available via the [Platform Specific > Windows](#) options.


Android

Using the ExoPlayer API is recommended for streaming video as it generally has wider support for streaming protocols.

Android streaming requires the Internet Access setting (in Player Settings) to be set to ["Require"](#):

ExoPlayer will also allow you to select the option to begin streaming at the highest bit-rate available via the [Platform Specific > Android](#) options.

ExoPlayer exposes buffering values via the [Platform Specific > Android](#) options.

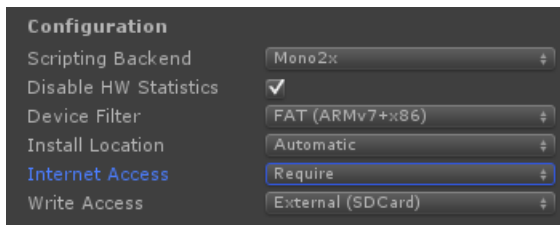

NOTE

Starting with Android 9 (API level 28) cleartext support (unencrypted HTTP connections) is disabled by default, which can cause some HTTP streams to fail. You should be able to resolve this by switching the URL to HTTPS or by adding `android:usesCleartextTraffic="true"` into your AndroidManifest.xml file.


macOS / iOS / tvOS

This platform supports streaming of HLS streams which typically end with the m3u or m3u8 extension.

NOTE

HTTP URLs are no longer supported by default on these platforms, and a secure HTTPS URL should be used.

If you can only use HTTP then your app has to have a special flag set to let it use HTTP connections (this is a security issue for Apple). This setting is exposed in the Unity Player Settings here for iOS and tvOS:

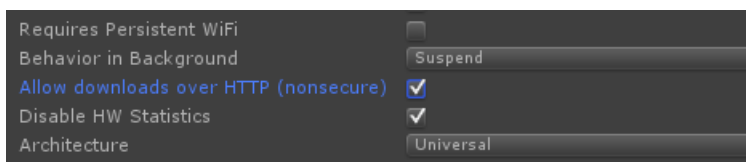

The setting is also exposed in the Unity scripting API here: <http://docs.unity3d.com/ScriptReference/PlayerSettings.iOS-allowHTTPDownload.html>

If for some reason your version of Unity doesn't expose this then you will have to add it manually. In the Unity editor you need to edit "Unity.app/Contents/Info.plist" and in your built application you would need to edit "your.app/Contents/Info.plist". These files need to have these keys added:

```
<key>NSAppTransportSecurity</key>
<dict>
  <key>NSAllowsArbitraryLoads</key>
  <true/>
</dict>
```

You can find more information about this here: <http://ste.vn/2015/06/10/configuring-app-transport-security-ios-9-osx-10-11/>

UWP / Hololens

Make sure to tick the "InternetClient" capabilities option in Player Settings.

If you're streaming video from a local server / LAN then you need to enable the "PrivateNetworkClientServer" option.

For best results with adaptive streams, select the WinRT video API (requires Windows 10) instead of the default Media Foundation. This will give better streaming performance and compatibility, especially for live streams. This will also allow you to select the option to begin streaming at the highest bit-rate available via the Platform Specific > Windows options.

WebGL

IMPORTANT

We do not officially support WebGL, but only include it as it may be useful for some people. We found too many issues with browser compatibility to continue supporting it

If you are trying to access a URL on another server/port/domain then you need to have CORS (cross-origin resource sharing) configured on that server to allow access. Websites like <https://enable-cors.org/> show you how to configure CORS on different web servers. If you are hosting on a S3 bucket there are also ways to configure this. You can also test whether CORS is the issue by installing a browser plugin to toggle CORS, for example this one for Chrome: \

<https://chrome.google.com/webstore/detail/allow-control-allow-origi/nlfbmbojpeacfgkhkpbjhdhdkkiljbi>

HLS and MPEG-DASH are not natively supported by all browsers. We have added hooks to include third-party javascript libraries to handle these formats. Under the "Platform Specific > WebGL" section you can select "External Library". This will force the MediaPlayer to use either [hls.js](#) or [dash.js](#). You can also select "custom" if you wish to add support for your own javascript library.

To add support or dash.js:

1. Download the latest dash.js release (we last tested with 2.8.0): \ <https://github.com/Dash-Industry-Forum/dash.js/releases>
2. Copy "dash.all.min.js" to the Assets/Plugins/WebGL folder and rename it "dash.all.min.jspre" (don't rename it inside the Unity editor as it will not get the correct extension, instead rename it from Explorer or Finder)
3. In the MediaPlayer component set Platform Specific > WebGL > External Library to dash.js
4. Build for WebGL

To add support for hls.js:

1. In the MediaPlayer component set Platform Specific > WebGL > External Library to hls.js
2. Build for WebGL
3. Download the latest hls.js release (we last tested with 0.10.1):

<https://github.com/video-dev/hls.js/releases>
4. Once your build is made, copy "hls.min.js" to the TemplateData folder
5. Edit the index.html to add `<script src="TemplateData/hls.min.js"> </script>` before the UnityLoader.js script is loaded. Ideally you would add this to a new WebGL template so that you don't have to make these changes for each build.

YouTube Support

We get asked a lot about YouTube support, so we are including this note here. AVPro Video doesn't officially support streaming from YouTube. This is because it is against their terms & conditions, and the streaming URLs are protected by javascript and server obfuscation. We have heard though that some people are using 3rd party tools to extract the streaming URLs. In theory these URLs could be playable in AVPro Video but this is not something we support.

Vimeo Support

If you are streaming videos from VIMEO as MP4 then you should note that you can replace the ".mp4" part in the URL with ".m3u8" to instead make it an HLS stream. This may be particularly useful if you are developing apps for the Apple's App Store as you would need to use HLS streaming to pass certification (as for April 2016).

There is also an official Unity plugin for Vimeo (by Vimeo) that integrates with the old version of AVPro Video. Unfortunately Vimeo have not maintained their plugin so we can no longer recommend it.

Test Streams

We found these 3rd-party streams handy for testing (but no guarantee that they're still working):

- "Tears of Steel" VOD
<https://stream.mux.com/4XYzhPXzqArkFI8d1vDsScBLD69Gh1b2.m3u8>
HTTPS - HLS - H.264 - AAC - WebVTT Subtitles - 1080p
- "Tears of Steel" LIVE
<https://cph-p2p-msl.akamaized.net/hls/live/2000341/test/master.m3u8>
HTTPS - HLS - H.264 - AAC - 1080p
- "Apple Bip Bop" VOD
https://devstreaming-cdn.apple.com/videos/streaming/examples/bipbop_16x9/bipbop_16x9_variant.m3u8
HTTPS - HLS - H.264 - AAC - WebVTT Subtitles - 1080p
- "Skate Phantom" VOD
http://sample.vodobox.net/skate_phantom_flex_4k/skate_phantom_flex_4k.m3u8
HTTP - HLS - H.264 - AAC - 4K
- "Llama Drama" VOD
[http://amssamples.streaming.mediaservices.windows.net/634cd01c-6822-4630-8444-8dd6279f94c6/CaminandesLlamaDrama4K.ism/manifest\(format=m3u8-aapl\)](http://amssamples.streaming.mediaservices.windows.net/634cd01c-6822-4630-8444-8dd6279f94c6/CaminandesLlamaDrama4K.ism/manifest(format=m3u8-aapl))
HTTP - HLS - H.264 - AAC - 4K


Transparency

Codecs

Not many video codecs have native support for transparency / alpha channels. Formats supported by some platforms of AVPro Video are:


- HEVC+Alpha
 - Requires macOS 10.15, iOS 13.0 or tvOS 13.0
- Hap
 - Only supported in Ultra edition
 - Hap Alpha
 - Great support on Windows and macOS. Fast and low overhead format, though file size can get large depending on the content. Currently this is the format we recommend for transparent video.
 - Hap Q Alpha
 - Great support on Windows and macOS. Slightly higher quality and file size compared to Hap Alpha.
- NotchLC
 - Only supported in Ultra edition
- Uncompressed RGBA / YUVA
 - Uncompressed isn't ideal for file size or disk bandwidth but can still be used as a fallback
- ProRes 4444
 - Best support is on macOS. Files can be huge though.
- VP6
 - Legacy format. We support it only via 3rd party DirectShow plugins for Windows (eg LAV Filters)

Alpha Packing

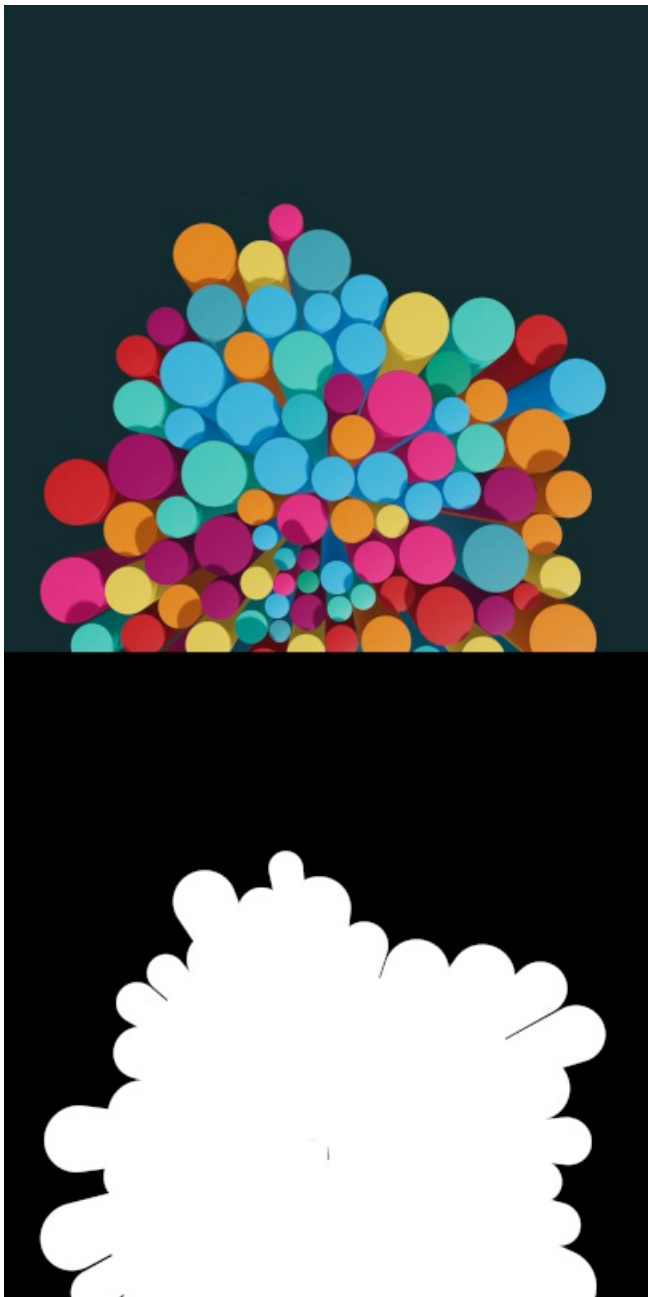

Perhaps the best option is to encode your videos in video formats that don't support an alpha channel (eg MP4 as H.264 or HEVC) by packing the alpha channel into the same frame. You can double the width for a left-right packing layout, or double the height for a top-bottom packing layout. This packing could be created in software such as AfterEffects, or the command-line FFmpeg tool can be used.

The packing format is then specified either in the `MediaReference` or `MediaPlayer` as part of the `MediaHints`:

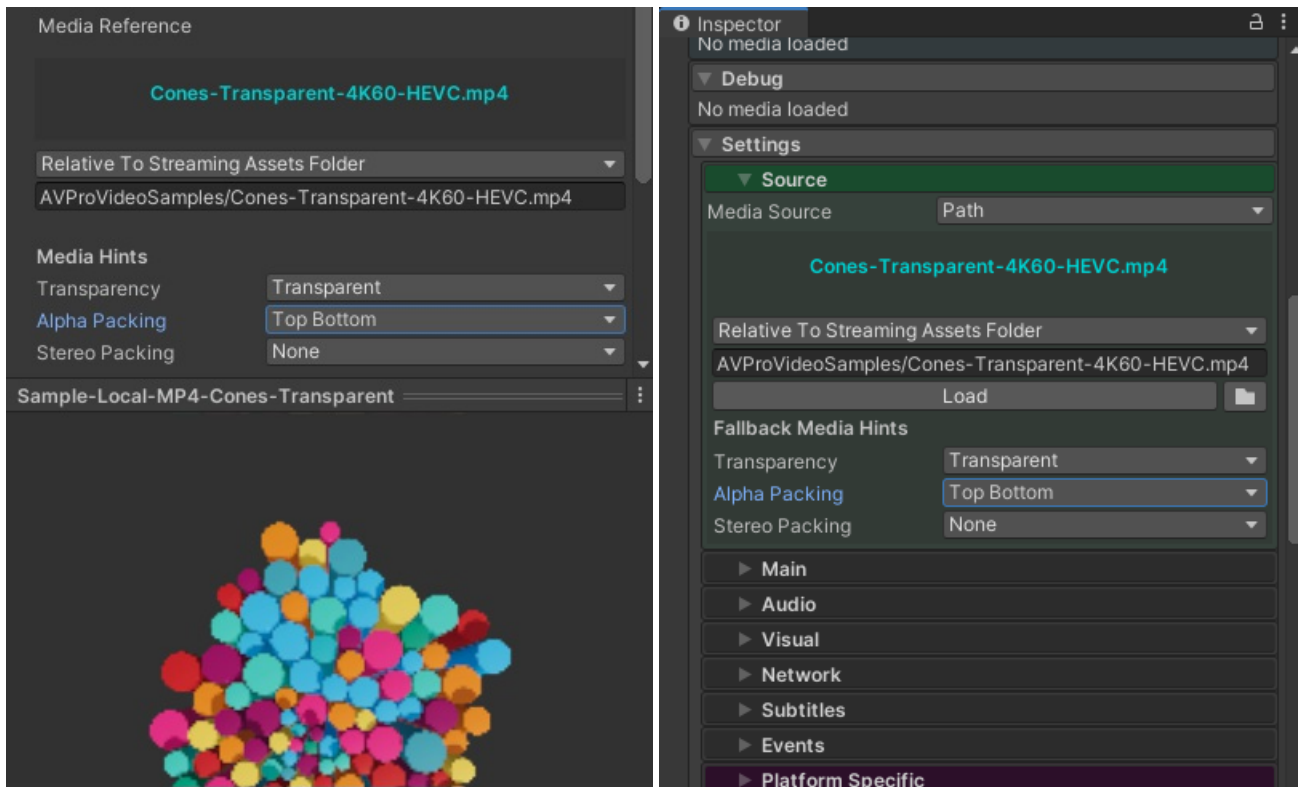


Alpha Packing with FFMPEG

FFMPEG command-line can be used to convert a source video containing a transparency/alpha channel into an alpha packed format:


Left-right alpha packing:

```
ffmpeg -i input.mov -vf "split [a], pad=iw*2:ih [b], [a] alphaextract, [b] overlay=w" -y output-lr.mp4
```

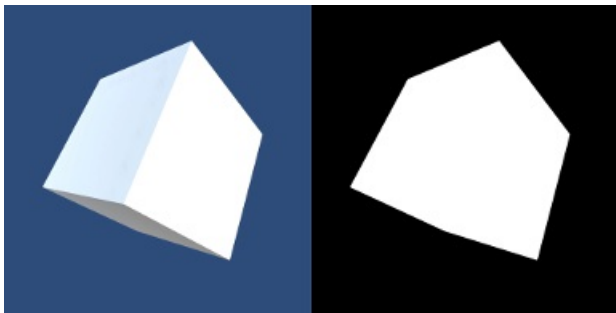

Top-bottom alpha packing:

```
ffmpeg -i input.mov -vf "split [a], pad=iw:ih*2 [b], [a] alphaextract, [b] overlay=0:h" -y output-tb.mp4
```

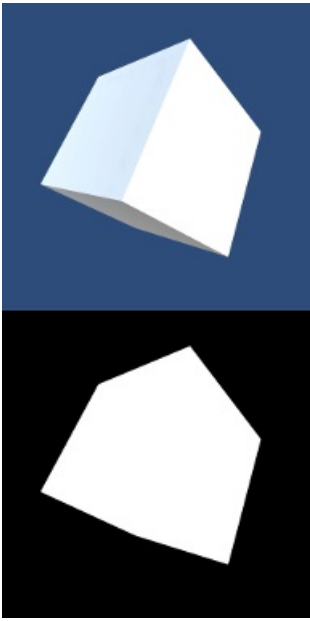

Augmented / Mixed / Virtual Reality

AVPro Video has a number of features useful for XR experiences.

High Resolution Video

360 and 180 videos for VR generally require very high resolutions. The video resolution that can be played is only limited by the video decoder capabilities of the hardware. Most systems can decode 4K H.264 or HEVC(H.265) in hardware. Some systems (especially mobile / untethered) have some custom encoding requirements for higher resolutions and the developer documentation should be researched.

NOTE

In general there is limited hardware support for H.264 above 4K resolution. For higher resolutions HEVC (H.265) should be used.

WARNING

If you use up all the capabilities of the hardware video decoder, then a second video will often not be loadable until you have unloaded the first video. This is especially true on mobile platforms.

Windows

On Windows 8K video decoding usually requires a high-end GPUs (NVidia Geforce 10xx series and above, or newer Intel integrated GPUs) with 64-bit builds, using the HEVC codec.

Android

See the performance notes for the [Android Platform](#) about using OES mode for best high-resolution video performance.

Oculus Quest

The Quest has special encoding requirements which are detailed in this [Blog Post](#).

macOS / iOS

See the performance notes for the [iOS Platform](#) about using YcbCr mode for best high-resolution video performance.

360 and 180 Formats

Three popular spatial mapping formats are supported:

- Equirectangular 360
- Equirectangular 180
- Cubemap 3:2 (also known as Facebook Cubemap)

Equirectangular videos can be played on a sphere, or assigned to a Skybox material.

These layouts can be set as a hint on the MediaPlayer via the Inspector, or via scripting:

```
// Set the video layout mapping hint on the MediaPlayer
mediaPlayer.VideoLayoutMapping = VideoMapping.EquiRectangular180;
```

3D Stereo Video


Packed side-by-side or top-bottom stereo video is supported on all platforms.

Auto-Detection

The stereo packing format of the video can be detected automatically by AVPro Video if the correct metadata is embedded. Currently the [st3d box / atom](#) is supported on all platforms (except DirectShow API in Windows, and MediaPlayer API on Android). Stereo videos without this atom may also have stereo data embedded as "SEI FPA (frame packing arrangement)", however this automatic detection of this is currently only supported on Windows.

Manually Specifying

If the auto-detection is not able to determine the stereo packing format (perhaps because the information is not encoded into the video file), then the packing format can be explicitly set via the MediaReference asset, or as a fallback MediaHint in the MediaPlayer when not loading from a MediaReference.

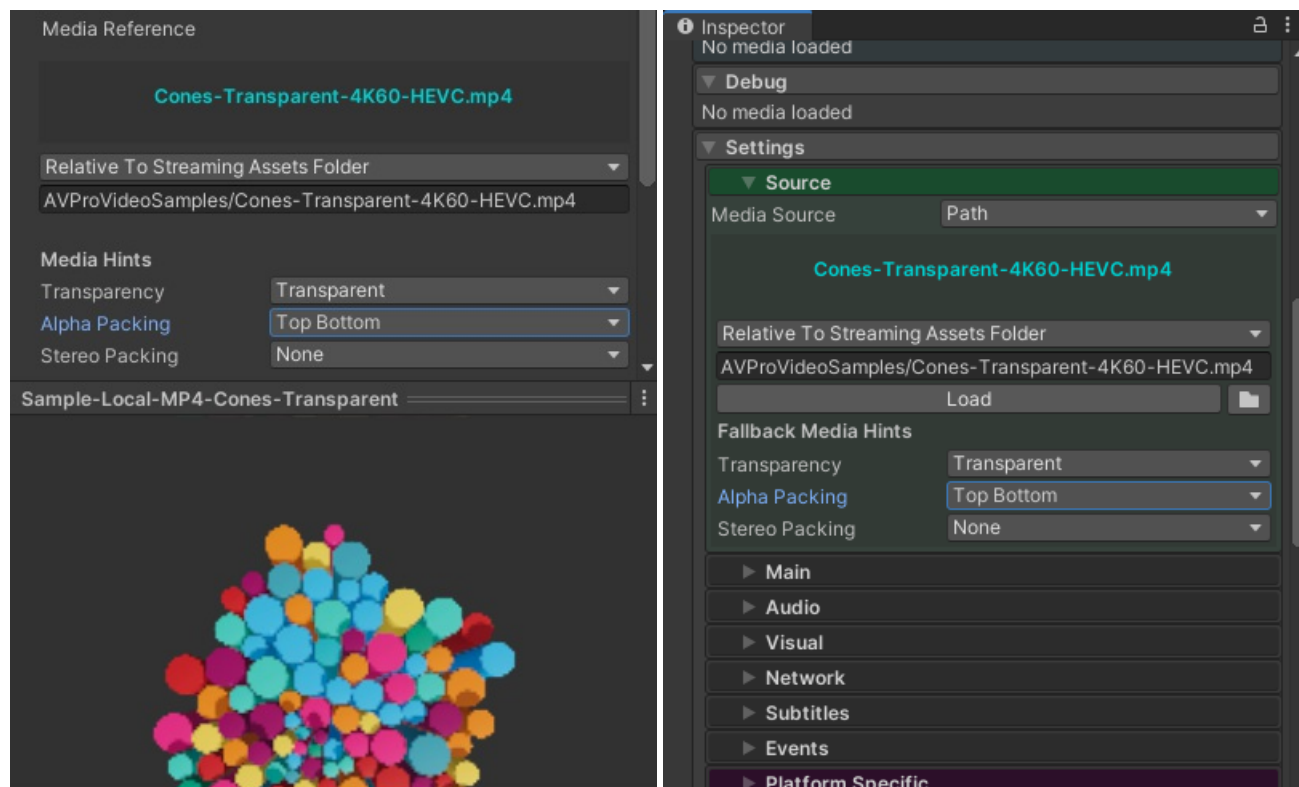

Stereo packing hints can also be set via scripting:

```
// Setting the fallback stereo packing on the MediaPlayer when loading videos via the Path MediaSource
MediaHints hints = mediaPlayer.FallbackMediaHints;
hints.stereoPacking = StereoPacking.TopBottom;
mediaPlayer.FallbackMediaHints = hints;
```

Forcing Stereo Eye Mode

It's possible to force the eye mode as well via scripting:

```
// Use the static VideoRender class to force a stereo eye mode on a material (eg Material used in
ApplyToMesh/ApplyToMaterial)
VideoRender.SetupStereoEyeModeMaterial(material, StereoEye.Left);
```

NOTE

Be sure to include the [UpdateMultiPassStereo](#) component if your stereo application will run in multi-pass mode.

Spatial Audio

See the [360 Audio](#) section.

VR / AR / MR / XR Headsets Supported

Android

- Oculus Rift Go
- Oculus Gear VR
- Oculus Quest
- Oculus Quest 2
- HTC Vive Focus
- Gear VR
- Google Cardboard
- Google Daydream
- Pico Goblin & Neo
- Lenovo Mirage Solo


Windows Desktop

- HTC Vive
- HTC Vive Pro
- HTC Vive Cosmos
- Valve Index
- Oculus Rift
- Oculus Rift S
- StarVR

Windows UWP

- Microsoft Hololens
- Microsoft Hololens 2
- Samsung Odyssey
- Asus
- HP
- Acer
- Lenovo Explorer
- Dell Visor


Subtitles

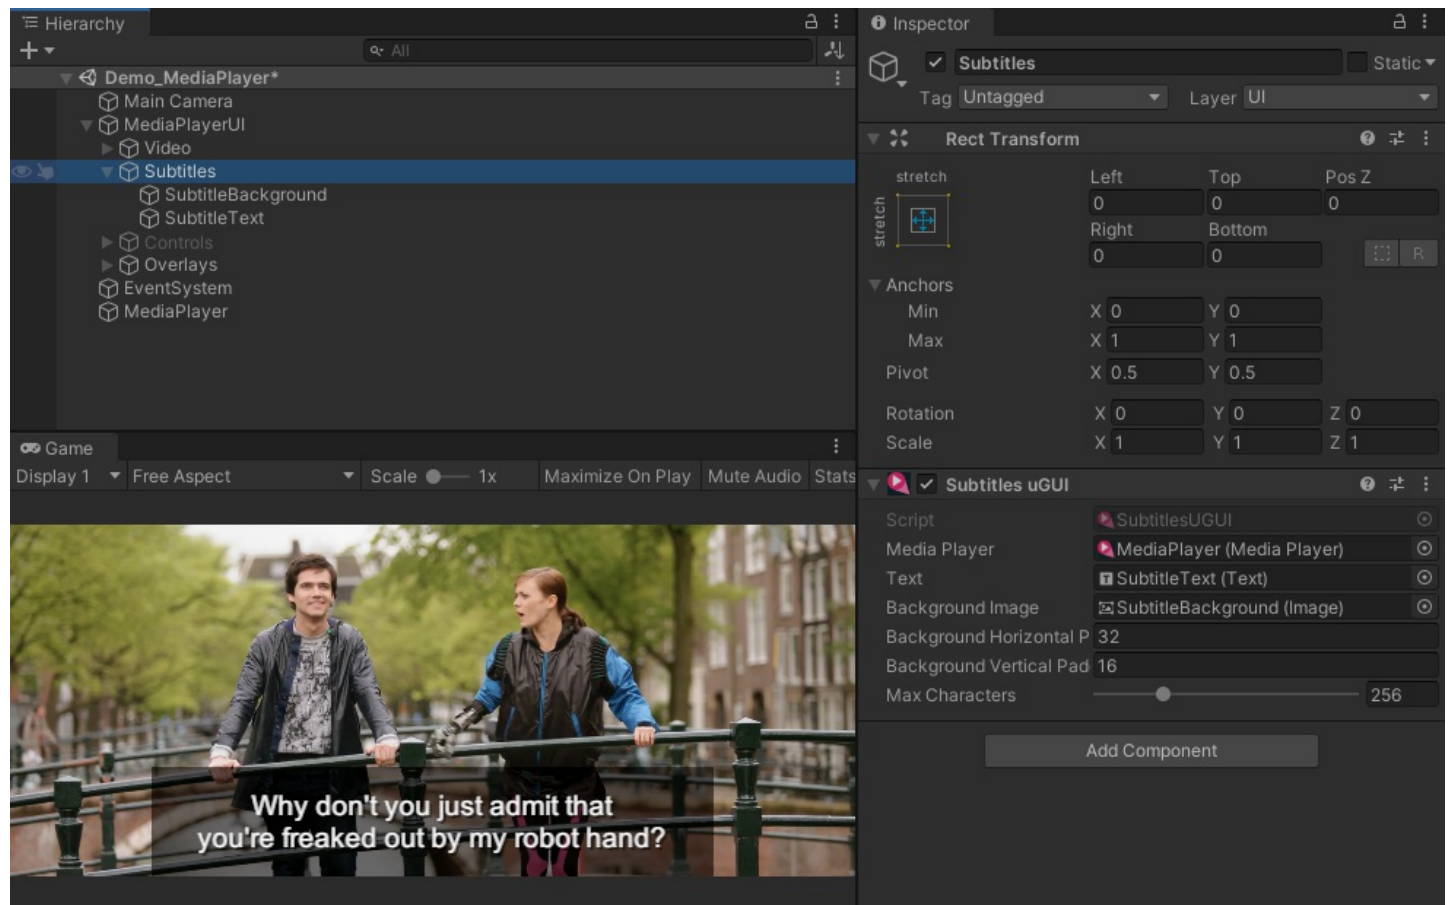

Various subtitles formats are supported:

- WebVTT in HLS - macOS, iOS, tvOS, Android (using ExoPlayer API), Windows and UWP (using WinRT or Media Foundation API)
- CEA/EIA 608 & 708 - Windows and UWP (using WinRT or Media Foundation API)
- tx3g in MP4 and MOV - macOS only

When loading media that contains subtitles tracks, the tracks are displayed in the Inspector allowing tracks to be selected and a preview of the subtitle content to be shown:

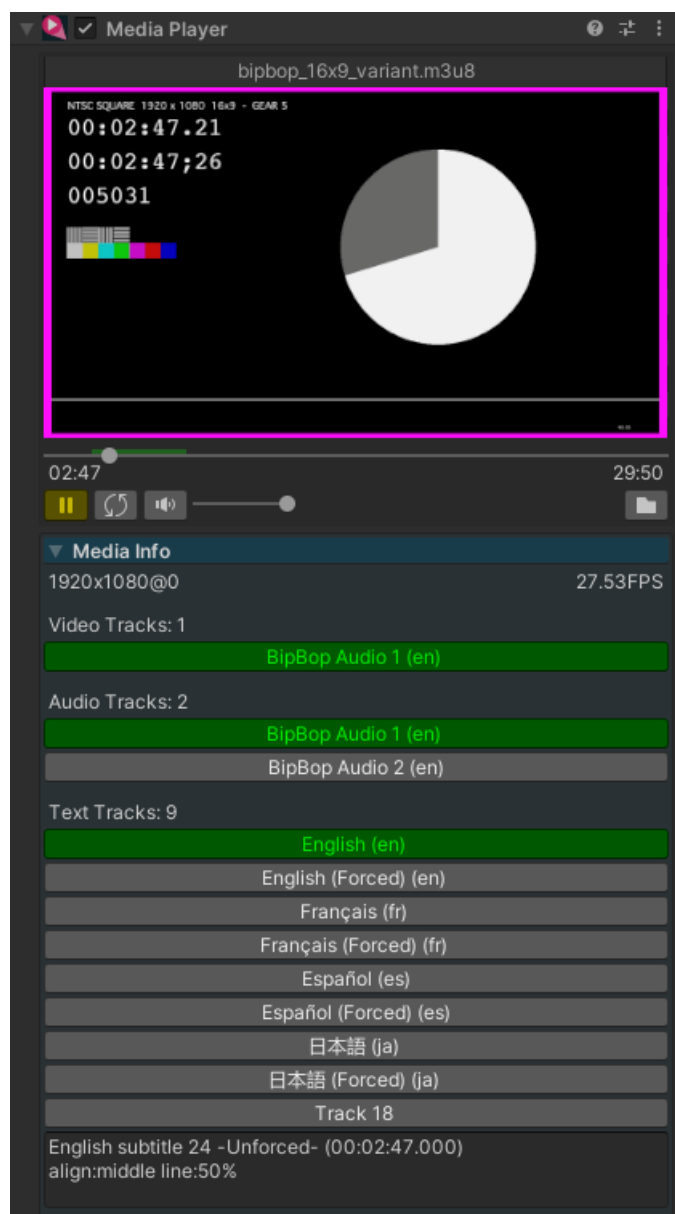

Text tracks can be scripted:


```
// Get the number of text tracks
int trackCount = mediaPlayer.TextTracks.GetTextTracks().Count;


// Iterate through the tracks
foreach (TextTrack track in mediaPlayer.TextTracks.GetTextTracks())
{
    Debug.Log(track.DisplayName);
}

// Get information about the active text track
TextTrack track = mediaPlayer.TextTracks.GetActiveTextTrack();
if (track != null)
{
    Debug.Log(string.Format("{0}:{1}", track.Name, track.Language));
}
else
{
    Debug.Log("No active text track");
}

// Set the active text track
mediaPlayer.TextTracks.SetActiveTextTrack(track);

// Get the current text cue
TextCue textCue = mediaPlayer.TextTracks.GetCurrentTextCue();
if (textCue != null)
{
    Debug.Log(textCue.Text);
}
```

SRT Sideloading

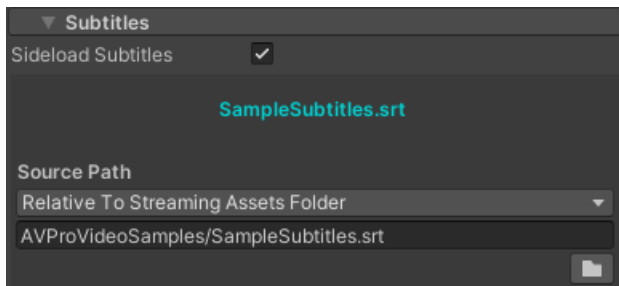

AVPro Video supports external subtitles in the SRT format on all platforms.

```
// Load subtitles
mediaPlayer.SideloadSubtitles = true;
mediaPlayer.EnableSubtitles(MediaLocation.RelativeToStreamingAssetsFolder, "subtitles.srt");

// Disable subtitles
mediaPlayer.DisableSubtitles();
```

Displaying

You can create your own system to display subtitles, or use the included [SubtitlesUGUI component](#).

Video Capture

To make a non-realtime video capture of your Unity scenes which include videos, requires the video playback to slow down or speed up to match the video capture rate. AVPro Video supports this through the "TimeScale Support" option which is found in the Global Settings panel of the Media Player component. This means you can create high quality renders running at 1fps to produce a smooth 60fps video, and any videos in your scene will play back at the correct rate for the recording. Audio is not supported though when using this option.

Content Protection

Most of the content protection features are in the Ultra Edition, but the Core edition does support the file offsetting on Android.

File Offset

On Android (this is the only platform that currently supports this feature) in the Core Edition a file offset can be specified which allows loading of media which is embedded within another file. This is very useful for hiding media. An additional method is to a dummy video file, and then append your real media to this file, as this will then allow the video to play and so it will not be obvious where the hidden media is.

In Windows you can easily append your video to a dummy video file with the following command:

```
copy /b DummyVideo.mp4 + %1 %~n1-hidden.mp4
```

The offset can be set via the UI in the `Platform Specific > Android` section, or via `PlatformOptionsAndroid` in scripting:

```
// Set the Android file offset  
mediaPlayer.PlatformOptionsAndroid.fileOffset = 54321;
```

Seeking / Playback Rate

Seeking

All time operations are done in seconds using doubles:

```
// Get the media duration in seconds
double duration = mediaPlayer.Info.GetDuration();

// Get current time in seconds
double time = mediaPlayer.Control.GetCurrentTime();

// Get the ranges of time that can be seeked between
TimeRanges seekRanges = mediaPlayer.Control.GetSeekableTimes();

// Seek to 24 seconds
mediaPlayer.Control.Seek(24.0);

// Seek to nearest keyframe at 24 seconds
mediaPlayer.Control.SeekFast(24.0);

// Seek to closest keyframe allowing keyframe to be either ahead, behind or on both sides of the desired time
// This is only currently available on macOS, iOS, iPadOS and tvOS
mediaPlayer.Control.SeekWithTolerance(24.0, 5.0, 0.0);
```

Media that has a known constant frame rate can be seeked using frames:

```
// Get the media duration in frames
int durationFrames = mediaPlayer.Info.GetDurationFrames();

// Get the highest frame number you can seek to (the same as durationFrames-1)
int maxFrame = mediaPlayer.Info.GetMaxFrameNumber();

// Seek to frame 60
mediaPlayer.Control.SeekToFrame(60);

// Seek back 10 frames
mediaPlayer.Control.SeekToFrameRelative(-10.0);

// Get current time in frames
int frame = mediaPlayer.Control.GetCurrentTimeFrames();
```

If the frame rate can not be determined (eg in some HLS media the frame rate returns zero) then you can still use the frame-based time methods by manually supplying the frame rate as an optional final parameter to the above methods:

```
// Get the media duration in frames
int durationFrames = mediaPlayer.Info.GetDurationFrames(30f);

// Seek to frame 60
mediaPlayer.Control.SeekToFrame(60, 30f);

// Get current time in frames
int frame = mediaPlayer.Control.GetCurrentTimeFrames(30f);
```

Playback Rate

Generally we recommend these rates:

0.25, 0.5, 1.0, 1.25, 1.5, 1.75, 2.0

Going up to 4.0 might be possible depending on your platform, machine specs and the codec used. Increasing playback rate usually places more demand on the video decoder and also on the disk/network source, so these limit how high you can set the playback rate.

Using negative values isn't generally recommended as it isn't as well supported, but if you do have to use a negative rate then also try keeping the numbers small such as:

```
-0.25, -0.5, -1.0
```

Audio also may or may not play when changing the playback rate - this depends on the platform (see table below).

One safe alternative to adjusting rate is to pause the video and fast seek to simulate a change in playback rate. This approach would work on all platforms.

Video encoding can also help the performance of a change in playback rate. Videos with more key-frames (or ideally all key-frames) and with less complex encoding (eg no B frames, CABAC disabled etc) will work better. Alternatively a fast key-frame-only codec could be used, such as Hap.

Scripting playback rate:

```
// Get the current playback rate
float rate = mediaPlayer.PlaybackRate;

// Set the current playback rate
mediaPlayer.PlaybackRate = rate * 2f;
```

Platform Differences

Seeking

| | FAST APPROXIMATE KEYFRAME SEEKING | SLOW ACCURATE FRAME SEEKING |
|------------------------------------|-----------------------------------|-----------------------------|
| Windows (WinRT / Media Foundation) | ☐ | ☐ |
| Windows (DirectShow) | ☐ | Depends on the codec |
| Android (ExoPlayer) | ☐ | ☐ |
| Android (MediaPlayer) | ☐ | API 26 and above |
| macOS | ☐ | ☐ |
| iOS/iPadOS/tvOS | ☐ | ☐ |
| WebGL | ☐ | Varies |

Playback Rate

| | ADJUST PLAYBACK RATE | NEGATIVE RATES | AUDIO PLAYS |
|------------------------------------|----------------------|----------------|------------------|
| Windows (WinRT / Media Foundation) | ☐ | ☐ | Depends on codec |
| Windows (DirectShow) | ☐ | . | . |
| Android (ExoPlayer) | ☐ | ? | ☐ |

| | ADJUST PLAYBACK RATE | NEGATIVE RATES | AUDIO PLAYS |
|------------------------------|----------------------|-------------------------|--------------------|
| Android (MediaPlayer) | API 23 and above | ? | ☐ |
| macOS | ☐ | Depends on media source | ☐ |
| iOS/iPadOS/tvOS | ☐ | Depends on media source | ☐ |
| WebGL | ☐ | . | Depends on browser |

Optimal Encoding

Most videos are optimally encoded for the typical use case: normal forward playback with approximate seeking.

If you want to start changing the playback rate, play in reverse, allow fast scrubbing, or have fast frame accurate seeking then you may run into issues where the playback becomes extremely slow or the seeking is not accurate. There are several reasons for this, but it mostly is related to how the video is encoded and specifically the key-frame distribution. There are also some platform differences to consider.

Codecs such as H.264 and H.265 generally compress video frames so that they depend on data included with previously decoded frames. These are called P and B frames and seeking to one of these is computationally expensive, as in order to display them the decoder must first decode the other frames that they depend on. The other type of frame is called a key-frame or I-frame and these frames can be decoded immediately because they don't depend on any other frames. Compressing using P And B frames is known as temporal compression and isn't ideal for accurate random seeking or playback rate changes.

For the best results you would encode your video with only key-frames, as then you can seek accurately and quickly anywhere in the video. This is possible, but increases the file size dramatically. Using FFMPEG you can encode a video to use key-frames only using the "-g 1" option. Another option would be to use a codec that only supports key-frames, such as Hap or ProRes - but again these result in large file sizes and limited GPU decoding capabilities.

In most codec with temporal compression the key-frames are spaced every 250 frames. Some platforms can only seek to the key-frames (see table above), while others can do accurate seeking but this can be very slow if the distances between key-frames is too large. Try reducing the key-frame distance for faster seeking. You can also reduce the decoder complexity by encoding with a `fastdecode` tuning option.


Here is an example FFMPEG command to encode using H.264 codec with all keyframes for very fast seeking:

```
ffmpeg -hide_banner -y -i input.mp4 -pix_fmt yuv420p -c:v libx264 -crf 18 -tune fastdecode -x264-params "keyint=1" output-h264.mp4
```

360 Audio

Spatial audio support is currently available using Facebook Audio 360 on Windows desktop, UWP and Android. On Windows, only Windows 10 and above is supported and the Media Foundation video API must be selected. On Android the ExoPlayer video API must be selected. The video files must be using a MKV file container and audio must be using the Opus codec encoded with Facebook Audio 360 tools.


The best way to encode the video is to use the FB360 Encoder tool which comes as part of the FB360 Spatial Workstation. Set Output Format to “FB360 Matroska (Spatial Workstaton 8 channel)” and then set your video and audio source files and encode your video. This should create a MKV file with 10 channels of Opus audio.

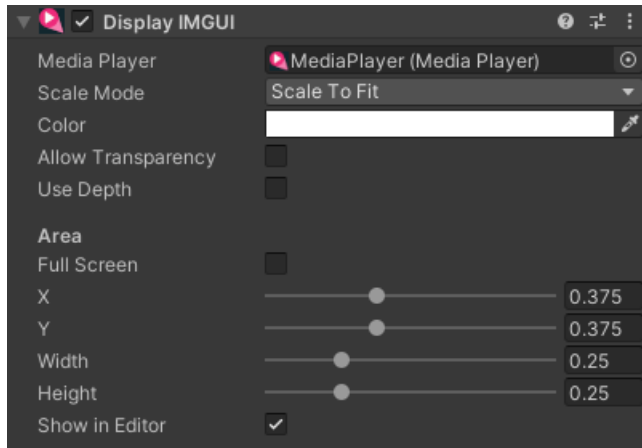

The settings are located under the Audio section of the MediaPlayer component. The “Head Transform” field must be set to the transform that represents the player's head so that rotation and positional changes affect the audio rendering. Usually this is the main camera.

“Enable Focus” can be enabled when a specific region of audio in the 360 field needs to be given focus. The rest of the audio has its volume reduced.

Next the Facebook Audio 360 support must be enabled for each platform that needs it via the “Platform Specific” panel. Currently it is only available on Windows desktop and Android.

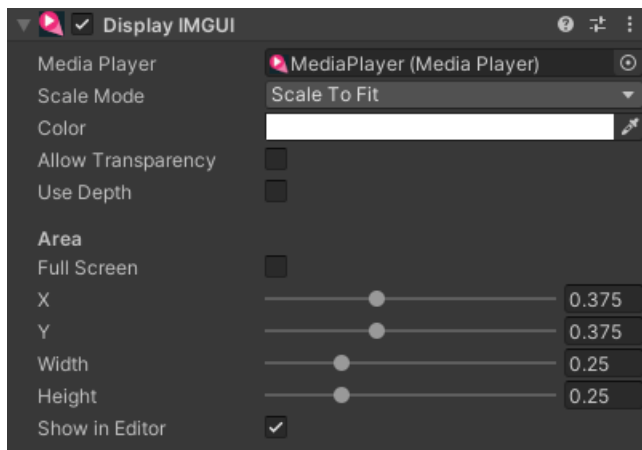

The “Channel Mode” must be set to the channel encoding mode used when creating the video. Currently this can not be determined automatically. The default is “TBE_8_2” which means 8 channels of hybrid ambisonics and 2 channels of head-locked stereo audio.

Encoding with Facebook 360 Spatial WorkStation

More information on encoding etc can be found on the Facebook Audio 360 website at: <https://facebook360.fb.com/spatial-workstation/>

Alternative steps for encoding manually

1. Create a WAV file with the audio format they need (Eg 9 channels ambisonics with 2 channels of head-locked audio will require a 11 channel WAV file with the 2 head-locked channels at the end)
2. Use Opus tools, as described here to convert the WAV file to Opus: <https://opus-codec.org/downloads/>
https://facebookincubator.github.io/facebook-360-spatial-workstation/Documentation/SDK/Audio360_SDK_GettingStarted.html#encoding-opus-files
3. Use ffmpeg to mux this opus file into the video container (ensure that the video file doesn't have any audio first):

```
ffmpeg -i audio.opus video.mp4 -c:a copy -c:v copy audio_video.mkv
```

4. In AVPro Video specify the required channel map

Converting existing ambisonic videos

It is also possible to convert existing ambisonic videos so they are compatible. For example if you have an existing MP4 file with 4-channel 1st order ambisonic audio, then it is possible to convert this into the above format (MKV container with Opus audio) using a tool like FFMPEG. Simple put the following command in a .BAT file and then drag your MP4 into the batch file:

```
ffmpeg -y -i input.mp4 -c:v copy -acodec libopus -mapping_family 255 output.mkv
```

This should then generate an MKV file that you can play with AVPro Video. All that remains is to set the channel mapping in the MediaPlayer component to AMBIX_4.

Hap Codec

The [Hap video codec](#) is natively supported by AVPro Video on macOS and Windows in the Ultra Edition, and has the following benefits:

- Low CPU usage
- Low memory usage
- GPU decompression
- Supports very high resolutions
- Supports alpha channel transparency
- Fast seeking and variable playback speed

The main downside is:

- Very large files

Windows Support

Hap, Hap Alpha, HapQ, HapQ Alpha and HapR are supported. AVI and MOV containers can both be used in Windows however we recommend the MOV container. Hap currently requires the either the "DirectShow" or "Media Foundation" video API to be used.

WARNING

There is currently a bug on Windows that prevents MOV files with a bitrate of more than 4Gbps from playing. We are working to create a solution for this.

macOS Support

Hap, Hap Alpha, HapQ, HapQ Alpha and HapR are supported.

Encoding

JOKYO

In 2020 Jokyo introduced their fast and high quality Hap encoder with plugins for Adobe After Effects, Premiere Pro etc: <https://jokyohapencoder.com>

FFMPEG

Alternatively you can use a recent build of FFMPEG with the following command-lines:

- `ffmpeg -i input.mov -vcodec hap -format hap output-hap.mov`
- `ffmpeg -i input.mov -vcodec hap -format hap_alpha output-hap.mov`
- `ffmpeg -i input.mov -vcodec hap -format hap_q output-hap.mov`

Notes:

- You can also add the `-chunks 4` option which will encode each frame into 4 chunks so the decoding work can be split across multiple threads, resulting in faster decoding as long as the disk can keep up.
- Width and height must be multiple of a 4.
- Hap Alpha requires straight alpha (not pre-multiplied).
- Sadly ffmpeg doesn't yet support the HapQ Alpha format.
- We don't support Hap Q Alpha variant in Windows when using the legacy D3D9 graphics API

QUICKTIME

You can download the QuickTime codec for Windows and macOS here:

<https://github.com/Vidvox/hap-qt-codec/releases>

This codec can be used with QuickTime Pro or any other software that supports QuickTime codecs such as Adobe After Effects and Adobe Premiere.

NotchLC Codec

The [NotchLC video codec](#) is natively supported by AVPro Video on Windows in the Ultra Edition, and has the following benefits:

- Low CPU usage
- Low memory usage
- GPU decompression
- 10-bit colour
- Supports very high resolutions
- Supports alpha channel transparency
- Fast seeking and variable playback speed
- Higher quality than the Hap codec

The main downside is:

- Very large files

Windows Support

AVI and MOV containers can both be used in Windows however we recommend the MOV container. NotchLC currently requires the the "Media Foundation" video API to be used.

WARNING

There is currently a bug that prevents MOV files with a bitrate of more than 4Gbps from playing. We are working to create a solution for this.

Encoding

Encoding notes are in the Notch [user manual](#)

Content Protection

Content protection schemes supported by the plugin are summarised as:

- Windows Desktop & UWP
 - Custom HTTP header fields can be specified which can help with server side validation (requires using the WinRT API)
 - HLS with AES-128 clear-key, direct key and key request is supported
- Android
 - Custom HTTP header fields can be specified which can help with server side validation
 - HLS with AES-128 clear-key, direct key and key request is supported (make sure your TS segments are 188 bytes aligned for maximum Android compatibility)
 - A file offset feature allows you to access files hidden within a file at an offset.
- macOS / iOS / tvOS
 - HLS with AES-128 clear-key, direct key and key request using an auth token in the HTTP header ("Authorization" field). More information about HLS encryption can be read in the RFC here: <https://tools.ietf.org/html/draft-pantos-http-live-streaming-23>
 - Custom HTTP header fields can be specified which can help with server side validation

NOTE

DRM schemes Fairplay, Widevine, PlayReady etc are not yet supported

File Offset

On Android (this is the only platform that currently supports this feature) in the Core Edition a file offset can be specified which allows loading of media which is embedded within another file. This is very useful for hiding media. An additional method is to a dummy video file, and then append your real media to this file, as this will then allow the video to play and so it will not be obvious where the hidden media is.

In Windows you can easily append your video to a dummy video file with the following command:

```
copy /b DummyVideo.mp4 + %1 %~n1-hidden.mp4
```

The offset can be set via the UI in the `Platform Specific > Android` section, or via `PlatformOptionsAndroid` in scripting:

```
// Set the Android file offset
mediaPlayer.PlatformOptionsAndroid.fileOffset = 54321;
```

Custom HTTP Headers

Custom HTTP headers can be specified in the Ultra Edition. Typically we have seen them used for authentication, token exchange and cookies. Here are Some examples of formats we've used in the past:


For authentication the typical HTTP headers are:

```
Authorization Basic <username>:<password>
Authorization Bearer <token>
```

For cookies the typical HTTP headers are:

```
Cookie <cookie-name>=<cookie-value>;<cookie-name2>=<cookie-value2>;
```

In the plugin custom headers can be specified via the component UI or via script. Using the component UI you would specify them like:

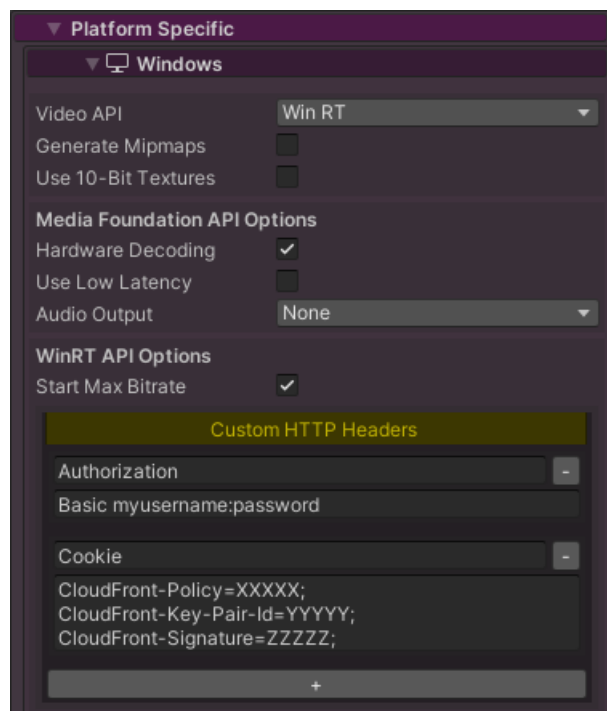

NOTE

The fields will turn red if the format is not correct

Or via scripting:

```
// Set custom HTTP headers on Android platform
mediaPlayer.PlatformOptionsAndroid.httpHeaders.Add("Authorization", "Basic <username>:<password>");
mediaPlayer.PlatformOptionsAndroid.httpHeaders.Add("Authorization", "Bearer <token>");
mediaPlayer.PlatformOptionsAndroid.httpHeaders.Add("Cookie", "<cookie-name>=<cookie-value>;<cookie-name2>=<cookie-value2>;");
```

NOTE

Internally custom HTTP headers are passed in this string format: `name1:value1\r\nname2:value2`

HLS AES-128 Encrypted Playback

In the Ultra Edition AES-128 HLS streams are supported. This allows playback of encrypted content with secure key exchange. There is support on macOS, iOS, tvOS, Android (using Exoplayer API), Windows and UWP (using WinRT API).

Key retrieval from a server URL usually requires an authentication token, which can be specified using the member `keyServerToken`, or this can be ignored if your key retrieval server doesn't require any token for key retrieval (clear-key). The auth token is a string that is inserted into the "Authorization" HTTP field when retrieving the decryption key from the server URL specified in the HLS manifest. Sometimes this field has the "Bearer" prefix.


We also added some functionality to specify the decryption key data directly. `overrideDecryptionKey` can be used to specify the

Scripting examples:


```
// Set the authentication token for the key server to allow access of the decryption key
mediaPlayer.PlatformOptionsIOS.keyAuth.keyServerToken =
"eyJ0eXAiOiJKV1QiLCJhbGciOiJIUzI1NiJ9.eyJ1cm46bWljcm9zb2Z0OmF6dXJlOm1lZG1hc2VydmljZXM6Y29udGVudGtleWlkZW50aWZpZXIiOiI5ZGRhMGJjYy01NmZiLTQxNDM0OWQzMj0zYWY5Y2M2ZWZlMGIiLCJpc3MiOiJodHRwOi8vdGVzdGFjc3Y5b20vIiwiaXVkiJjoidXJ0OnRlc3QiLCJleHAiOiJlE3MTA4MDczODI9LjJXm5hmkp5ArRIAHqVJGefW2bcTzd91iZphoKDwa6w8")};

// Just specify a decryption key manually
mediaPlayer.PlatformOptionsIOS.keyAuth.overrideDecryptionKey = new byte[] { 12, 95, 93, 64, 234, 76, 93, 64,
125, 0, 95, 23 };
```

These options can also be specified in the MediaPlayer inspector UI (in the Platform Specific section) under HLS Decryption:

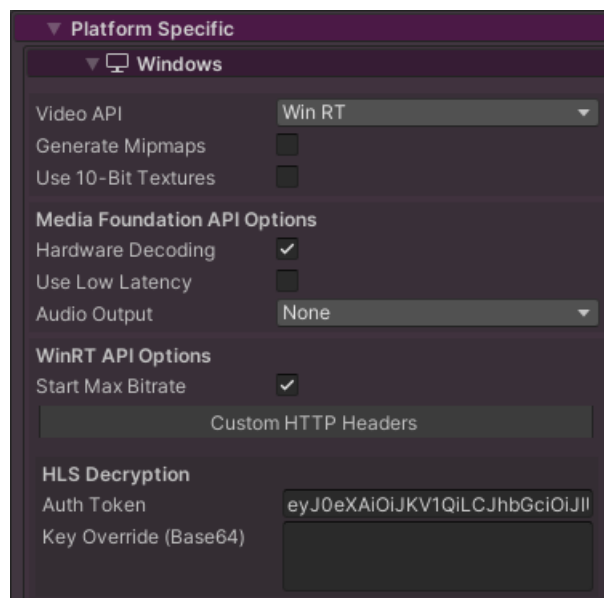

Media Player

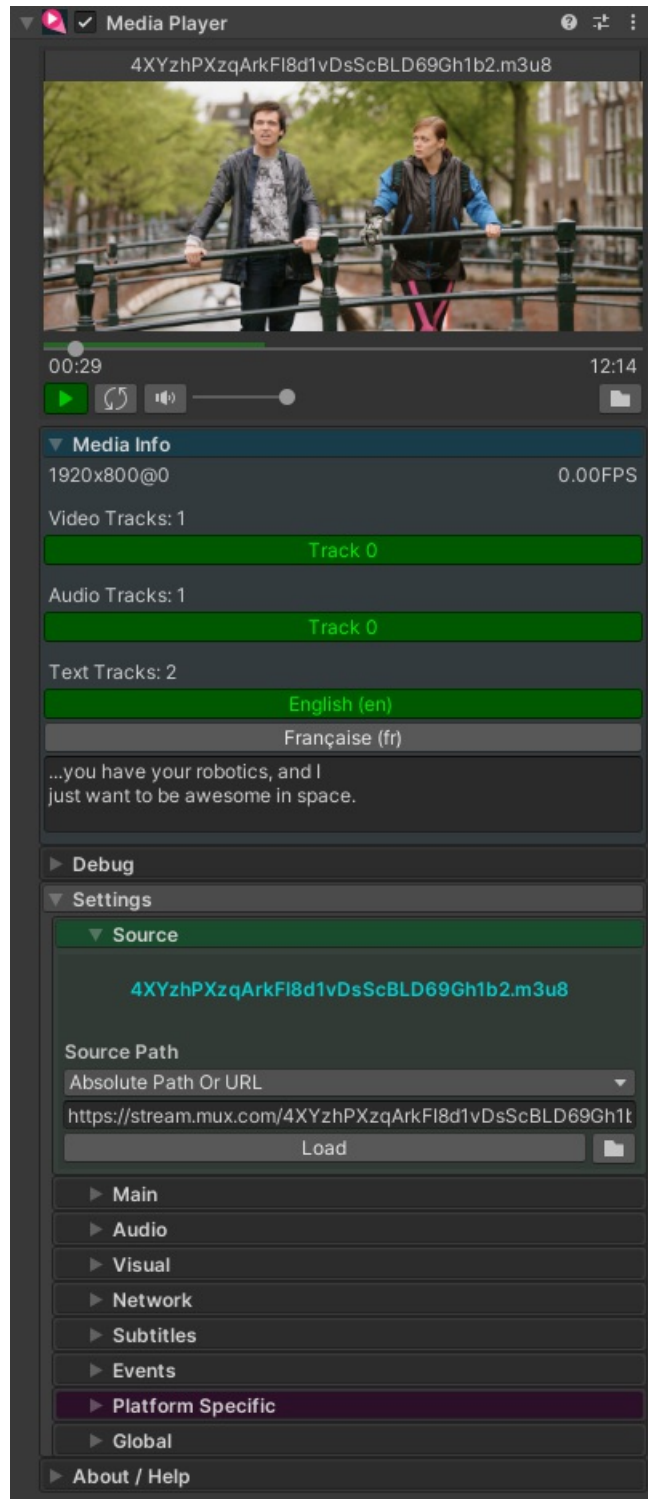


The MediaPlayer component is the primary component of AVPro Video. It handles loading of media, setting playback options, playback and interacting with the other AVPro Video components.

This component does not display the video in the Unity scene. For this you need to use one of these components: ApplyToMesh, ApplyToMaterial, Display UGUI, DisplayIMGUI or your own custom script.

This is a complex component and is split into several sections.

Preview

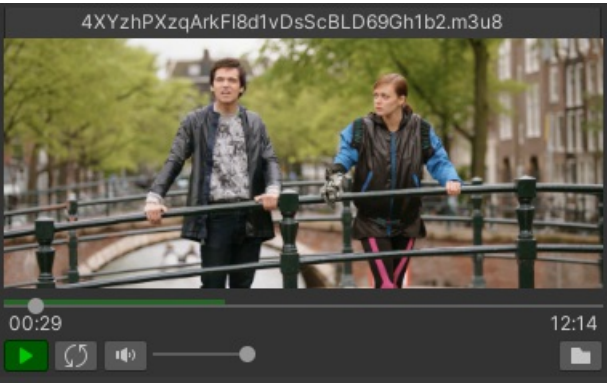

Shows a preview of the playing media and allows control of playback and loading of media. The currently buffered range is shown in green on the timeline control.

Media Info

Media Info

1920x800@00.00FPS

Video Tracks: 1

Track 0

Audio Tracks: 1

Track 0

Text Tracks: 2

English (en)

Franaise (fr)

...you have your robotics, and I just want to be awesome in space.

Shows information about the media that is currently loaded, including resolution, frame rate (if known), current playback frame rate and track information. Tracks can be switched between and the active text track will show a preview of the current text cue.

Source

Source

Media SourceReference

Media ReferenceSample-Local-MP4-RenderHead

Load

Source

Media SourcePath

BigBuckBunny-360p30-H264.mp4

Relative To Streaming Assets Folder

AVProVideoSamples/BigBuckBunny-360p30-H264.mp4

Load

Fallback Media Hints

TransparencyOpaque

Stereo PackingNone


Specifies the location of the media to load. The Load button will load the media immediately. The folder button will show a popup menu allowing file browsing, or shortcuts to recently loaded media or MediaReference assets. See the Loading Media section for more information.

Properties

| PROPERTY | FUNCTION |
|-----------------|---|
| Media Source | Specifies the type of source - either Media Reference or Path. Media Reference allows selection of an existing media asset. Path allows specifying media direct into the MediaPlayer. |
| Media Reference | The MediaReference asset to use for loading. |

| PROPERTY | FUNCTION |
|----------------------|---|
| Source Path | The location of the media (URL or file path). |
| Fallback Media Hints | |
| Transparency | This hint specified whether the media contains any transparency |
| Alpha Packing | If the transparency hint is enabled then an optional Alpha Packing hint can be specified. |
| Stereo Packing | The packing layout for stereo video |


Main

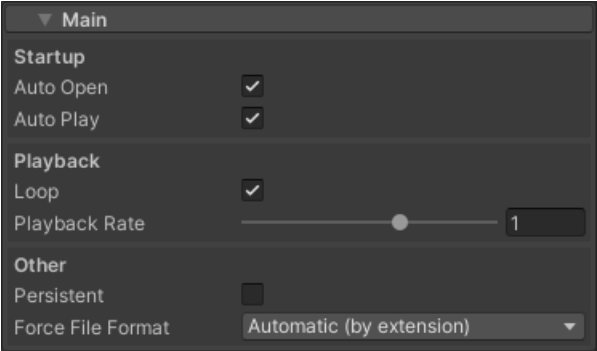

Properties

| PROPERTY | FUNCTION |
|-------------------|---|
| Auto Open | Open/Load the media on Start |
| Auto Play | Play the media as soon as it has loaded |
| Loop | Loop the playback |
| Playback Rate | Speed up or slow down playback by this rate |
| Persistent | Uses Unity's <code>Object.DontDestroyOnLoad()</code> to preserve this GameObject during scene loads |
| Force File Format | Allows a format to be specified when the correct file extension is not used. This is only supported on Android (using ExoPlayer). |


Visual

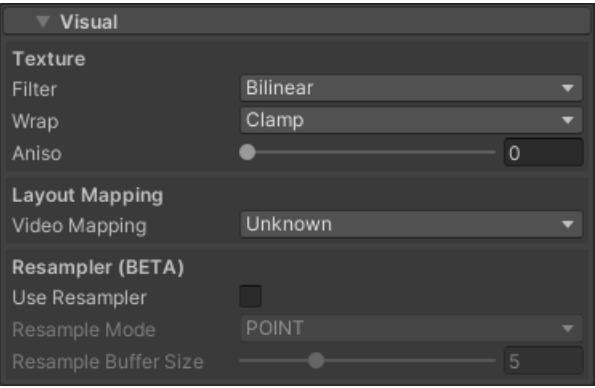

Properties

| PROPERTY | FUNCTION |
|---------------|---|
| Filter | The texture filter mode to set on the video frame texture |
| Wrap | The texture wrap mode to set on the video frame texture |
| Aniso | The anisotropic filter level to set on the video frame texture |
| Video Mapping | A hint to specify the layout of the video (eg equirectangular, or 180 degree). This is used by some AVPro Video shaders to determine how to display the video |
| Use Resampler | Enable the video frame resampler. This is useful to smooth out rendering by buffering frame textures and showing them at the correct time, or even blending frames together |
| Resample Mode | POINT selects the best buffered frame texture to display. BILINEAR allows blending between the two best frames |


Network

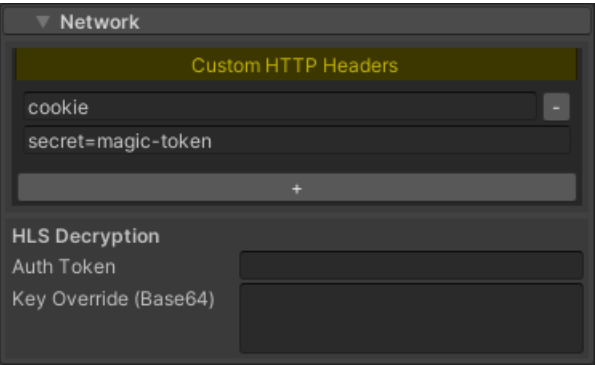

Properties

| PROPERTY | FUNCTION |
|-----------------------|---|
| Custom HTTP Headers | Set multiple custom HTTP headers by specifying the header key and value pair. |
| Auth Token | The authorisation token to pass to the key server for HLS AES-128 decryption. |
| Key Override (Base64) | The authorisation key to use for HLS AES-128 decryption. This allows a key to be forced in debugging cases where the key server is offline. |


Subtitles

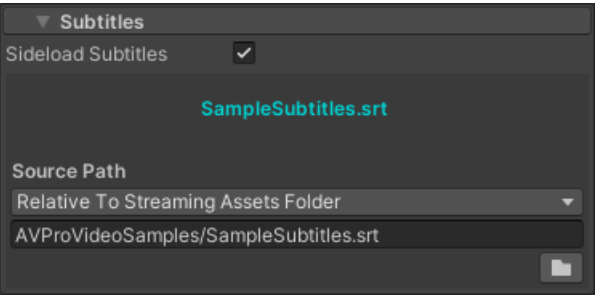

Properties

| PROPERTY | FUNCTION |
|--------------------|---|
| Sideload Subtitles | Enable sideloading of subtitles |
| Source Path | The location of the subtitle SRT file to sideload |

Events

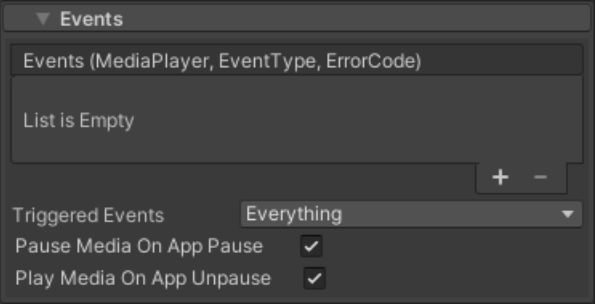

Properties

| PROPERTY | FUNCTION |
|---------------------------|---|
| Events | Specify methods to call for triggered events |
| Triggered Events | A mask to allow events to be disabled for performance reasons |
| Pause Media On App Pause | Pause media playback when the application is paused (eg switched to the background) |
| Play Media On App Unpause | Resumed media playback when the application is unpaused (eg switched to foreground) |

Platform Specific - Windows

Platform Specific

Windows

Video API

Media Foundation

Generate Mipmaps

Media Foundation API Options

Hardware Decoding

Use Low Latency

Audio Output

Unity

WinRT API Options

Start Max Bitrate

Custom HTTP Headers

HLS Decryption

Auth Token

Key Override (Base64)

DirectShow API Options

Alpha Channel Hint

Force Audio Output Device


Preferred Filters

Properties

| PROPERTY | FUNCTION |
|------------------------------|--|
| Video API | Select the video API to use. Media Foundation is the default. DirectShow is a legacy API but can be useful for loading many file formats when a codec pack is installed (eg LAV Filters). WinRT is the new Windows API and has better support for adaptive streaming media, but doesn't support many other features (eg Unity audio) |
| Media Foundation API Options | |
| Hardware Decoding | Enable hardware decoding |
| Use Low Latency | Enable low latency mode (not recommended as it degrades playback performance) |
| Audio Output | The audio output mode. System Direct (default): Plays the audio directly to the hardware bypassing Unity. Unity: Sends the audio to Unity for playback via the <code>AudioOutput</code> component. Facebook Audio 360: Supports playing MKV files with spatial audio encoded using Facebook Audio 360. |
| WinRT API Options | |
| Start Max Bitrate | Forces adaptive streams to begin at the highest bitrate available |
| Custom HTTP Headers | Set multiple custom HTTP headers by specifying the header key and value pair. |
| Auth Token | The authorisation token to pass to the key server for HLS AES-128 decryption. |

| PROPERTY | FUNCTION |
|---------------------------|--|
| Key Override (Base64) | The authorisation key to use for HLS AES-128 decryption. This allows a key to be forced in debugging cases where the key server is offline. |
| DirectShow API Options | |
| Force Audio Output Device | Specify name of the audio output device to use if using the default device is not desired |
| Preferred Filters | Force named DirectShow filters to be used as first priority. "LAV Video Decoder" could be specified here to prefer it over the Microsoft decoders. |

Platform Specific - macOS

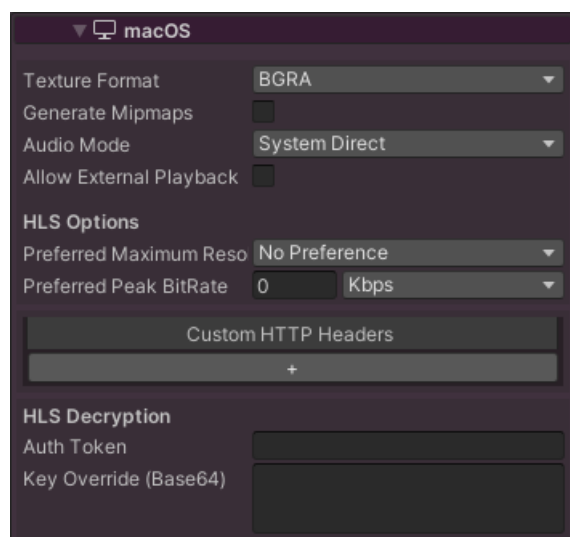


Properties

| PROPERTY | FUNCTION |
|------------------------------|--|
| Texture Format | BGRA is the default. YCbCr420 can be specified to save memory and potentially improve performance. With YCbCr420 the AVPro Video shaders are required for display, unless the resolve option is used. |
| Generate Mipmaps | Enable generation of texture mipmaps which is useful to improve filtering quality when the video texture is scaled down on screen. |
| Audio Mode | System Direct (default): Audio is played directly to the hardware, bypassing Unity. Unity: Audio is played by Unity via the <code>AudioOutput</code> component. |
| Allow External Playback | Enable playback on external devices via Airplay |
| Preferred Maximum Resolution | For HLS videos, limits the maximum resolution the video will playback at. |
| | |

| PROPERTY | FUNCTION |
|------------------------|---|
| Preferred Peak Bitrate | For HLS videos, puts an upper limit on the network bandwidth used for playback. |
| Custom HTTP Headers | Set multiple custom HTTP headers by specifying the header key and value pair. |
| Auth Token | The authorisation token to pass to the key server for HLS AES-128 decryption. |
| Key Override (Base64) | The authorisation key to use for HLS AES-128 decryption. This allows a key to be forced in debugging cases where the key server is offline. |

Platform Specific - Android

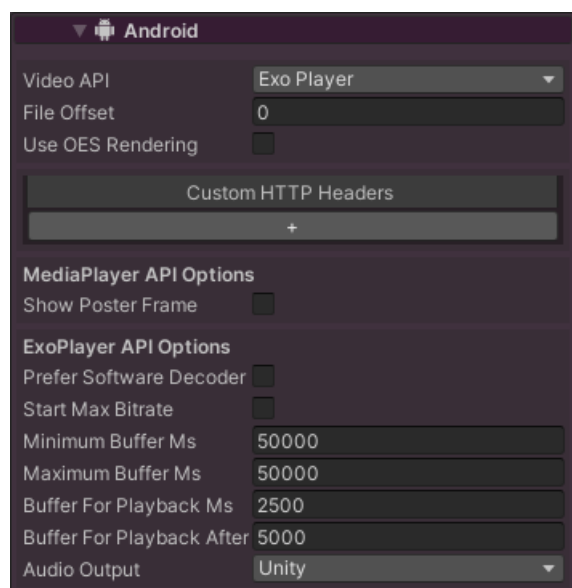


Properties

| PROPERTY | FUNCTION |
|-------------------------|---|
| Video API | Select the media API to use. ExoPlayer is the default and is the most flexible option. MediaPlayer uses the built-in Android API. |
| Use OES Rendering | Enables the OES rendering optimisation. This saves memory and improves performance and is most useful for very high resolution video playback. See Android platform notes for more details. |
| Custom HTTP Headers | Set multiple custom HTTP headers by specifying the header key and value pair. |
| MediaPlayer API Options | |
| Show Poster Frame | If the video is not set to auto play, then when it is loaded this option will force a play and then pause so that the first (poster) frame is rendered. |
| ExoPlayer API Options | |
| Start Max Bitrate | Start an adaptive stream (eg HLS) at the highest bit-rate possible |

| PROPERTY | FUNCTION |
|--|--|
| Minimum Buffer Ms | The minimum duration of media that the player will attempt to ensure is buffered at all times, in milliseconds. |
| Maximum Buffer Ms | The maximum duration of media that the player will attempt to buffer, in milliseconds. |
| Buffer for Playback Ms | The duration of media that must be buffered for playback to start or resume following a user action such as a seek, in milliseconds. |
| Buffer for Playtback After Rebuffer Ms | The default duration of media that must be buffered for playback to resume after a rebuffer, in millisecond. |
| Audio Output | System Direct (default): Audio is played directly to the hardware, bypassing Unity. Unity: Audio is played by Unity via the <code>AudioOutput</code> component. |

Platform Specific - iOS

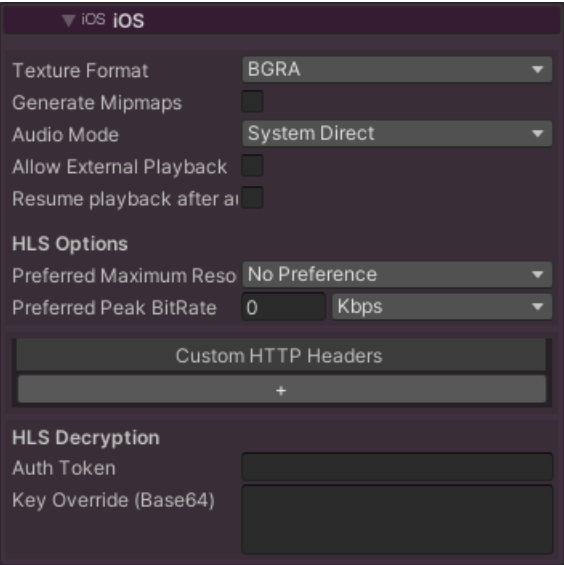


Properties

| PROPERTY | FUNCTION |
|--|--|
| Texture Format | BGRA is the default. YCbCr420 can be specified to save memory and potentially improve performance. With YCbCr420 the AVPro Video shaders are required for display, unless the resolve option is used. |
| Generate Mipmaps | Enable generation of texture mipmaps which is useful to improve filtering quality when the video texture is scaled down on screen. |
| Audio Mode | System Direct (default): Audio is played directly to the hardware, bypassing Unity. Unity: Audio is played by Unity via the <code>AudioOutput</code> component. |
| Allow External Playback | Enable playback on external devices via Airplay |
| ResumePlaybackAfterAudioSessionRouteChange | The default behaviour is for playback to pause when the audio route changes, for instance when disconnecting headphones. |
| Preferred Maximum Resolution | For HLS videos, limits the maximum resolution the video will playback at. |
| | |

| PROPERTY | FUNCTION |
|------------------------|---|
| Preferred Peak Bitrate | For HLS videos, puts an upper limit on the network bandwidth used for playback. |
| Custom HTTP Headers | Set multiple custom HTTP headers by specifying the header key and value pair. |
| Auth Token | The authorisation token to pass to the key server for HLS AES-128 decryption. |
| Key Override (Base64) | The authorisation key to use for HLS AES-128 decryption. This allows a key to be forced in debugging cases where the key server is offline. |


Platform Specific - tvOS

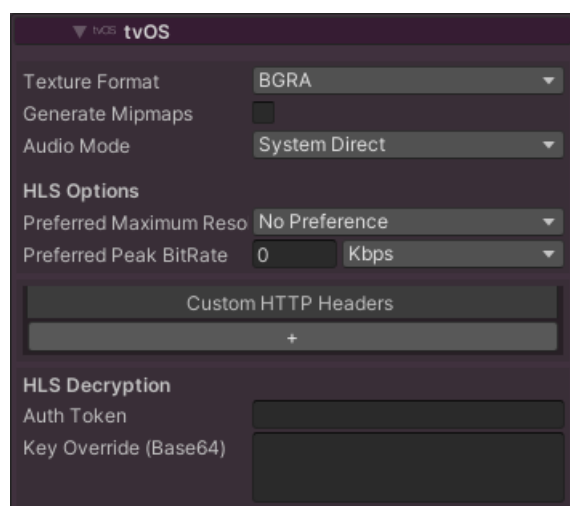

Properties

| PROPERTY | FUNCTION |
|------------------------------|--|
| Texture Format | BGRA is the default. YCbCr420 can be specified to save memory and potentially improve performance. With YCbCr420 the AVPro Video shaders are required for display, unless the resolve option is used. |
| Generate Mipmaps | Enable generation of texture mipmaps which is useful to improve filtering quality when the video texture is scaled down on screen. |
| Audio Mode | System Direct (default): Audio is played directly to the hardware, bypassing Unity. Unity: Audio is played by Unity via the <code>AudioOutput</code> component. |
| Preferred Maximum Resolution | For HLS videos, limits the maximum resolution the video will playback at. |
| Preferred Peak Bitrate | For HLS videos, puts an upper limit on the network bandwidth used for playback. |
| Custom HTTP Headers | Set multiple custom HTTP headers by specifying the header key and value pair. |
| Auth Token | The authorisation token to pass to the key server for HLS AES-128 decryption. |
| Key Override (Base64) | The authorisation key to use for HLS AES-128 decryption. This allows a key to be forced in debugging cases where the key server is offline. |


Platform Specific - WebGL



Properties

| PROPERTY | FUNCTION |
|------------------|--|
| External Library | Whether to use any external JS library for video decoding. This requires that the javascript is included in the HTML. Currently Dash.JS and HLS.JS are supported. A custom library can also be specified and would require editing of the AVProVideo.js file to add support for it. See WebGL platform information for more details. |
| Generate Mipmaps | Enable generation of texture mipmaps which is useful to improve filtering quality when the video texture is scaled down on screen. |


Global

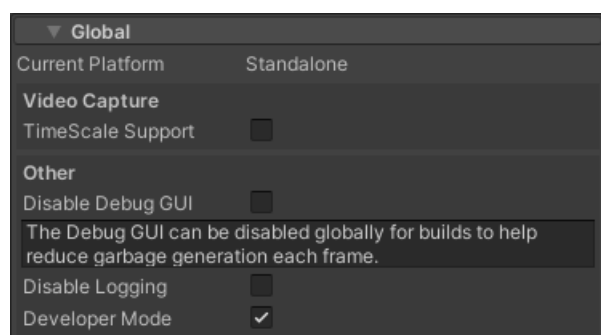


Global per-platform settings. These options need to be set for each platform (via Build Settings > Switch).

Properties

| PROPERTY | FUNCTION |
|-------------------|---|
| TimeScale Support | Enable support for video playback to react to changes in Time.TimeScale. This is mostly useful for offline video capture where capturing is not running in real-time. Audio playback will not work during captures as the video is paused and simply seeks to the desired position. |
| Disable Debug GUI | Deprecated |
| Disable Logging | Disables all the "[AVProVideo]" debug logging |
| Developer Mode | Enables the Developer section on the MediaPlayer inspector view which shows internal state |

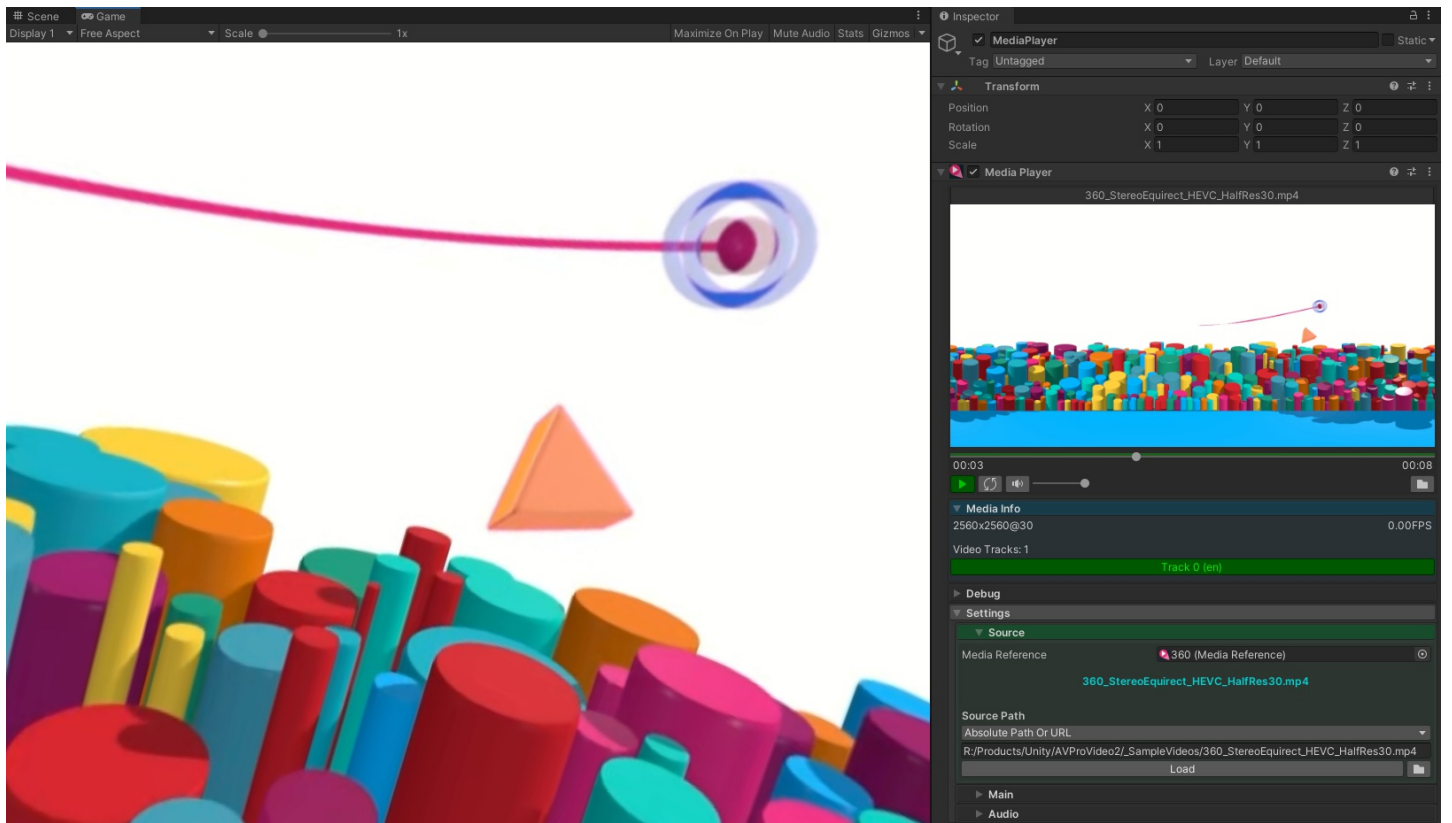

Media Reference

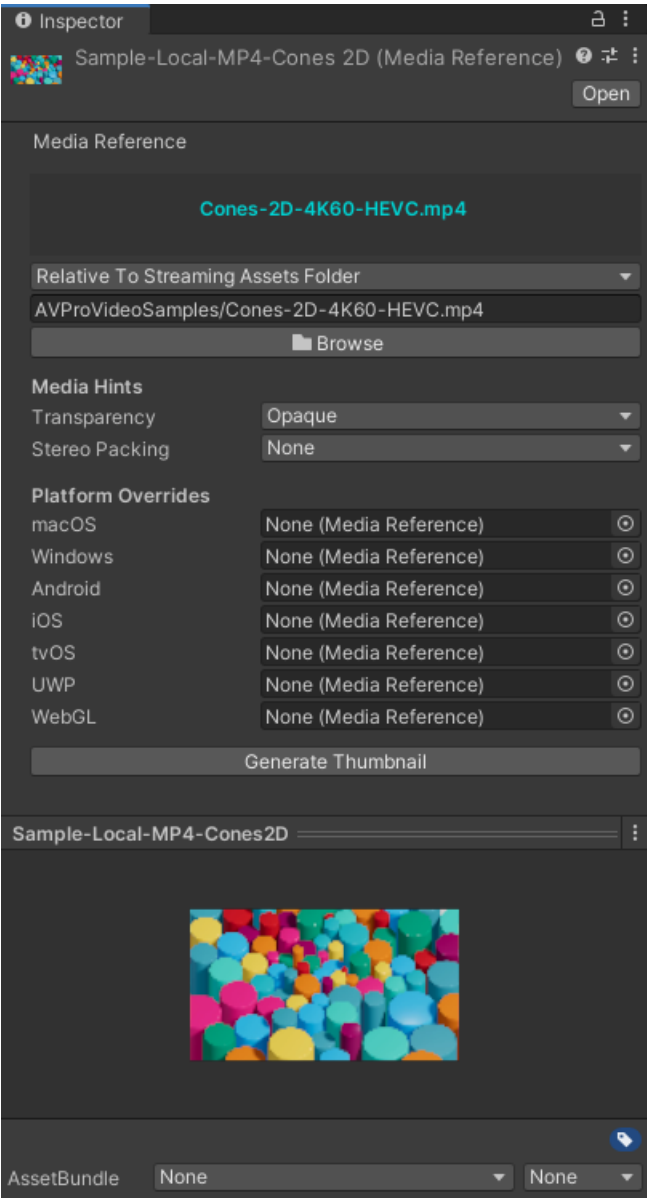

Media Reference is a `ScriptableObject` asset used to define media location and properties. These are used with the `MediaPlayer` to load new media in a convenient manner. Media Reference is similar to `VideoClip` asset in Unity.

The "Generate Thumbnail" button will generate a previous thumbnail which can make finding media easier. Note these thumbnails are editor only and are not included in builds. The horizontal slider allows setting the time in the video at which to capture the thumbnail. The toggle "Zoom To Fill" allows thumbnail image to fill the entire area of the square thumbnail, regardless of aspect-ratio.

Properties

| PROPERTY | FUNCTION |
|----------------|---|
| Media Location | The path or URL to the media |
| Transparency | This hint specified whether the media contains any transparency |
| Alpha Packing | If the transparency hint is enabled then an optional Alpha Packing hint can be specified. |
| Stereo Packing | The packing layout for stereo video |
| | |

| PROPERTY | FUNCTION |
|-------------------|---|
| Platform Override | Allows specifying an alternative MediaReference to load for that platform. If none is specified then the default one specified here is used |

Create

The screenshot shows the Unity Project window with the 'Assets' panel expanded to 'AVProVideo > Demos > SampleMedia'. A right-click context menu is open, showing the 'Create' option selected. A submenu is displayed for 'Create', listing 'Folder', 'AVPro Video', 'C# Script', 'Shader', and 'Testing'. The 'AVPro Video' submenu is further expanded, showing 'Media Reference' as the selected option.

A Media Reference asset can be created in the Project window by right-clicking and selecting:


Create > AVPro Video > Media Reference

Select

The screenshot shows the Unity Project window with the 'Assets' panel expanded to 'AVProVideo > Demos > SampleMedia'. A grid of 10 Media Reference assets is displayed, each with a thumbnail image and a label. The assets are arranged in three rows: the first row has 4 assets, the second row has 4 assets, and the third row has 2 assets. The asset labeled 'Sample-Local-M...' with a yellow dragon thumbnail is selected.

Media References display a thumbnail of the video in the Project window and they can be selected from the Browse button on the Media Player.

Apply To Material

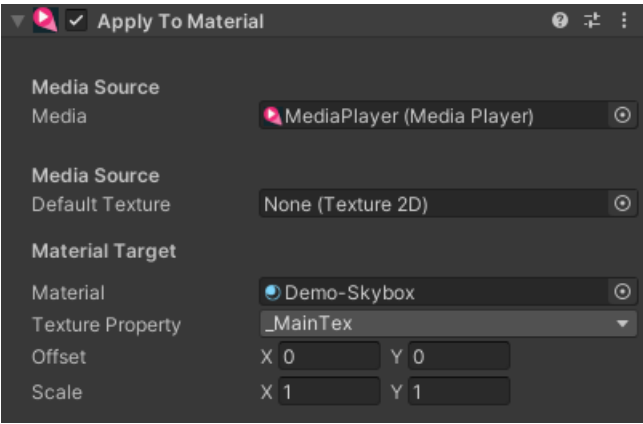

Sets up a material to display video from the `MediaPlayer` component. This material can then be used on 3D meshes or other renderers.

Not only is the texture from the video applied, but also certain material keywords and properties are adjusted depending on the requirements to display the video texture. For example on some platforms the video texture is flipped vertically, or in a different colour space, so the shader is required to support these conversions. The AVPro Video shaders support these conversions and used be used in most cases. If you choose to 'resolve' the textures in the MediaPlayer then these adjustments are already made and so any material can be used.


Properties

| PROPERTY | FUNCTION |
|------------------|---|
| Media | The <code>MediaPlayer</code> component to apply to the material |
| Default Texture | The texture to display during times when there is no video texture to display (eg during video loading) |
| Material | The target Material to apply the video texture to |
| Texture Property | The name of the Material texture to set. The default texture property depends on the render pipeline used. Standard shaders use <code>_MainTex</code> . URP shaders use <code>_Basemap</code> . HDRP shaders use <code>_BaseColorMap</code> . |
| Offset | The normalised X, Y offset to apply to the texture (if shader supports it) |
| Scale | The normalised X, Y scale to apply to the texture (if shader supports it) |

TIP

This component can be used to render a video to a material which can then be assigned to the `Skybox` component.

Apply To Mesh

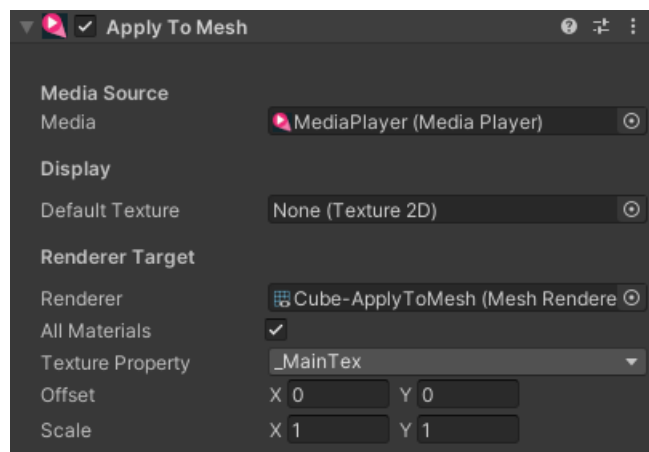


Sets up the materials used by a Renderer (eg MeshRenderer) to display video from the `MediaPlayer` component.

Not only is the texture from the video applied, but also certain material keywords and properties are adjusted depending on the requirements to display the video texture. For example on some platforms the video texture is flipped vertically, or in a different colour space, so the shader is required to support these conversions. The AVPro Video shaders support these conversions and used be used in most cases. If you choose to 'resolve' the textures in the MediaPlayer then these adjustments are already made and so any material can be used.

Properties

| PROPERTY | FUNCTION |
|------------------|---|
| Media | The <code>MediaPlayer</code> component to apply to the mesh |
| Default Texture | The texture to display during times when there is no video texture to display (eg during video loading) |
| Renderer | The target Renderer (eg MeshRenderer) to apply the video texture to |
| All Materials | For renderers with multiple materials, either apply to all materials or a specific one |
| Material Index | Assign to a specific material index |
| Texture Property | The name of the Material texture to set. The default texture property depends on the render pipeline used. Standard shaders use <code>_MainTex</code> . URP shaders use <code>_Basemap</code> . HDRP shaders use <code>_BasecolorMap</code> . |
| Offset | The normalised X, Y offset to apply to the texture (if shader supports it) |
| Scale | The normalised X, Y scale to apply to the texture (if shader supports it) |

Update Multi-Pass Stereo

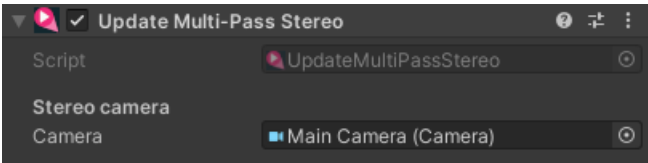


This component is used for VR devices running in multi-pass mode instead of single-pass mode. In multi-pass mode AVPro Video needs to know which eye is currently rendering, and this component works that out and sets up the shader variables appropriately.

Properties

| PROPERTY | FUNCTION |
|----------|---|
| Camera | The camera representing the viewers head position. If you are using a camera per-eye, then this should still be set to the camera between the two eyes. |

Display IMGUI

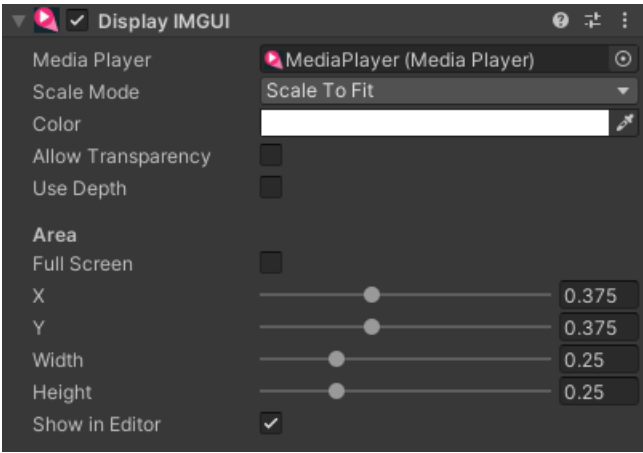


Displays a video on screen from the `MediaPlayer` component using the legacy IMGUI rendering system. IMGUI is always the rendered last and an top of all other rendering. IMGUI is not supported in VR/AR headsets.


This is the easiest and quickest way to render video to the screen.

Properties

| PROPERTY | FUNCTION |
|--------------------|---|
| Media Player | The <code>MediaPlayer</code> component to display |
| Scale Mode | Aspect ratio fitting mode to use |
| Color | The color to multiply the video by. Useful for fading to black or fading to transparent |
| Allow Transparency | Performance option (disabled is faster) to allow transparent rendering for videos with transparency |
| Use Depth | Performance option (disabled is faster) to allow specifying the IMGUI depth to value |
| Depth | Depth value the affects the render order when used with other IMGUI components |
| Full Screen | Whether to display across the entire screen or allow a rectangle area to be specified |
| X | Normalised X position for the top-left corner of the video rectangle |
| Y | Normalised Y position for the top-left corner of the video rectangle |
| Width | Normalised width of the video rectangle |
| Height | Normalised height of the video rectangle |
| Show in Editor | Display a texture in the editor so that rectangle area can be visualised |

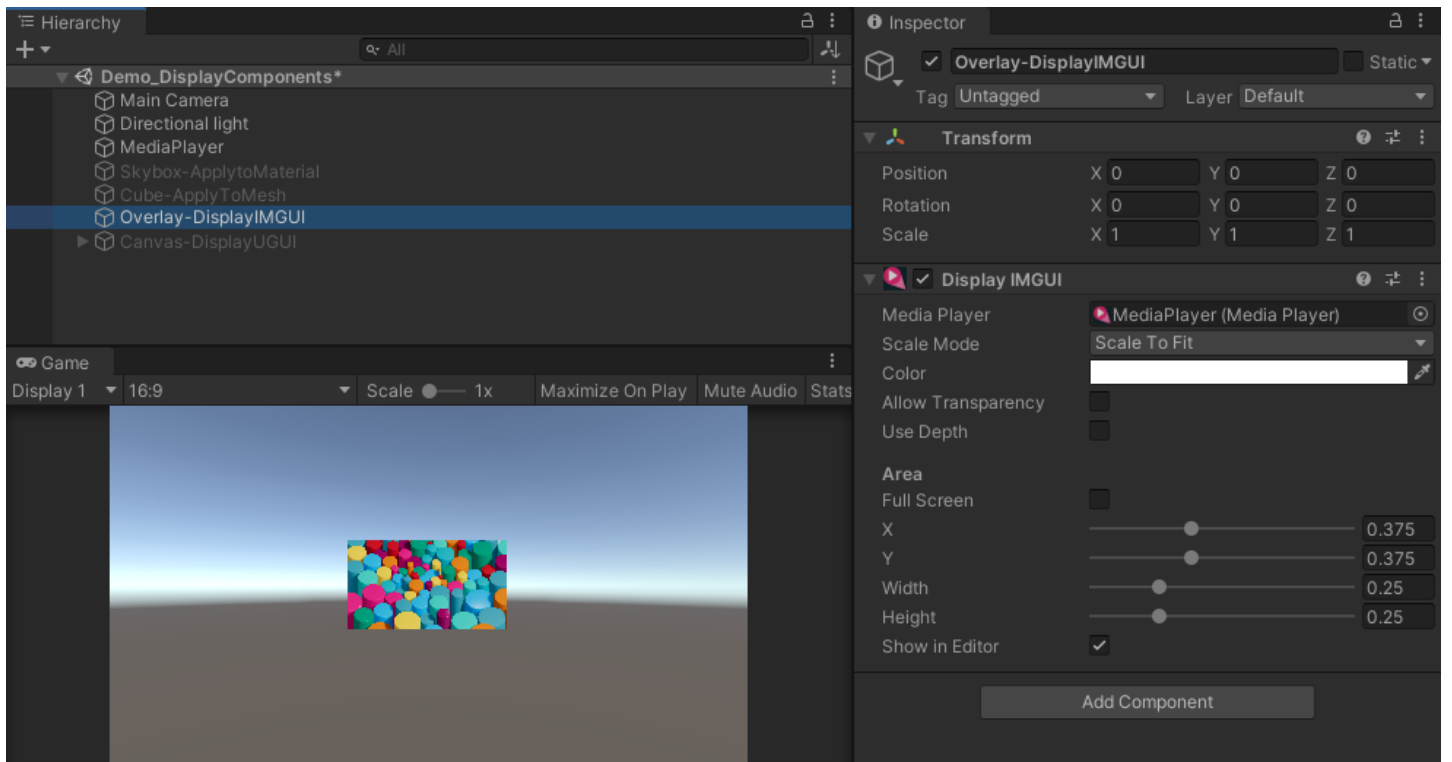


Display UGUI

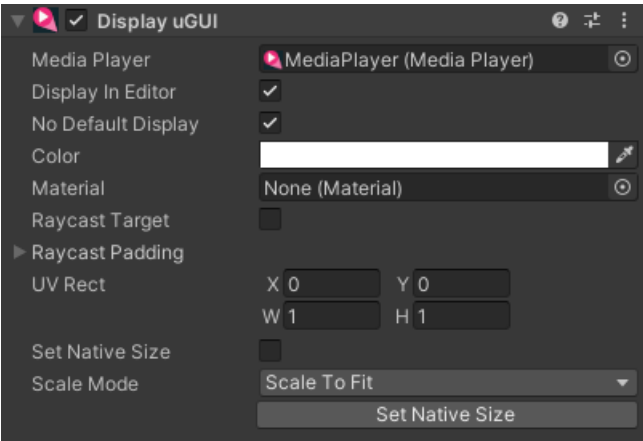


Displays a video on screen from the `MediaPlayer` component using the standard Unity UI system (also called uGUI).

Properties

| PROPERTY | FUNCTION |
|--------------------|---|
| Media Player | The <code>MediaPlayer</code> component to display |
| Display in Editor | Display a texture in the editor so that rectangle area can be visualised |
| No Default Display | Whether or not to display the default texture when no texture is being generated by the MediaPlayer (eg when loading) |
| Default Texture | The texture to display when no texture is being generated by the MediaPlayer (eg when loading) |
| Color | The color to multiply the video by. Useful for fading to black or fading to transparent |
| Material | The material to use for rendering. We recommend this is left empty as generally videos require our own AVPro Video shaders to be assigned at runtime to render the video correctly. When using custom materials, the materials shader needs to support the AVPro Video shader keywords, or the MediaPlayer needs to be set to resolve the textures. |
| Raycast Target | Whether this element is hitable by the interaction raycaster |
| UV Rect | Scaling and offset to apply to the texture |
| Set Native Size | Adjust the size of the RectTransform to match the resolution of the video texture |
| Scale Mode | Aspect ratio fitting mode to use |

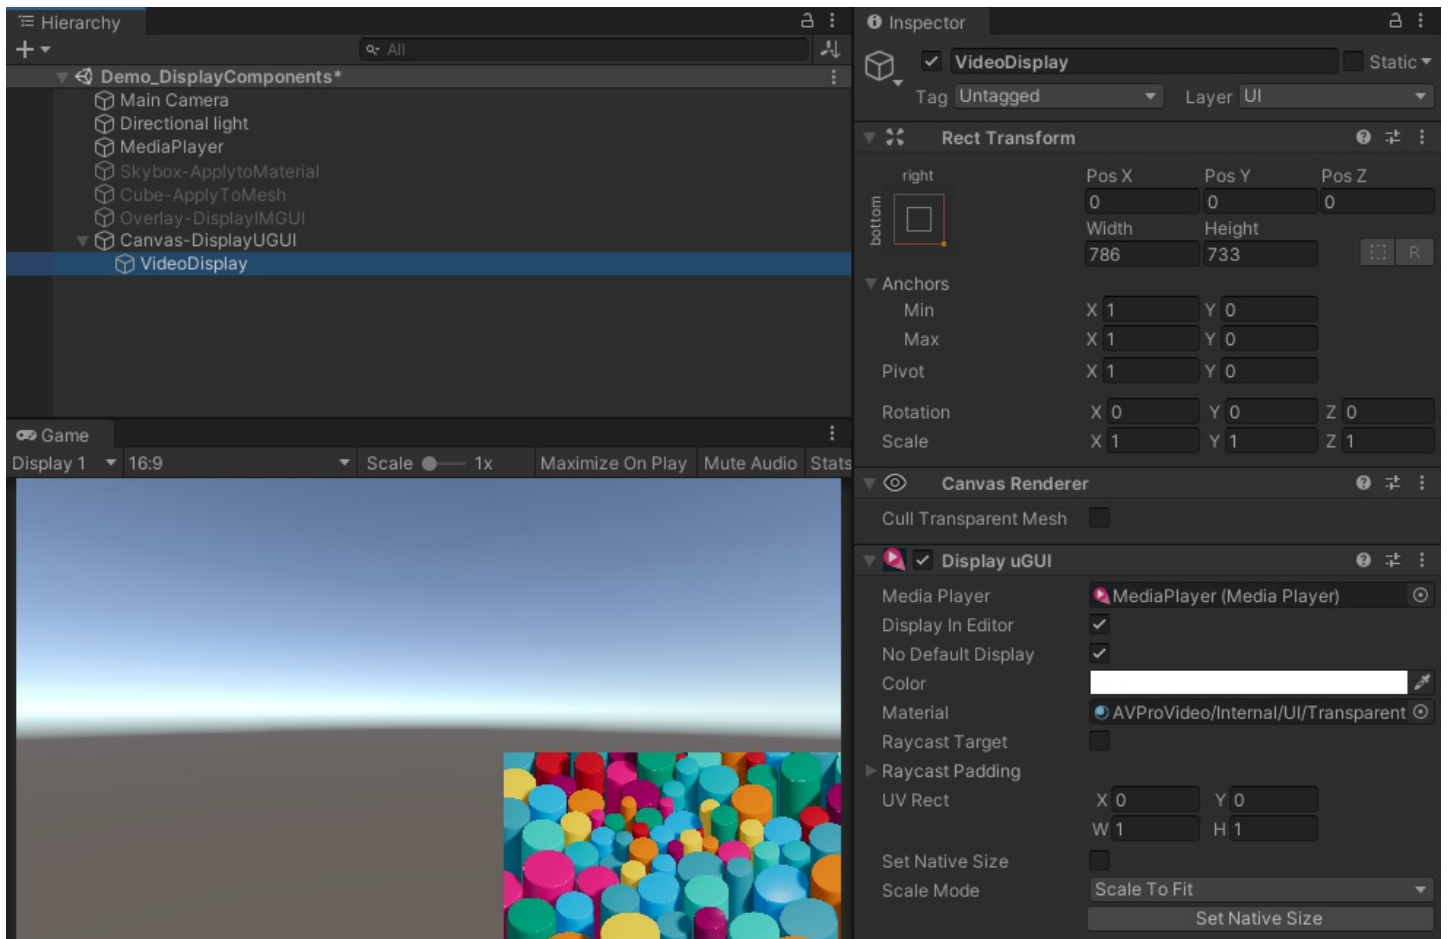

Audio Output

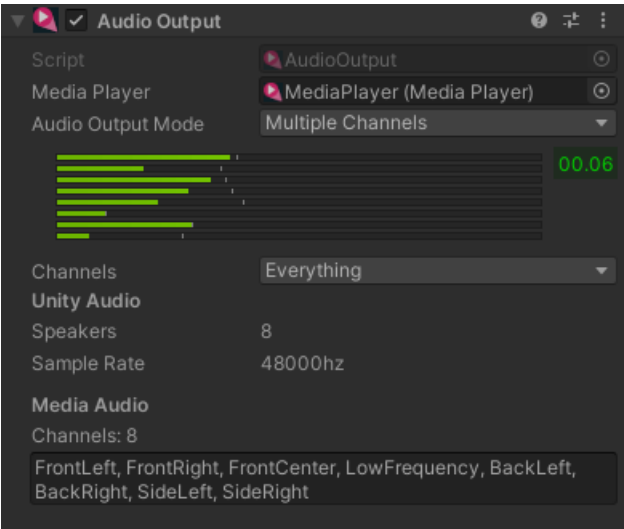


This component is required when the audio output mode is set to Unity. It handles retrieving the audio data from the plugin via `OnAudioFilterRead()` and playing it in Unity through an `AudioSource` component. The number of audio channels that are processed will depend on the Audio settings in Unity and the number of channels in the media. For best performance and latency the sample rate of your audio should match that of Unity.

Properties


| PROPERTY | FUNCTION |
|-----------------|--|
| MediaPlayer | The MediaPlayer component to retrieve audio from |
| AudioOutputMode | <p>Selects the mode for how audio channels are rendered.</p> <p>OneToAllChannels: will take a single audio channel and copy it to all the output audio channels. This can be useful when used with the <code>AudioChannelMixer</code> to pan audio across speakers.</p> <p>MultipleChannels: Allows selection of which channels to play back (default is all).</p> |

TIP

You can retrieve the `AudioSource` component that is being used by the MediaPlayer by using the `AudioSource` property in the MediaPlayer. From the AudioSource you can use methods such as `GetSpectrumData()` to create audio visualisations.

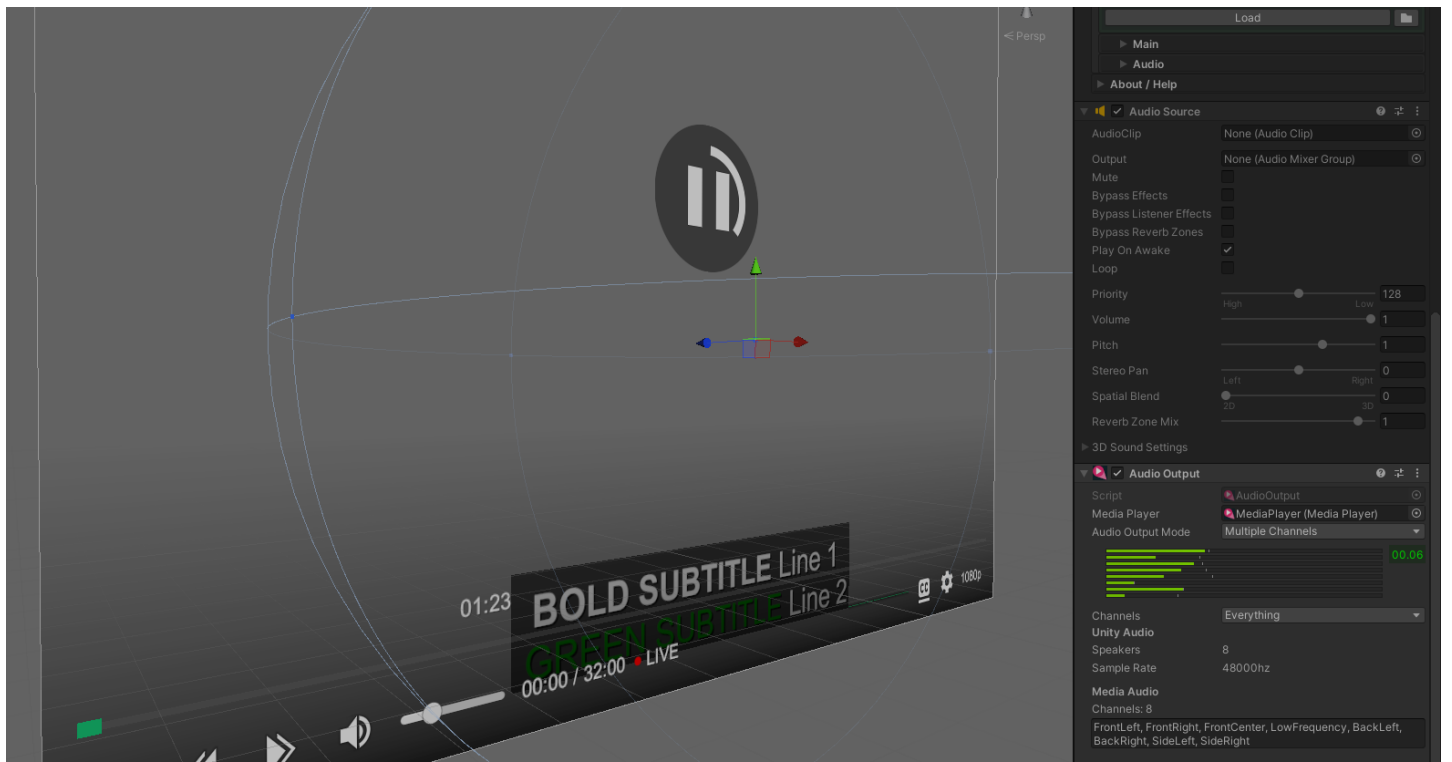

Audio Channel Mixer

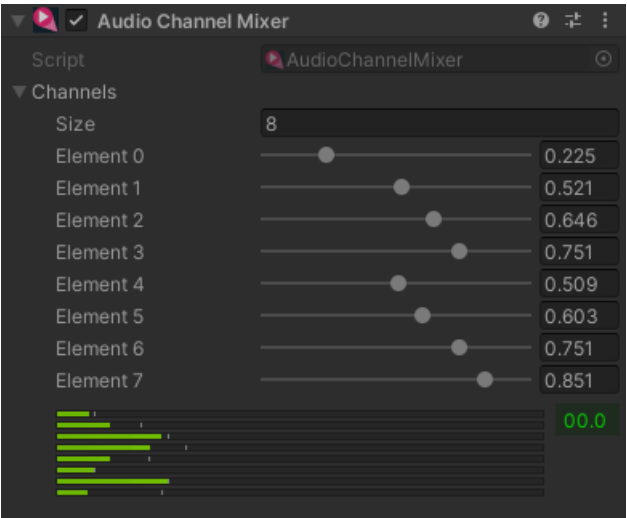


This component allows the volume of each audio channel (up to 8) to be adjusted. Value range from 0.0 to 1.0. This component is used together with the [AudioOutput](#) component for audio that is directed to Unity's AudioSource for playback. It must be placed below the AudioSource and AudioOutput components.

Properties

| PROPERTY | FUNCTION |
|----------|---|
| Channels | 8 values with range 0.0 to 1.0 used to modulate the volume of that audio channel. |

TIP

If you have audio where all 8 channels are the same audio then by fading down the appropriate channels you can move that sound between the 8 speakers. If you have the 8 speakers set up in a physical space in a row, then you could move the audio in real world space very easily.

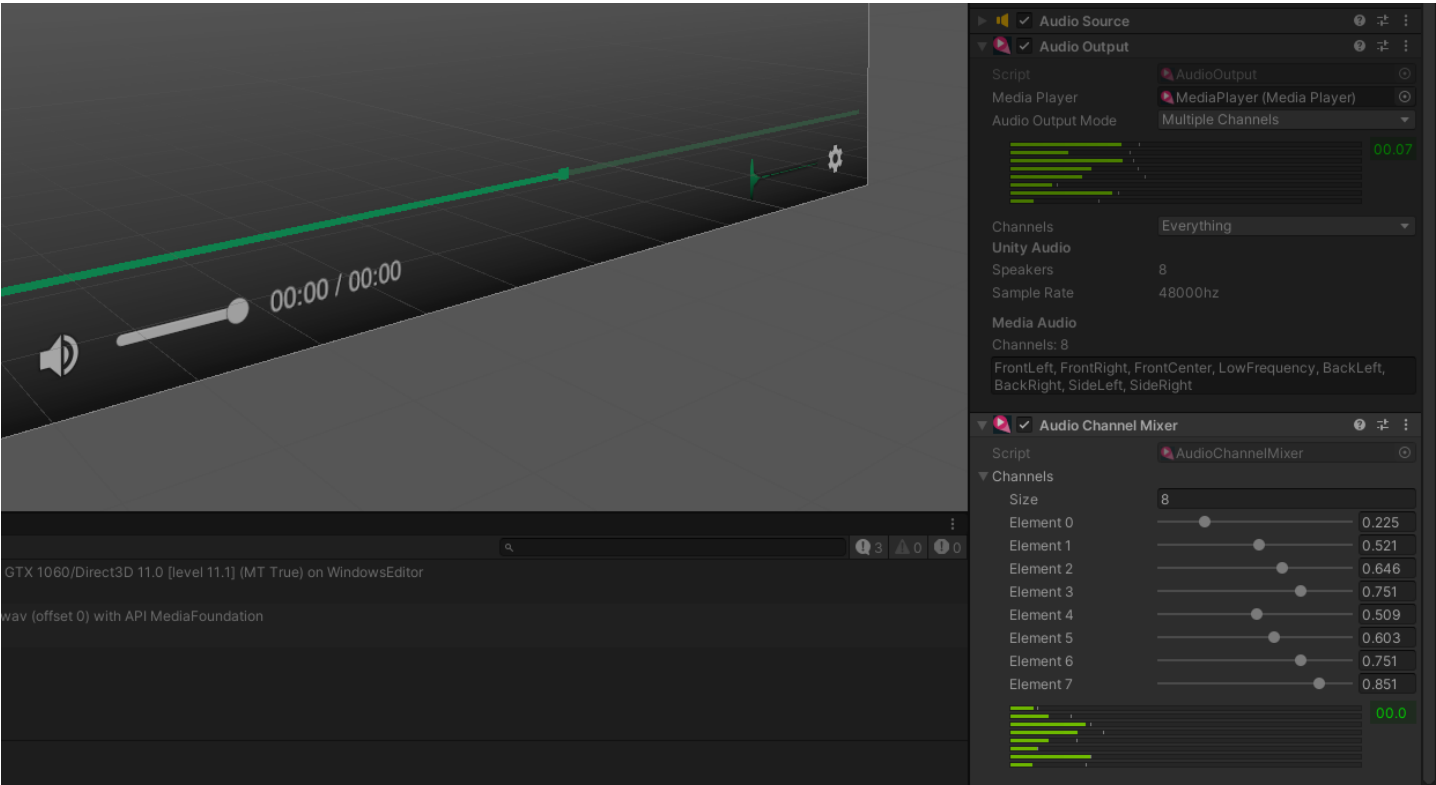

Playlist Media Player



The PlaylistMediaPlayer component extends the MediaPlayer by allowing a playlist of multiple media to be played. Optionally visual transitions can be specified between the media items. Audio is also cross-faded when transitioning.

This component uses two MediaPlayer instances, so it is more expensive than simply using a single MediaPlayer.

NOTE

When playing very high resolution videos (eg in VR), this component may not work on mobile systems as they usually have limited hardware video decoders and memory and this component requires two videos to be in memory at once.

Properties

| PROPERTY | FUNCTION |
|------------------|--|
| Player A | The first MediaPlayer component |
| Player B | The second MediaPlayer component |
| Auto Progress | Enable the playlist to progress to the next item automatically, or wait for manual trigger via scripting |
| Loop Mode | None: Do not loop the playlist when the end is reached. Loop: Rewind the playlist and play again when the each is reached |
| Auto Close Video | Closes videos that aren't playing. This will save memory but adds extra overhead |
| Next | The transition to use when progressing to the next video |
| Easing | The type of easing to use for the transition |
| Duration | The duration of the transition in seconds |
| Pause Previous | Causes the previously playing video to pause at the end of the transition which improves performance |

Playlist Items

Playlist Items

Item 0

File Location

Relative To Streaming Assets Folder ▾

File Path

AVProVideoSamples/BigBuckBunny_7'

Loop

☐

Auto Play

☒

Start Mode

Immediate ▾

Progress Mode

Before Finish ▾

Progress Time Seconds

0.5

Override Transition

☐

Insert

Delete

Up

Down

Item 1

File Location

Relative To Streaming Assets Folder ▾

File Path

AVProVideoSamples/BigBuckBunny_7'

Loop

☐

Auto Play

☒

Start Mode

Immediate ▾

Progress Mode

Before Finish ▾

Progress Time Seconds

0.5

Override Transition

☐

Insert

Delete

Up


Down

Each item in the playlist needs to be specified.

| PROPERTY | FUNCTION |
|-----------------------|--|
| File Location | Location of the file |
| File Path | Path or URL of the file |
| Loop | Loop the playback |
| Auto Play | Start playback automatically |
| Start Mode | Immediate (default): start playback immediately Manual: require API or GUI trigger to start playback |
| Progress Mode | On Finish (default): the playlist will progress when the media reaches the end Before Finish: the playlist will progress at some interval before the end of the media is reached. This is useful when cross-fading Manual: the playlist will only progress by the API |
| Progress Time Seconds | When Progress Mode is set to Before Finish this duration in seconds is used to specify how long before the end of the media duration the playlist will progress to the next item. |
| Override Transition | Enables a custom transition to be specified for this media item |
| Transition | The custom transition to use for this media item |
| Duration | The duration in seconds for the custom transition |

| PROPERTY | FUNCTION |
|----------|---|
| Easing | The easing type for the custom transition |

Subtitles UGUI

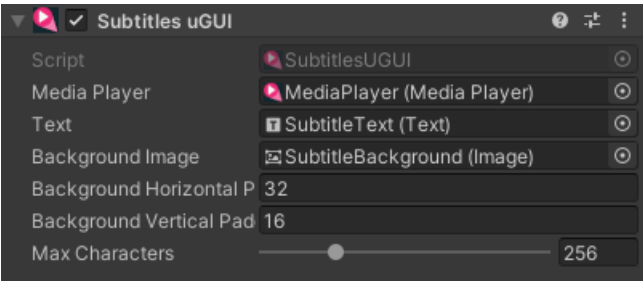

Assigns the current text cue from subtitles active on the `MediaPlayer` to a uGUI `Text` component.


An optional background `Image` component can be adjusted to fit the size of the text with some padding.

Properties


| PROPERTY | FUNCTION |
|-------------------------------|---|
| Media Player | The <code>MediaPlayer</code> component used to retrieve the subtitle text cues |
| Text | The Text component to update with subtitle text |
| Background Image | An optional Image component which is resized to fit the text |
| Background Horizontal Padding | Number of pixels to use to pad the background image horizontally |
| Background Vertical Padding | Number of pixels to use to pad the background image vertically |
| Max Characters | The maximum number of characters to display. Text strings longer than this will be truncated. Useful to prevent unexpected very long text displaying. |

TIP

A version of this component for TextMeshPro could easily be made

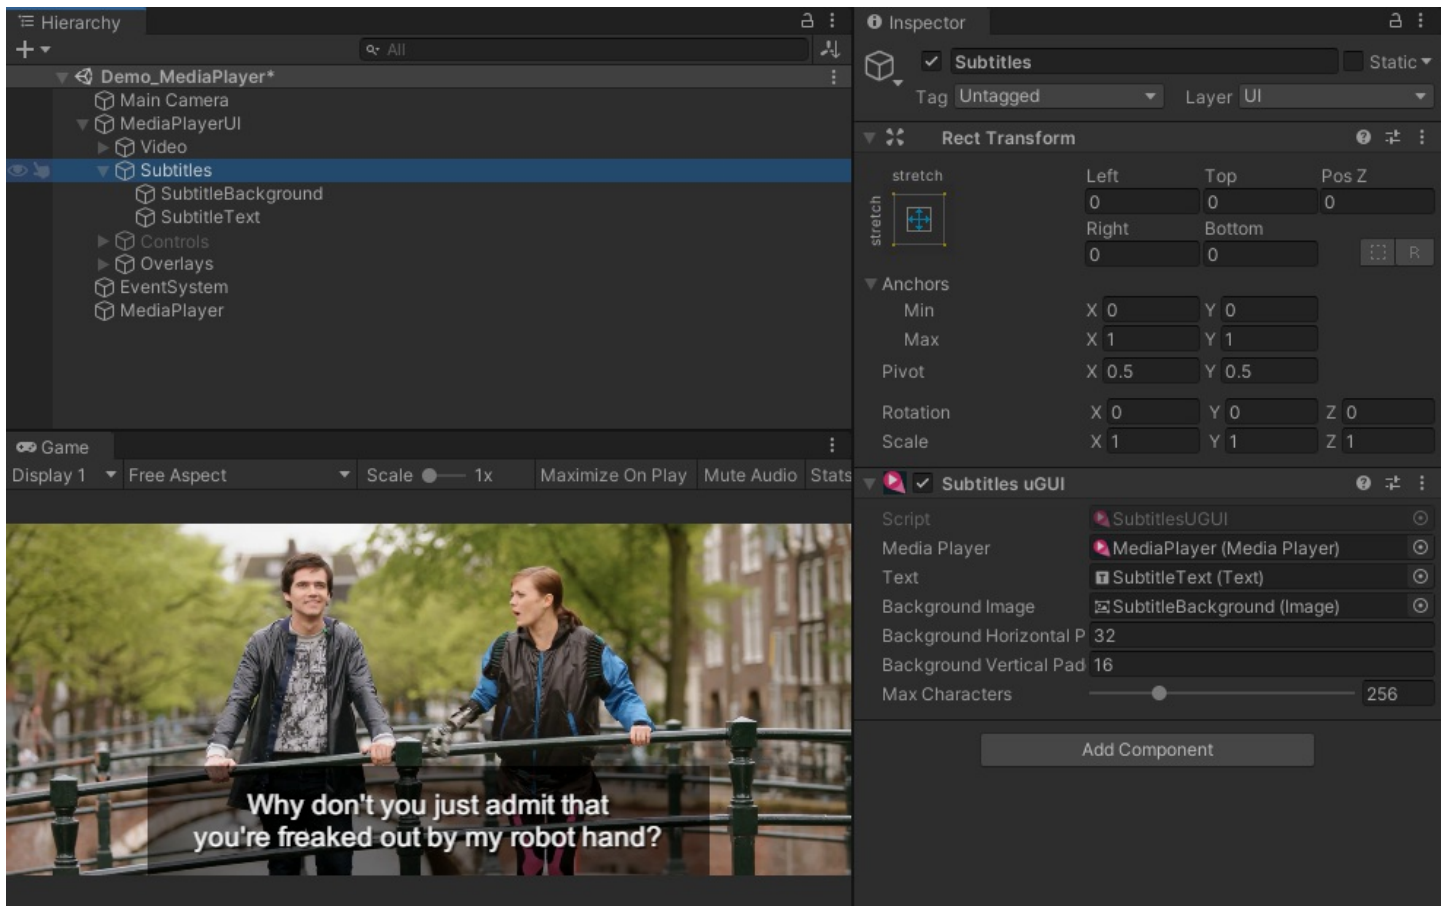

Apply To VFX Graph

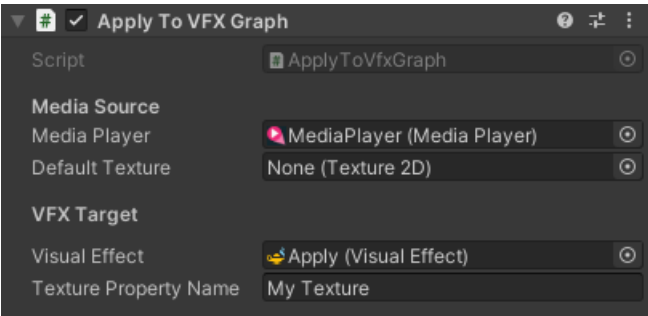


This component allows for a MediaPlayer video to be used as input to a Visual Effect Graph (requires the Visual Effect Graph Package).

Properties

| PROPERTY | FUNCTION |
|-----------------------|---|
| Media Player | The MediaPlayer component to apply to the material |
| Default Texture | The texture to display during times when there is no video texture to display (eg during video loading) |
| Visual Effect | The VisualEffect component to apply the video texture to |
| Texture Property Name | The name of the exposed texture variable to set. |

TIP

You may need to add `AVPRO_PACKAGE_VFXGRAPH` to your player Preprocessor Defines for this component to become available. You can also edit `ApplyToVfxGraph.cs` and comment in the `#define AVPRO_PACKAGE_VFXGRAPH` line at the top.

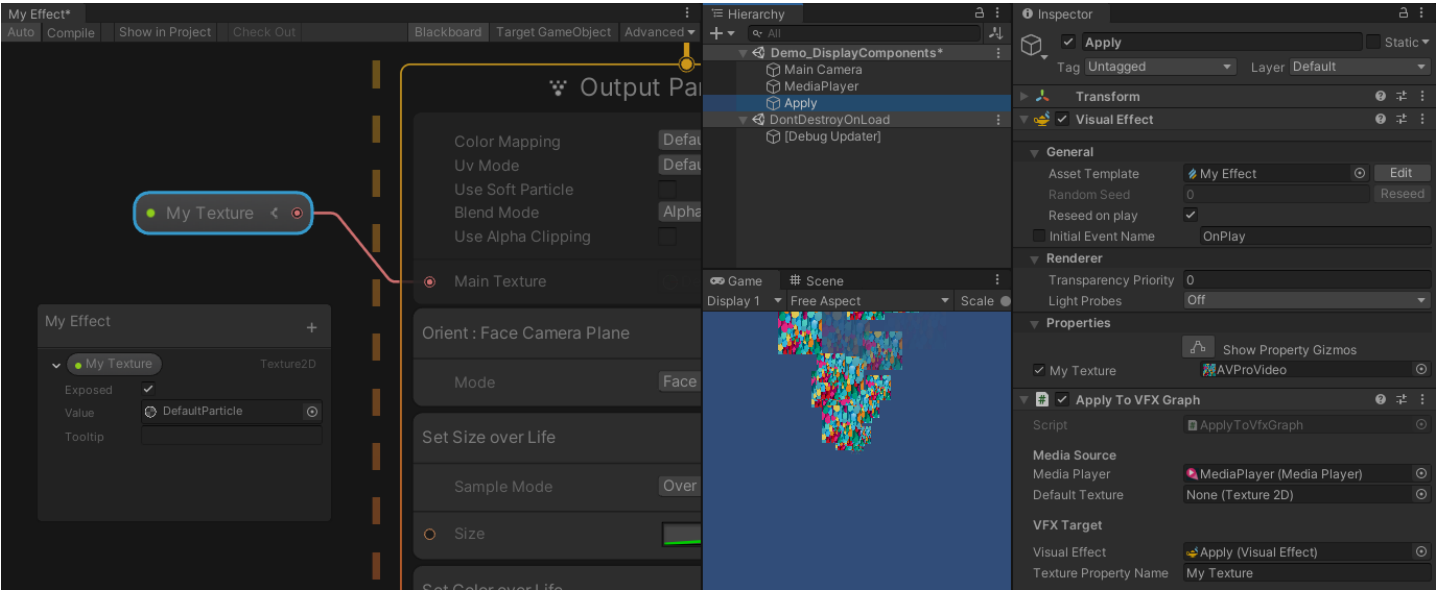

Timeline Playables



This component allows for a MediaPlayer video to be used as input to a Visual Effect Graph (requires the Timeline Package).

Properties

| PROPERTY | FUNCTION |
|-----------------------|---|
| Media Player | The MediaPlayer component to apply to the material |
| Default Texture | The texture to display during times when there is no video texture to display (eg during video loading) |
| Visual Effect | The VisualEffect component to apply the video texture to |
| Texture Property Name | The name of the exposed texture variable to set. |

TIP

You may need to add AVPRO_PACKAGE_TIMELINE to your player Preprocessor Defines for this component to become available. You can also edit ApplyToVfxGraph.cs and comment in the #define AVPRO_PACKAGE_TIMELINE line at the top.



Windows Desktop Platform

Plugin Specs

- Compatibility
 - Unity 2018.x - 2020.x are supported
 - Supported CPU architectures are 32-bit and 64-bit x86
 - Windows 7 - 10 are supported, however some versions of Windows allow for more features than others
- Rendering
 - For rendering we support Direct3D 11, Direct3D 12 (requires minimum Unity 2019.3), and also have limited support for legacy Direct3D 9 and OpenGL.
 - Multi-threaded rendering is supported.
- Internals
 - Under the hood we're using the WinRT, Media Foundation and DirectShow API's. WinRT is supported on Windows 10 and above, Media Foundation supported on Windows 8 and above, and DirectShow is supported from Windows 7.
 - The only 3rd-party libraries used in the Windows Desktop binaries are:
 - Hap <https://github.com/Vidvox/hap>
 - Google Snappy <https://github.com/google/snappy>
 - GDCL Mpeg-4 <https://github.com/roman380/gdcl.co.uk-mpeg4>
 - GLEW <http://glew.sourceforge.net/>
 - Facebook Audio 360 1.7.12 <https://facebook360.fb.com/spatial-workstation/>

Supported Media

See the [Supported Media](#) section for more information.

Troubleshooting

Windows N / KN editions

- There are some editions of Windows (N and KN) that ship with greatly reduced built-in media playback capabilities.
- It seems like these editions don't include MFPlat.DLL, but do include some basic DirectShow components. This means the Media Foundation playback path will not work.
- These editions of Windows require either a 3rd party codec installed (such as the LAV Filters for DirectShow), or the Microsoft Media Feature Pack:
 - Media Feature Pack for Windows 7 SP1 <https://www.microsoft.com/en-gb/download/details.aspx?id=16546>
 - Media Feature Pack for Windows 8.1 <https://www.microsoft.com/en-gb/download/details.aspx?id=40744>
 - Media Feature Pack for Windows 10 <https://www.microsoft.com/en-gb/download/details.aspx?id=48231>
- We found that MJPEG DirectShow codec still works on these editions without installing the Media Feature Pack, so this the best choice for maximum compatibility

Android Platform

Plugin Specs

- Compatibility
 - Unity 2018.x - 2020.x are supported (see below for build notes)
 - Supported CPU architectures are arm-v7a, arm64-v8a and x86
 - This plugin requires a minimum Android API level of 15 when using the MediaPlayer API, and API level 16 when using ExoPlayer (due to its use of MediaCodec).
- Rendering
 - For rendering OpenGL ES 2.0 and OpenGL ES 3.0 are supported, and multi-threaded rendering is supported on both.
 - Vulkan graphics API is not yet supported
- Internals
 - Under the hood we're using the Android MediaPlayer API and ExoPlayer 2.12.1 API
 - The only 3rd-party libraries used are:
 - ExoPlayer 2.12.1 <https://github.com/google/ExoPlayer>
 - Facebook Audio 360 1.7.12 <https://facebook360.fb.com/spatial-workstation/>
 - Secret Rabbit Code (aka libsamplerate) 0.1.9 <http://www.mega-nerd.com/SRC/license.html>

Supported Media

See the [Supported Media](#) section for more information.

Build Notes

Gradle must be used as the build environment. This was introduced in Unity 2017, but different versions of Unity use different versions of Gradle (as outlined here: <https://docs.unity3d.com/Manual/android-gradle-overview.html>). We have found that it is not possible to build an application that incorporates AVPro Video using some of the older versions of Gradle found in many of the 2017/2018 Unity releases. The following list will guide you as to what versions we have observed working, and if there are any special requirements.

| | |
|---------------------|-----------------------------|
| 2017.1 | - requires gradle change* |
| 2017.2 | - requires gradle change* |
| 2017.3 | - requires gradle change* |
| 2017.4 to 2017.4.16 | - requires gradle change* |
| 2017.4.17 onwards | - works directly from Unity |
| 2018.1 | - requires gradle change* |
| 2018.2 | - requires gradle change* |
| 2018.3 | - works directly from Unity |
| 2018.4 | - works directly from Unity |
| 2019.1 | - works directly from Unity |
| 2019.2 | - works directly from Unity |
| 2019.3 | - works directly from Unity |
| 2019.4 | - works directly from Unity |
| 2020.1 | - works directly from Unity |
| 2020.2 onwards | - see notes below |

- old gradle needs a toolchain in older NDK (<= 16b), old NDK does not support Java 1.8 which ExoPlayer requires compilation with.

NOTE

It has been seen that Unity can sometimes want to use a version of the build tools that are not on a given system. To overcome this you have to tell gradle to use a version you have on your system. In [Player Settings](#) | [Publisher Settings](#), enable the [Custom Gradle Template](#)

option. This will allow you to adjust the buildToolsVersion to one you have on your system. The template is found at:

```
/Assets/Plugins/Android/mainTemplate.gradle
```

Unity 2020.2 and above

When using Unity 2020.2 and above it has been seen that the build process overly optimises which causes issues in the ExoPlayer library. To overcome this issue, you will need to add a custom gradle property. In **Player Settings|Publisher Settings**, enable the **Custom Gradle Properties Template** option. The template is found at:

```
/Assets/Plugins/Android/gradleTemplate.properties
```

 and it should be edited adding the following line to the end of the file:

```
android.enableDexingArtifactTransform=false
```


Troubleshooting

Streaming

- If you want to support streaming from URL don't forget to set the "Internet Access" option in Player Settings to "require"
- If you're streaming on Android 9 or above and connecting to an HTTP stream, then you either need to switch to HTTPS stream, or enable cleartext support in the AndroidManifest.xml

OES Playback Path

For Android there is a special playback option called "Use Fast OES Path". This option caters especially for VR where users are trying to get the highest possible frame rate and resolution out of the device (without it overheating at the same time). The option is available in the Platform Specific section of the MediaPlayer component:

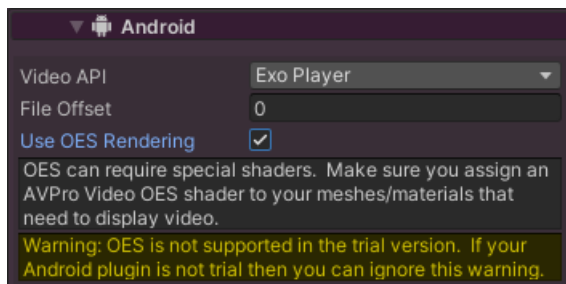

The OES path is not enabled by default because it requires some special care to be taken and can be tricky for beginners. When this option is enabled the Android GPU returns special OES textures (see EGL extension OES_EGL_image_external) that are hardware specific. Unfortunately Unity isn't able to use these textures directly, so you can't just map them to a material or UI. To use the texture a GLSL shader must be used. Unfortunately Unity's GLSL support isn't as good as its CG shader support so again this makes things more tricky. The GLSL compiler only happens on the device (not inside Unity) so errors in the shader can be difficult to debug.

We have included a version of the VR sphere shader that supports stereo videos as an example. Hopefully in the future we can improve the integration of these shaders so they aren't such special cases. This playback path is much faster though, so is definitely worth exploring. Note that for VR stereo rendering, OES only currently supports multi-pass rendering path, and not single-pass or single-pass instanced.

macOS Platform

Plugin Specs

- Compatibility
 - Unity 2017.x - 2020.x are supported
 - macOS 10.13 and later are supported
 - Only 64-bit (x86_64, arm64) builds are supported
- Rendering
 - Only the Metal rendering API is supported
 - Multi-threaded rendering is supported
- Internals
 - Under the hood we're using Apple's AVFoundation API
 - The only 3rd-party libraries used in the macOS binaries are:
 - HapInAVFoundation <https://github.com/Vidvox/hap-in-avfoundation>

Supported Media

See the [Supported Media](#) section for more information.

Troubleshooting

Rendering


- Lack of video output is usually due to the OpenGLCore renderer being selected. Make sure you're using the Metal renderer and have enabled "Metal Editor Support" in the "Other Settings" section of the macOS Player Settings inspector.

Notarising

- We notarise the plugin bundle so you shouldn't have to code-sign it prior to building your package for submission to the App Store.

Y'CbCr Video Output Mode

Apple platforms have support for Y'CbCr textures which has lower memory overheads and is slightly more performant when compared with standard BGRA32 textures. This option is disabled by default and can be enabled on the MediaPlayer in at Platform Specific section:

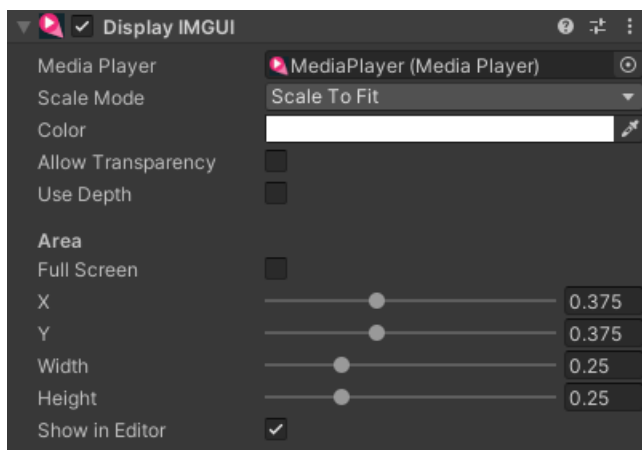

The DisplayIMGUI and DisplayUGUI components automatically detect the use of Y'CbCr mode and switch to a suitable shader. ApplyToMesh/ApplyToMaterial also detect this setting and try to set up the shader on the material to the correct settings, however it requires the shader to have the correct properties. The AVPro Video shaders support this, so if you want to use this on

a mesh then make sure you're using these shaders.

iOS / iPadOS / tvOS Platforms

Plugin Specs

- Compatibility
 - Unity 2018.x - 2020.x are supported
 - iOS 11.0, iPadOS 13.1, tvOS 11.0 and later are supported
 - Only 64-bit (arm64) builds are supported
- Rendering
 - Only the Metal rendering API is supported
- Internals
 - Under the hood we're using Apple's AVFoundation API

Supported Media

See the [Supported Media](#) section for more information.


Troubleshooting

Streaming

- By default streaming requires that the HTTPS protocol is used. If you want to support streaming via HTTP you need to enable this explicitly. Look for the "Allow downloads over HTTP" option in the "Other Settings" pane of the iOS and tvOS player settings inspector.

Y'CbCr Video Output Mode

Apple platforms have support for Y'CbCr textures which has lower memory overheads and is slightly more performant when compared with standard BGRA32 textures. This option is disabled by default and can be enabled on the MediaPlayer in at Platform Specific section:

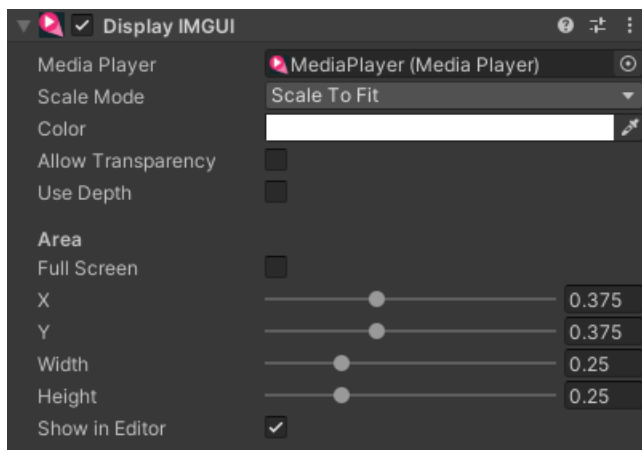

The DisplayIMGUI and DisplayUGUI components automatically detect the use of Y'CbCr mode and switch to a suitable shader. ApplyToMesh/ApplyToMaterial also detect this setting and try to set up the shader on the material to the correct settings, however it requires the shader to have the correct properties. The AVPro Video shaders support this, so if you want to use this on a mesh then make sure you're using these shaders.

Windows UWP Platform

Plugin Specs

- Compatibility
 - Unity 2018.x - 2020.x are supported
 - Supported CPU architectures are x86, x86_64, ARM and ARM64
- Rendering
 - For rendering we support Direct3D 11 and Direct3D 12 (requires minimum Unity 2019.3)
 - Multi-threaded rendering is supported.
- Internals
 - Under the hood we're using the WinRT and Media Foundation
 - The only 3rd-party libraries used in the UWP binaries (x86 32-bit and 64-bit only, not ARM) are:
 - Facebook Audio 360 1.7.12 <https://facebook360.fb.com/spatial-workstation/>

Supported Media

See the [Supported Media](#) section for more information.

Troubleshooting

Streaming

- For streaming video don't forget to enable the "InternetClient" capability option in Unity's Player Settings. If you're streaming video from a local server / LAN then you need to enable the "PrivateNetworkClientServer" option.

Performance

- For best compatibility and performance add

```
appCallbacks.AddCommandLineArg("-force-d3d11-no-singlethreaded");
```

to your MainPage.xaml.cs/cpp or MainPage.cs/cpp. You should call this before the `appCallbacks.Initialize()` function.

WebGL Platform

IMPORTANT

We do not officially support WebGL, but only include it as it may be useful for some people. We found too many issues with browser compatibility to continue supporting it

Plugin Specs

- Compatibility
 - We have had especially troubling times with the Safari browser as it has very strict rules about content playback, and also mobile browsers
 - Web security features like CORS also make this platform difficult to support
 - The supported formats and features is dependant on the web browser capabilities
 - We have used it for playback of MP4 files, HLS and MPEG-DASH streams
 - The plugin supports extensions via the hls.js and dash.js libraries for browsers that do not have native support for these streaming formats
- Rendering
 - The plugin supports both WebGL 1.0 and 2.0, however some browsers (notably Safari) do not support WebGL 2.0
- Internals
 - Under the hood we're just using the <video> browser tag
 - No 3rd-party libraries are used, however there is support for adding specific 3rd-party libraries (hls.js and dash.js)

Supported Media

See the [Supported Media](#) section for more information.

Troubleshooting

Compatibility

- For best compatibility you can always force WebGL 1.0 instead of 2.0 (which is the default). This is done by going to `Player Settings > Other Settings > Auto Graphics API` and removing WebGL 2.0. We have tested successfully with the following browsers
 - macOS
 - Mozilla Firefox
 - Google Chrome
 - Windows
 - Microsoft Edge 38.14393.0.0
 - Mozilla Firefox 51.0
 - Google Chrome 56.0 - 62.0
- The following browsers are not supported:
 - Internet Explorer 11 (any version), instead use the Microsoft Edge browser

Supported Media

In general the most common format that is supported are MP4 files with H.264 encoding for video and AAC encoding for audio. This format is supported across all platforms though not necessarily all bit-rates and profiles.

AVPro Video doesn't include native support for any codecs (except for Hap and NotchLC) and relies on codecs that are natively supported by the operating system. The tables below give a fairly accurate idea of what we expect to be supported. On Windows 3rd party codecs can be installed via DirectShow and Media Foundation and are supported.

Container Formats

Container formats are file formats that contain audio, video, text or metadata tracks. An important distinction to realise is that these file formats are separate for the audio and video codecs. It is not enough to say a video is in 'MP4' format as this format contains tracks which are encoded using different codecs.

| | WINDOWS | ANDROID | MACOS | IOS / IPADOS / TVOS |
|------|----------------|---------|-------|---------------------|
| MP4 | ☐ | ☐ | ☐ | ☐ |
| MOV | ☐ | . | ☐ | ☐ |
| MKV | ☐ ¹ | ☐ | . | . |
| WebM | ☐ ² | ☐ | . | . |
| AVI | ☐ | . | . | . |
| MP3 | ☐ | ☐ | ☐ | ☐ |
| AAC | ☐ | ☐ | ☐ | ☐ |
| WAV | ☐ | . | . | . |
| CAF | . | . | ☐ | ? |

¹ Requires Windows 10 for native support. Otherwise DirectShow API can be used with LAV Filters.

² Requires Windows 10 (1607 Anniversary and above) for native support. Otherwise DirectShow API can be used with LAV Filters.

Streaming Formats

AVPro Video supports several streaming protocol depending on the platform:

| | WINDOWS | ANDROID | MACOS | IOS / IPADOS / TVOS |
|------------------|---------|---------|-------|---------------------|
| HTTP Progressive | | | | |
| MP4 | ☐ | ☐ | ☐ | ☐ |
| Adaptive | | | | |

| | WINDOWS | ANDROID | MACOS | IOS / IPADOS / TVOS |
|----------------------------------|----------------|----------------|-------|---------------------|
| HLS (m3u8) | ☐ ¹ | ☐ | ☐ | ☐ |
| MPEG-DASH (mpd) | ☐ ¹ | ☐ ⁴ | . | . |
| Microsoft Smooth Streaming (ism) | ☐ ¹ | . | . | . |
| Real-time | | | | |
| RTSP | ~ ² | ~ ⁵ | . | . |
| RTMP | ~ ³ | . | . | . |

¹ Requires Windows 10 for native support, or using DirectShow with suitable 3rd party filter (eg LAV Filters).

² Limited native support. Read Microsoft notes about support here: <https://docs.microsoft.com/en-us/windows/win32/medfound/supported-protocols>. Support seems improved from Windows 10 build 1803 onwards.

³ Only using DirectShow with suitable 3rd party filter (eg LAV Filters).

⁴ Using ExoPlayer API only.

⁵ Using MediaPlayer API only, but not fully featured.

Audio Codecs

| | WINDOWS | ANDROID | MACOS | IOS / IPADOS / TVOS |
|------------------------------|----------------|---------|-------|---------------------|
| AAC | ☐ | ☐ | ☐ | ☐ |
| MP3 | ☐ | ☐ | ☐ | ☐ ³ |
| FLAC | ~ ¹ | ☐ | ☐ | ☐ |
| AC3 | ☐ | ? | ☐ | ☐ |
| WMA | ☐ | . | . | . |
| MIDI | ☐ | ? | ☐ | ☐ |
| Vorbis | . | ☐ | . | . |
| Opus | ~ ² | ☐ | . | . |
| ALAC (Apple Lossless) | . | . | ☐ | ☐ |
| μLAW | ☐ | . | ☐ | ☐ |
| ADPCM | ☐ | . | ☐ | ☐ |
| Linear PCM | ☐ | ☐ | ☐ | ☐ |

¹ Requires Windows 10 for native support. Otherwise DirectShow API can be used with LAV Filters.

² Requires Windows 10 Windows 10 1607 Anniversary and above.

³ Audio files only, not supported as audio tracks inside MP4 files

Video Codecs

| | WINDOWS | ANDROID | MACOS | IOS / IPADOS / TVOS |
|--------------------------|----------------|---------|-------|---------------------|
| HEVC / H.265 | ☐ ¹ | ☐ | ☐ | ☐ |
| H.264 | ☐ | ☐ | ☐ | ☐ |
| H.263 (DivX/XVid) | ☐ | ☐ | . | ? |
| MJPEG | ☐ | . | ☐ | ☐ |
| WMV | ☐ | . | . | . |
| VP8 | ☐ ² | ☐ | . | . |
| VP9 | ☐ ² | ☐ | . | . |
| Hap | ☐ | . | ☐ | . |
| NotchLC | ☐ | . | . | . |
| ProRes 422 | . | . | ☐ | . |
| ProRes 4444 | . | . | ☐ | . |
| DV | ☐ | ☐ | . | . |
| Lagarith | ☐ ³ | . | . | . |
| Uncompressed RGBA | ☐ | ? | ☐ | ? |
| Uncompressed YUV | ☐ | ? | ? | ? |
| Uncompressed R10K | . | ☐ | . | . |
| Uncompressed V210 | ? | ☐ | . | . |
| Uncompressed 2VUY | ? | ☐ | . | . |

¹ HEVC requires Windows 10 for native support, but the codec no longer ships with Windows and requires a download from Microsoft Store [12](#). Otherwise DirectShow API can be used with LAV Filters.

² Yes, only in Windows 10 and only 4:2:0. Native VP9 support only comes in Yes in Windows 10 1607 Anniversary Update and above, but it may be available before that via Intel GPU drivers. If you use DirectShow and 3rd party filter then 4:4:4 can be supported. Using Media Foundation no audio codecs (Vorbis or Opus) are supported and will cause the video to fail to load if included.

³ Using DirectShow API and with codec installed.

⁴ Using DirectShow API and with codec installed.

Android

Android supports many media formats. For a complete list check the Android MediaPlayer documentation here:

<https://developer.android.com/guide/appendix/media-formats.html> and the ExoPlayer documentation here:

<https://google.github.io/ExoPlayer/supported-formats.html>

HEVC (H.265) support was officially added in Android 5.0 (Lollipop) but only as a software decoding implementation on older devices.

We have found that using GearVR on Samsung Galaxy S6 and S7 that H.265 codec works best, with a resolution of 3840x1920 at 30fps, or 2048x2048 at 60fps.

A list of media-player related Android chipsets and which formats they support for hardware decoding:

http://kodi.wiki/view/Android_hardware

iOS / iPadOS / tvOS

Many media formats are supported by iOS including H.264. iOS 11 adds support for H.265 (HEVC). The iPhone 7 is the first device with the hardware to support H.265.

iOS doesn't support MP3 audio tracks in a video file, so best to use AAC instead.

It has proven difficult getting the true video decoding capabilities of iOS devices. Apple's website has information, but we found it to be slightly inaccurate (for example we can decode 4K video on iPhone5s, which apparently can only do 1080p). It seems that if your device has a 64-bit processor then it will be able to decode 4K H.264, but older devices with 32-bit processors will not.

macOS

Many media formats are supported by macOS including H.264, HEVC, ProRes 422 and ProRes 4444.

macOS Yosemite (10.10) added support for

- DV
- Uncompressed R10k
- Uncompressed v210
- Uncompressed 2vuy

macOS High Sierra (10.13) added support for

- HEVC (H.265)
- FLAC
- Opus (only as a .caf file)

Windows

A full list of natively supported formats can be found here: [https://msdn.microsoft.com/en-us/library/windows/desktop/dd757927\(v=vs.85\).aspx](https://msdn.microsoft.com/en-us/library/windows/desktop/dd757927(v=vs.85).aspx)

<https://msdn.microsoft.com/en-us/windows/uwp/audio-video-camera/supported-codecs>

H.264 decoder supports up to profile L5.1, but Windows 10 supports above L5.1 profile: [https://msdn.microsoft.com/en-us/library/windows/desktop/dd797815\(v=vs.85\).aspx](https://msdn.microsoft.com/en-us/library/windows/desktop/dd797815(v=vs.85).aspx)

H.265 decoder specs are here: [https://msdn.microsoft.com/en-us/library/windows/desktop/mt218785\(v=vs.85\).aspx](https://msdn.microsoft.com/en-us/library/windows/desktop/mt218785(v=vs.85).aspx)

Windows 10 adds native support for the following formats:

- H.265 / HEVC
- MKV
- FLAC
- HLS Adaptive Streaming
- MPEG-DASH

Windows 10 and UWP HLS features supported: <https://docs.microsoft.com/en-us/windows/uwp/audio-video-camera/hls-tag-support>

Windows 10 and UWP MPEG-DASH features supported: <https://docs.microsoft.com/en-us/windows/uwp/audio-video-camera/dash-profile-support>

Windows 10 Fall Update seems to remove native H.265 / HEVC support for some users and requires them to download the free [HEVC Video Extension](#). Before update KB4056892 (4 Jan 2018), users also had to open a H.265 video in the Films & TV app after a restart before AVPro Video could play H.265 videos. This update seems to fix that however.

Windows UWP

Details on media supported by this platform can be found is platform are here:

[https://msdn.microsoft.com/library/windows/apps/ff462087\(v=vs.105\).aspx](https://msdn.microsoft.com/library/windows/apps/ff462087(v=vs.105).aspx)

<https://msdn.microsoft.com/en-us/windows/uwp/audio-video-camera/supported-codecs>

WebGL

Support for WebGL platform is still varied and depends on the platform and browser support. Some formats such as AVI file container are not supported at all. As with all other platforms, H.264 video in an MP4 container is the most widely supported format.

Adaptive streaming (such as HLS) is still not supported natively by most browsers, but we have seen it working in the Microsoft Edge and Safari browsers.

For best compatibility make sure to force WebGL 1.0 by going to Player Settings > Other Settings > Auto Graphics API and removing WebGL 2.0. Failure to do so can make videos on Chrome not render.

HLS and MPEG-DASH are not natively supported on all browsers. We have added the ability to include 3rd party javascript libraries to handle these (dash.js and hls.js). See the streaming section for how to implement these.

On newer versions of Safari videos are not allows to auto-play unless given permission by the user (in the preferences menu). This doesn't affect videos that have no audio track so this may be a workaround. More details can be found here: <https://webkit.org/blog/7734/auto-play-policy-changes-for-macos/>

Some resources about the supported formats:

https://developer.mozilla.org/en-US/docs/Web/HTML/Supported_media_formats

https://en.wikipedia.org/wiki/HTML5_video#Browser_support

<http://www.encoding.com/html5/>