

Master's Thesis (Academic Year 2023)

Link Management For Quantum Network

Keio University Graduate School of Media and Governance
Makoto Nakai

Abstract of Bachelor's Thesis - Academic Year 20xx

Link Management For Quantum Network

I can't write English.

Keywords :

1. Thesis, 2. RG, 3. Jun Murai Lab., 4. L^AT_EX

Keio University Graduate School of Media and Governance
Makoto Nakai

Contents

1	Introduction	1
1.1	Background	1
1.2	Research Contribution	1
1.3	Thesis Structure	1
2	Background	2
2.1	Quantum State	2
2.1.1	Quantum Bit	2
2.1.2	Bloch sphere	2
2.1.3	Multi-Qubit State	3
2.2	Quantum Operations	4
2.2.1	I gate	4
2.2.2	X Gate	4
2.2.3	Y gate	4
2.2.4	Z Gate	5
2.2.5	H Gate	5
2.2.6	CNOT Gate	5
2.2.7	Measurement	6
2.3	Quantum Circuit	6
2.4	Quantum Entanglement	7
2.4.1	Bell Pair	7
2.4.2	Multipartite Entanglement	7
2.4.3	Bell State Measurement	7
2.4.4	Quantum Teleportation	8
2.4.5	Entanglement Swapping	8
2.4.6	Entanglement Purification	9
2.5	Quantum Networking	9
2.5.1	Quantum Node	9
2.5.2	Quantum Repeater	9
2.5.3	Quantum Link	9
2.5.4	Major Applications of Quantum Networking	9
3	Related Works	10
3.1	RuleSet-Based Quantum Network	10
3.2	Quantum Recursive Network Architecture	10

4	Problem Definition	11
4.1	Problem Definition	11
5	Proposal: Link Management For Quantum Network	12
5.1	Overview	12
5.2	Requirements	12
5.3	Link Allocation Policy	12
5.4	Link Allocation Policy Negotiation	12
5.5	Link Allocation Timing Negotiation	12
5.6	Resource Allocation	12
5.7	Link Management Finite State Machines	12
5.8	Link Management Finite State Events	12
5.9	Type of Messages	12
5.10	Relationship With Connection Setup	12
5.11	Relationship With Connection Teardown	12
6	Simulation	13
6.1	Overview of QuISP (Quantum Internet Simulation Package)	13
6.2	Major Components	13
6.3	BSA Controller	13
6.4	EPPS Controller	13
6.5	Bell Pair Store	13
6.6	RuleEngine	13
6.6.1	Link Allocation Policy Negotiation	13
6.6.2	Link Allocation Timing Negotiation	13
6.6.3	Resource Allocation	13
6.6.4	Connection Teardown	13
6.7	Connection Manager	13
6.7.1	LinkAllocationUpdateNotifier	13
6.7.2	Connection Teardown	13
7	Evaluation	14
7.1	Experiment	14
7.1.1	Two Node Network With an MM Link	14
7.1.2	Two Node Network With an MIM Link	14
7.1.3	Two Node Network With an MSM Link	14
7.1.4	Two Node Network With an MIM Link (Without Timing Negotiation)	14
8	Conclusion	15
8.1	Conclusion	15
8.2	Future Works	15
A	Appendix	16
A.1	hoge	16
	Acknowledgement	17

List of Figures

2.1	Bloch Sphere	3
2.2	Quantum circuit for quantum teleportation	8
2.3	Quantum circuit for entanglement swapping	8

List of Tables

Chapter 1

Introduction

1.1 Background

1.2 Research Contribution

1.3 Thesis Structure

Chapter 2

Background

2.1 Quantum State

2.1.1 Quantum Bit

A classical bit has two different states, which are 0 and 1. Instead, those of a quantum bit (or **qubit** in short) are $|0\rangle$ and $|1\rangle$, each of which can be described as a vector. For example

$$|0\rangle = \begin{bmatrix} 1 \\ 0 \end{bmatrix}$$

$$|1\rangle = \begin{bmatrix} 0 \\ 1 \end{bmatrix}$$

The state of a single qubit $|\psi\rangle$ can be described as follows.

$$|\psi\rangle = \alpha|0\rangle + \beta|1\rangle \quad (\alpha, \beta \in \mathbb{C}, |\alpha|^2 + |\beta|^2 = 1)$$

. After the operation called measurement, the quantum state would be collapsed into either 0 or 1. The measurement probability of 0 is $|\alpha|^2$ and that of 1 is $|\beta|^2$. In other words, a single qubit can take both states probabilistically at the same time. For instance, a qubit can be

$$|\psi\rangle = \frac{1}{\sqrt{2}}|0\rangle + \frac{1}{\sqrt{2}}|1\rangle \tag{1}$$

which can be 50% 0 and 50% 1.

2.1.2 Bloch sphere

Because $|\alpha|^2 + |\beta|^2 = 1$, the notation of a single qubit state can be represented like this.

$$|\psi\rangle = e^{i\gamma} \left(\cos \frac{\theta}{2} + e^{i\phi} \sin \frac{\theta}{2} \right) (\gamma, \phi, \theta \in \mathbb{R}) \tag{2.1}$$

Because $e^{i\gamma}$ is just a global state, it can be ignored and the same state can be rewritten like this.

$$|\psi\rangle = \cos \frac{\theta}{2} + e^{i\phi} \sin \frac{\theta}{2} (\phi, \theta \in \mathbb{C}) \quad (2.2)$$

Because the equation above has two parameters, any pure single qubit state can be considered as a point on the surface and its geometric representation is called **Bloch sphere**.

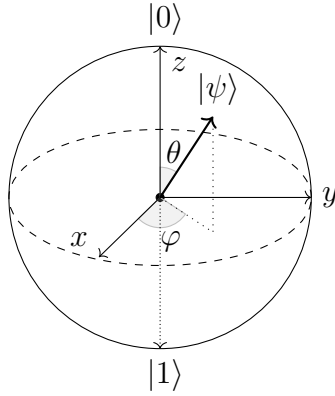


Figure 2.1: Bloch Sphere

2.1.3 Multi-Qubit State

The quantum state for multi-qubits is a **tensor product** of a state vector of each qubit. The general notation of two qubit state is

$$|\psi\rangle = (\alpha|0\rangle + \beta|1\rangle) \otimes (\gamma|0\rangle + \delta|1\rangle) \quad (2.3)$$

$$= \alpha\gamma|00\rangle + \alpha\delta|01\rangle + \beta\gamma|10\rangle + \beta\delta|11\rangle \quad (2.4)$$

$$(\alpha, \beta, \gamma, \delta \in \mathbb{C}, |\alpha|^2 + |\beta|^2 + |\gamma|^2 + |\delta|^2 = 1) \quad (2.5)$$

For example, the state $|00\rangle$ is equal to

$$\begin{bmatrix} 1 \\ 0 \end{bmatrix} \otimes \begin{bmatrix} 1 \\ 0 \end{bmatrix} = \begin{bmatrix} 1 \\ 0 \\ 0 \\ 0 \end{bmatrix} \quad (2.6)$$

However, some quantum states such as

$$|\psi\rangle = \frac{1}{\sqrt{2}}|00\rangle + \frac{1}{\sqrt{2}}|11\rangle \quad (2.7)$$

cannot be decomposed into quantum state of each qubit. These special quantum states are called **entangled** states.

2.2 Quantum Operations

2.2.1 I gate

I gate is equal to the 2x2 identity matrix, which is

$$I = \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix} \quad (2.8)$$

For example,

$$I|0\rangle = \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix} \begin{bmatrix} 1 \\ 0 \end{bmatrix} = \begin{bmatrix} 1 \\ 0 \end{bmatrix} = |0\rangle \quad (2.9)$$

$$I|1\rangle = \begin{bmatrix} 1 & 0 \\ 0 & 1 \end{bmatrix} \begin{bmatrix} 0 \\ 1 \end{bmatrix} = \begin{bmatrix} 0 \\ 1 \end{bmatrix} = |1\rangle \quad (2.10)$$

2.2.2 X Gate

X gate

X gate flips the logical value of a qubit.

$$X = \begin{bmatrix} 0 & 1 \\ 1 & 0 \end{bmatrix} \quad (2.11)$$

For example,

$$X|0\rangle = \begin{bmatrix} 0 & 1 \\ 1 & 0 \end{bmatrix} \begin{bmatrix} 1 \\ 0 \end{bmatrix} = \begin{bmatrix} 0 \\ 1 \end{bmatrix} = |1\rangle \quad (2.12)$$

$$X|1\rangle = \begin{bmatrix} 0 & 1 \\ 1 & 0 \end{bmatrix} \begin{bmatrix} 0 \\ 1 \end{bmatrix} = \begin{bmatrix} 1 \\ 0 \end{bmatrix} = |0\rangle \quad (2.13)$$

2.2.3 Y gate

Y gate flips the logical value of a qubit and add an imaginary number.

$$Y = \begin{bmatrix} 0 & -i \\ i & 0 \end{bmatrix} \quad (2.14)$$

For example,

$$Y|0\rangle = \begin{bmatrix} 0 & -i \\ i & 0 \end{bmatrix} \begin{bmatrix} 1 \\ 0 \end{bmatrix} = \begin{bmatrix} 0 \\ i \end{bmatrix} = i|1\rangle \quad (2.15)$$

$$Y|1\rangle = \begin{bmatrix} 0 & -i \\ i & 0 \end{bmatrix} \begin{bmatrix} 0 \\ 1 \end{bmatrix} = \begin{bmatrix} -i \\ 0 \end{bmatrix} = -i|0\rangle \quad (2.16)$$

2.2.4 Z Gate

Z gate flips the phase of $|1\rangle$

$$Z = \begin{bmatrix} 1 & 0 \\ 0 & -1 \end{bmatrix} \quad (2.17)$$

For example,

$$Z|0\rangle = \begin{bmatrix} 1 & 0 \\ 0 & -1 \end{bmatrix} \begin{bmatrix} 1 \\ 0 \end{bmatrix} = \begin{bmatrix} 1 \\ 0 \end{bmatrix} = |0\rangle \quad (2.18)$$

$$Z|1\rangle = \begin{bmatrix} 1 & 0 \\ 0 & -1 \end{bmatrix} \begin{bmatrix} 0 \\ 1 \end{bmatrix} = \begin{bmatrix} 0 \\ -1 \end{bmatrix} = -|1\rangle \quad (2.19)$$

2.2.5 H Gate

H gate creates superposition.

$$H = \frac{1}{\sqrt{2}} \begin{bmatrix} 1 & 1 \\ 1 & -1 \end{bmatrix} \quad (2.20)$$

For example,

$$H|0\rangle = \frac{1}{\sqrt{2}} \begin{bmatrix} 1 & 1 \\ 1 & -1 \end{bmatrix} \begin{bmatrix} 1 \\ 0 \end{bmatrix} = \frac{1}{\sqrt{2}} \begin{bmatrix} 1 \\ 1 \end{bmatrix} = \frac{1}{\sqrt{2}}(|0\rangle + |1\rangle) \quad (2.21)$$

$$H|1\rangle = \begin{bmatrix} 1 & 1 \\ 1 & -1 \end{bmatrix} \begin{bmatrix} 0 \\ 1 \end{bmatrix} = \frac{1}{\sqrt{2}} \begin{bmatrix} 1 \\ -1 \end{bmatrix} = \frac{1}{\sqrt{2}}(|0\rangle - |1\rangle) \quad (2.22)$$

2.2.6 CNOT Gate

A CNOT gate involves two qubits, one is called **controlled qubit** and the other is called **target qubit**. If the controlled qubit is 1, the bit value of the target qubit is flipped.

$$CNOT = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 1 \\ 0 & 0 & 1 & 0 \end{bmatrix} \quad (2.23)$$

For example,

$$CNOT_{0,1}|10\rangle = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 1 \\ 0 & 0 & 1 & 0 \end{bmatrix} \begin{bmatrix} 0 \\ 0 \\ 1 \\ 0 \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \\ 0 \\ 1 \end{bmatrix} = |11\rangle \quad (2.24)$$

$$CNOT_{0,1}|11\rangle = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 1 \\ 0 & 0 & 1 & 0 \end{bmatrix} \begin{bmatrix} 0 \\ 0 \\ 0 \\ 1 \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \\ 1 \\ 0 \end{bmatrix} = |10\rangle \quad (2.25)$$

2.2.7 Measurement

Quantum measurement can be described by using a group of measurement operators $\{M_m\}$ (m is the measurement result that is expected to get). If the quantum state before measurement is $|\psi\rangle$, the measurement probability of value m is

$$p(m) = \langle\psi|M_m^\dagger M_m|\psi\rangle$$

The quantum state after the measurement is

$$\frac{M_m|\psi\rangle}{\sqrt{\langle\psi|M_m^\dagger M_m|\psi\rangle}}$$

The measurement operators satisfy the completeness equation


$$\sum_m M_m^\dagger M_m = I$$

Also, the sum of the measurement probability of each possible measurement outcome is equal to one.

$$\sum_m p(m) = \langle\psi|\sum_m M_m^\dagger M_m|\psi\rangle = 1$$

2.3 Quantum Circuit

Here is the example of a quantum circuit.

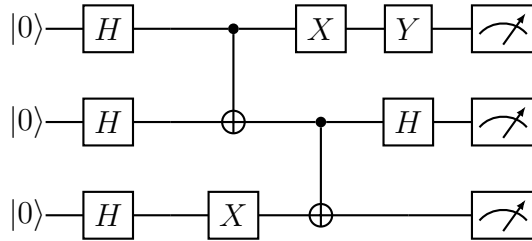

Each horizontal line represents each qubit and the square boxes that contain alphabets mean single quantum gates. The sign which involves a vertical line means a CNOT gate, and the box on the most right side indicates measurement.

2.4 Quantum Entanglement

Quantum entanglement is a special type of quantum state that cannot be described in the form of tensor product of the state of each particle.

2.4.1 Bell Pair

The entangled states between two qubits are called bell pairs, and each of four states has a special notation.

$$|\Phi^+\rangle = \frac{|00\rangle + |11\rangle}{\sqrt{2}} \quad (2.26)$$

$$|\Phi^-\rangle = \frac{|00\rangle - |11\rangle}{\sqrt{2}} \quad (2.27)$$

$$|\Psi^+\rangle = \frac{|01\rangle + |10\rangle}{\sqrt{2}} \quad (2.28)$$

$$|\Psi^-\rangle = \frac{|01\rangle - |10\rangle}{\sqrt{2}} \quad (2.29)$$

2.4.2 Multipartite Entanglement

There are cases that more than two qubits are entangled and that state is called Greenberger–Horne–Zeilinger state or GHZ state.

Here is the braket notation of the GHZ state that involves three qubits.


$$|GHZ\rangle = \frac{|000\rangle + |111\rangle}{\sqrt{2}} \quad (2.30)$$

In the general case, the braket notation of the GHZ state of N qubits is the following.

$$|GHZ\rangle = \frac{|0\rangle^{\otimes N} + |1\rangle^{\otimes N}}{\sqrt{2}} \quad (2.31)$$

2.4.3 Bell State Measurement

Bell state measurement is a special type of quantum measurement that determines which bell pair the given two qubit entangled state is.



Measurement results	Bell state
00	$ \Phi^+\rangle$
01	$ \Phi^-\rangle$
10	$ \Psi^+\rangle$
11	$ \Psi^-\rangle$

2.4.4 Quantum Teleportation

Unlike classical communication, quantum states cannot be just copied and transmit to other nodes due to the no-cloning theorem, which forbids duplication of any quantum state. However, a method called quantum teleportation [?] was proposed, which overcomes the restriction and allows sender to transmit single qubit state to a distant location.

This method requires both the single qubit state and a new Bell pair, and also the sender have to prepare two qubits and the receiver have to prepare one qubit. After applying a CNOT gate and an H gate in the figure above, the sender have to measure both qubits and send those measurement results over the classical network. After the receiver get those measurement results and apply some quantum gates if the measurement results of corresponding qubits on the sender's side are 1, in order to correct on the quantum state on the receiver's side.

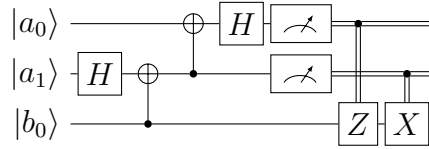


Figure 2.2: Quantum circuit for quantum teleportation

2.4.5 Entanglement Swapping

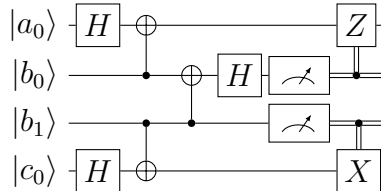


Figure 2.3: Quantum circuit for entanglement swapping

2.4.6 Entanglement Purification

2.5 Quantum Networking

2.5.1 Quantum Node

2.5.2 Quantum Repeater

2.5.3 Quantum Link

2.5.4 Major Applications of Quantum Networking

Chapter 3

Related Works

3.1 RuleSet-Based Quantum Network

3.2 Quantum Recursive Network Architecture

Chapter 4

Problem Definition

4.1 Problem Definition

Chapter 5

Proposal: Link Management For Quantum Network

5.1 Overview

5.2 Requirements

5.3 Link Allocation Policy

5.4 Link Allocation Policy Negotiation

5.5 Link Allocation Timing Negotiation

5.6 Resource Allocation

5.7 Link Management Finite State Machines

5.8 Link Management Finite State Events

5.9 Type of Messages

5.10 Relationship With Connection Setup

5.11 Relationship With Connection Teardown

Chapter 6

Simulation

6.1 Overview of QuISP (Quantum Internet Simulation Package)

6.2 Major Components

6.3 BSA Controller

6.4 EPPS Controller

6.5 Bell Pair Store

6.6 RuleEngine

6.6.1 Link Allocation Policy Negotiation

6.6.2 Link Allocation Timing Negotiation

6.6.3 Resource Allocation

6.6.4 Connection Teardown

6.7 Connection Manager

6.7.1 LinkAllocationUpdateNotifier

6.7.2 Connection Teardown

Chapter 7

Evaluation

7.1 Experiment

7.1.1 Two Node Network With an MM Link

7.1.2 Two Node Network With an MIM Link

7.1.3 Two Node Network With an MSM Link

7.1.4 Two Node Network With an MIM Link (Without Timing Negotiation)

Chapter 8

Conclusion

8.1 Conclusion

8.2 Future Works

Appendix A

Appendix

A.1 hoge

Acknowledgement

Reference

- [1] Satoshi Nakamoto. Bitcoin: A peer-to-peer electronic cash system. <http://www.cryptovest.co.uk/resources/Bitcoin%20paper%20original.pdf>, 2008.