


Checkpointed Relational Agent — System Architecture

checkpoint-relalg-v1 · Direct / Atomic / Hybrid · authority, state, execution, and no-leak boundaries

CURRENT: HYBRID

ARM A: TEXT-JSON

DIAGNOSTIC ONLY

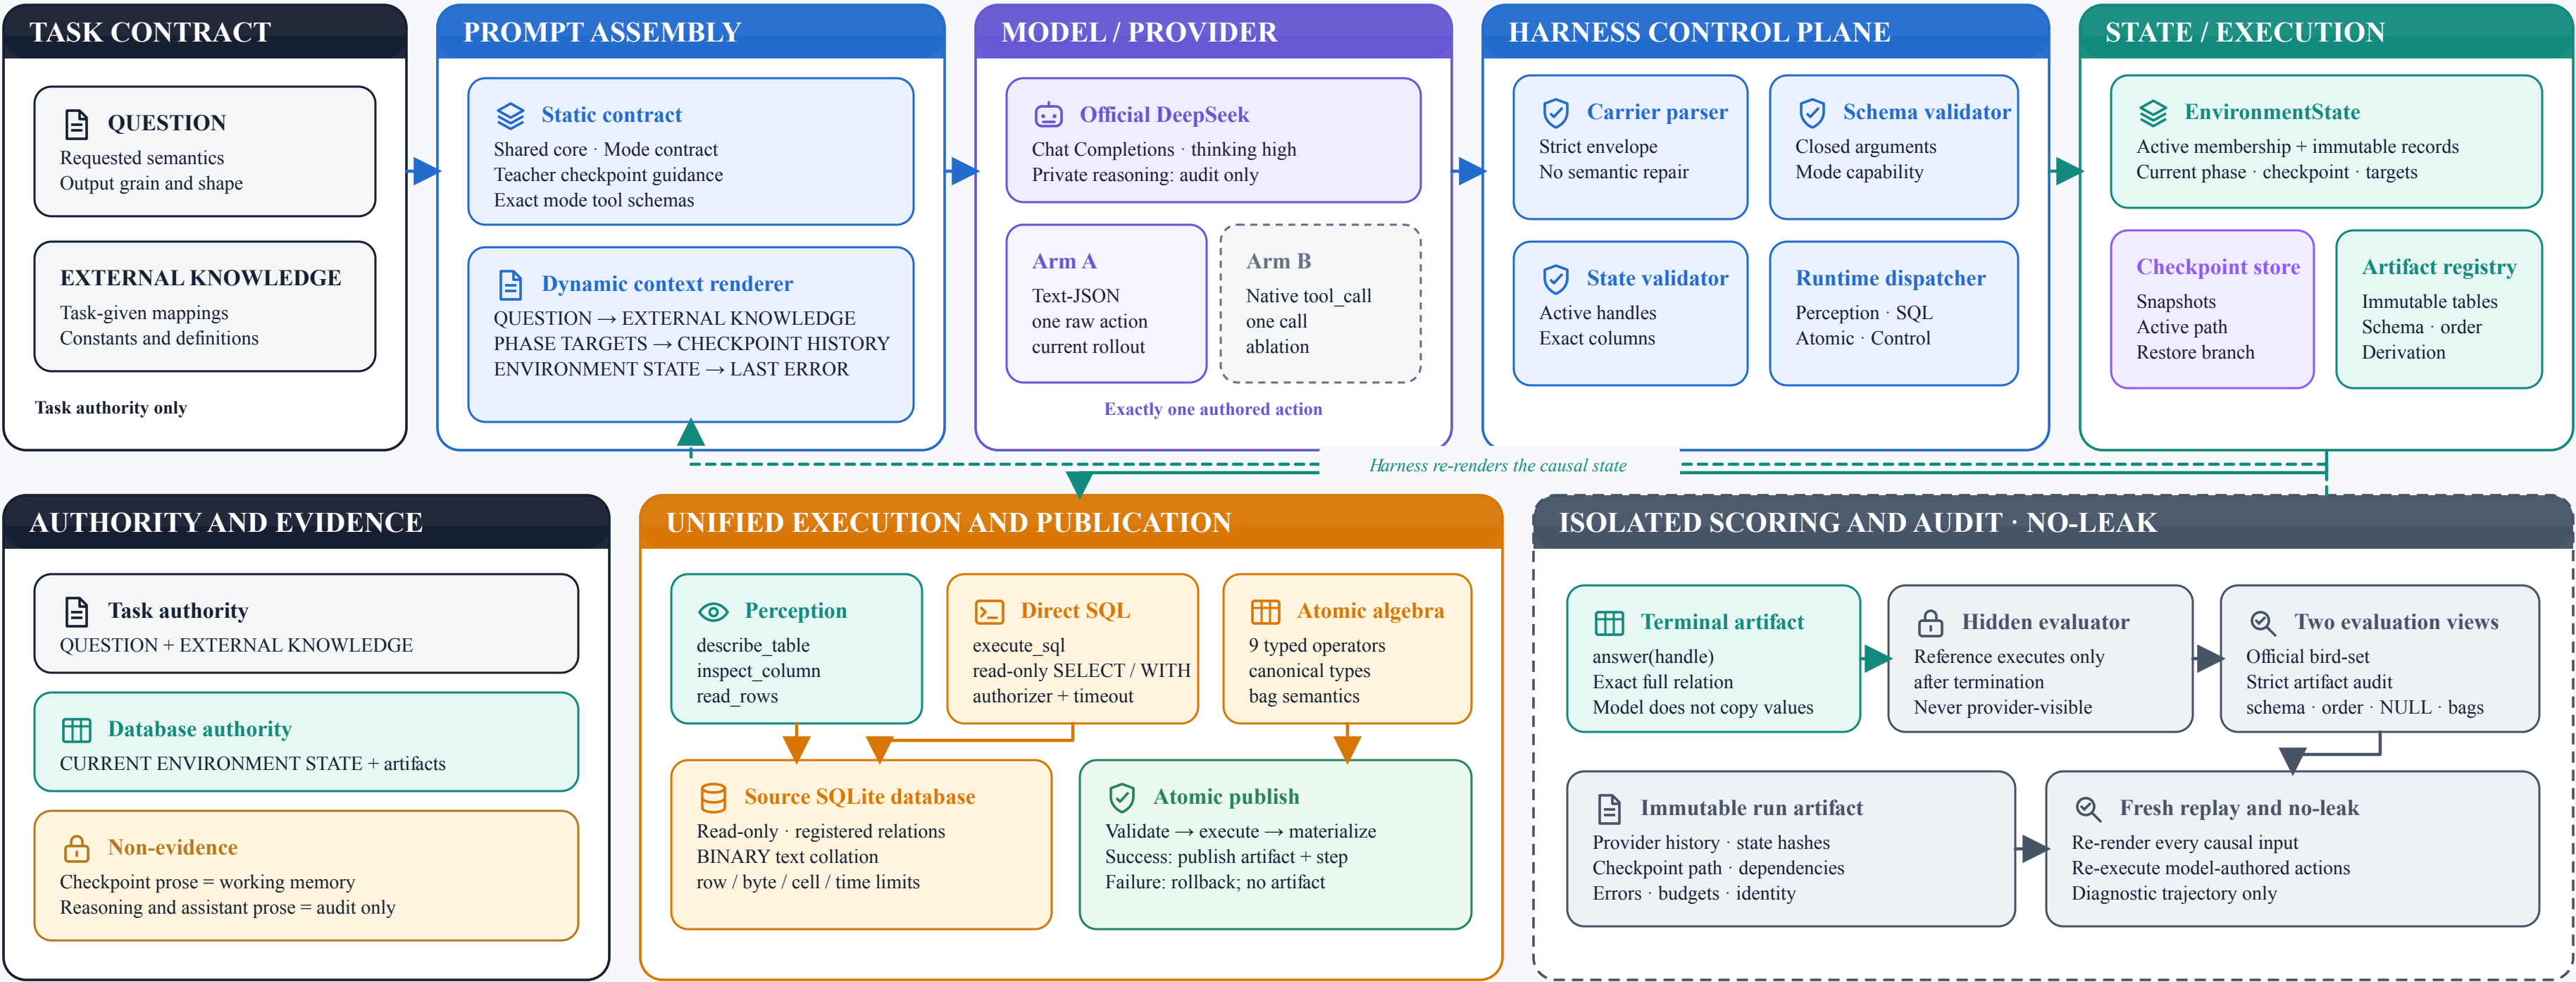

Bounded client retry = transport event, not a semantic action

F01 · Causal context

$$M_t = \text{Render}(Q, K, T_t, C_{0:k}, S_t, E_t)$$

F02 · Single-action invariant

$$a_t \sim \pi_\theta(\cdot \mid M_t), \quad |\text{AuthoredActions}_t| = 1$$