

iPhone App Dev

Lesson 2

Source Codes

<https://github.com/makzan/ios-dev-course-example-2013>

Practice

- Browse the App Store. Find some apps that impress you. Discuss why they are good.
- Do you have any problem that want to solve in a mobile phone? What app do you want to develop?

Summary

- Introducing Objective-C
- NSString and tracing log message
- Using UILabel
- Application Life Cycle
- Delegation
- Using UITextField
- Using UIButton
- Detecting Touches

Objective-C

Introducing Obj-C

- Obj-C is a super set of C
- We can use C stuff, such as primitive type

```
1 int a = 12;
2 int b = 100;
3 int c = a+b; // we have c = 112.
4 a=10;
5 int d = a+b; // we have d = 110.
```

Introducing Obj-C

- Obj-C is a super set of C
- We can use C stuff, such as primitive type

```
1 int a = 12;
2 int b = 100;
3 int c = a+b; // we have c = 112.
4 a=10;
5 int d = a+b; // we have d = 110.
```

Data is Dumb

- Data is not smart.
- Data does not have any ability.
- Data is manipulated and transformed and it is still dumb data.

For example, given a number variable 13. This data itself doesn't know the next integer.

Function is not smart

- Function take input data and calculate the output data.
- Function does not care about the data.
- Function has no relationship with data.
- Function and Data encourage Procedural Programming

Object is smart

- Object contains both data and function, which we call it method.
- We define behavior of object.
- Methods have strong relationship with data inside the object.
- We can think in higher level to tackle the problem.

Class and Instance

- Class is prototype of a kind of Object.
- Class is like a factory object. We build objects based on the factory setting.

Class and Instance

- Instance is the object built from the factory, Class.
- We cannot create object instance without a class.
- Each object instance has the same data and methods as defined in its Class.

Obj-C Class

- Objective-C Class contains both Interface and Implementation.
- Interface is usually named .h file
- Implementation is usually named .m file
- Obj-C++ implementation is named .mm

Interface

- An example of Obj-C interface

```
1 #import <UIKit/UIKit.h>
2
3
4
5 @interface MainController : NSObject
6
7 - (void)touchesBegan:(NSSet *)touches withEvent:(UIEvent *)event;
8
9 - (void)touchesMoved:(NSSet *)touches withEvent:(UIEvent *)event;
10
11 - (void)touchesEnded:(NSSet *)touches withEvent:(UIEvent *)event;
12
13 - (void)sayHello;
14
15 @end
```

Example

```
MainViewController *controller = [[MainViewController alloc] init];  
[controller sayHello];
```

Message Passing

```
1 @interface Person : NSObject
2 - (void) sayMessage: (NSString*) msg to: (NSString*) target;
3 @end
4
5
6 Person *person = [[Person alloc] init];
7 [person sayMessage:@"hello" to:@"Thomas"];
```

NSString

NSLog - Log Message

- NSLog takes a NSString format argument.
So we can log a text in console with


```
1 NSLog(@"hello world");
2 // output "hello world"
3
4 NSLog(@"this is a number: %d", 123);
5 // output "this is a number: 123"
6
7 NSLog(@"%@", 1, 2, 3);
8 // output "1 + 2 = 3"
```

NSLog - Log Message

- %d is decimal number.
 - %f is floating point number
 - %@ is a string description of an object
-
- %02d means decimal with at least 2 digits.
 - %.2f means floating point with 2 decimal places.


Creating XCode Project

Creating XCode Project

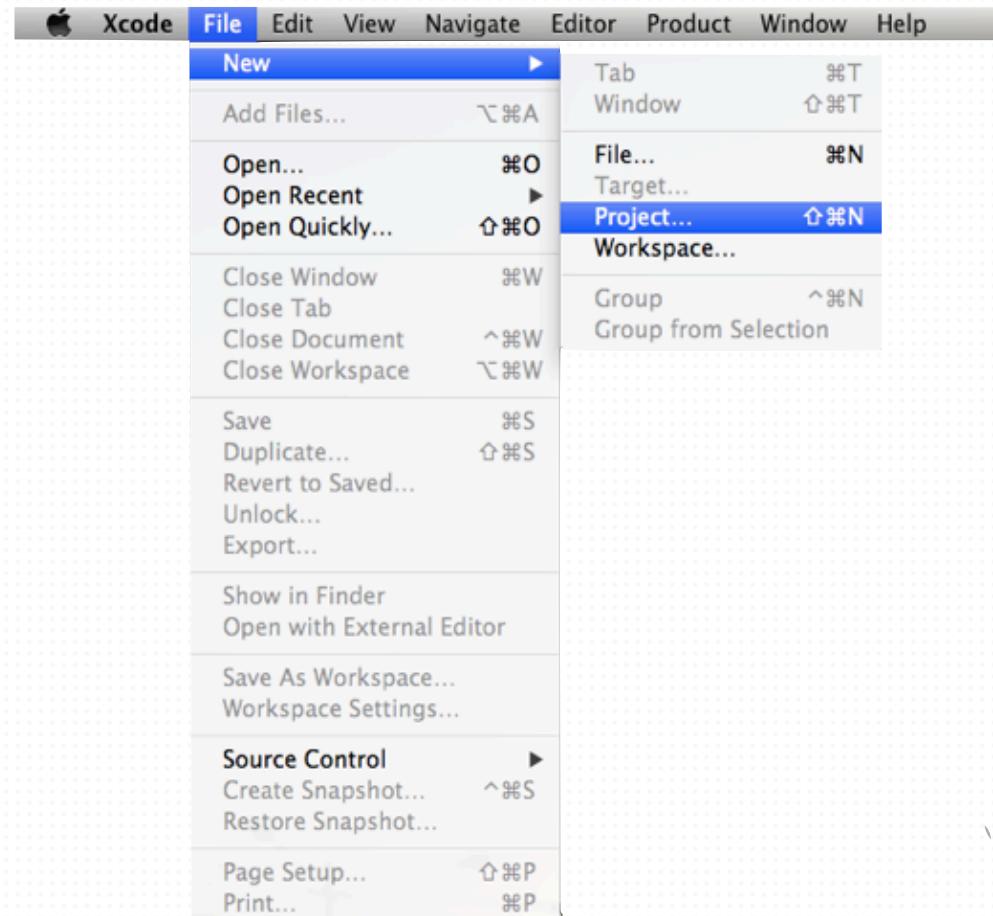


File | New | Project

Creating XCode Project

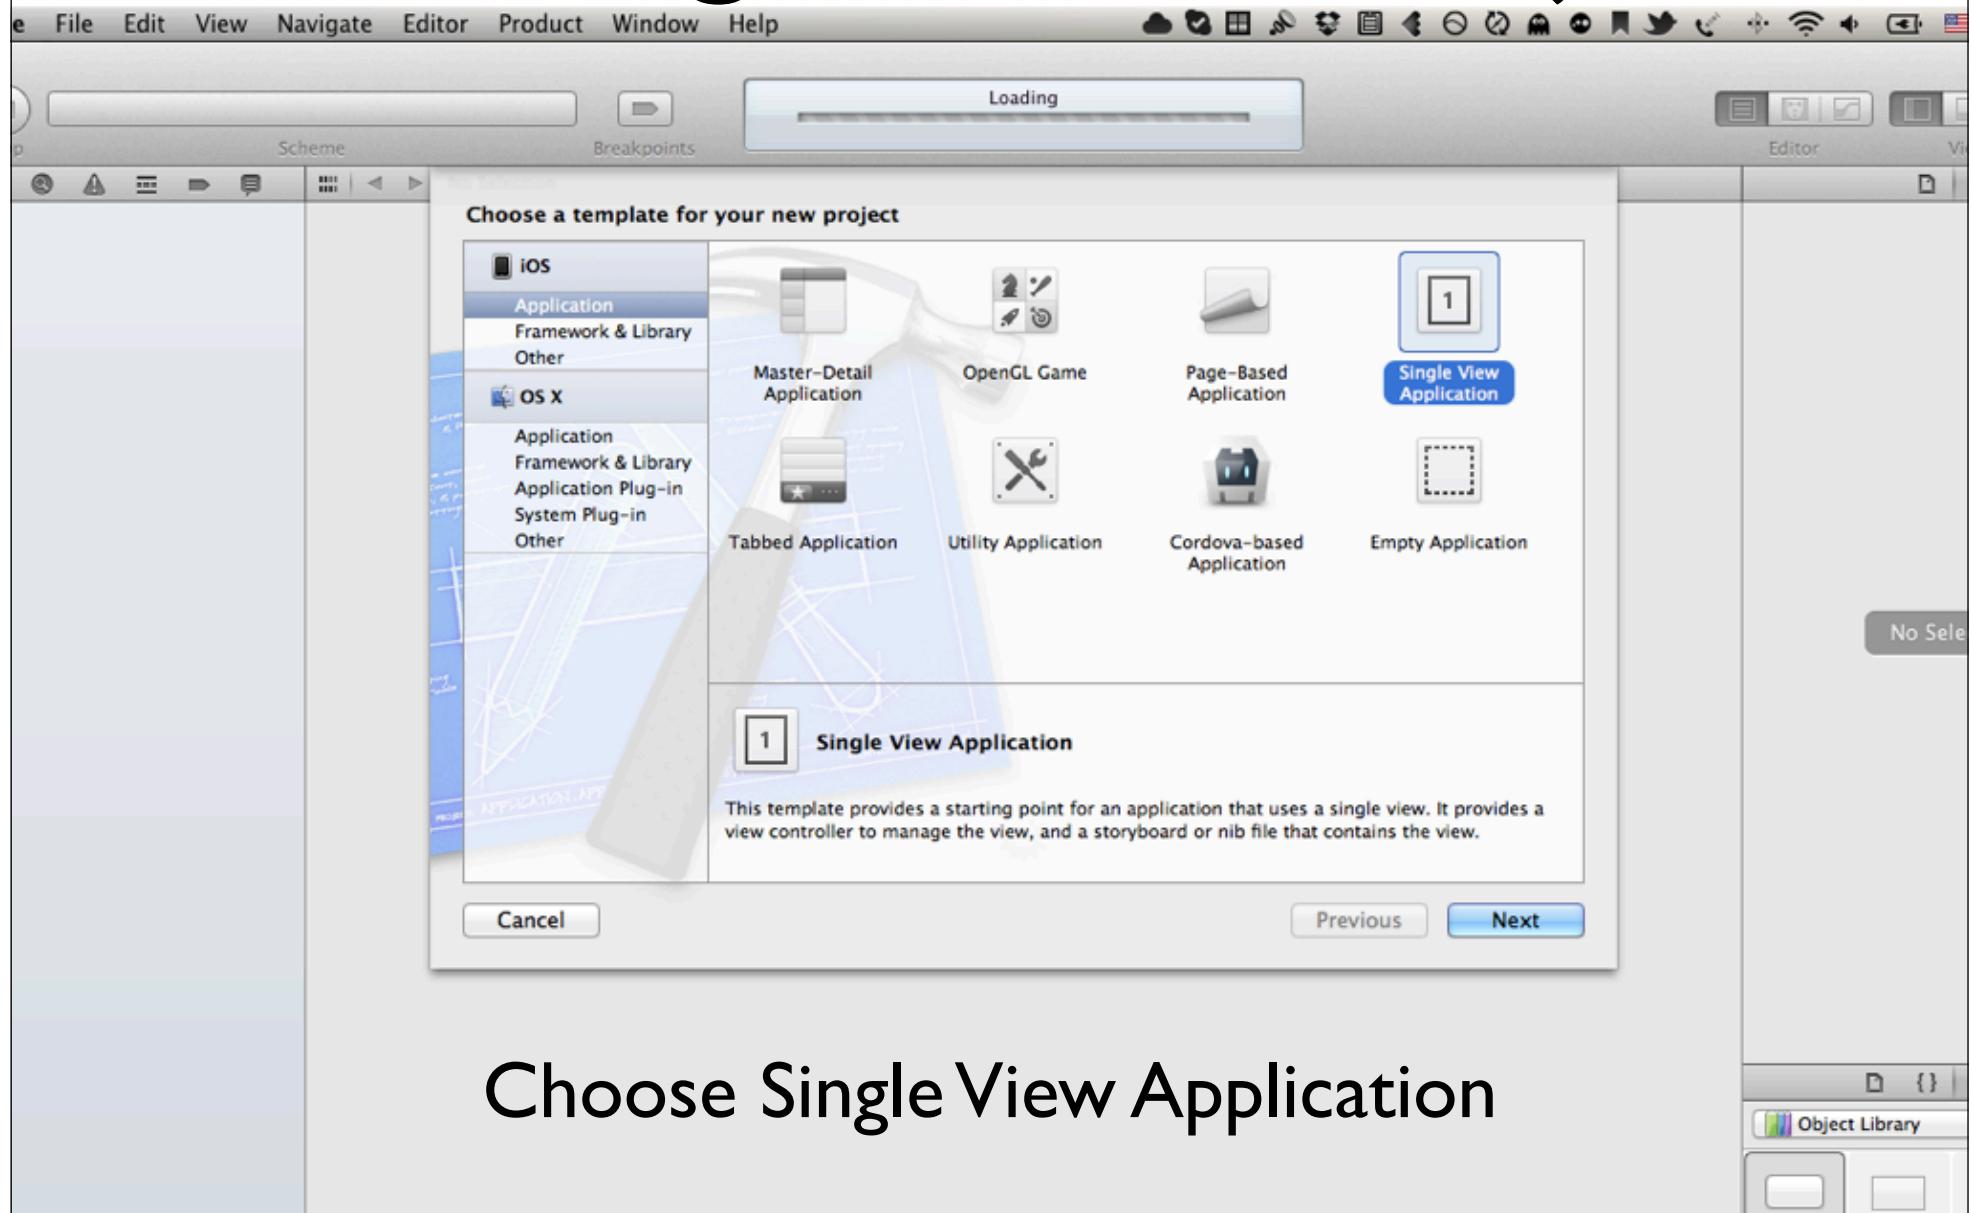

Choose Single View Application


Creating XCode Project

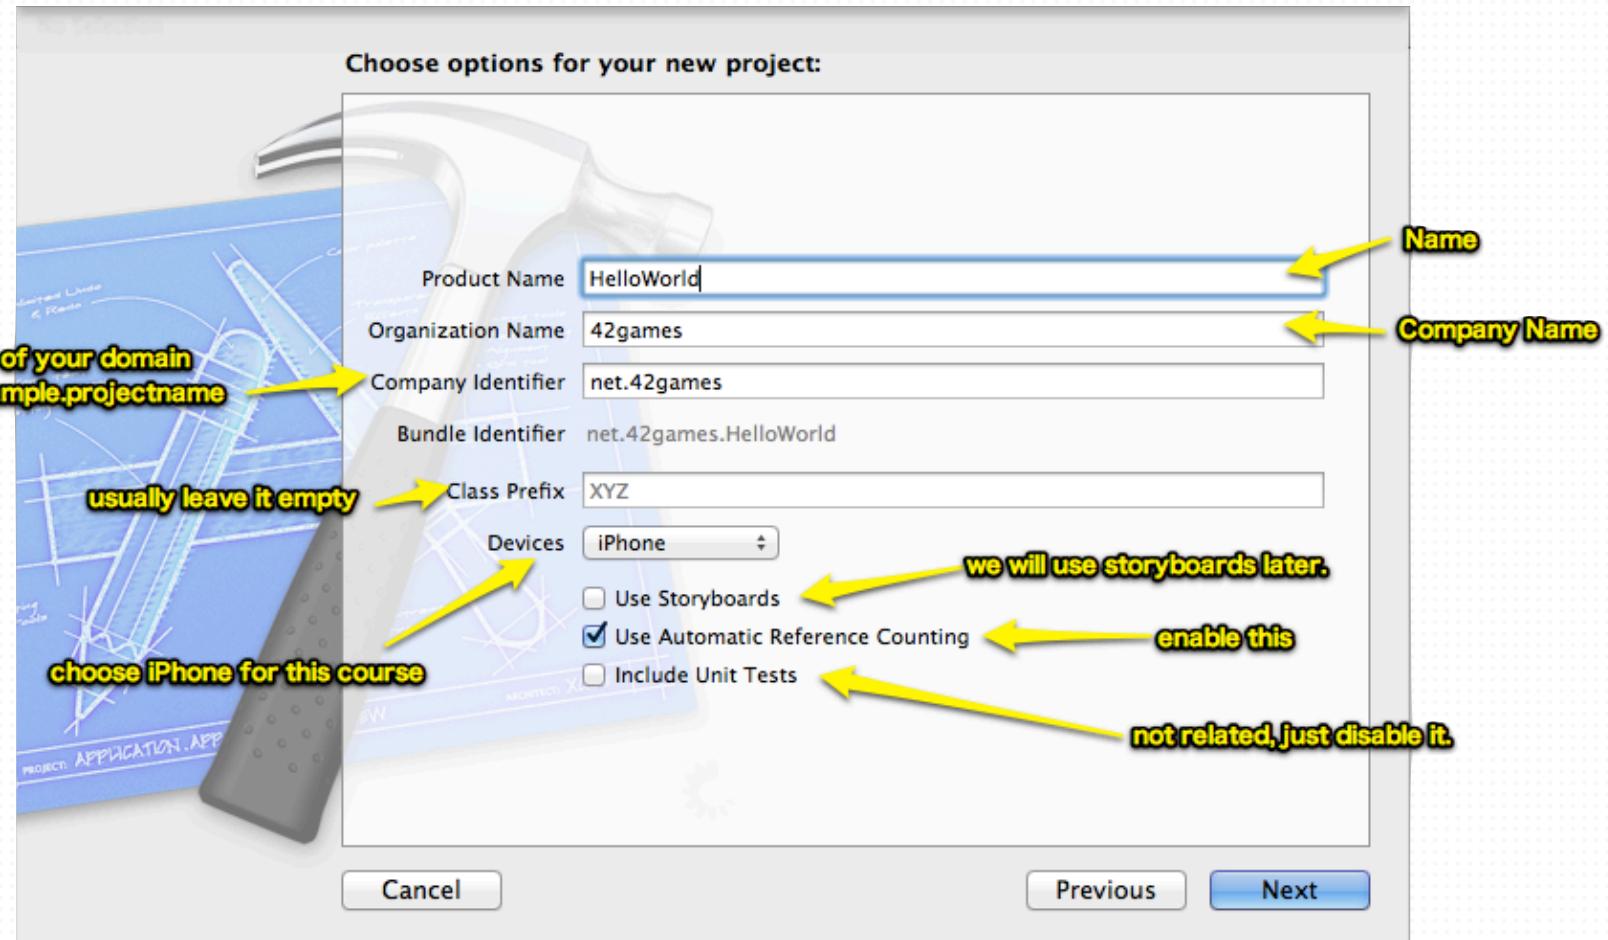

Choose Single View Application


Using UILabel

Using UILabel

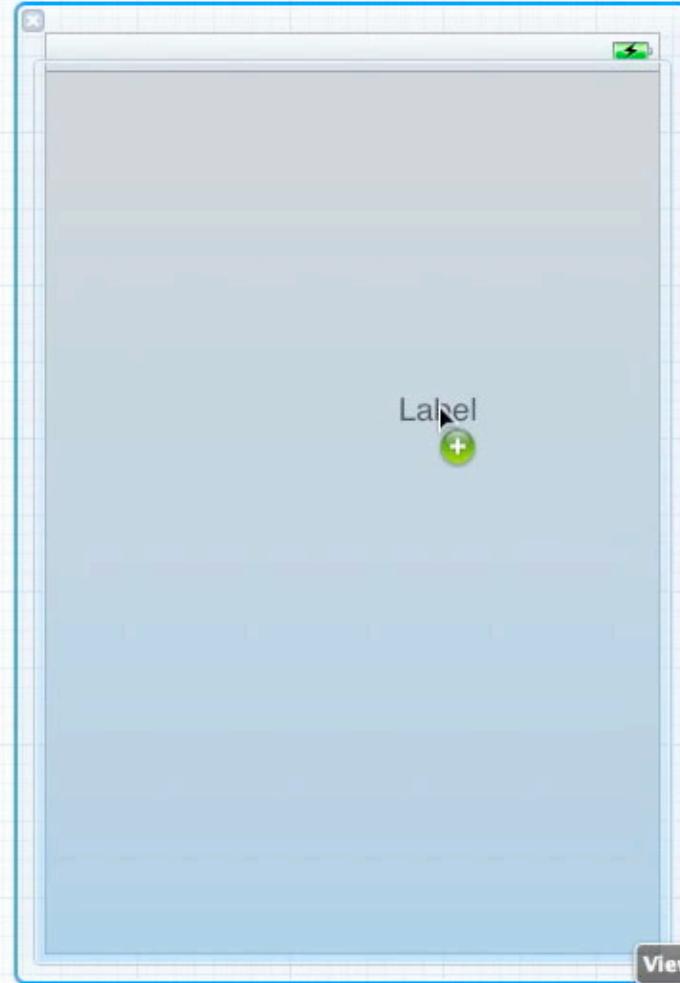


Dragging a Label into the view.

Using UILabel

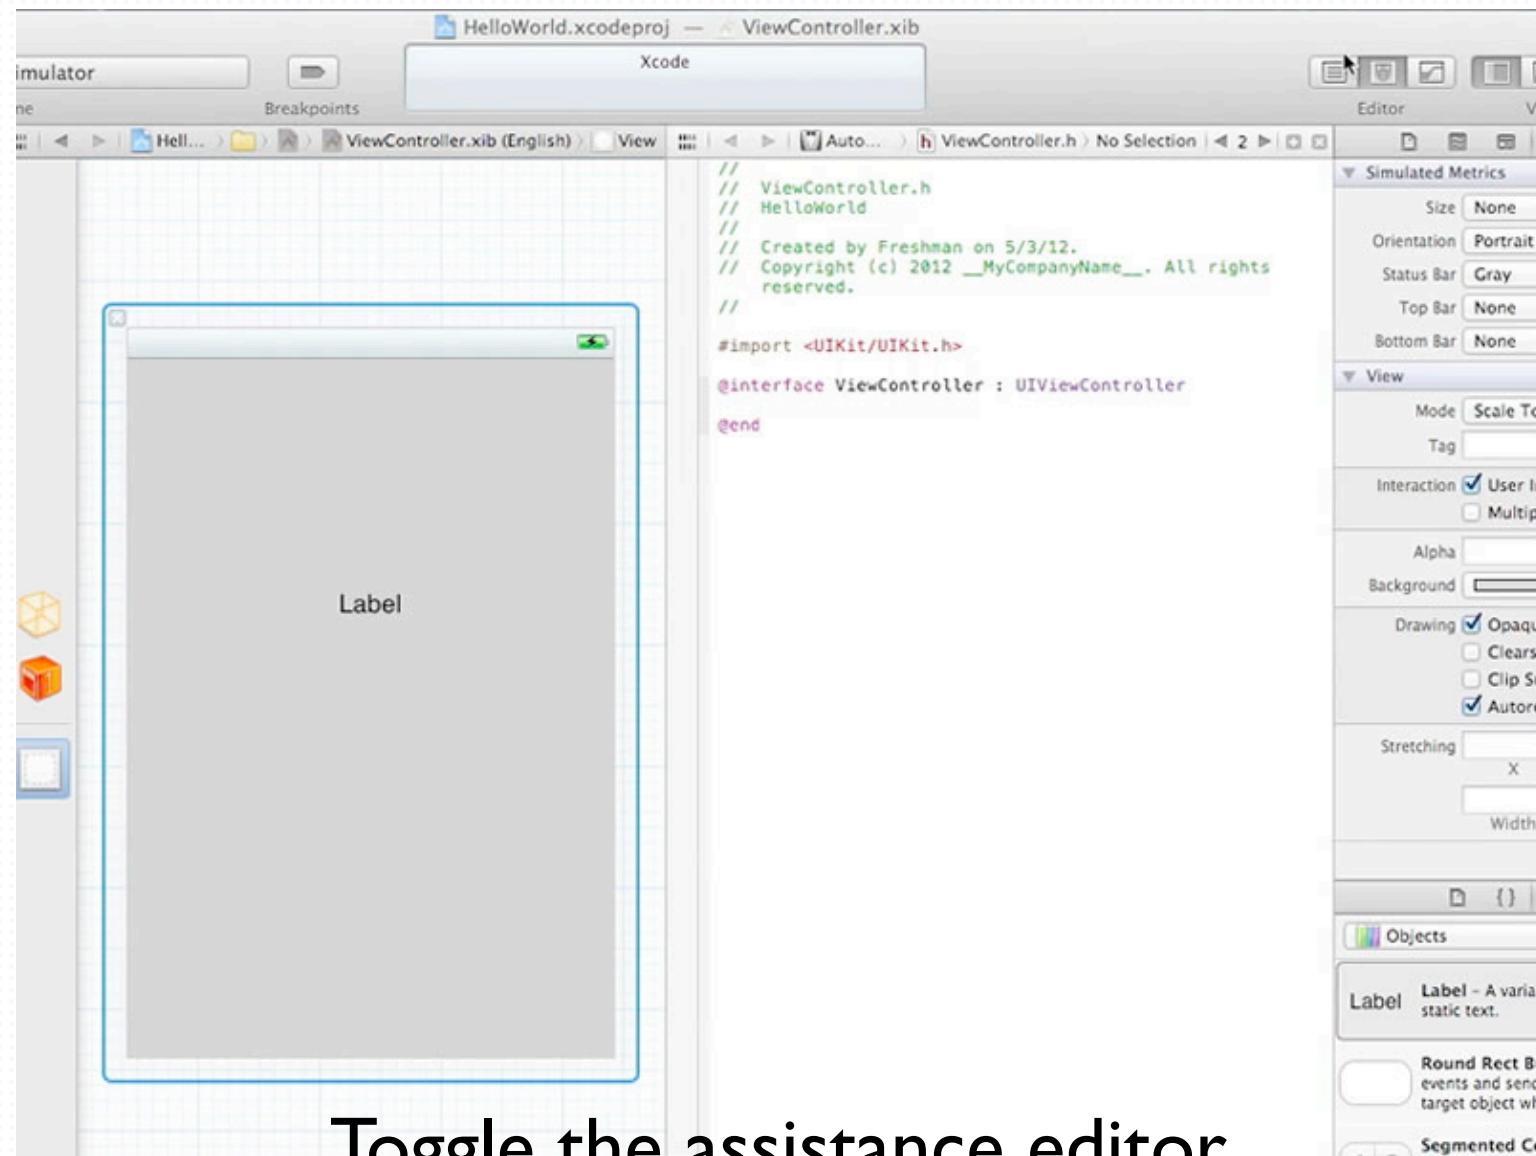


Toggle the assistance editor.

Using UILabel

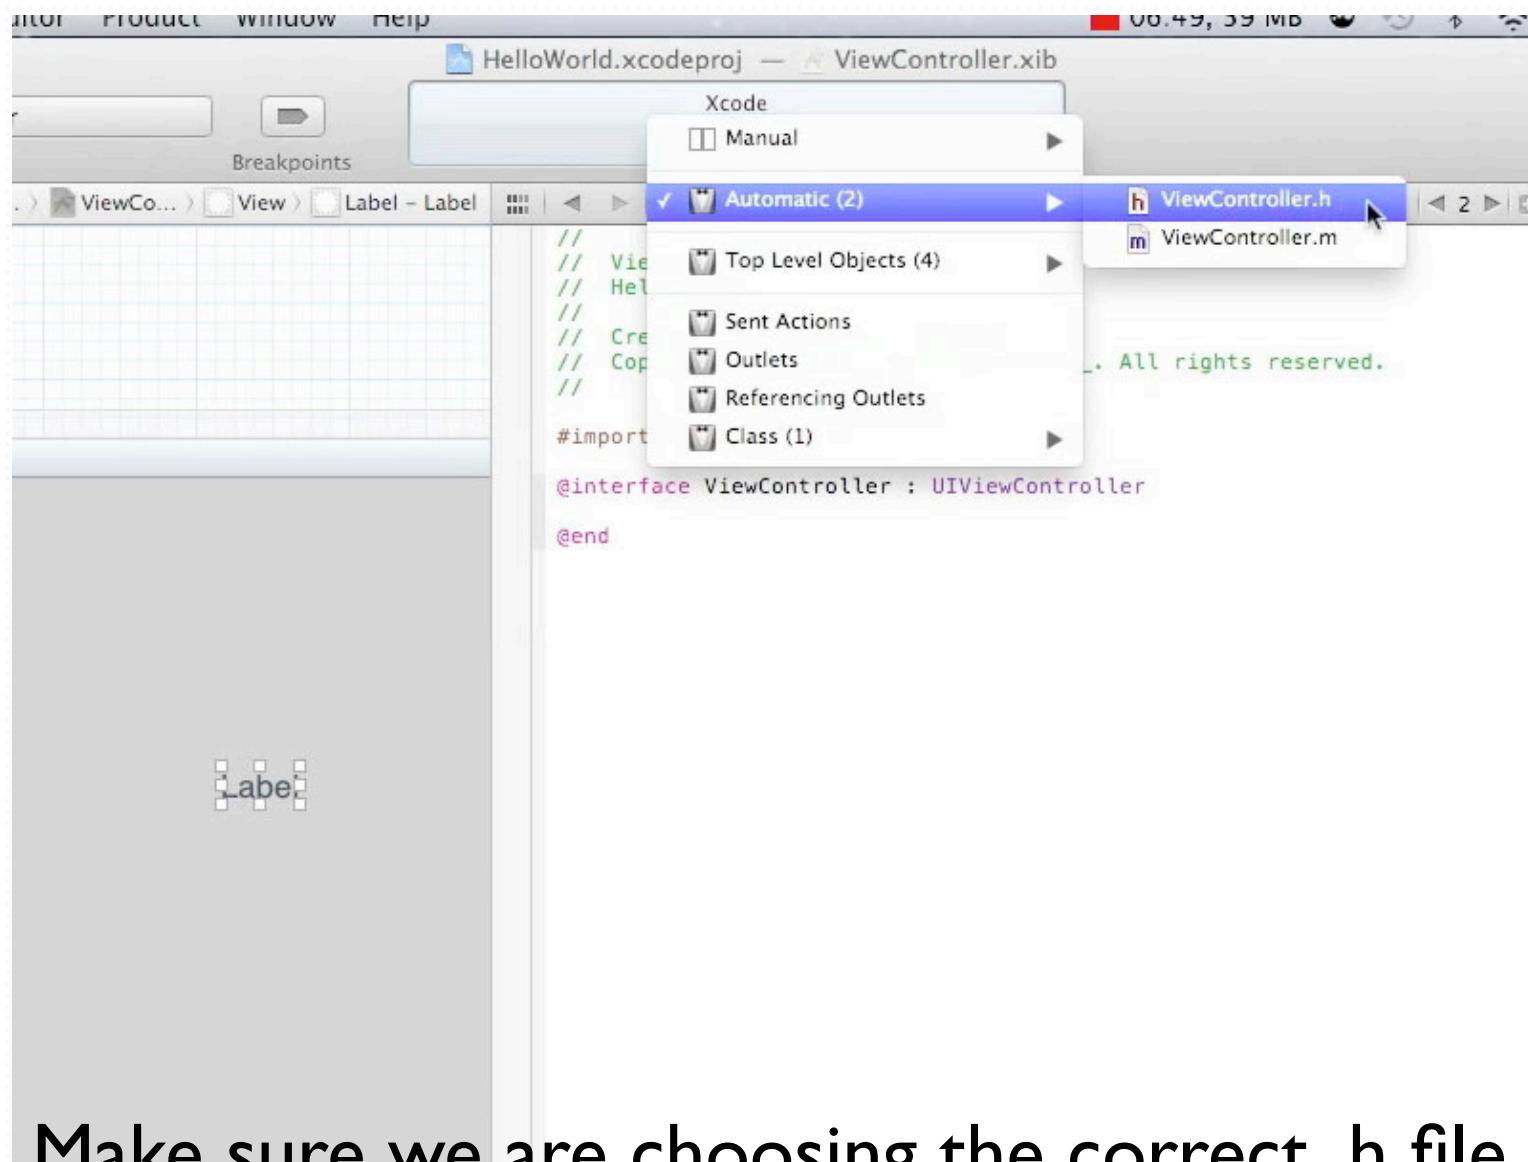


Make sure we are choosing the correct .h file.

Using UILabel

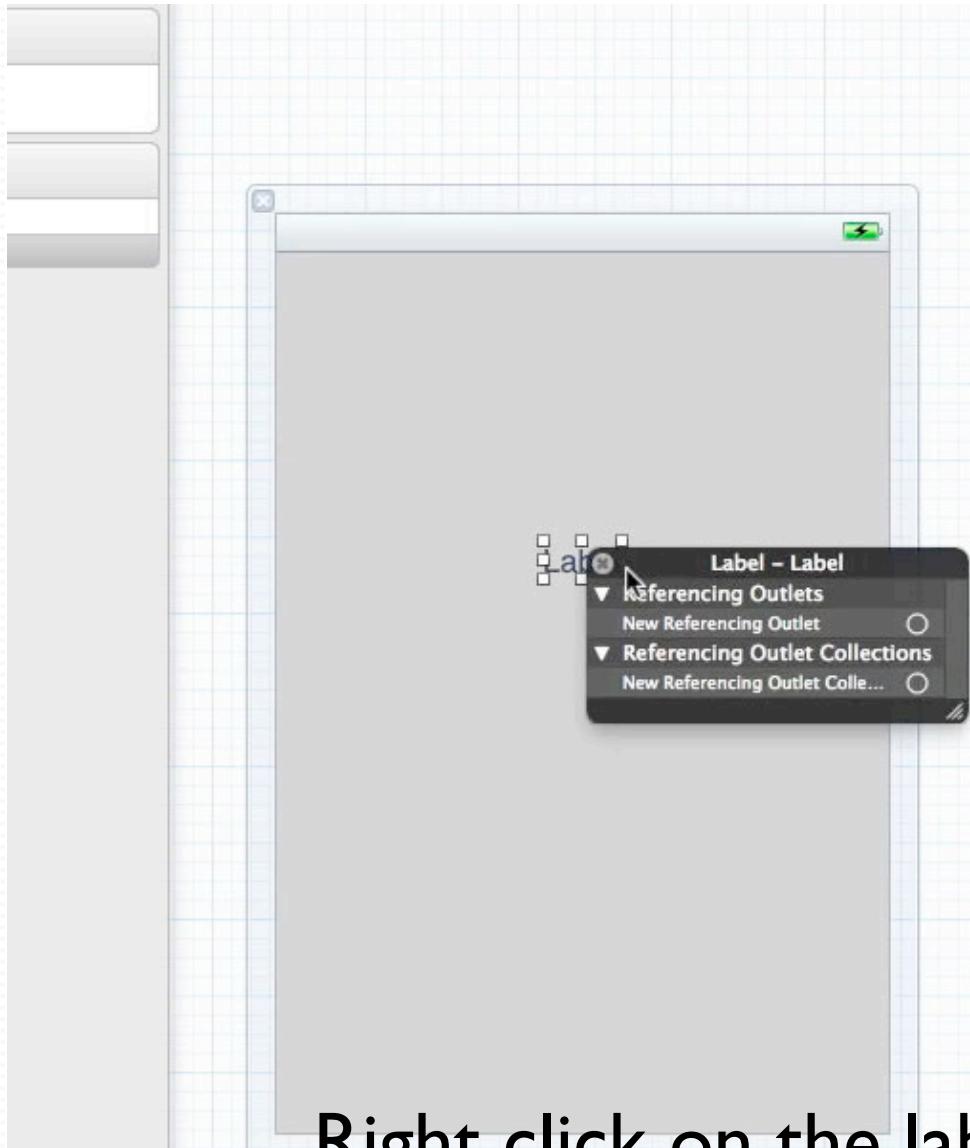


Right click on the label view.

Using UILabel

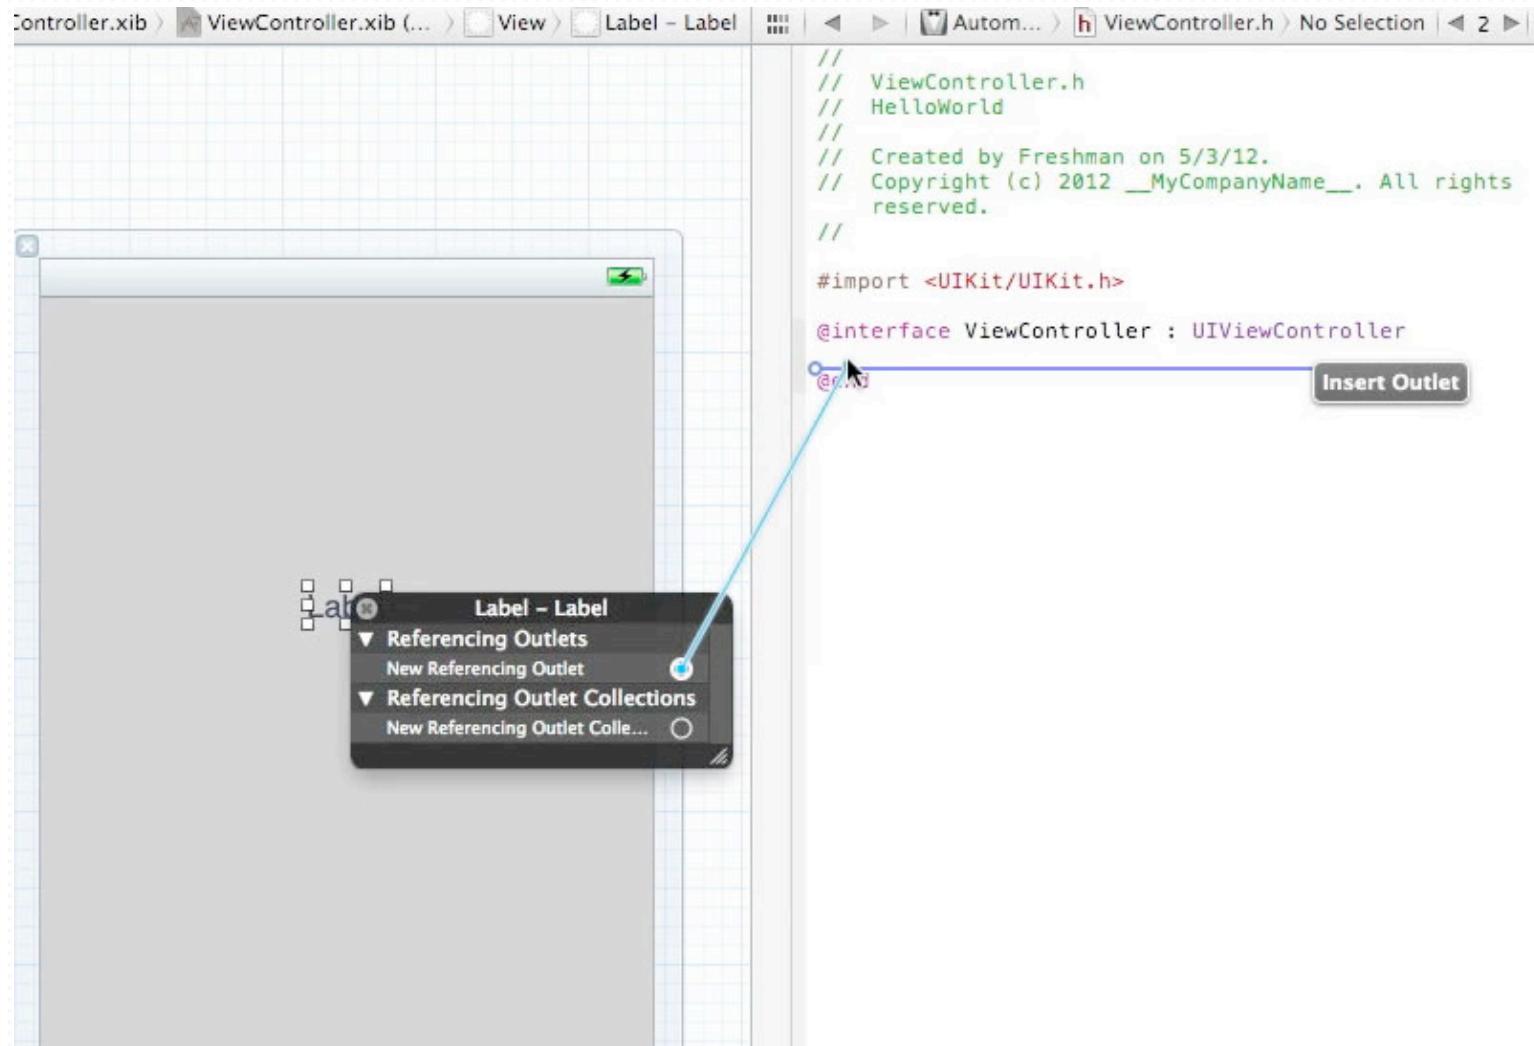


Drag the “New Referencing Outlet” to header.

Using UILabel

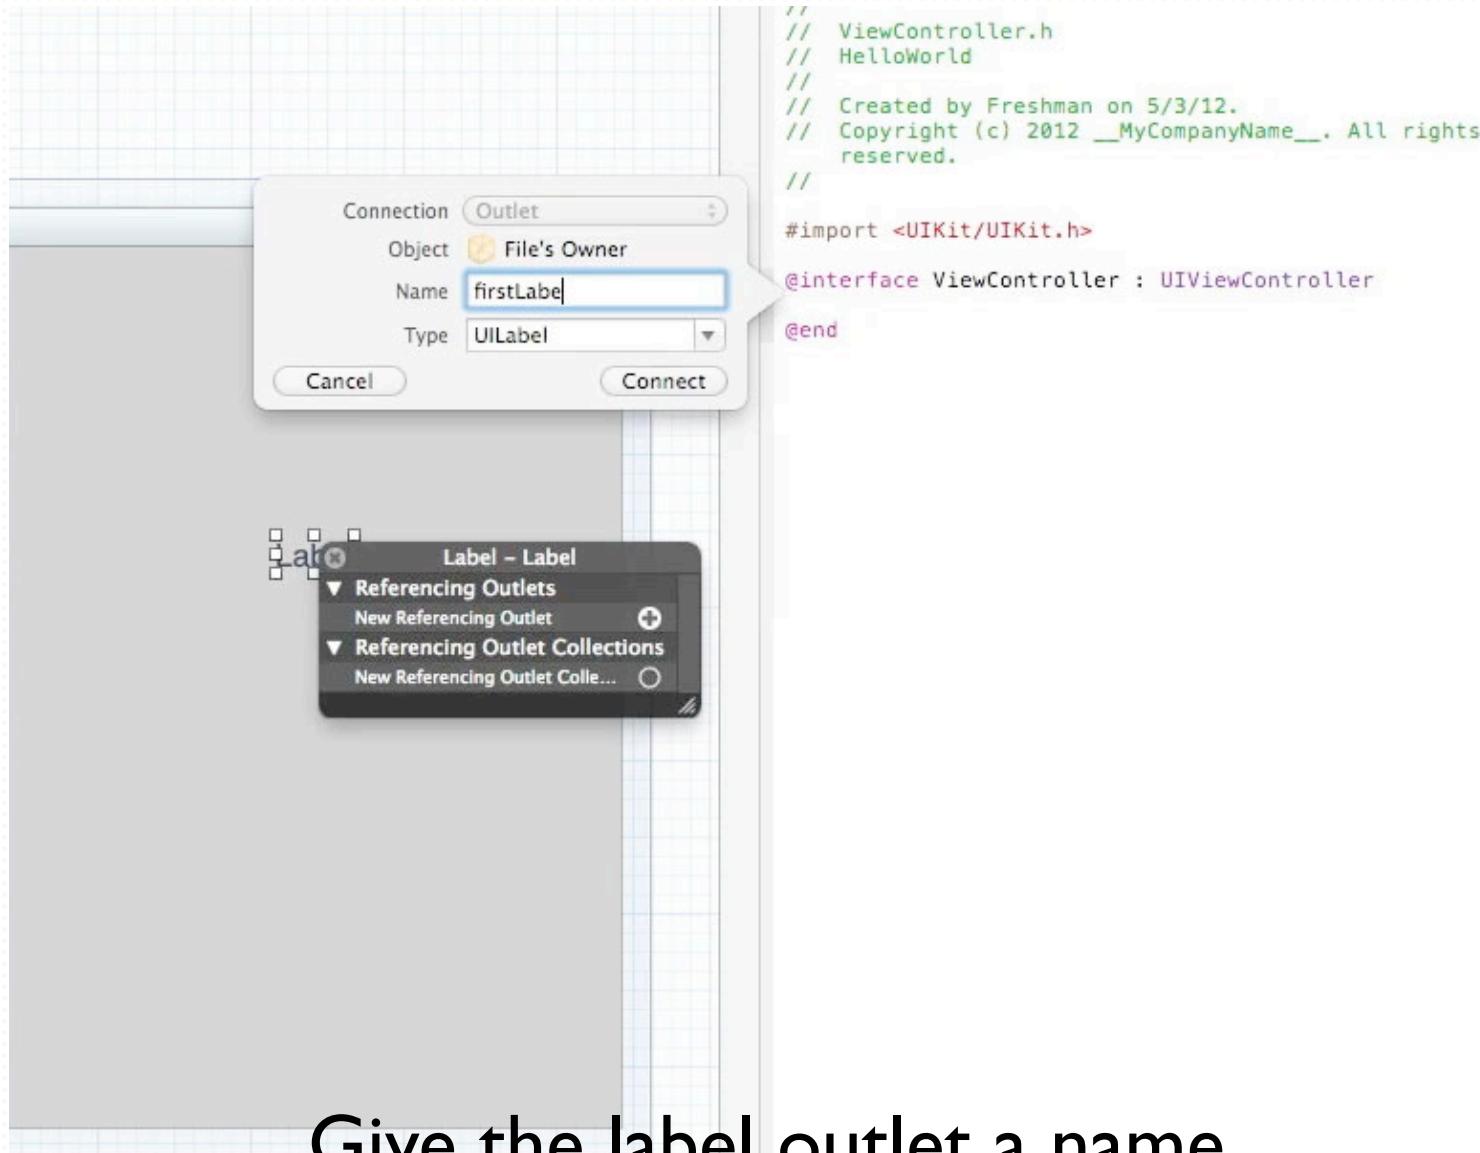

Give the label outlet a name.

Using UILabel

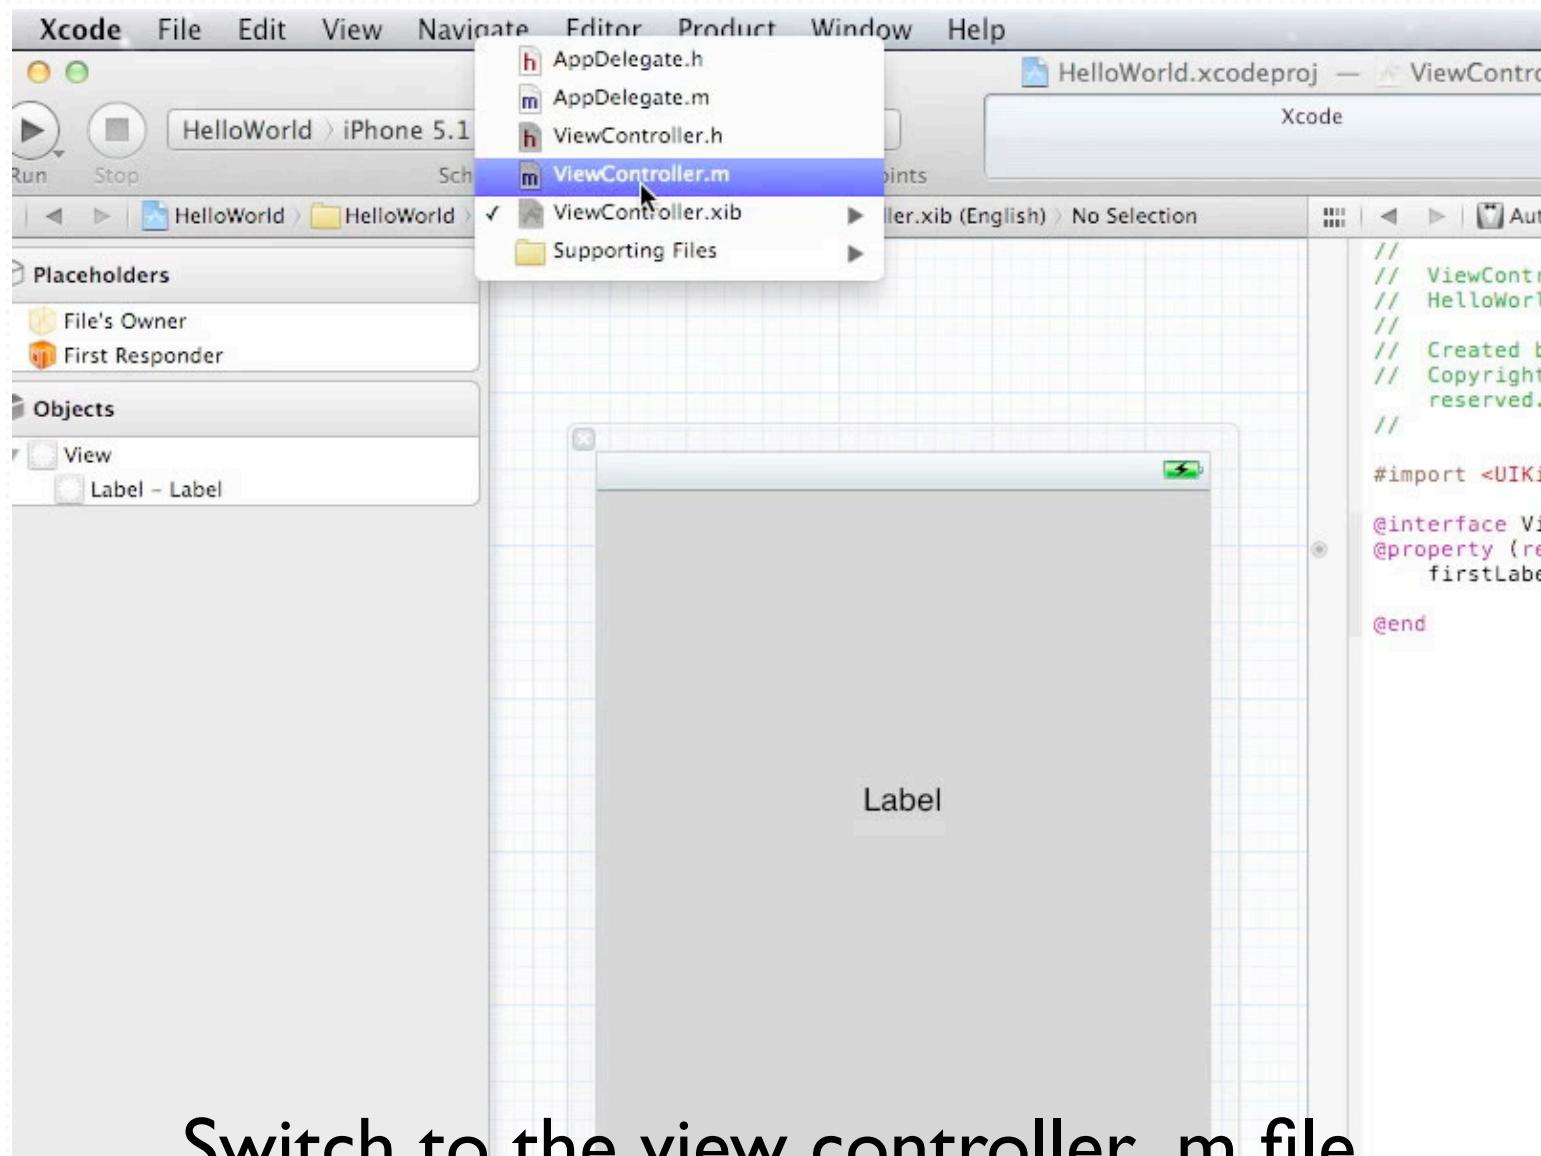

Switch to the view controller .m file.


Using UILabel

```
//  
// ViewController.m  
// HelloWorld  
//  
// Created by Freshman on 5/3/12.  
// Copyright (c) 2012 __MyCompanyName__. All rights reserved.  
  
#import "ViewController.h"  
  
@interface ViewController ()  
  
@end  
  
@implementation ViewController  
@synthesize firstLabel;  
  
- (void)viewDidLoad  
{  
    [super viewDidLoad];  
    // Do any additional setup after loading the view, typically from a nib.  
  
    firstLabel.text = @"Hello";  
}  
  
- (void)viewDidUnload  
{  
    [self setFirstLabel:nil];  
    [super viewDidUnload];  
    // Release any retained subviews of the main view.  
}  
  
- (BOOL)shouldAutorotateToInterfaceOrientation:(UIInterfaceOrientation)interfaceOrientation  
{  
    return (interfaceOrientation != UIInterfaceOrientationPortraitUpsideDown);  
}  
  
- (void)dealloc {  
    [firstLabel release];  
    [super dealloc];  
}  
@end
```

```
//  
// ViewContr  
// HelloWorl  
//  
// Created b  
// Copyright  
reserved.  
  
//  
  
#import <UIKit.h>  
  
@interface Vi  
@property (re  
    firstLabe  
  
@end
```

Add the label text changing code in
viewDidLoad delegate method

Using UILabel

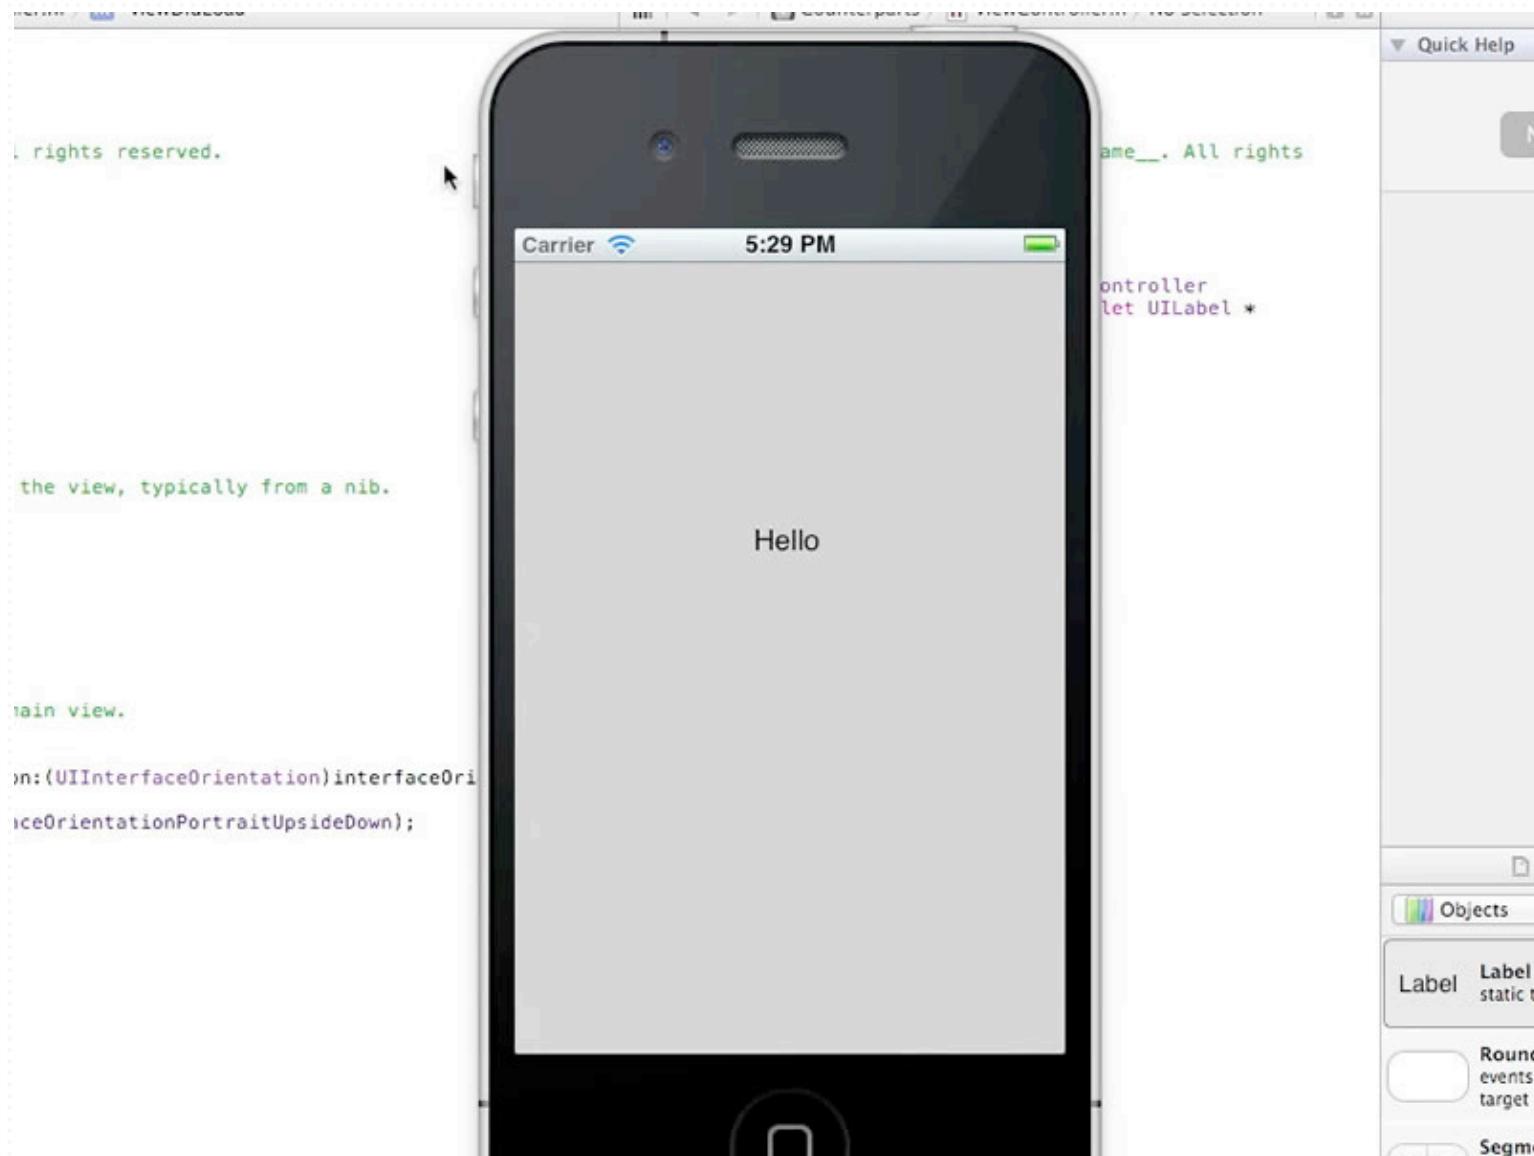

Using UILabel

- Setting text label


```
1 firstLabel.text = @"Hello";
```

Using UILabel

- Setting text label with string formatter

```
1 NSString *caption = @"Addition";
2
3 int a = 100;
4 int b = 12;
5 int c = a + b;
6
7 firstLabel.text = [NSString stringWithFormat:@"%@:
%d + %d = %d", caption, a, b, c];
```

Using UILabel

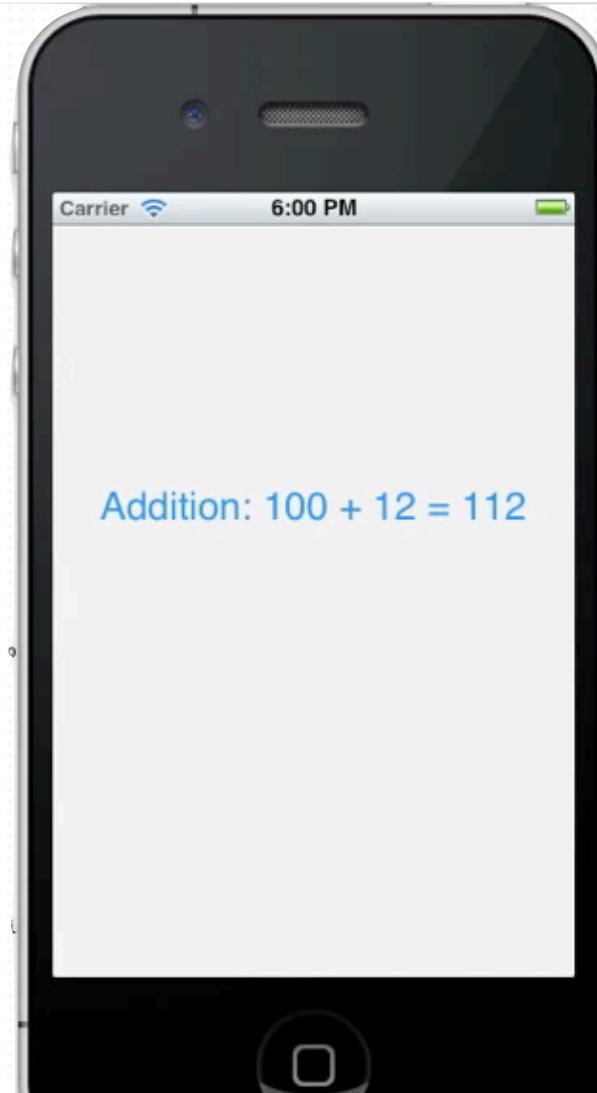

Using UILabel

- **Setting text color**

```
1 firstLabel.textColor = [UIColor redColor];
```

- **Setting font size**

```
1 firstLabel.font = [UIFont systemFontOfSize:24.0f];
```

Using UILabel

The screenshot shows the Xcode Documentation Organizer window titled "Organizer – Documentation". The toolbar at the top includes icons for Devices, Repositories, Projects, Archives, and Documentation. The navigation bar below the title bar shows the path: iOS 5.1 Library > User Experience > Windows & Views > UILabel Class Reference. On the left, a sidebar search bar contains the query "UILabel". Below it, the "Reference" section is expanded, showing one result for "UILabel", which is selected and highlighted in blue. Other sections like "System Guides" and "Tools Guides" are also listed. The main content area on the right is titled "Tasks" and lists several properties under "Accessing the Text Attributes": `text` *property*, `font` *property*, `textColor` *property*, `textAlignment` *property*, `lineBreakMode` *property*, and `enabled` *property*. Further down, under "Sizing the Label's Text", are `adjustsFontSizeToFitWidth` *property*, `baselineAdjustment` *property*, `minimumFontSize` *property*, and `numberOfLines` *property*. Other sections include "Managing Highlight Values" with `highlightedTextColor` *property* and `highlighted` *property*, and "Drawing a Shadow" with `shadowColor` *property*.

How the label links with code?

- **IBOutlet**
- The xib remember which outlet variable the view is pointing to.
- The code change the variable and inform the xib to update the view.

Application Life Cycle

Application Life Cycle

- main.m > UIApplication > AppDelegate Class
- AppDelegate is our app's entry point.

<UIApplicationDelegate>

- (void)applicationDidFinishLaunching:(UIApplication *)application;

- Entry point of the application.
- Execute every time when the app launched.

<UIApplicationDelegate>

- (void)applicationDidBecomeActive:(UIApplication *)application;

- Execute every time when the app is open from background to foreground. (Switch from other app)

<UIApplicationDelegate>

- (void)applicationWillResignActive:(UIApplication *)application;

- Execute when the app is moved from active state into inactive state.
- Including when the multi-task bar appear on bottom.
- Good point to pause any running logic, such as game loop.

<UIApplicationDelegate>

- (void)applicationDidEnterBackground:(UIApplication *)application;

- Execute when the user switch to home screen or other application.
- The app entered background.
- Good point to save all user data into persistent storage.

<UIApplicationDelegate>

- (void)applicationWillTerminate:(UIApplication *)application;

- Execute when the application is going to be terminated.
- Usually not much we can do here. All data should be saved when the app entered background.

<UIApplicationDelegate>

- (BOOL)application:(UIApplication *)application handleOpenURL:(NSURL *)url;

- Execute when the app is launched by calling the app URL scheme.
- App that is launched with *your-app-scheme://something*
- This is usually done by executing an app from the other app.
- Facebook uses this approach for Single Sign On.

Delegates

Delegate Protocol


- Define a collection of methods.
- These methods act as communication bridge between two classes.
- The original class pass the task to the delegate to execute.
- We use delegate to customize behavior.

Delegate Protocol

- Application cycle are handled in UIApplication in OS.
- We provide delegate method to define behavior when UIApplication informs us.

```
1 @protocol UIApplicationDelegate<NSObject>
2
3 - (void)applicationDidFinishLaunching: (UIApplication *)application;
4
5 @end
```


Delegate Protocol

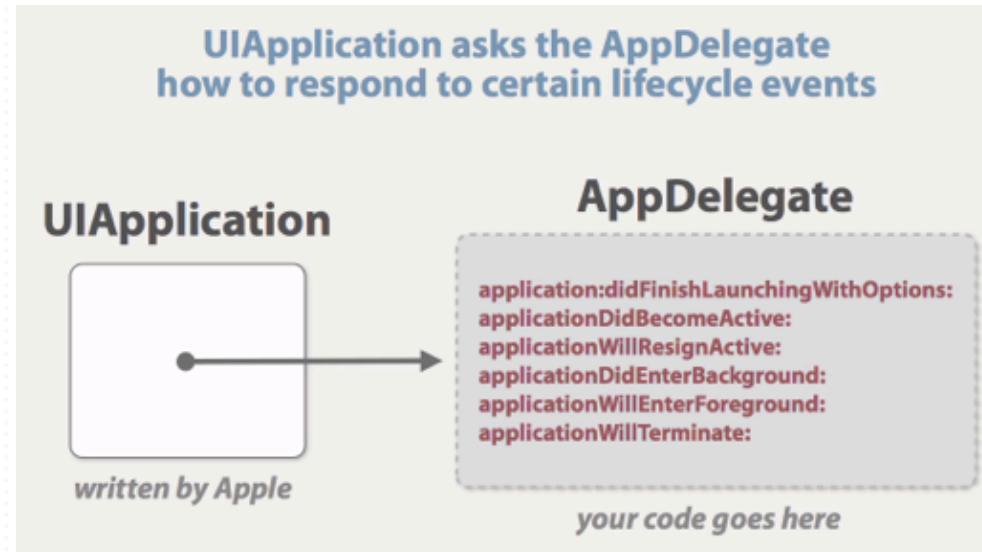

Graph from <http://pragmaticstudio.com/screencasts/rubymotion>

Using UITextField

Using UITextField

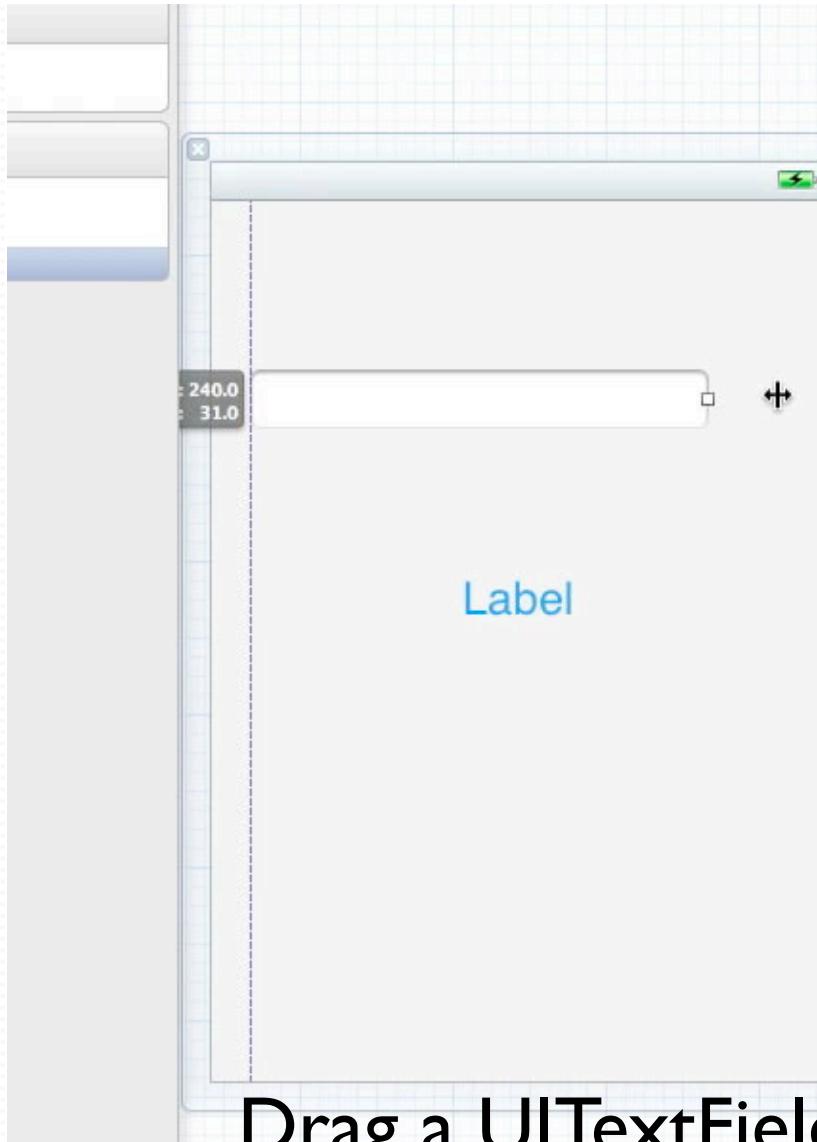


Drag a UITextField into the view.

```
// ViewController.h
// HelloWorld
//
// Created by Freshman on 5/3/12.
// Copyright (c) 2012 __MyCompanyName__. All rights reserved.


#import <UIKit/UIKit.h>

@interface ViewController : UIViewController
@property (retain, nonatomic) IBOutlet UILabel *firstLabel;
@property (retain, nonatomic) IBOutlet UILabel *secondLabel;
@property (retain, nonatomic) IBOutlet UILabel *thirdLabel;
@end
```

Using UITextField

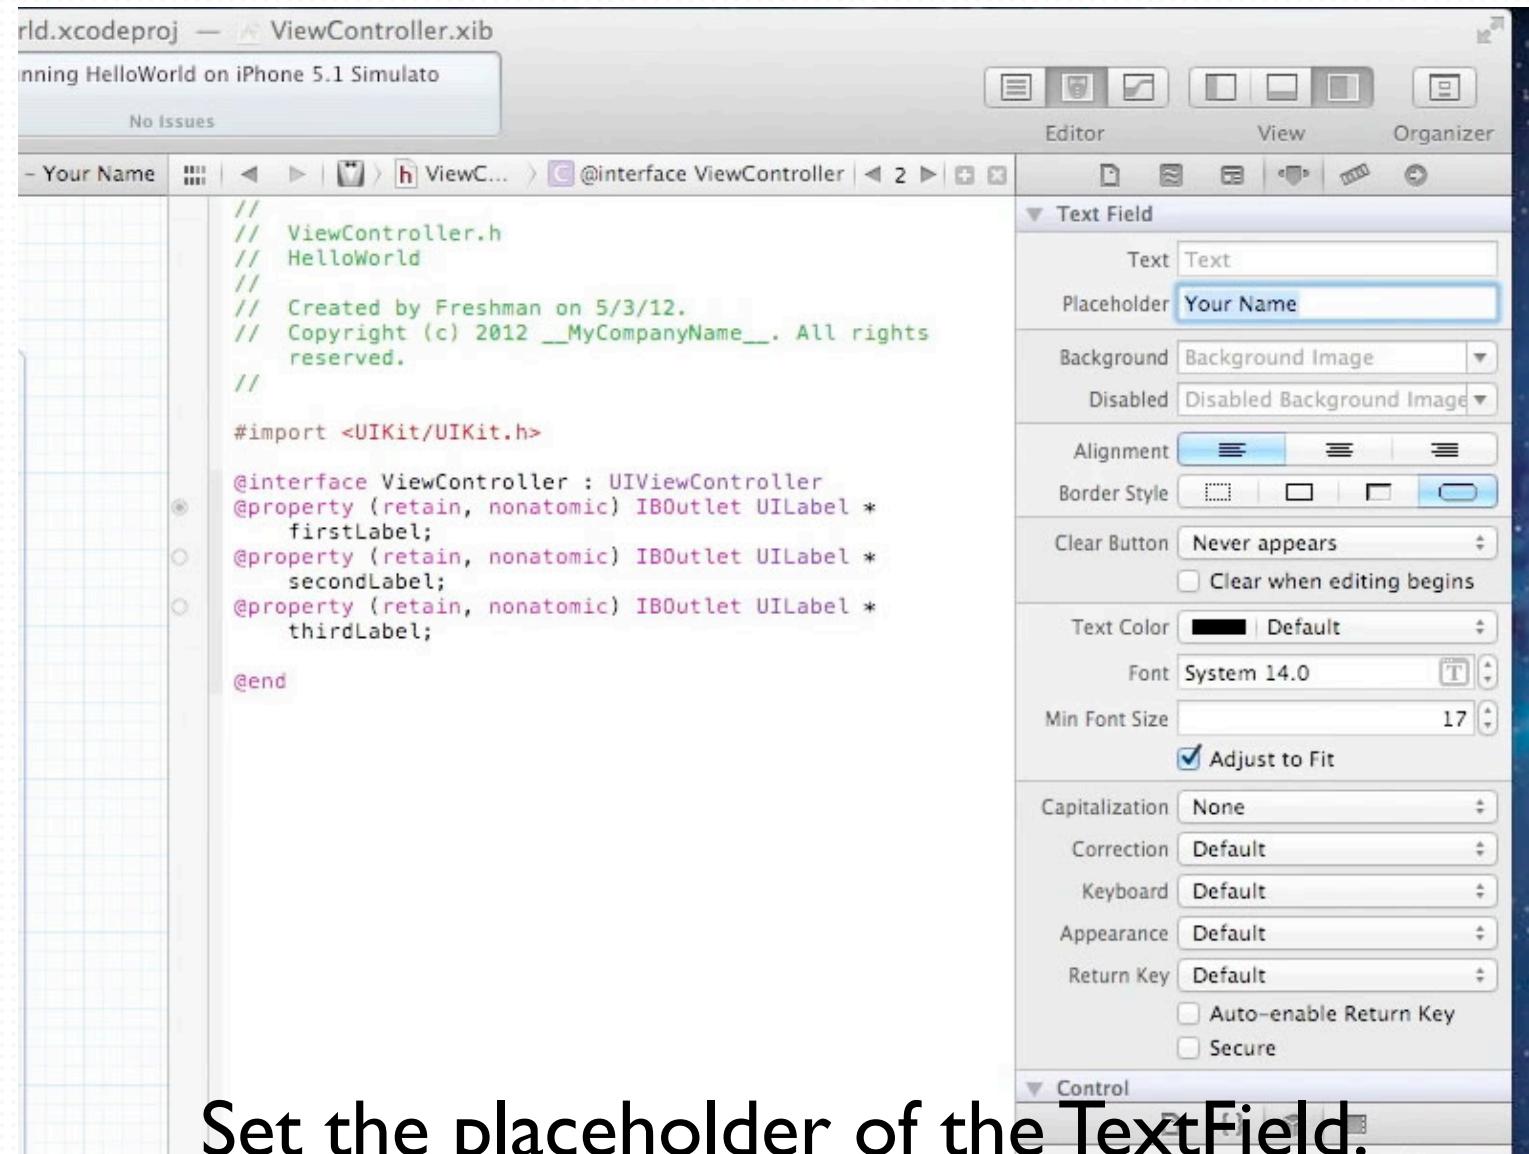

Using UITextField

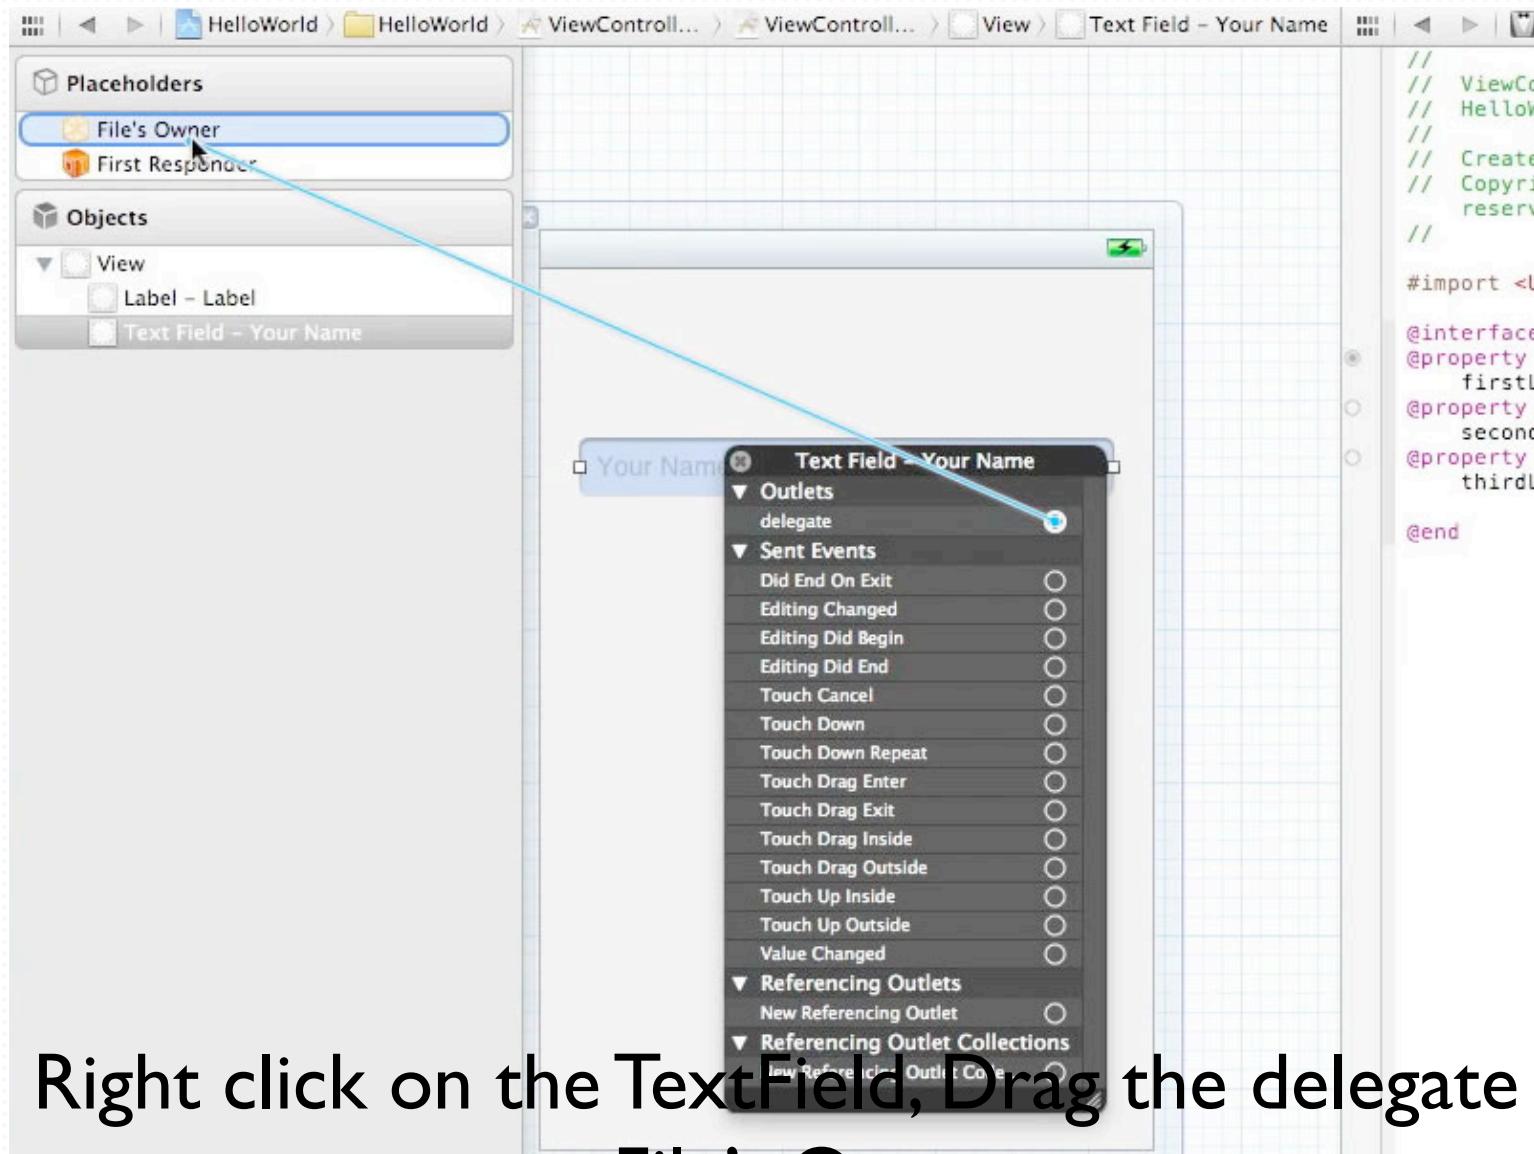


Right click on the TextField, Drag the delegate to File's Owner.

Using UITextField

```
1 - (BOOL)textFieldShouldReturn:(UITextField*)textField  
2 {  
3     [textField resignFirstResponder];  
4 }
```

Add the above delegate method to the view controller .m file

Using UITextField

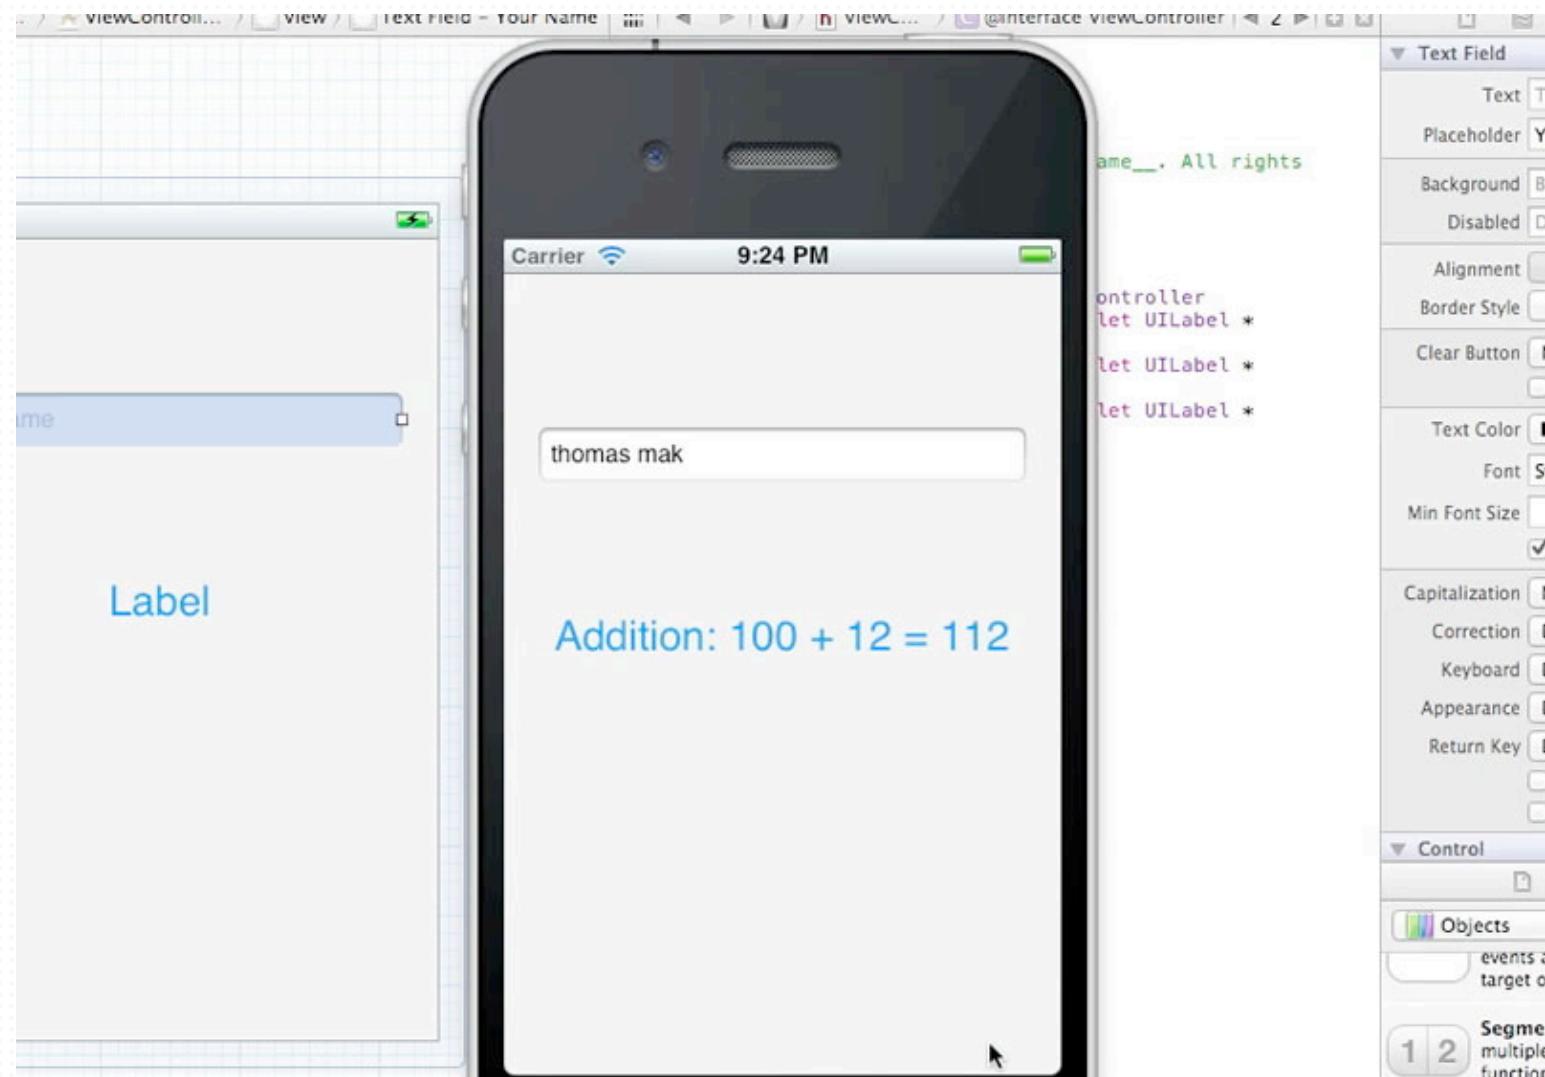


Let's test it in Simulator

Using UITextField

```
1 - (BOOL)textFieldShouldReturn:  
    (UITextField*)textField  
2 {  
3 [textField resignFirstResponder];  
4 firstlabel.text = [NSString  
stringWithFormat:@"Hello %@", textField.text];  
5 }
```

Add the highlighted code into the delegate method.


Using UITextField

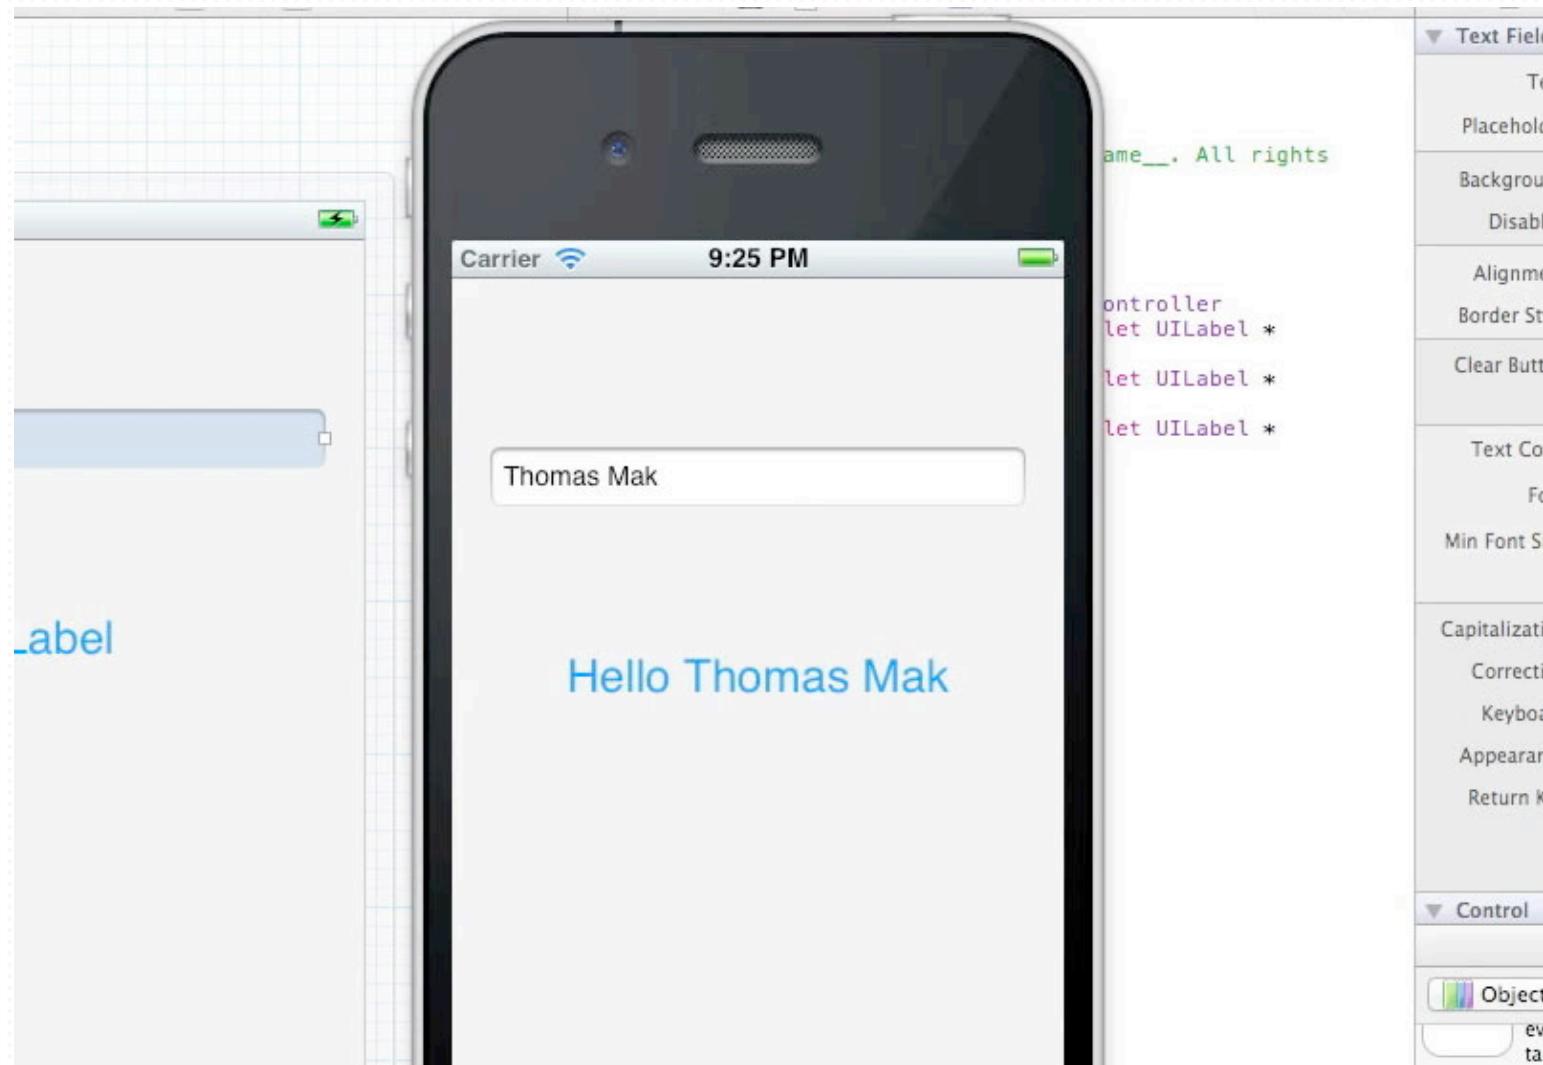

Let's test it in Simulator


Using UITextField

- Capitalization
- Correction
- Keyboard
- Appearance
- Return Key

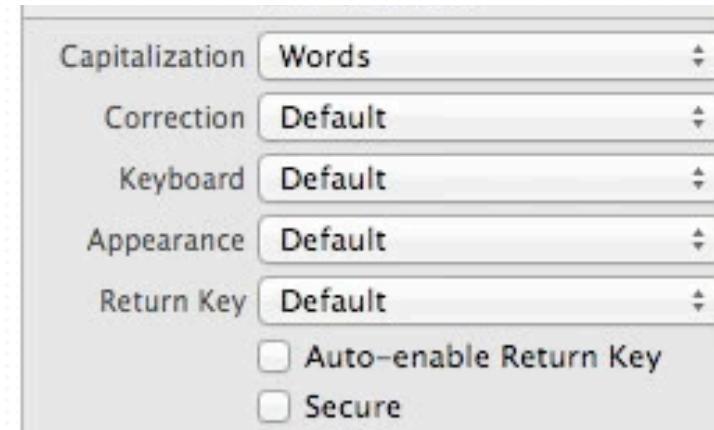

Using UITextField

- Return Key

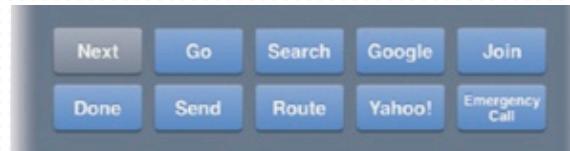

Graph from TapWorthy book.

Using UIButton

Using UIButton

The image shows a screenshot of the Xcode IDE. On the left, the storyboard editor displays a view controller with a label and a text field. The label is labeled "Label" and contains the placeholder text "Your Name". On the right, the code editor shows a partial implementation of a view controller:

```
// Created by Freshman c
// Copyright (c) 2012 __
// reserved.


#import <UIKit/UIKit.h>

@interface ViewController : UIViewController
@property (retain, nonatomic) IBOutlet UILabel *firstLabel;
@property (retain, nonatomic) IBOutlet UITextField *secondLabel;
@property (retain, nonatomic) IBOutlet UILabel *thirdLabel;
@end
```

A blue rounded rectangle placeholder indicates where a button will be placed on the view.

Place an UIButton on view.

Using UIButton

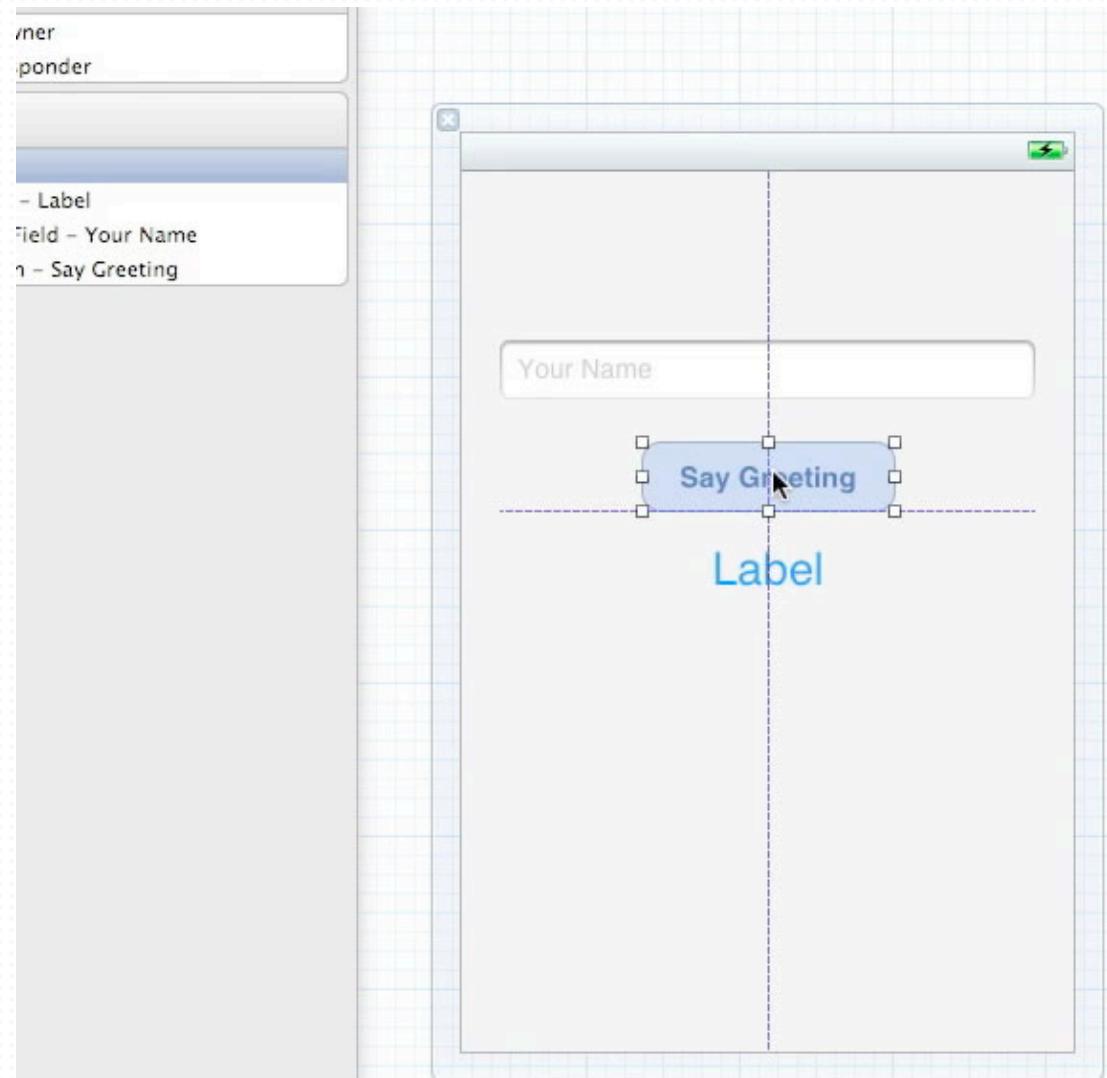


```
// HELLOWORLD
//
// Created by Freshman
// Copyright (c) 2012
// reserved.

//
#import <UIKit/UIKit.h>

@interface ViewController : UIViewController
@property (retain, nonatomic) IBOutlet UILabel *firstLabel;
@property (retain, nonatomic) IBOutlet UILabel *secondLabel;
@property (retain, nonatomic) IBOutlet UILabel *thirdLabel;
@end
```


Fill in the text and put into right place.

Using UIButton

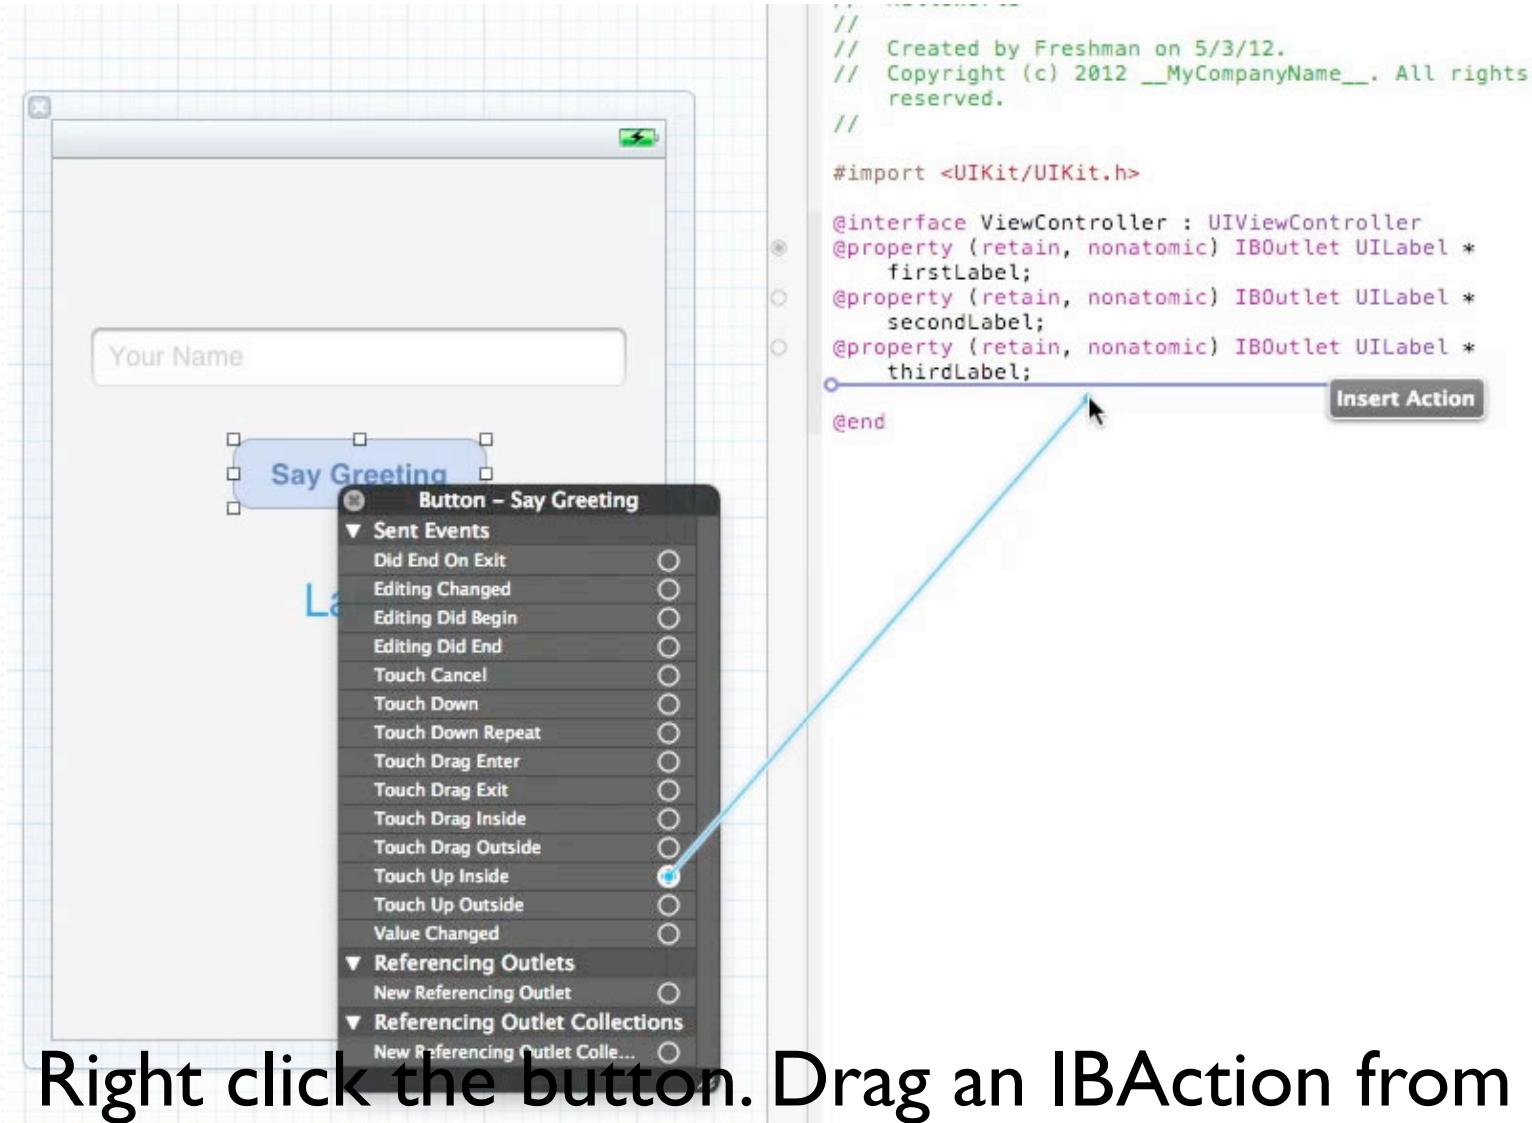


Right click the button. Drag an IBAction from
“Touch Up Inside”

Using UIButton

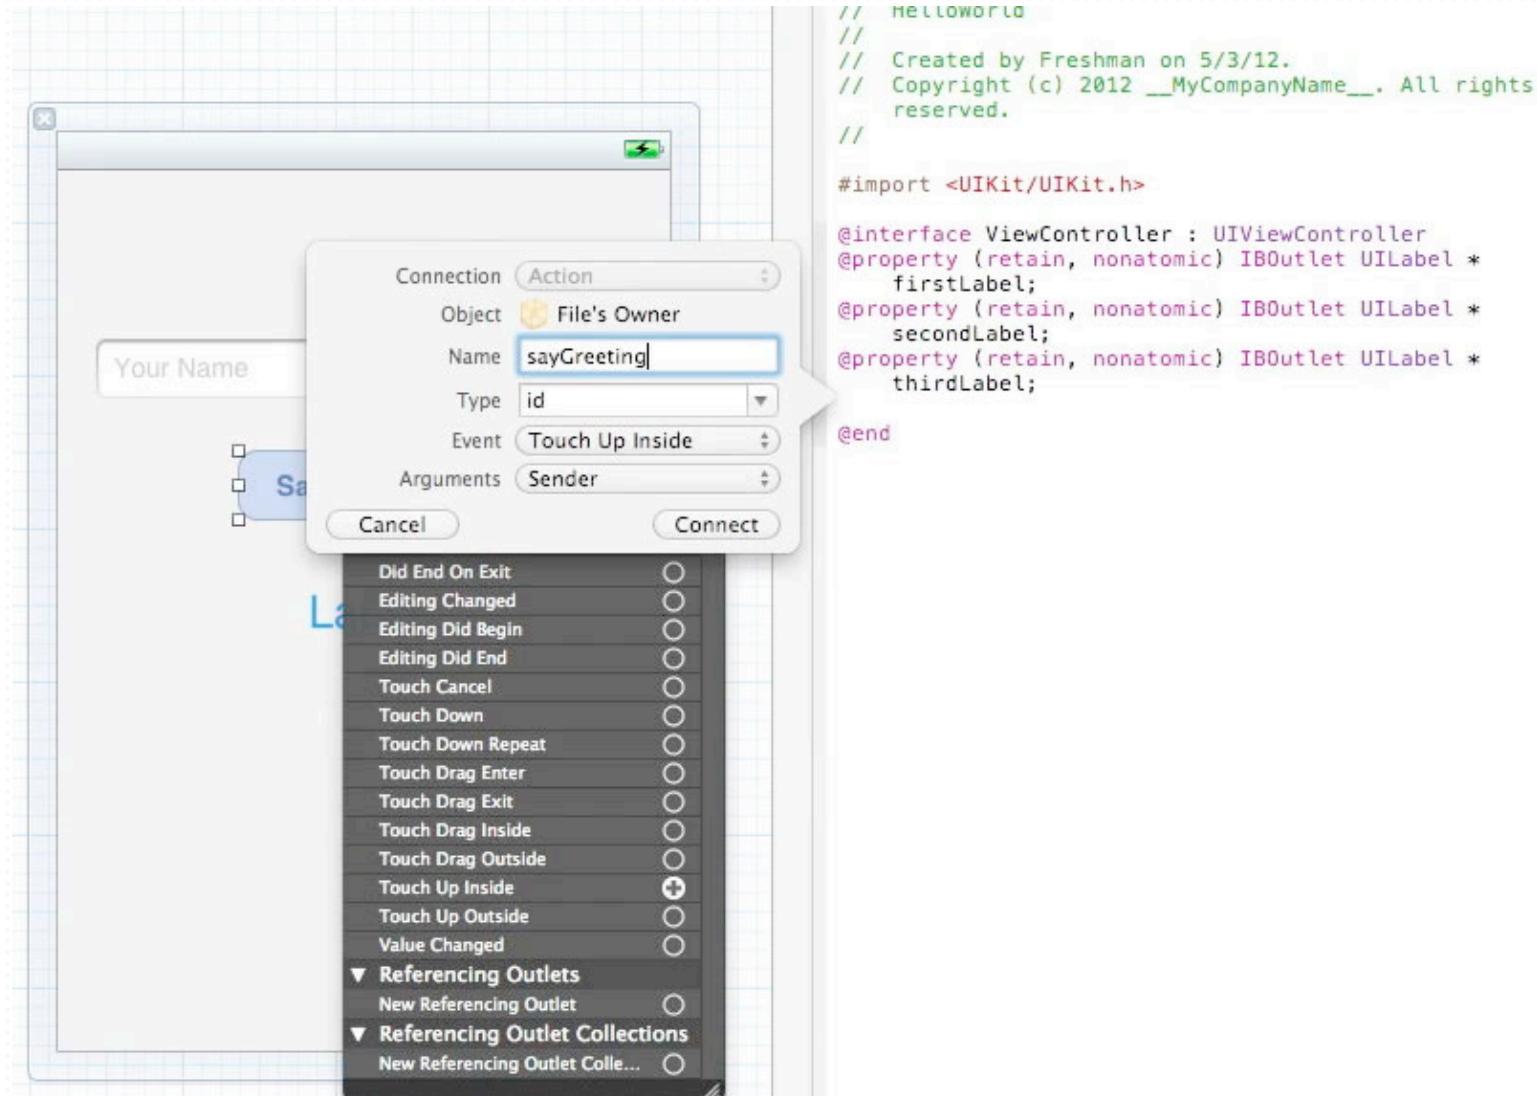

Give the IBAction a name, such as 'sayGreeting'

Using UIButton

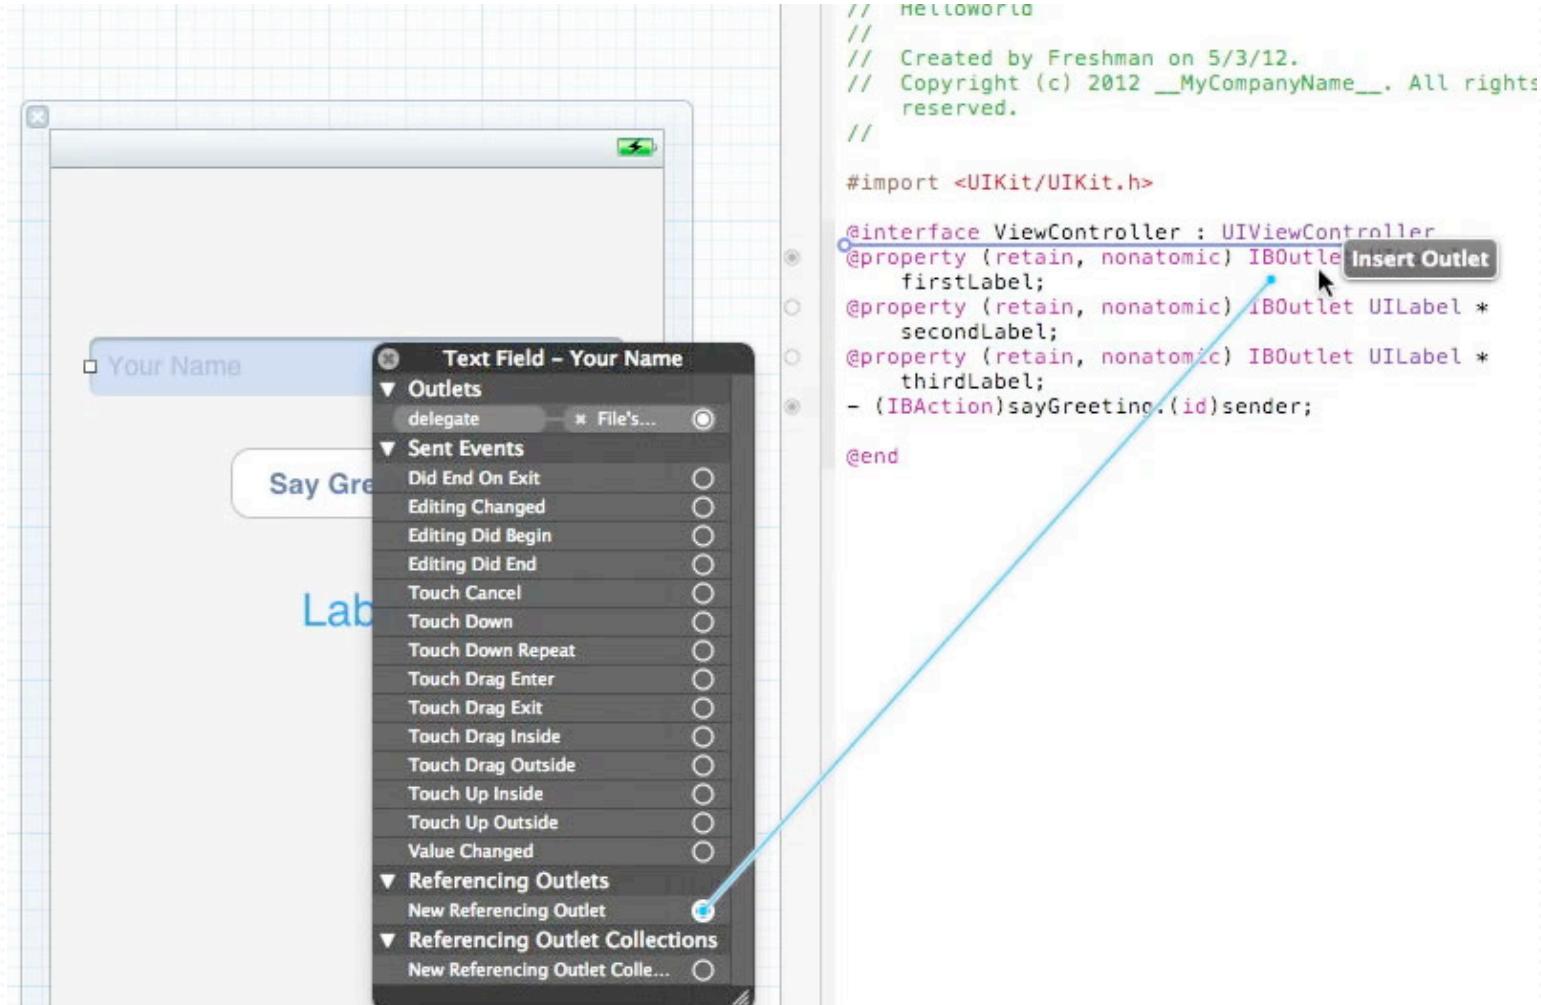

We need a reference to the textfield. Drag an IBOOutlet of the textfield to interface.

Using UIButton

The screenshot shows the Xcode interface with a storyboard on the left and a code editor on the right. In the storyboard, there is a text field with the placeholder "Your Name" and a button labeled "Say Greet". A connection inspector popover is open over the text field, showing the following details:

- Connection: Outlet
- Object: File's Owner
- Name: nameTextField
- Type: UITextField

The "Outlets" section of the popover is expanded, showing the "delegate" outlet connected to "File's...".

The code editor on the right shows the ViewController.h file with the following content:

```
// MELLOWORLD
//
// Created by Freshman on 5/3/12.
// Copyright (c) 2012 __MyCompanyName__. All rights reserved.

#import <UIKit/UIKit.h>

@interface ViewController : UIViewController
@property (retain, nonatomic) IBOutlet UILabel *firstLabel;
@property (retain, nonatomic) IBOutlet UILabel *secondLabel;
@property (retain, nonatomic) IBOutlet UILabel *thirdLabel;
- (IBAction)sayGreeting:(id)sender;
@end
```


Name the IBOutlet 'nameTextField'

Using UIButton

```
1 - (IBAction)sayGreeting:(id)sender {
2     // hide the keyboard.
3     [nameTextField resignFirstResponder];
4
5     // Show the greeting message when return
6     firstLabel.text = [NSString
stringWithFormat:@"Hello %@", nameTextField.text];
7
8 }
```

Implement the sayGreeting method.

Using UIButton

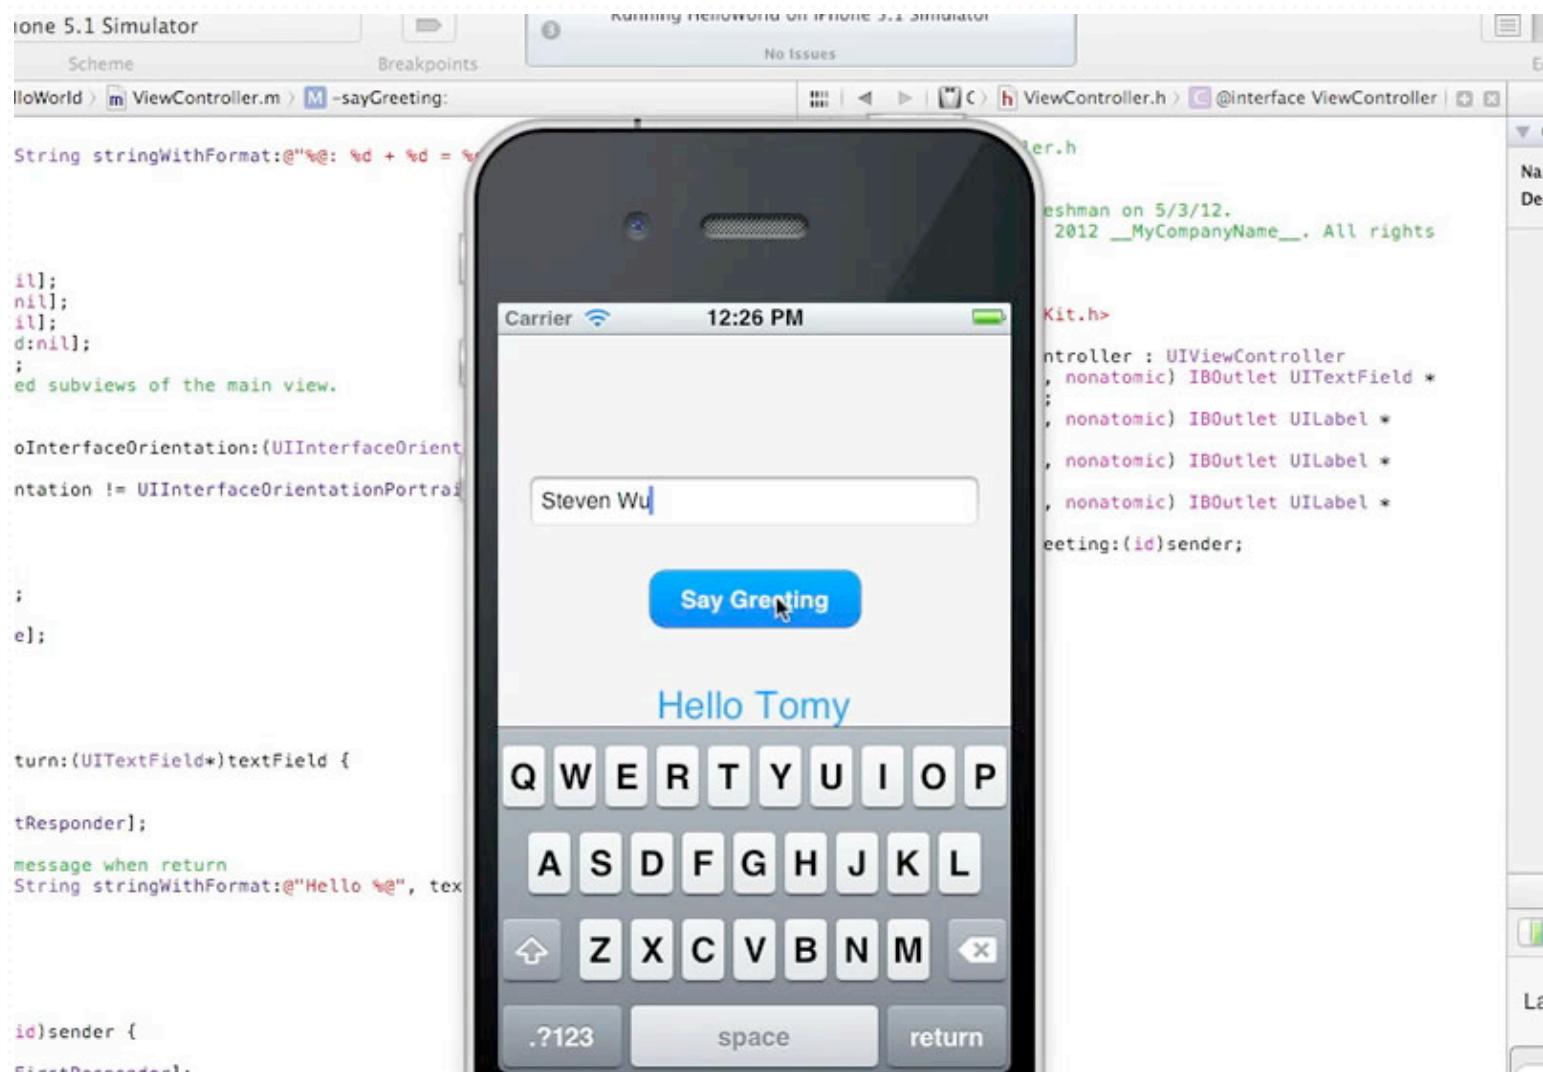

Test the app in simulator.

Extracting Method

- Now that we have similar behavior in both text field return delegate and button action method.
- We can extract them to have cleaner code.

Extracting Method

```
1 - (void)showGreetingMessage {
2     // hide the keyboard.
3     [nameTextField resignFirstResponder];
4
5     // Show the greeting message when return
6     firstLabel.text = [NSString stringWithFormat:@"Hello
%@", nameTextField.text];
7 }
8
9
10 // TextField delegates
11 - (BOOL)textFieldShouldReturn:(UITextField*)textField {
12
13     [self showGreetingMessage];
14
15     return YES;
16 }
17
18
19
20 - (IBAction)sayGreeting:(id)sender {
21     [self showGreetingMessage];
22 }
```

Private and Public

- Methods are private when it is declared in .m
- The following interface code are declared in .m

```
1 @interface ViewController ()  
2 - (void)showGreetingMessage;  
3 @end
```

Private and Public

- Note that there is empty () after the ViewController interface.
- () is called Category in Obj-C.
- In simple words, this allows us to declare private methods and properties.

```
1 @interface ViewController ()  
2 - (void)showGreetingMessage;  
3 @end
```

Private and Public

- Methods that are declared in header are public.
- Public methods are visible by others.
- Others can invoke the public methods.

```
1 @interface ViewController  
2 - (void)showGreetingMessage;  
3 @end
```

Using Image in iOS

- filename.png
- filename@2x.png
- filename.jpg
- filename@2x.jpg

Using Image in iOS




button@2x.png
474 x 80




button.png
237 x 40

Images in UIButton

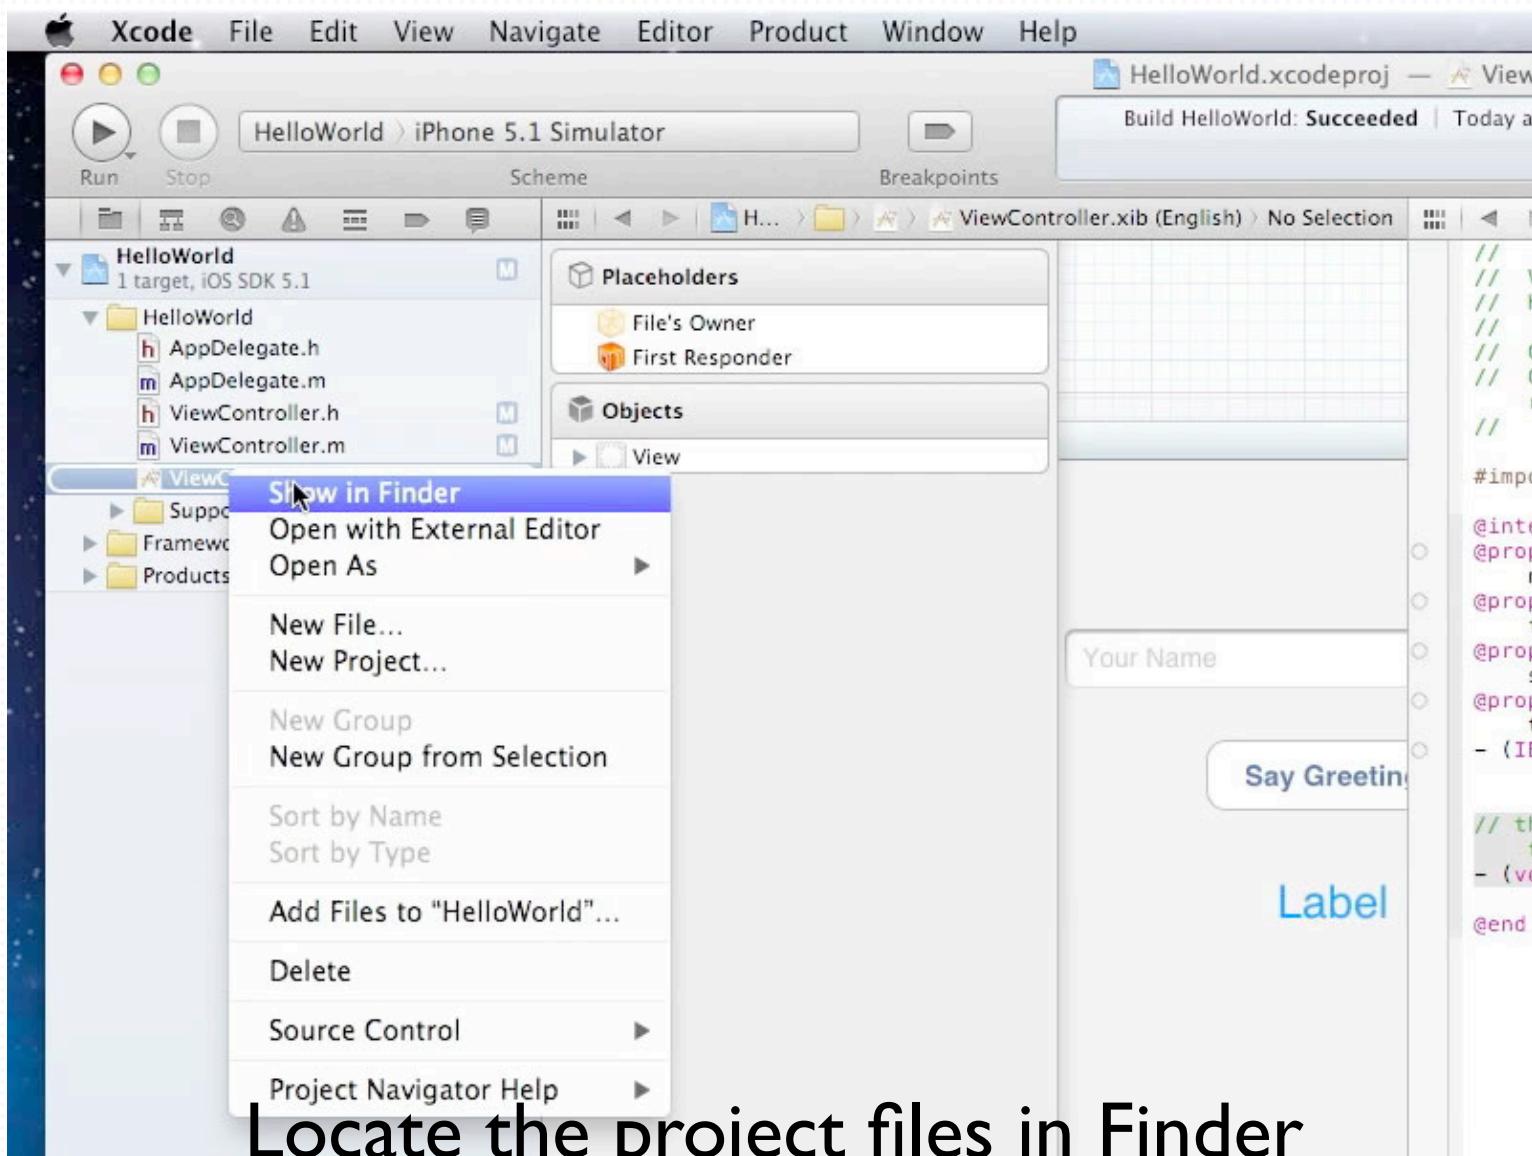


Locate the project files in Finder

Images in UIButton

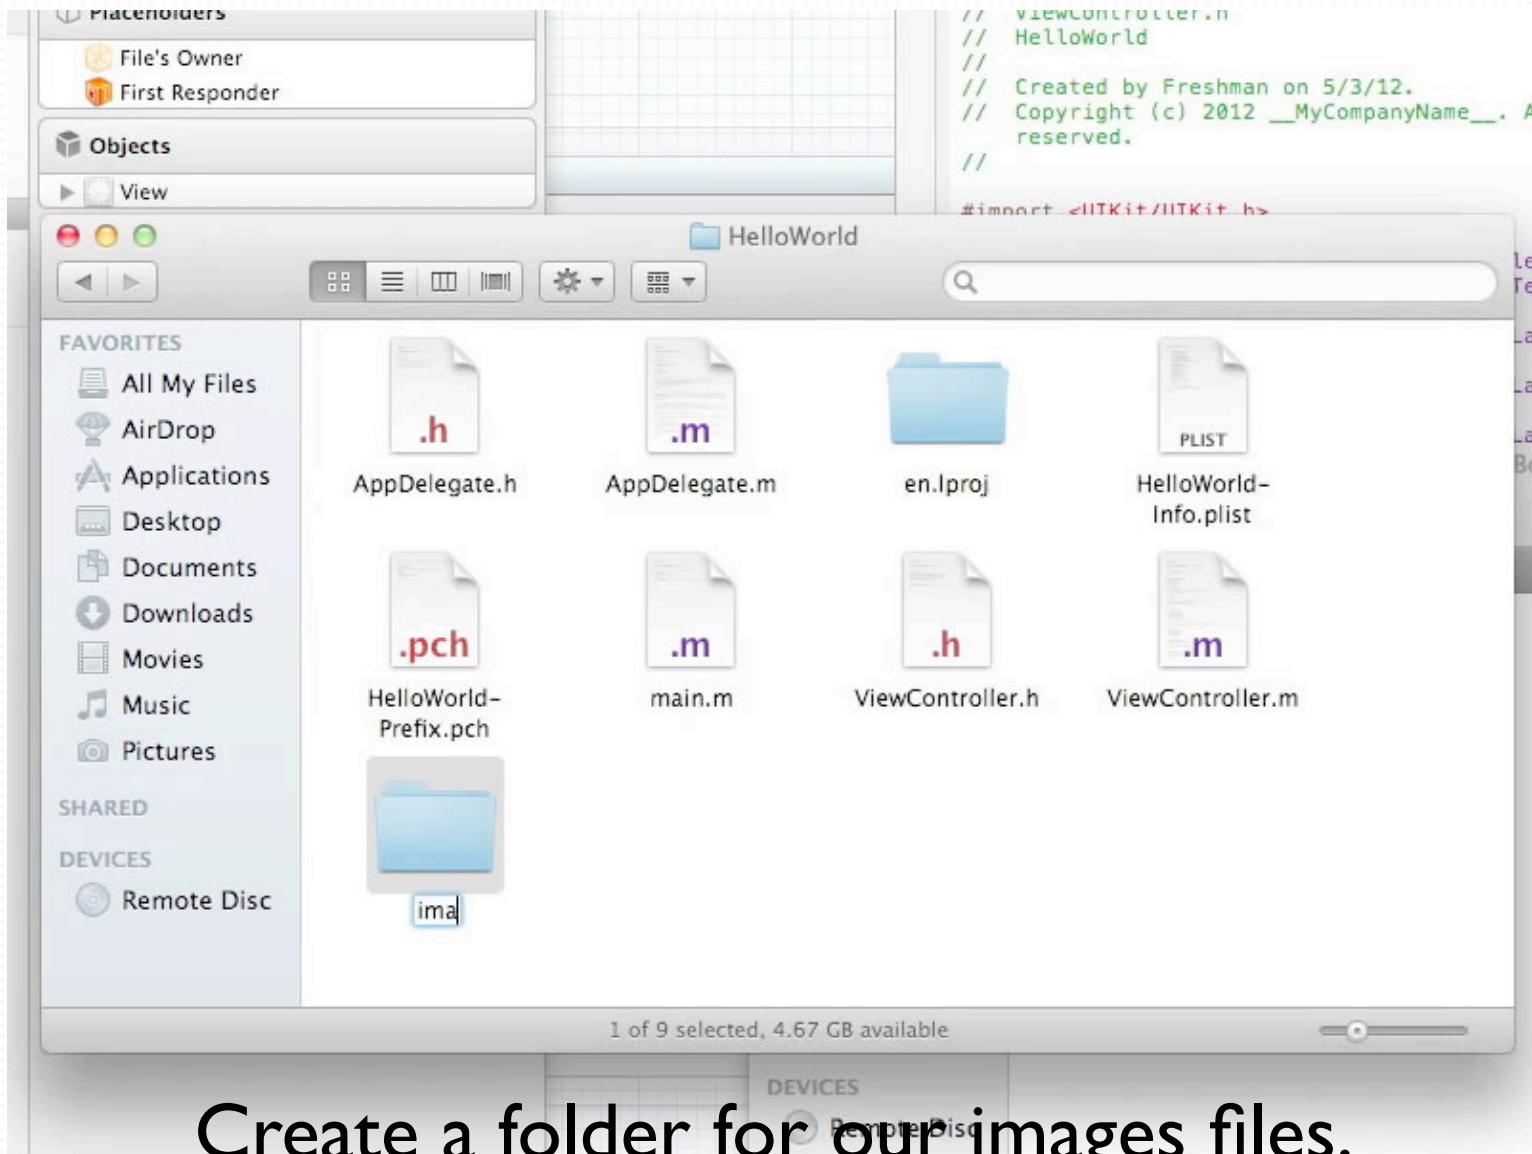


Images in UIButton

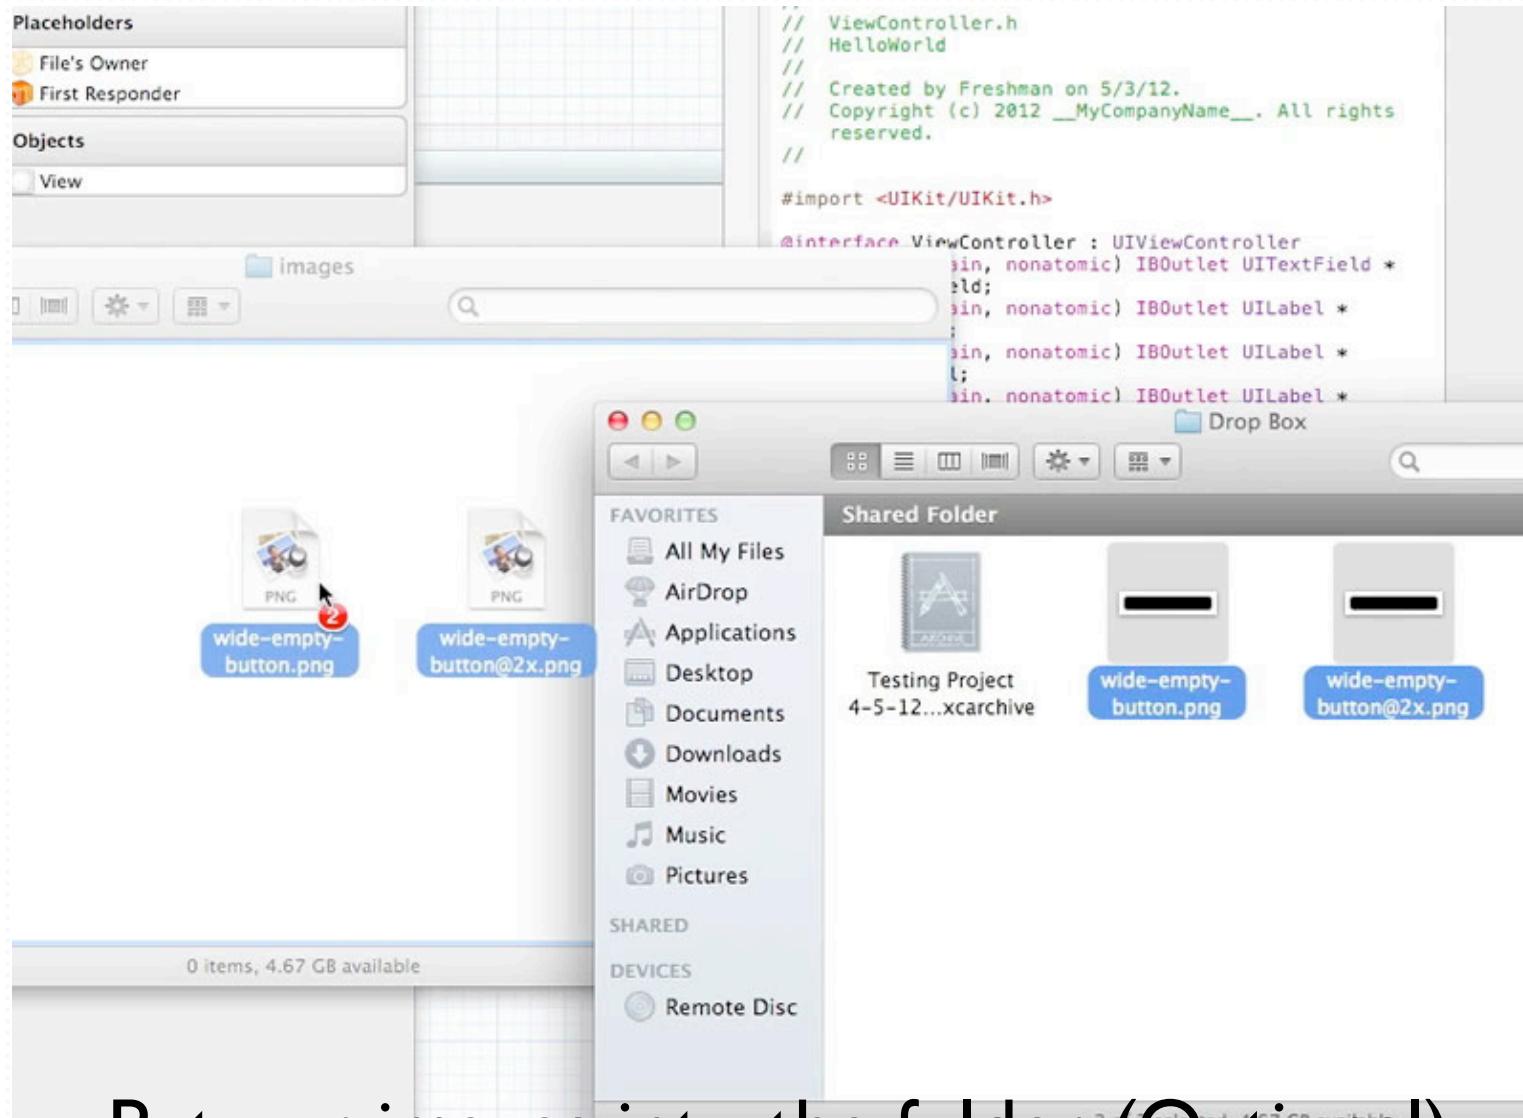


Put our images into the folder. (Optional)

Images in UIButton

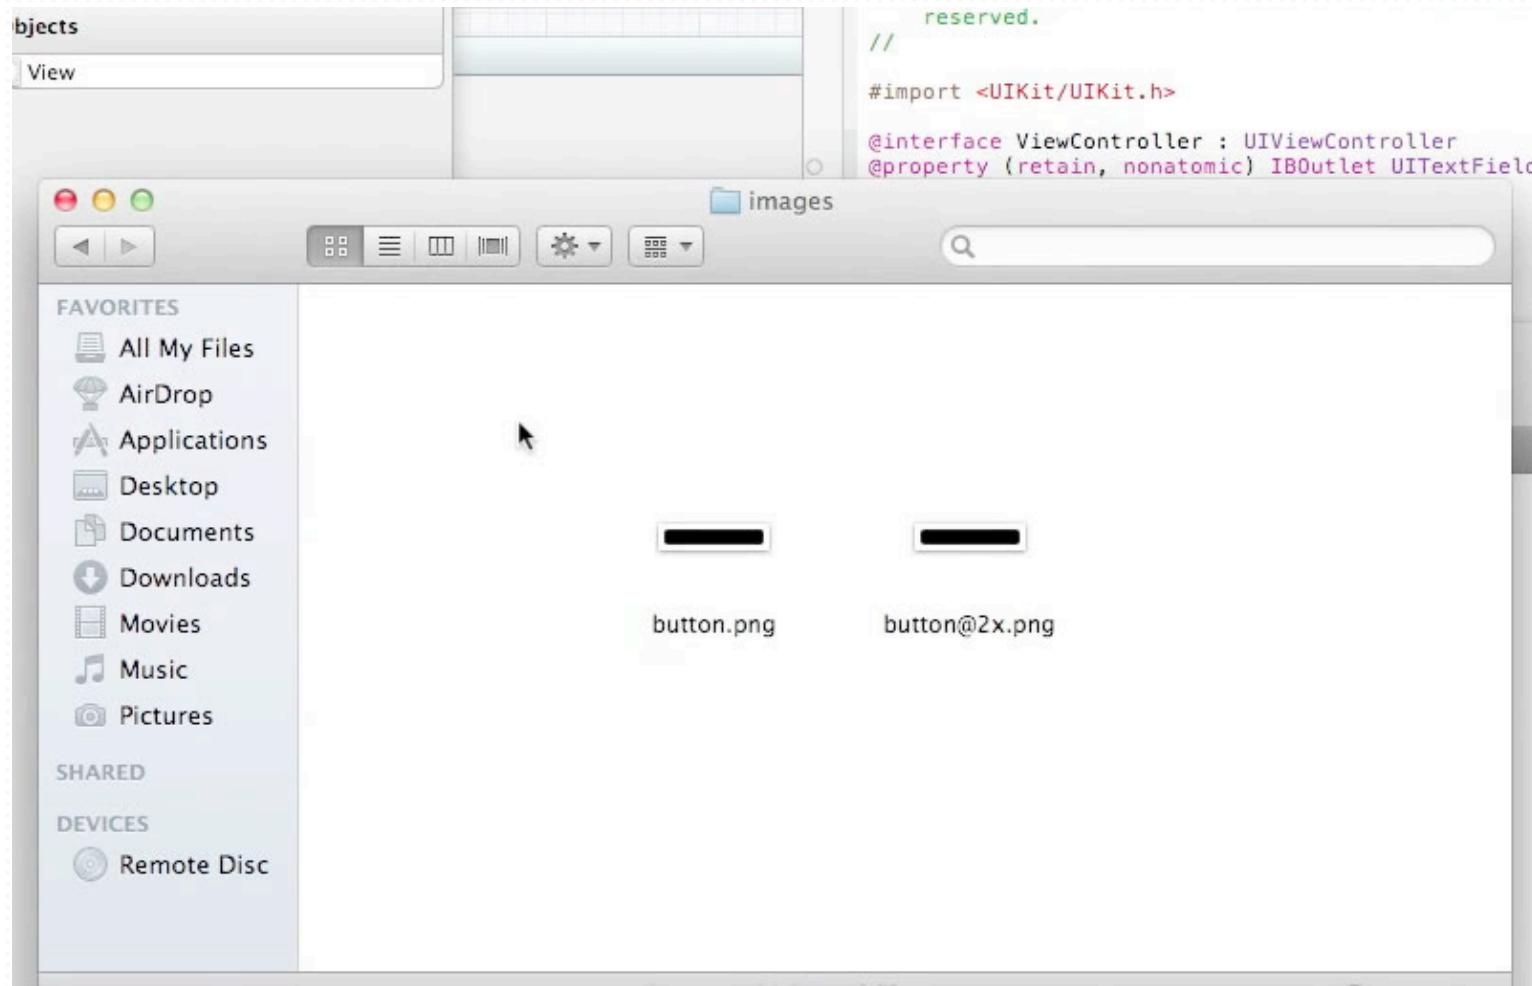


Make sure our image names are relevant.

Images in UIButton

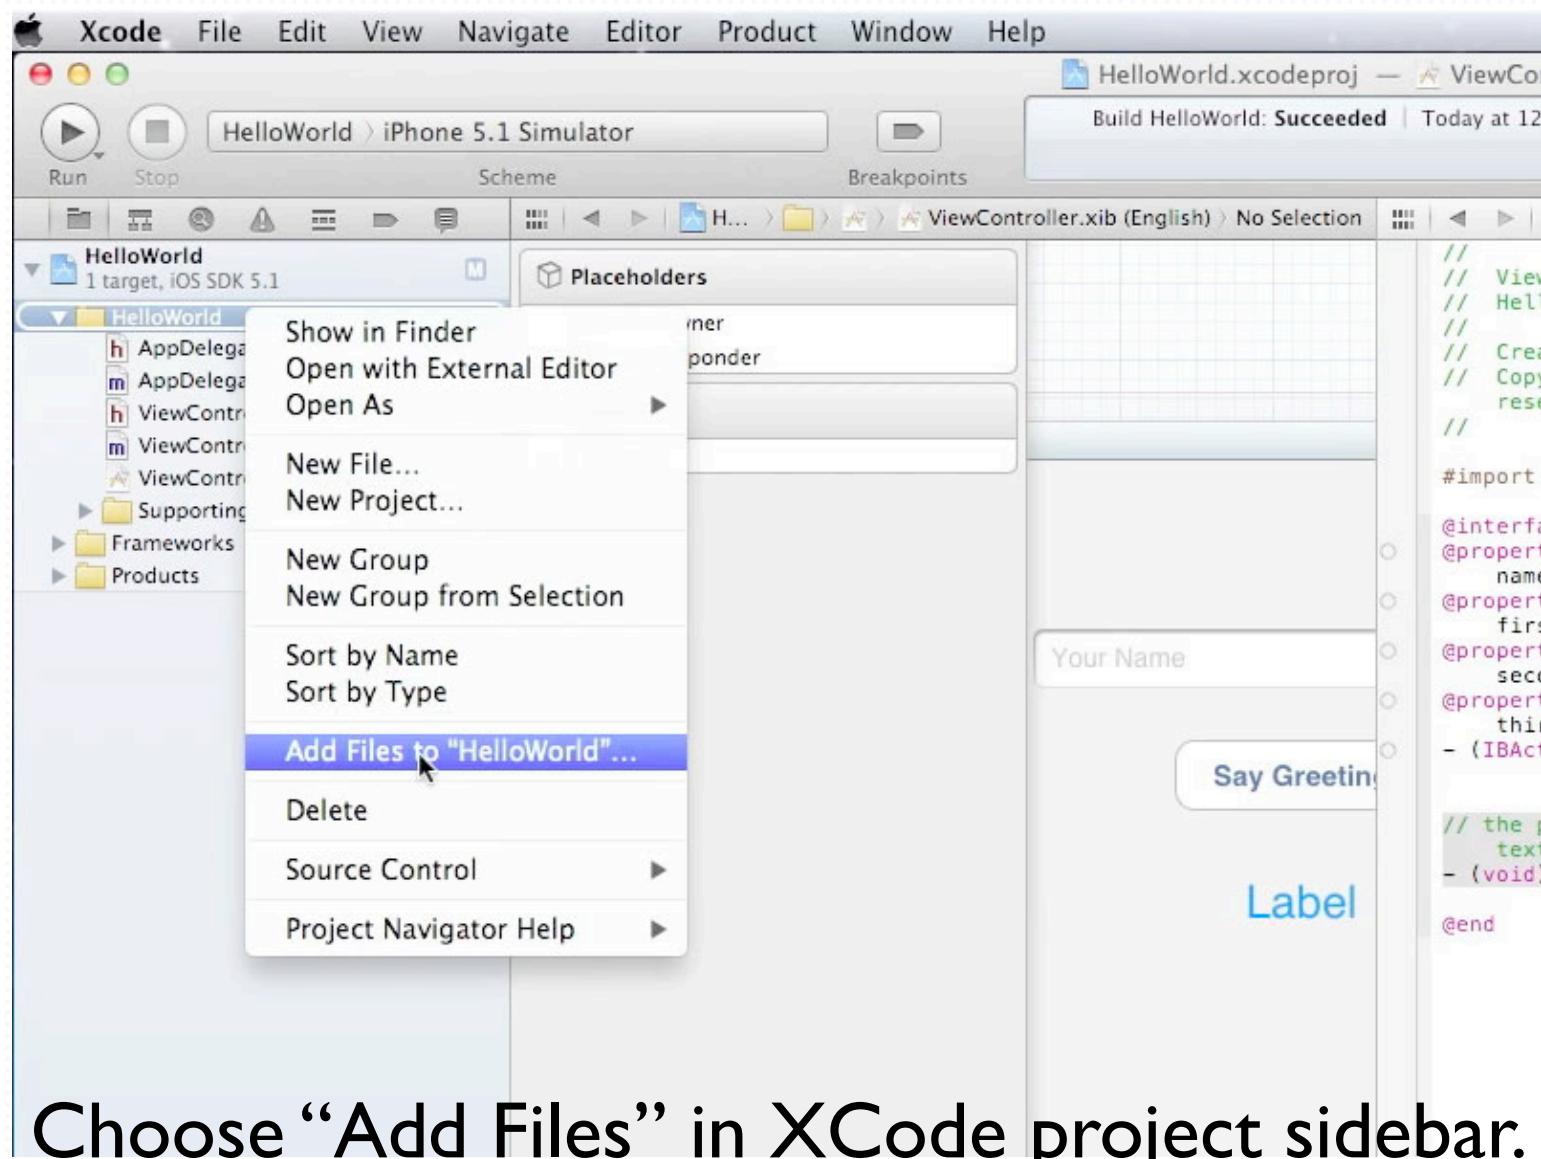


Choose “Add Files” in XCode project sidebar.

Images in UIButton

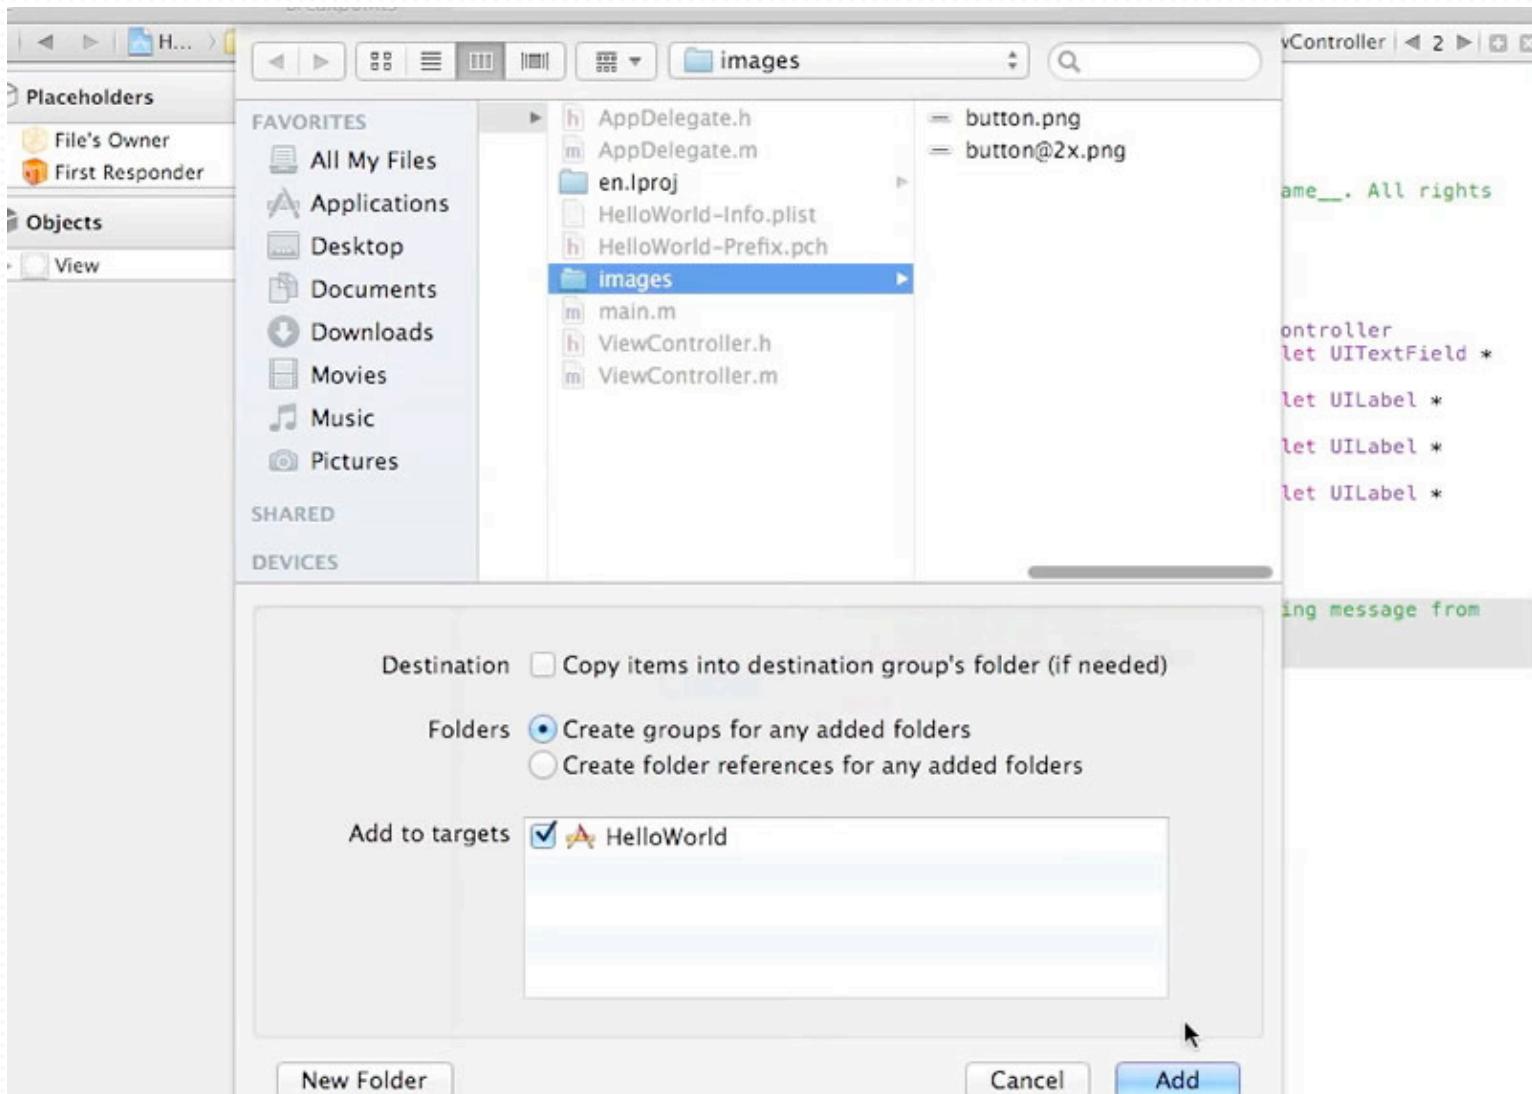


Select the files or folders that we are going to import.

Images in UIButton

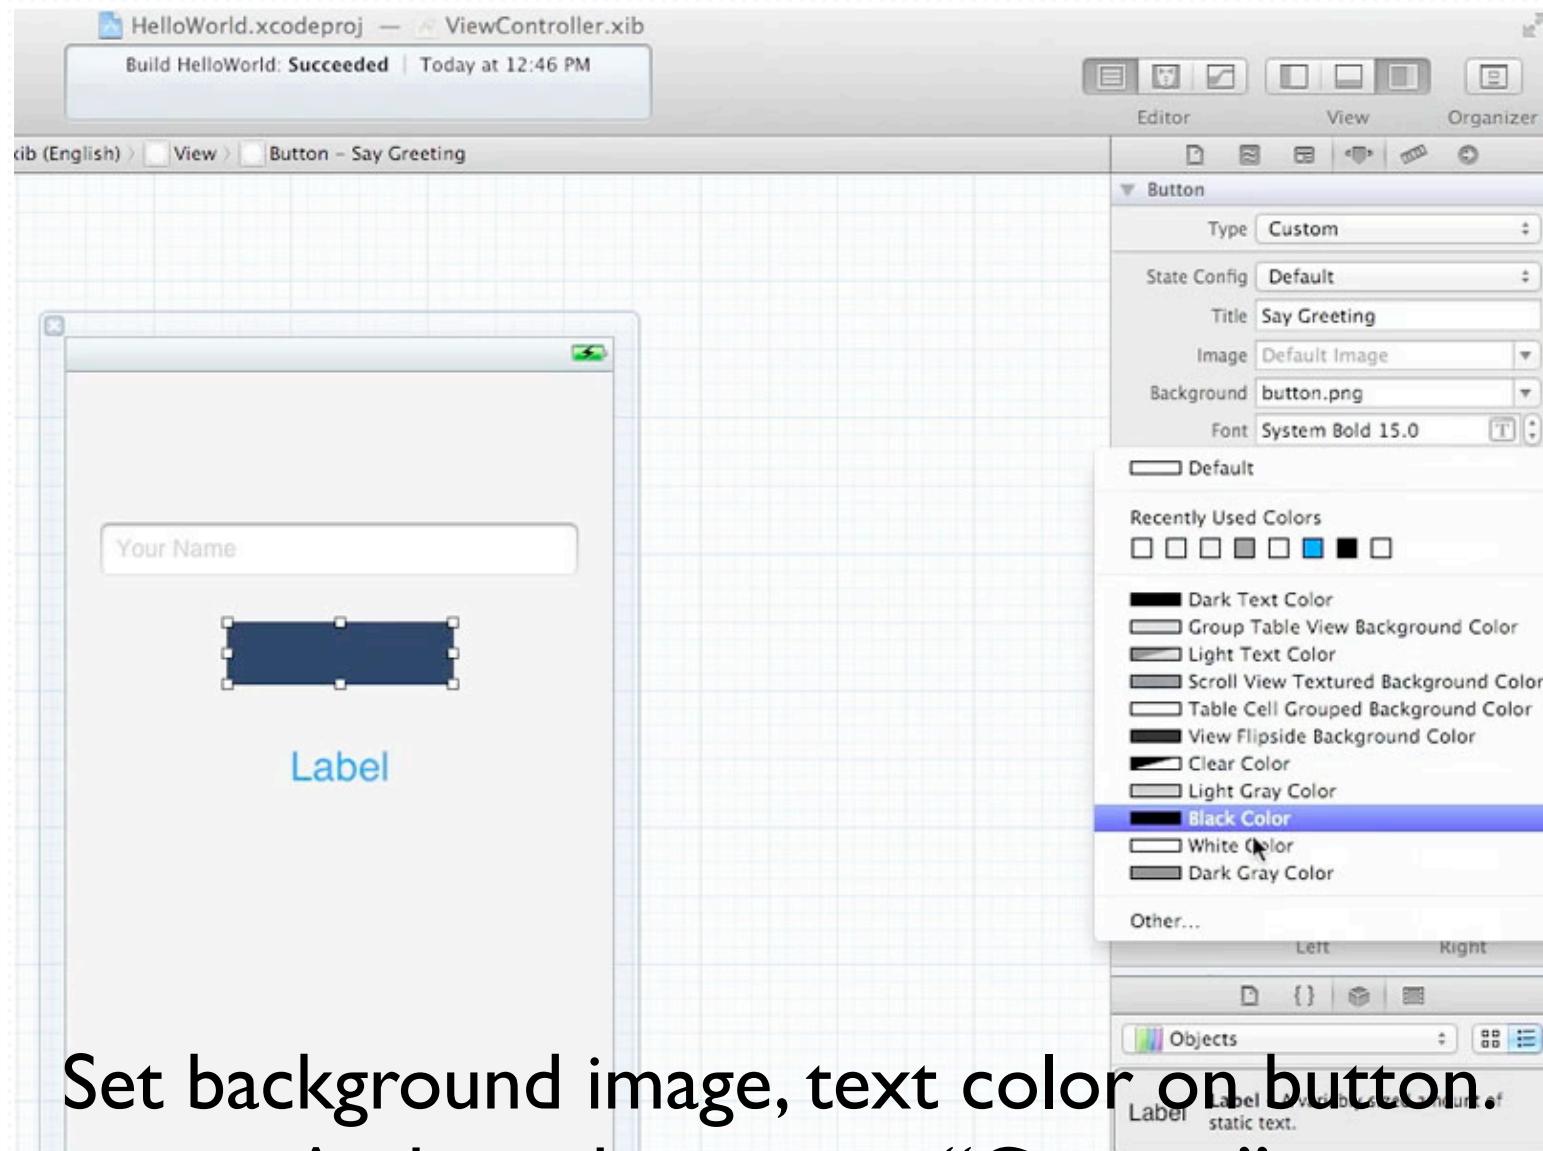


Images in UIButton

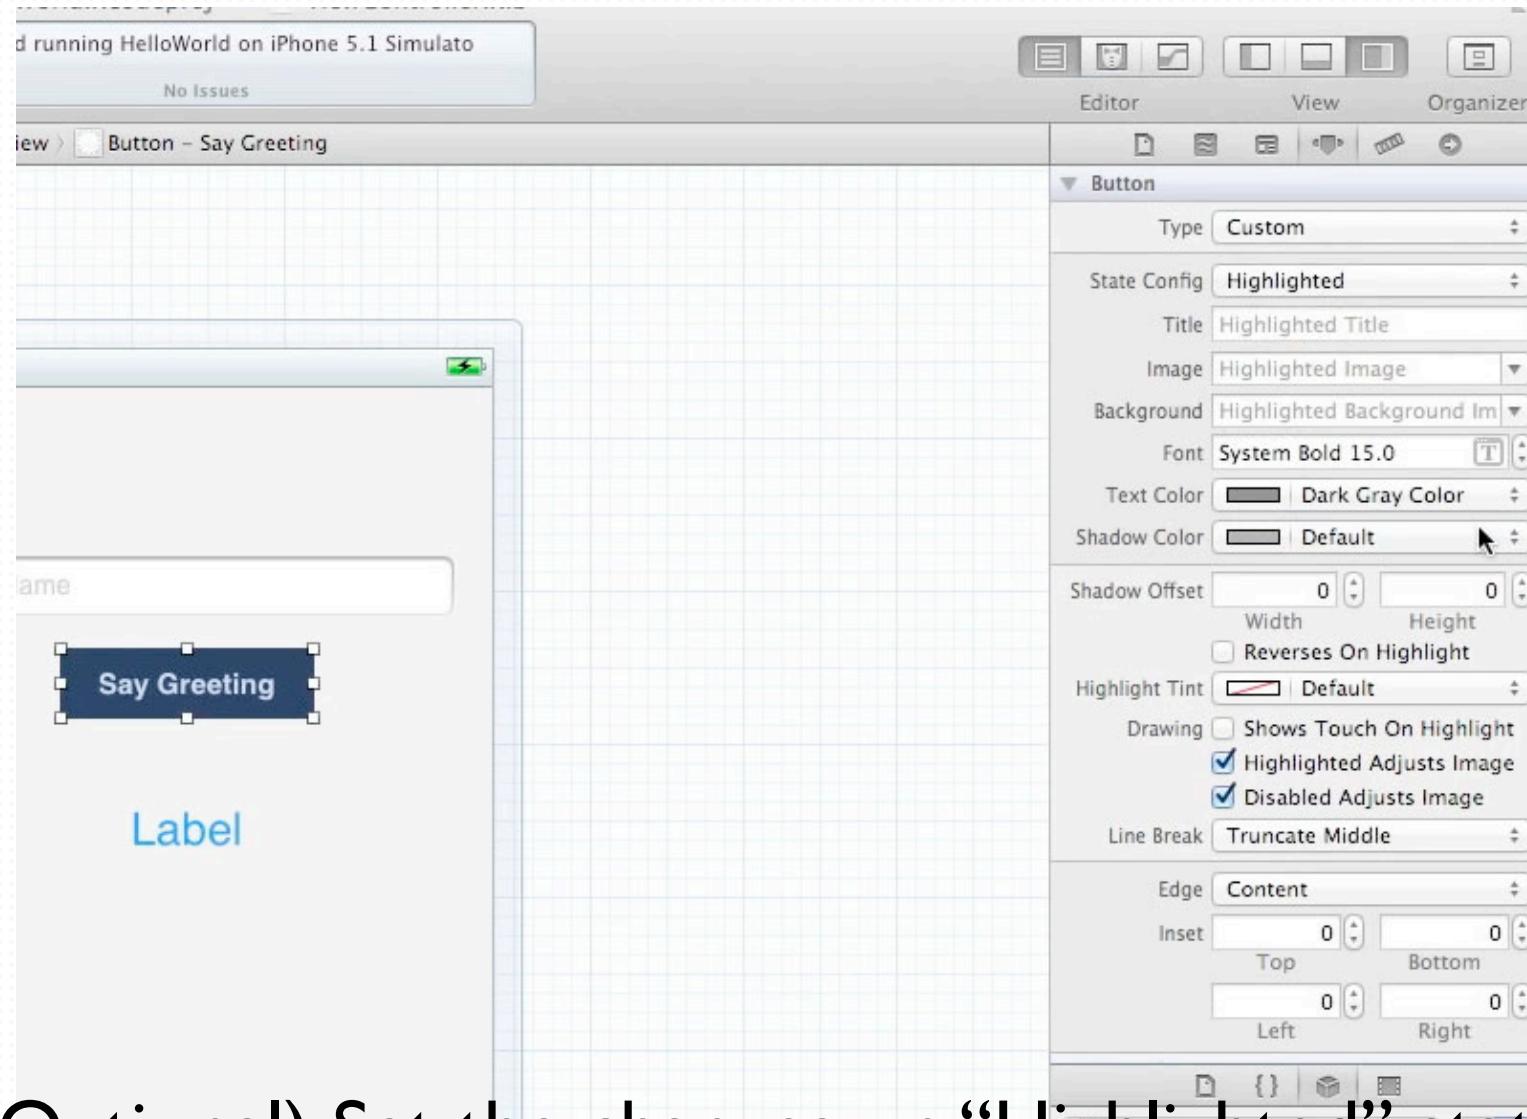

(Optional) Set the changes on “Highlighted” state.


Build a Currency Convertor

Using UIButton

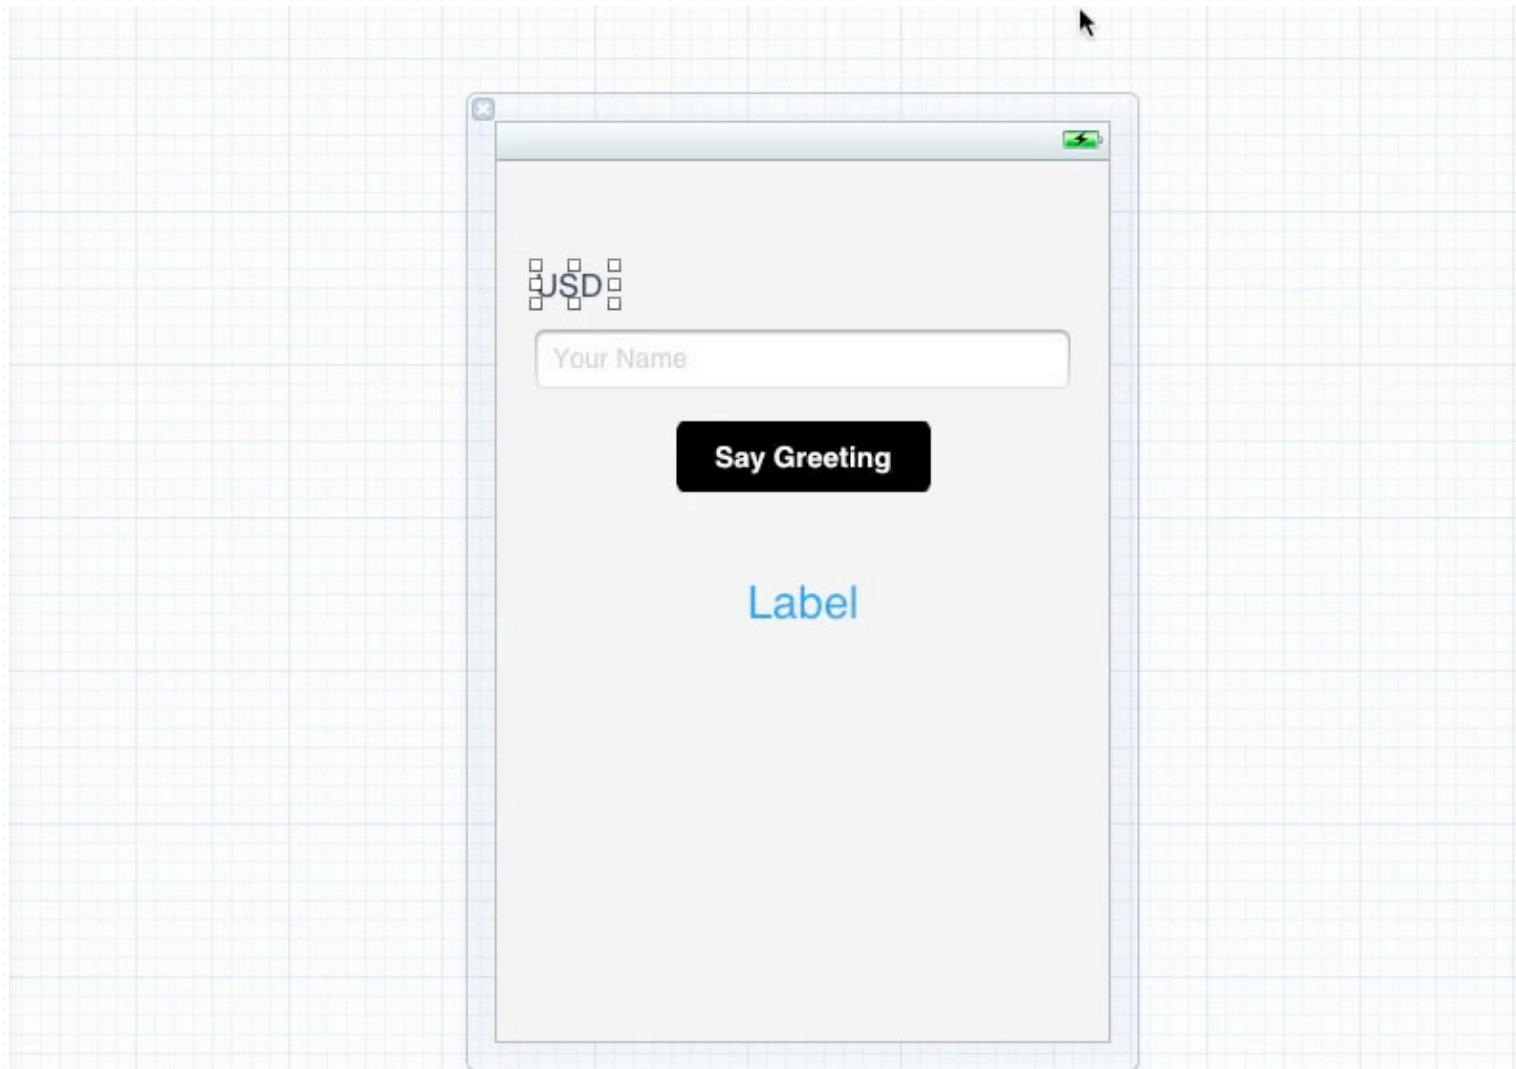


Let's modify the label views for the convertor.

Using UIButton

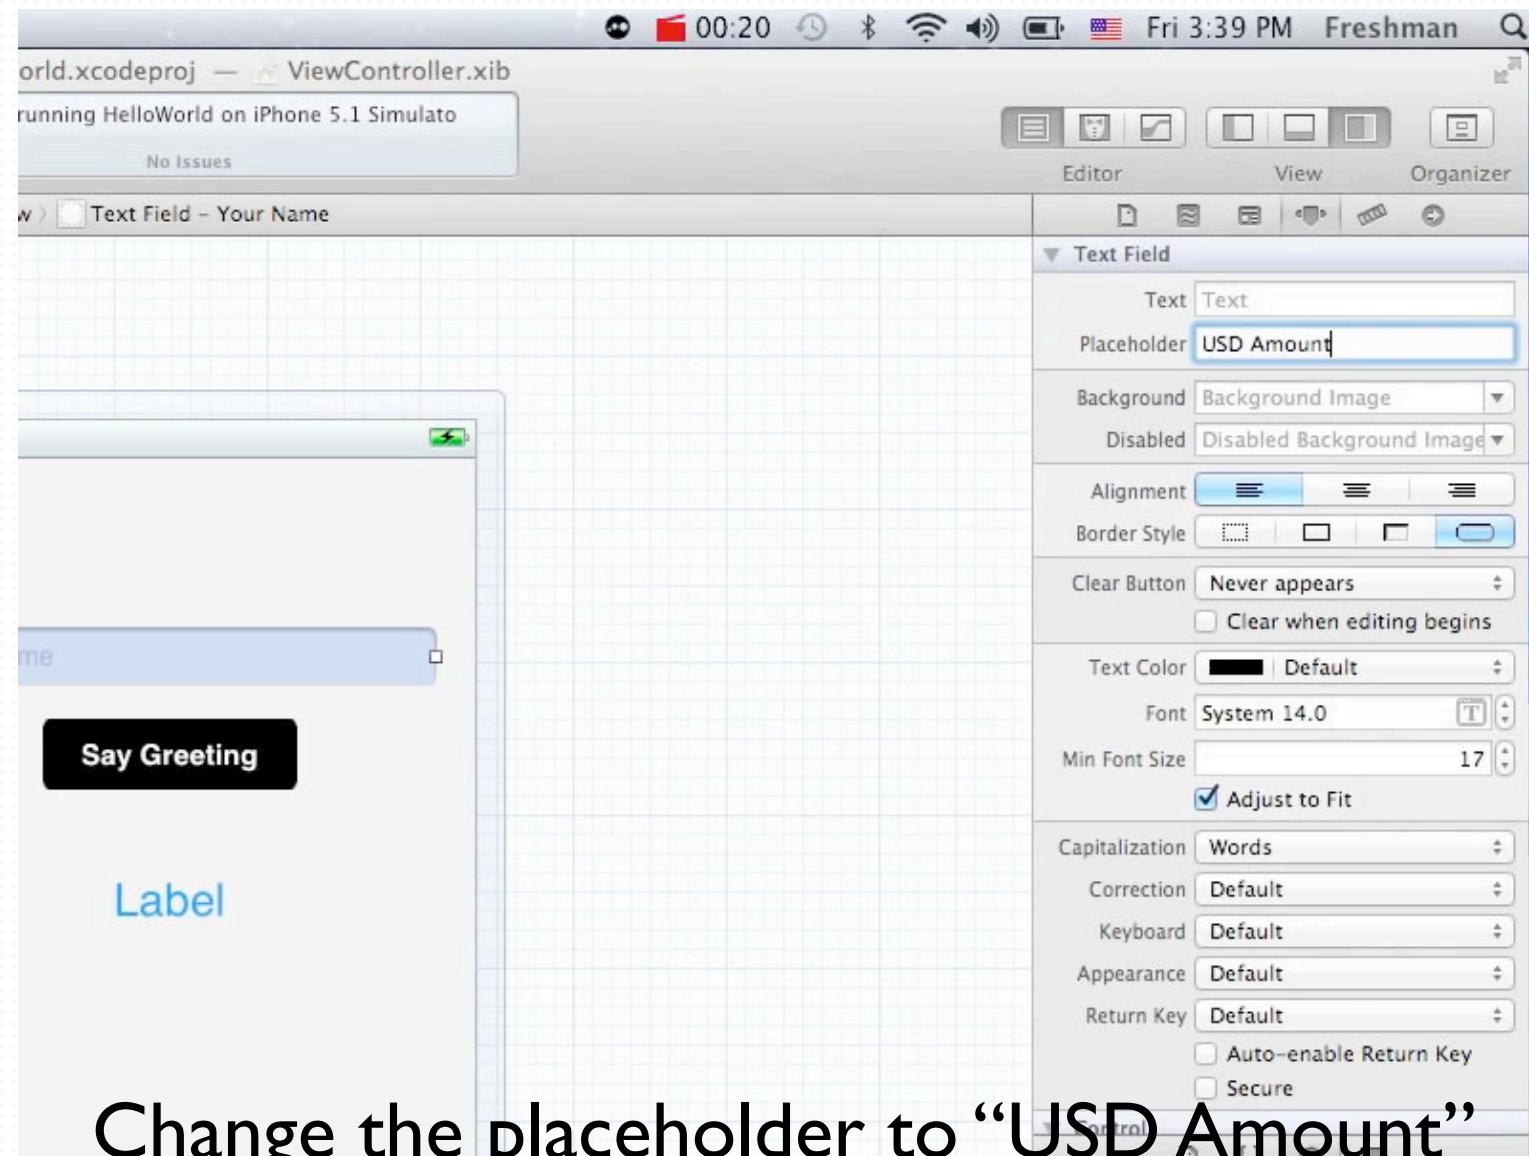

Change the placeholder to “USD Amount”

Using UIButton

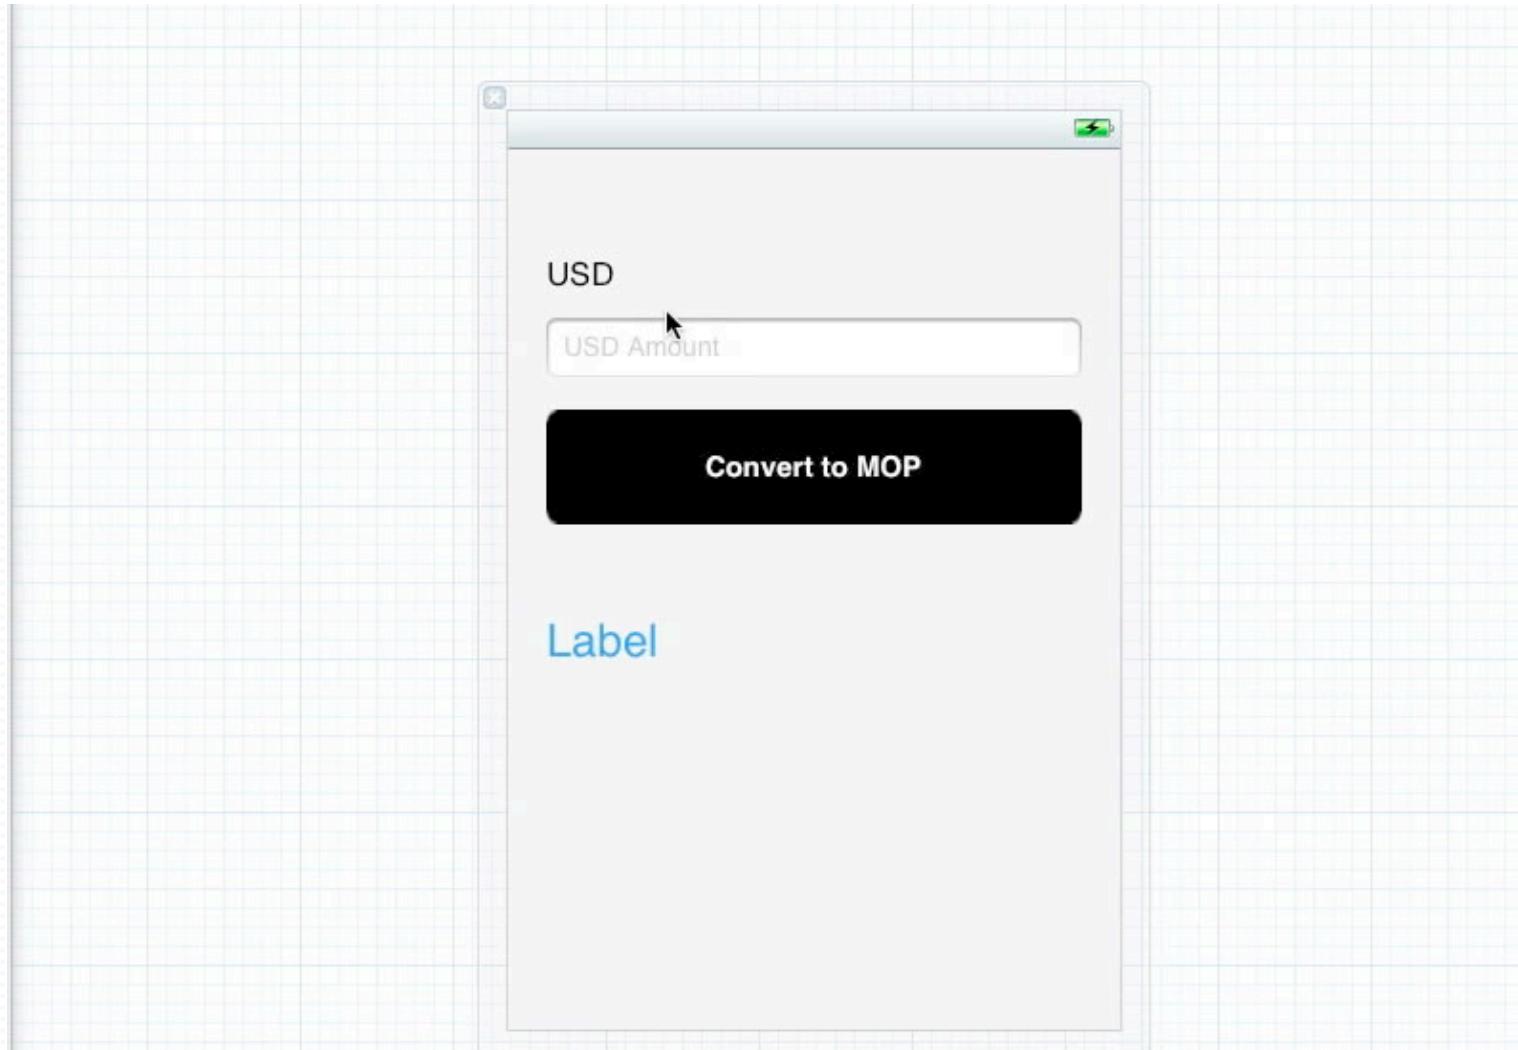


And we may want to make the button bigger.

Using UIButton

```
1 - (void)showGreetingMessage {
2     // hide the keyboard.
3     [nameTextField resignFirstResponder];
4
5     // calculate how much is the MOP
6     float usd = [nameTextField.text floatValue];
7     float mop = usd * 7.8;
8     firstLabel.text = [NSString
stringWithFormat:@"%@", mop];
9 }
```

We add some calculation logic when tap the button.

Using UIButton

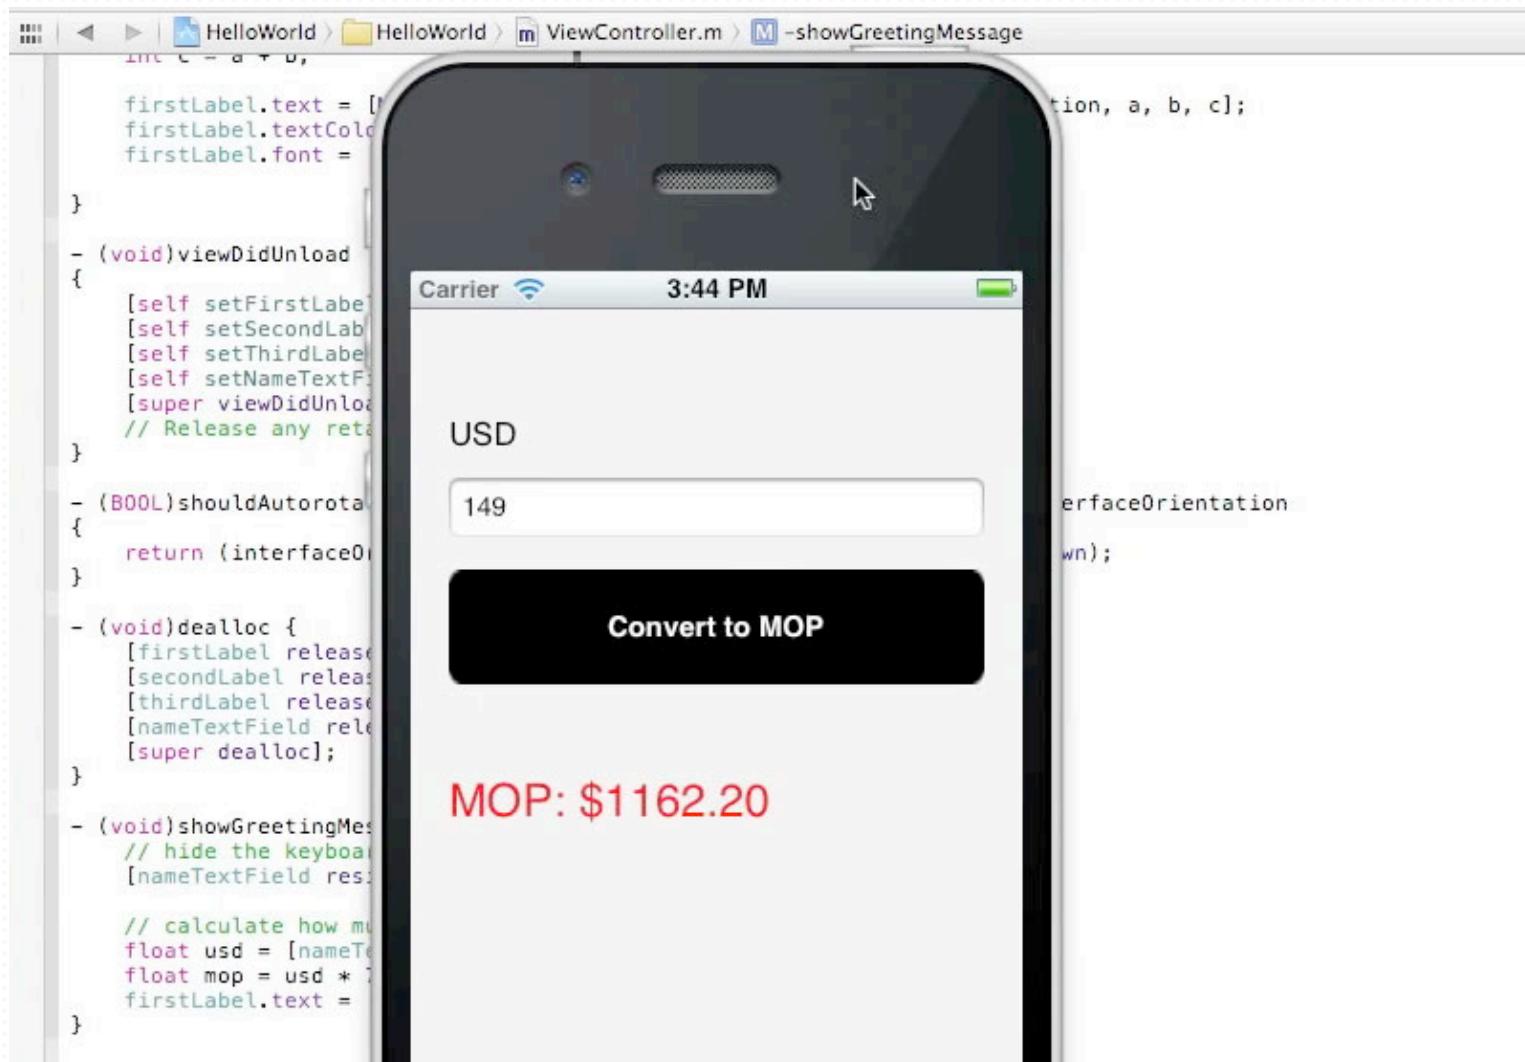

Finally, let's test the app in simulator.

Exercise

- ✓ Design an utility app.
- ✓ Present it to the class in next lesson.