



Object-Oriented Design Interview

0/14 completed


- 01 What is an Object-Oriented Design Interview >
- 02 A Framework for the OOD Interview >
- 03 OOP Fundamentals >
- 04 Design a Parking Lot >
- 05 Design a Movie Ticket Booking System >
- 06 Design a Unix File Search System >
- 07 Design a Vending Machine >
- 08 Design an Elevator System >
- 09 Design a Grocery Store System >
- 10 Design a Tic Tac Toe Game >
- 11 Design a Blackjack Game >
- 12 Design a Shipping Locker System >
- 13 Design an ATM System >
- 14 Design a Restaurant Management System >

05

Design a Movie Ticket Booking System

In this chapter, we'll walk through the design of a Movie Ticket Booking System. It's used to assess your ability to model real-world systems and apply object-oriented principles to create a well-structured solution. The goal is to carefully define the classes that represent key entities in a movie booking system, such as rooms, screenings, and movies. We'll aim to build a clear and functional structure that captures the essential interactions between these components, making the system intuitive and scalable.

Let's move on to gathering the specific requirements through a simulated interview scenario.

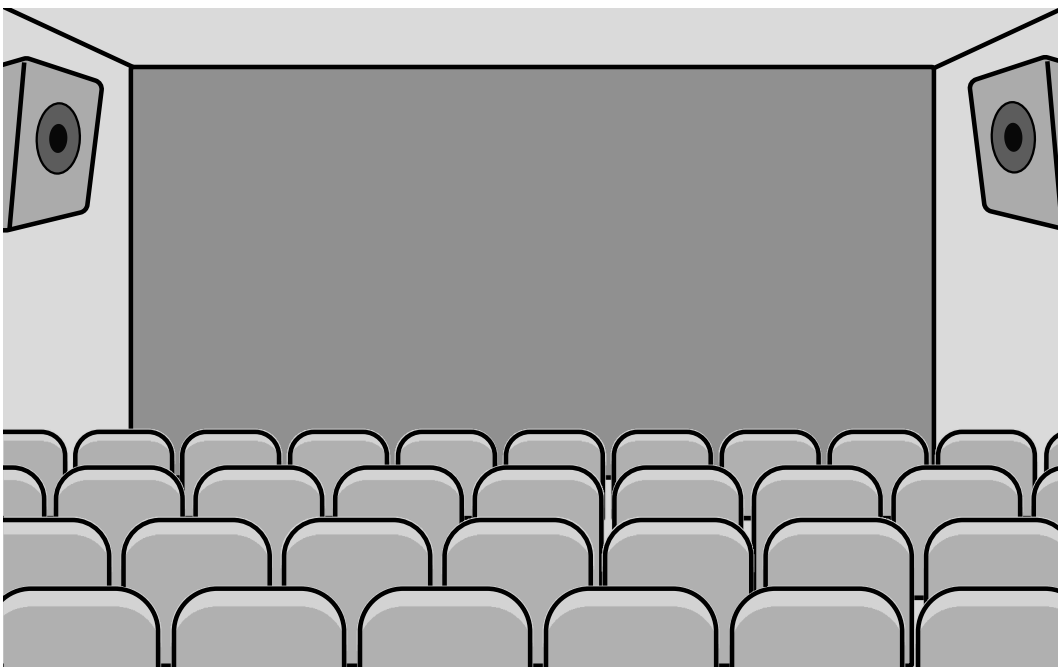

Movie Theater

Requirements Gathering

Here is an example of a typical prompt an interviewer might give:

"Imagine you're trying to book tickets for a blockbuster movie on a busy weekend. You log into the booking system, browse through the available showtimes, select your preferred seats, and proceed to book them. Within moments, your tickets are confirmed, and you receive a digital ticket. Behind the scenes, the system is efficiently managing seat availability, tracking screenings, and calculating ticket costs. Now, let's design a movie ticket booking system that handles all of this seamlessly."

To refine the system's scope, the candidate might ask the following questions:

Requirements clarification

Here is an example of how a conversation between a candidate and an interviewer might unfold:

- Candidate:** Does the system support finding and booking tickets across different cinemas and rooms?
Interviewer: Yes, users can search for available tickets across multiple cinemas, each containing multiple rooms.
- Candidate:** Does the system allow scheduling multiple screenings of the same movie across different rooms and times?
Interviewer: Yes, each movie can have different screenings scheduled across various rooms and times in the same cinema or different cinemas.
- Candidate:** Does the system support different pricing tiers for seats within the same screening?
Interviewer: Yes, each seat can have its pricing strategy, such as normal, premium, or VIP, affecting the ticket price.
- Candidate:** Can a user book multiple tickets in a single order, and how does the system calculate the total cost?
Interviewer: Yes, users can combine multiple tickets into one order for a specific screening. The system calculates the total cost by summing the prices of all selected seats based on their rate classes.
- Candidate:** Does the system need to handle payment processing as part of the booking process?
Interviewer: For this design, we can ignore payment processing and focus on browsing, scheduling, seat selection, and booking tickets.
- Candidate:** What happens when a user books a ticket for a specific seat?
Interviewer: The system should create a ticket with the screening, seat, and price based on the seat's pricing strategy, then add it to the screening's ticket list, marking the seat as booked.

Requirements

Based on the questions and answers, the following functional requirements can be identified:

Movie and screening management

- Each cinema is located at a specific location and contains multiple rooms.
- Movies can have multiple screenings scheduled across different rooms, cinemas, and time slots.

Seat management and pricing

- Each room has a grid of seats available for booking.
- Seats within a room can have varying pricing strategies (e.g., normal, premium, VIP) that affect ticket prices.

User search and book flow

- Users can find and book available tickets.
- A ticket represents a specific seat to watch a movie in a room at a particular time.
- A user can book multiple tickets within the same order.
- The total cost for an order is computed by summing the prices of all selected seats, based on their pricing tiers.

Below are the non-functional requirements:

- Fast searches for screenings for a smooth user experience.





Object-Oriented Design Interview

0/14 completed

- 01 What is an Object-Oriented Design Interview >
- 02 A Framework for the OOD Interview >
- 03 OOP Fundamentals >
- 04 Design a Parking Lot >
- 05 Design a Movie Ticket Booking System >
- 06 Design a Unix File Search System >
- 07 Design a Vending Machine >
- 08 Design an Elevator System >
- 09 Design a Grocery Store System >
- 10 Design a Tic Tac Toe Game >
- 11 Design a Blackjack Game >
- 12 Design a Shipping Locker System >
- 13 Design an ATM System >
- 14 Design a Restaurant Management System >

Identify Core Objects

To build a modular and maintainable system, we'll define objects that represent distinct entities with clear responsibilities. Here are the core objects:

- **Movie:** Represents a specific movie shown in cinemas, capturing its essential details like title and duration.

⌘ **Design choice:** We separate Movie from Screening to distinguish fixed movie data from dynamic screening schedules, improving reusability and clarity.

- **Cinema:** Models a physical location where movies are screened, containing multiple rooms.
- **Room:** Defines a screening space within a cinema, tied to a unique layout of seats.

⌘ **Design choice:** Separating Room from Layout allows rooms to share or customize seating arrangements, enhancing flexibility.

- **Layout:** Organizes the seating arrangement in a room as a grid, managing seat positions.
- **Seat:** Represents an individual seat in a room linked to a pricing strategy.
- **Screening:** Combines a movie, a room, and a time slot to define when and where a movie is shown.
- **Ticket:** Captures a customer's choice of a specific seat for a screening, including its price.
- **Order:** Groups multiple tickets purchased together into a single transaction, tracking the total cost.

Alternative approach: We could merge Room and Layout into one class, but this limits flexibility if rooms need varied layouts. Another option is adding a Customer class, but since the focus is on booking mechanics, we prioritize ticket-related entities.

Interview Tip: When presenting objects in an interview, explain why you chose them and how they meet the requirements. Mention alternatives (e.g., combining classes) to show you've considered different options and their trade-offs.


Design Class Diagram

Now that we know the core objects and their roles, the next step is to create classes and methods to build the movie ticket booking system.

Movie

The Movie class captures essential details about a specific movie in the system. It focuses on static information, title, genre, and duration, data that remains constant across all screenings of that film. It stands apart from a Screening, which ties a movie to a room and time slot for a particular showing.

Below is the UML diagram for the Movie class.

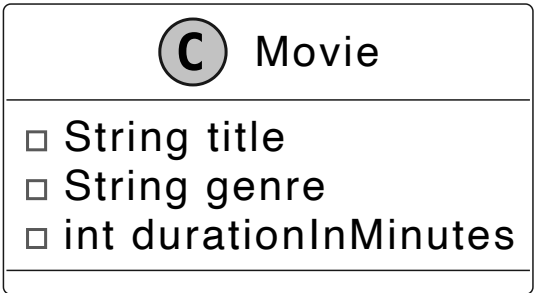

⌘ **Design choice:** We designed the Movie class to be a standalone entity, independent of cinema-specific or scheduling contexts. This isolation allows the same Movie to be reused across multiple cinemas and screenings without data duplication.


Seat

The Seat class holds key details about an individual seat, including its unique number. It uses the strategy pattern, implemented through the PricingStrategy interface with concrete classes like NormalRate, PremiumRate, and VIPRate, to manage price calculation flexibly.

The strategy pattern benefits the system in two key ways:

- It promotes extensibility, making it easy to add new rate classes.
- It reduces code redundancy by using a single Seat class for all pricing variations.

The UML diagram below illustrates this structure.

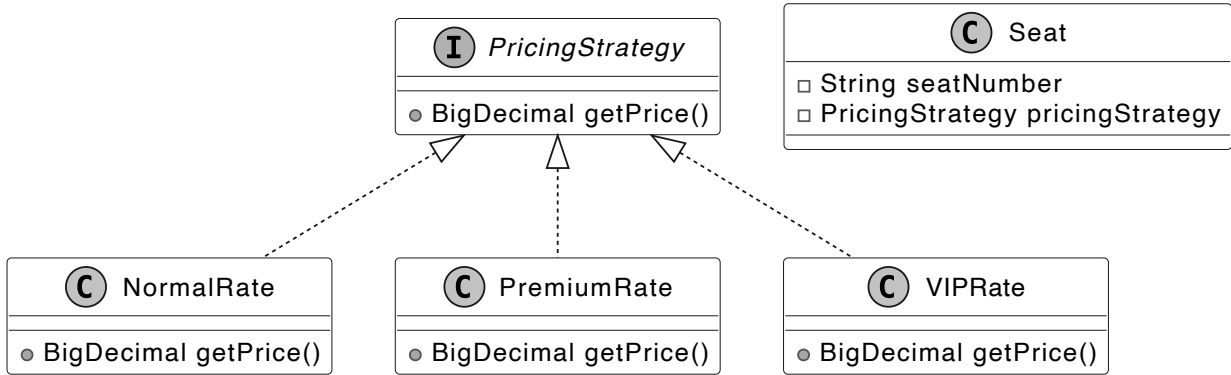

Seat and PricingStrategy Design

Alternate approach: We could embed pricing logic directly in Seat, but this reduces flexibility if pricing rules change. The strategy pattern, while more complex, supports future extensions.

The Seat class relies on a Layout to define its position in a room's seating grid, focusing solely on seat-specific data like its number and pricing strategy.

Note: To learn more about the Strategy pattern and its everyday use cases, refer to the **Parking Lot** chapter of the book.

Layout

The Layout class acts as a bridge between individual seats and cinema rooms. It organizes seats into a grid structure defined by rows and columns. It uses a nested map (Map<Integer, Map<Integer, Seat>>) for efficient seat lookup, where the outer map's key is the row






Object-Oriented Design Interview

0/14 completed

- 01 What is an Object-Oriented Design Interview >
- 02 A Framework for the OOD Interview >
- 03 OOP Fundamentals >
- 04 Design a Parking Lot >
- 05 Design a Movie Ticket Booking System >
- 06 Design a Unix File Search System >
- 07 Design a Vending Machine >
- 08 Design an Elevator System >
- 09 Design a Grocery Store System >
- 10 Design a Tic Tac Toe Game >
- 11 Design a Blackjack Game >
- 12 Design a Shipping Locker System >
- 13 Design an ATM System >
- 14 Design a Restaurant Management System >

It also maintains an index (Map<String, Seat>) to locate seats by their seat numbers quickly. This design simplifies managing seats across multiple theater rooms, ensuring easy access to seat data for booking purposes.

The UML diagram below illustrates this structure.

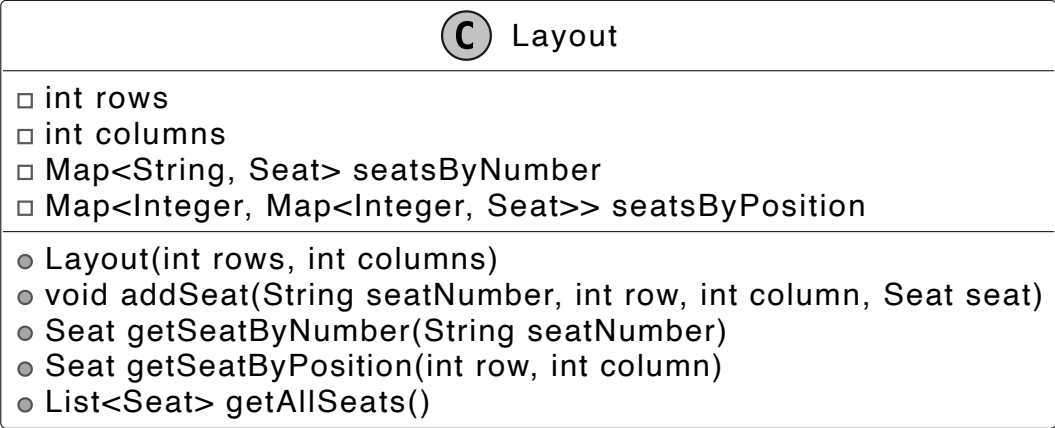

Alternative approach: In Layout, we use a nested map (Map<Integer, Map<Integer, Seat>>) for seat arrangement instead of a 2D array. This allows dynamic row creation with computeIfAbsent and supports variable row sizes. A 2D array for Layout could work for fixed-size rooms but lacks flexibility for irregular layouts or dynamic additions.


Interview Tip: When coding, explain why you chose a data structure (e.g., map vs. array) and how it supports your design goals.

Cinema and Room

The Cinema and Room classes structure the cinema system by leveraging the seat and layout framework. A Cinema contains multiple Room instances, exemplifying composition where one class holds another as an attribute. Each Room, in turn, includes a Layout to define its seat arrangement.

Together, these classes form a model of a cinema, with Cinema managing locations and rooms, and Room organizing seat layouts. Their composition ensures a clear hierarchy for managing theater spaces.

Below are the representations of these classes.

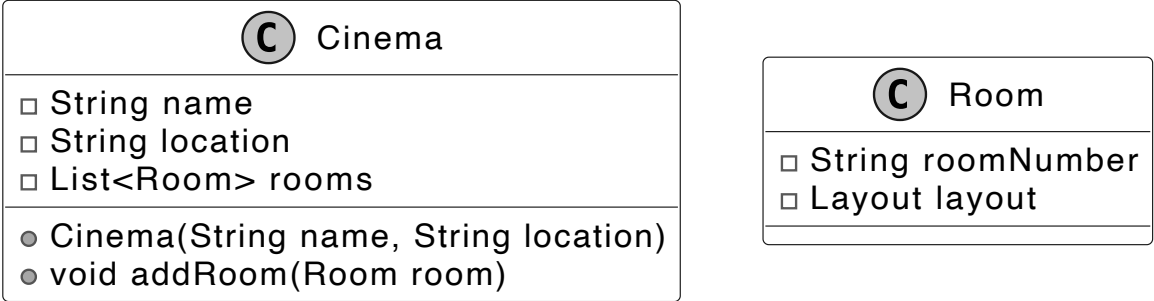


Cinema and Room classes

Design choice: We structured the Cinema and Room with a compositional relationship to simulate a real-world cinema with multiple screening rooms. This design allows each Room to operate independently with its layout and schedule, while the Cinema provides a unified context.

Screening

With the cinema structure in place, the Screening class defines a specific showing of a movie in a particular room at a scheduled time. It combines a Movie, a Room, and time details into a single entity.

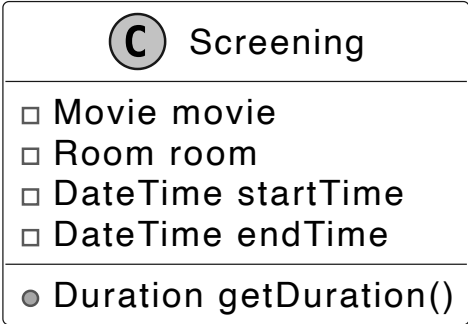


Design choice: The Screening class centralizes scheduling details, making it easier to manage showtimes across cinemas. It ensures a clear separation of concerns and simplifies schedule management.

Ticket

The Ticket class represents a purchased seat for a specific Screening, combining a Screening and a Seat.

It includes a price attribute, capturing the seat's cost at the time of purchase. This design, despite the Seat class using a strategy pattern for pricing, ensures the ticket price remains fixed, independent of any future changes to the seat's pricing strategy.

Here is the representation of this class.

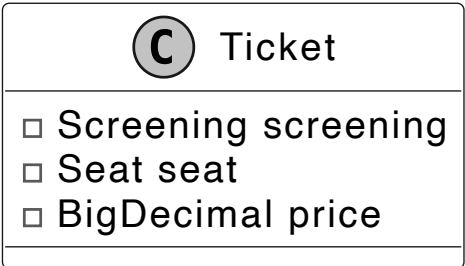

Order

The Order class groups multiple tickets into a single transaction, capturing all tickets purchased together at a specific time. It tracks the order's timestamp and provides the total cost of the tickets.





Object-Oriented Design Interview

0/14 completed

- 01 What is an Object-Oriented Design Interview >
- 02 A Framework for the OOD Interview >
- 03 OOP Fundamentals >
- 04 Design a Parking Lot >
- 05 Design a Movie Ticket Booking System >
- 06 Design a Unix File Search System >
- 07 Design a Vending Machine >
- 08 Design an Elevator System >
- 09 Design a Grocery Store System >
- 10 Design a Tic Tac Toe Game >
- 11 Design a Blackjack Game >
- 12 Design a Shipping Locker System >
- 13 Design an ATM System >
- 14 Design a Restaurant Management System >

❑ List<Ticket> tickets
❑ LocalDateTime orderDate
● Order(LocalDateTime orderDate)
● void addTicket(Ticket ticket)
● BigDecimal calculateTotalPrice()
● List<Ticket> getAllTickets()

ScreeningManager

Modeling classes like Movie, Seat, and Ticket alone does not create a complete system. To address this, we design a ScreeningManager class that manages key operations, such as searching for screenings of specific movies, identifying available seats, and storing purchased tickets.

The following UML diagram shows the ScreeningManager structure.

Ⓢ ScreeningManager
❑ Map<Movie, List<Screening>> screeningsByMovie
❑ Map<Screening, List<Ticket>> ticketsByScreening
● void addScreening(Movie movie, Screening screening)
● void addTicket(Screening screening, Ticket ticket)
● List<Screening> getScreeningsForMovie(Movie movie)
● List<Ticket> getTicketsForScreening(Screening screening)
● List<Seat> getAvailableSeats(Screening screening)

⚡ **Design choice:** The ScreeningManager class serves as a central coordinator for screening and ticket-related operations. An alternative could be to embed these operations in the Cinema class, with each cinema managing its screenings and tickets. However, this would couple the static cinema attributes (e.g., location and rooms) with the logic for scheduling and booking, reducing the system's modularity and maintainability.

MovieBookingSystem

The MovieBookingSystem class is the final piece that brings all components together. It integrates the list of movies, cinema locations, and an instance of ScreeningManager into a cohesive system. It acts as a facade, streamlining user interactions by delegating tasks to underlying classes like ScreeningManager, Movie, and Cinema.

Through MovieBookingSystem, key operations, such as adding movies or cinemas, finding screenings for a movie, checking available seats, and booking tickets, are centralized. This design enhances usability by offering a single entry point for these functions while preserving modularity, as each task remains handled by its respective class.

Here is the representation of this class.

Ⓢ MovieBookingSystem
❑ List<Movie> movies
❑ List<Cinema> cinemas
❑ ScreeningManager screeningManager
● void addMovie(Movie movie)
● void addCinema(Cinema cinema)
● void addScreening(Movie movie, Screening screening)
● void bookTicket(Screening screening, Seat seat)
● List<Screening> getScreeningsForMovie(Movie movie)
● List<Seat> getAvailableSeats(Screening screening)
● List<Ticket> getTicketsForScreening(Screening screening)
● int getTicketCount(Screening screening)

Alternate approach: We designed the MovieBookingSystem class as a facade to provide a simplified interface for client code. An alternative could be to allow client code to directly interact with classes like ScreeningManager or Cinema. However, this would increase coupling between clients and internal components, potentially leading to fragile and error-prone interactions. The facade pattern enhances maintainability and simplifies system interactions.

Complete Class Diagram

Below is the class diagram of our movie ticket booking system.






Object-Oriented Design Interview

0/14 completed

- 01 What is an Object-Oriented Design Interview
- 02 A Framework for the OOD Interview
- 03 OOP Fundamentals
- 04 Design a Parking Lot
- 05 Design a Movie Ticket Booking System
- 06 Design a Unix File Search System
- 07 Design a Vending Machine
- 08 Design an Elevator System
- 09 Design a Grocery Store System
- 10 Design a Tic Tac Toe Game
- 11 Design a Blackjack Game
- 12 Design a Shipping Locker System
- 13 Design an ATM System
- 14 Design a Restaurant Management System

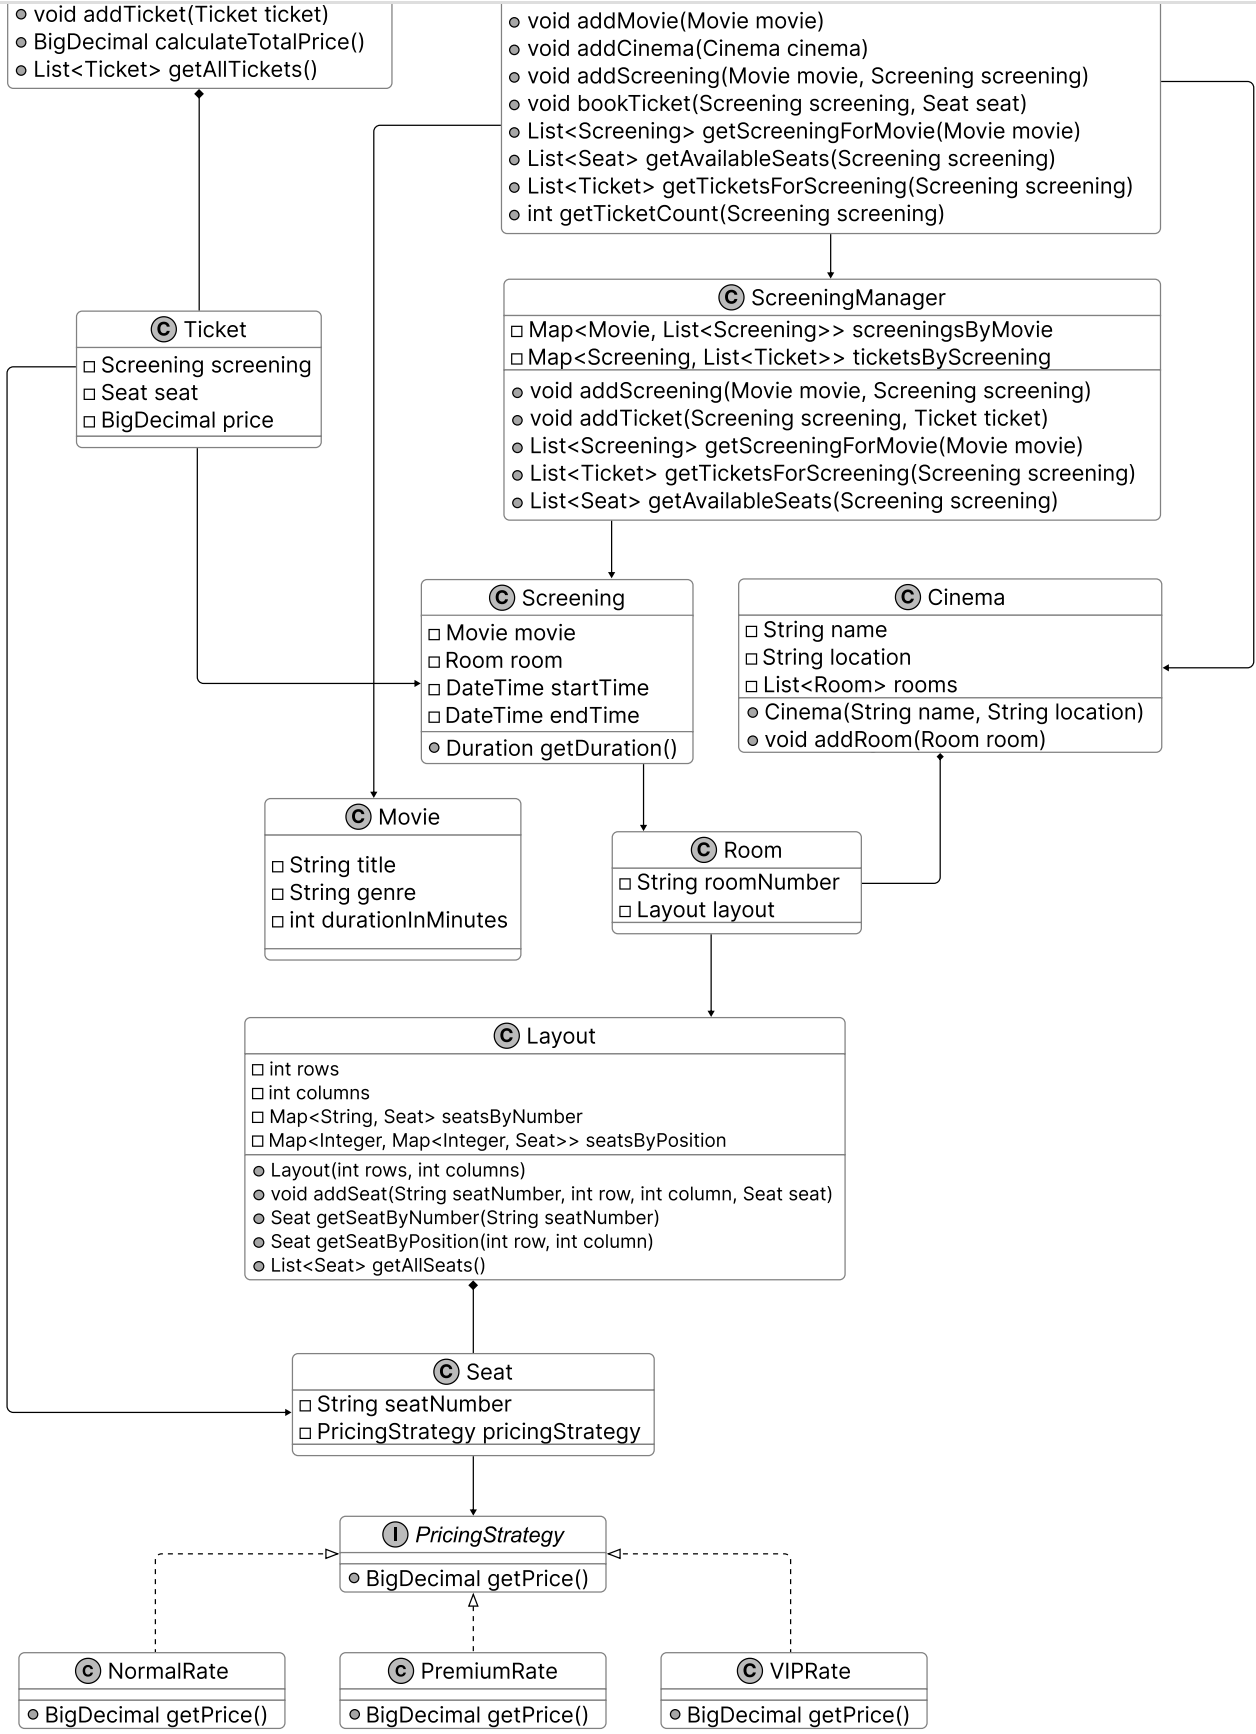

Class Diagram of Movie Ticket Booking System

Code - Movie Ticket Booking System

In this section, we'll implement the core functionalities of the movie ticket booking system, focusing on key areas such as handling cinema and movie listings, scheduling screenings, managing seat selection and availability, and processing ticket bookings through an order system.

Movie

The Movie class represents the static details of a film, such as its title, genre, and duration, which remain consistent across all screenings. The class is designed to be immutable, as it does not include setter methods, ensuring that movie details cannot be altered once the object is created. This immutability guarantees data integrity and reflects the static nature of a movie's attributes.

Below is the code implementation of this class:

```
public class Movie {
    private final String title;
    private final String genre;
    private final int durationInMinutes;

    public Movie(String title, String genre, int durationInMinutes) {
        this.title = title;
        this.genre = genre;
        this.durationInMinutes = durationInMinutes;
    }

    public Duration getDuration() {
        return Duration.ofMinutes(durationInMinutes);
    }

    // getter methods are omitted for brevity
}
```

The getDuration method converts the stored durationInMinutes value into a Duration object, offering a standardized and convenient way to represent and utilize the movie's length for tasks such as scheduling screenings or calculating screening durations.

Cinema

The Cinema class represents a cinema with attributes such as its name, location, and collection of Room objects. The rooms attribute is implemented as a dynamic List, allowing the addition of rooms at runtime using the addRoom method. This design provides flexibility, as cinemas can have varying numbers of rooms.

```
public class Cinema {
    private final String name;
    private final String location;
    private final List<Room> rooms;

    public Cinema(String name, String location) {
        this.name = name;
        this.location = location;
        this.rooms = new ArrayList<>();
    }

    public void addRoom(Room room) {
        rooms.add(room);
    }

    // getter and setter methods are omitted for brevity
}
```





Object-Oriented Design Interview

0/14 completed

01 What is an Object-Oriented Design Interview >

02 A Framework for the OOD Interview >

03 OOP Fundamentals >

04 Design a Parking Lot >

05 Design a Movie Ticket Booking System >

06 Design a Unix File Search System >

07 Design a Vending Machine >

08 Design an Elevator System >

09 Design a Grocery Store System >

10 Design a Tic Tac Toe Game >

11 Design a Blackjack Game >

12 Design a Shipping Locker System >

13 Design an ATM System >

14 Design a Restaurant Management System >

Room

The Room class represents a theater room within a cinema, with attributes such as its unique room number and a Layout object that defines its seating arrangement.

```
public class Room {
    private final String roomNumber;
    private final Layout layout;

    public Room(String roomNumber, Layout layout) {
        this.roomNumber = roomNumber;
        this.layout = layout;
    }
    // getter and setter methods are omitted for brevity
}
```

Layout

The Layout class defines the seating arrangement of a cinema room, tracking its rows and columns to form a grid. It uses a nested map (Map<Integer, Map<Integer, Seat>>) for locating seats by row and column positions, and a separate map (Map<String, Seat>) for quick lookup by unique seat numbers.

Below is the implementation of this class.

```
// Represents the seating layout of a cinema room.
public class Layout {
    private final int rows;
    private final int columns;

    // Maps seat numbers (e.g., "0-0") to Seat objects for direct access
    private final Map<String, Seat> seatsByNumber;

    // Nested map for position-based access (row -> column -> seat)
    private final Map<Integer, Map<Integer, Seat>> seatsByPosition;

    public Layout(int rows, int columns) {
        this.rows = rows;
        this.columns = columns;
        this.seatsByNumber = new HashMap<>();
        this.seatsByPosition = new HashMap<>();
        initializeLayout();
    }

    // Creates seats for all positions with default null pricing
    private void initializeLayout() {
        for (int i = 0; i < rows; i++) {
            for (int j = 0; j < columns; j++) {
                String seatNumber = i + "-" + j;
                addSeat(seatNumber, i, j, new Seat(seatNumber, null));
            }
        }
    }

    public void addSeat(String seatNumber, int row, int column, Seat seat) {
        // Store seat in number-based lookup map
        seatsByNumber.put(seatNumber, seat);
        // Store seat in position-based lookup map
        seatsByPosition.computeIfAbsent(row, k -> new HashMap<>()).put(column, seat);
    }

    public Seat getSeatByNumber(String seatNumber) {
        return seatsByNumber.get(seatNumber);
    }

    // Gets a seat by its row and column position
    public Seat getSeatByPosition(int row, int column) {
        Map<Integer, Seat> rowSeats = seatsByPosition.get(row);
        return (rowSeats != null) ? rowSeats.get(column) : null;
    }

    public List<Seat> getAllSeats() {
        return List.copyOf(seatsByNumber.values());
    }
}
```

- The addSeat method employs the computeIfAbsent technique to dynamically create rows in the nested map as needed, streamlining the addition of seats without requiring pre-initialization of the entire grid.
- The getSeatByNumber method retrieves a seat based on its unique string identifier, enhancing lookup efficiency.
- The getSeatByPosition method accesses a seat using its row and column coordinates, supporting precise seat selection.
- The getAllSeats method returns an unmodifiable list of all seats, ensuring safe access to the seating data.

Layout integrates with the Room class to provide the seating structure, working alongside Seat objects to support the ticket booking process, such as availability and pricing.

Implementation choice: We used a nested Map<Integer, Map<Integer, Seat>> for the seat grid and a Map<String, Seat> for seat number lookup in the Layout class, as these structures provide efficient O(1) access by row-column or seat number. The nested map supports dynamic row creation via computeIfAbsent. An alternative could be a 2D array (Seat[][]) for the grid, which is simpler for fixed-size layouts and offers direct index-based access. However, arrays lack flexibility for irregular layouts (e.g., missing seats) and require pre-allocation.

Seat

The Seat class represents an individual seat in a cinema room with attributes such as its unique seatNumber and associated PricingStrategy. The PricingStrategy provides dynamic pricing for each seat, enabling the system to assign different pricing logic (e.g., normal, premium, VIP) without modifying the Seat class itself.

```
public class Seat {
    private final String seatNumber;
    private PricingStrategy pricingStrategy;
```





Object-Oriented Design Interview

0/14 completed

- 01 What is an Object-Oriented Design Interview >
- 02 A Framework for the OOD Interview >
- 03 OOP Fundamentals >
- 04 Design a Parking Lot >
- 05 Design a Movie Ticket Booking System >
- 06 Design a Unix File Search System >
- 07 Design a Vending Machine >
- 08 Design an Elevator System >
- 09 Design a Grocery Store System >
- 10 Design a Tic Tac Toe Game >
- 11 Design a Blackjack Game >
- 12 Design a Shipping Locker System >
- 13 Design an ATM System >
- 14 Design a Restaurant Management System >

```
}
// getter and setter methods are omitted for brevity
}
```

Alternate Approach: We implemented the Seat class with a PricingStrategy interface reference, delegating pricing logic to the strategy pattern. An alternative could be to store the price info directly in Seat, with an enum for seat type (e.g., NORMAL, PREMIUM). However, this would embed pricing logic in Seat, making it harder to modify and extend pricing rules without changing the class.

PricingStrategy

The PricingStrategy interface establishes a contract requiring the implementation of a getPrice() method to provide a seat's price. Concrete classes, like NormalRate, PremiumRate, and VIPRate, encapsulate fixed price values for different seat types, reflecting their respective pricing tiers.

By associating a PricingStrategy with each seat, the system achieves flexibility and extensibility in pricing, adhering to the **Open-Closed Principle**: new pricing strategies can be added without modifying existing code.

Here is the implementation of this interface and its concrete classes.

```
public interface PricingStrategy {
    BigDecimal getPrice();
}

public class NormalRate implements PricingStrategy {
    private final BigDecimal price;

    public NormalRate(BigDecimal price) {
        this.price = price;
    }

    @Override
    public BigDecimal getPrice() {
        return price;
    }
}

public class PremiumRate implements PricingStrategy {
    private final BigDecimal price;

    public PremiumRate(BigDecimal price) {
        this.price = price;
    }

    @Override
    public BigDecimal getPrice() {
        return price;
    }
}

public class VIPRate implements PricingStrategy {
    private final BigDecimal price;

    public VIPRate(BigDecimal price) {
        this.price = price;
    }

    @Override
    public BigDecimal getPrice() {
        return price;
    }
}
```

Screening

The Screening class combines a Movie with a specific room, time, and duration, representing a scheduled instance of that movie being played in a particular cinema room. While the Movie class captures attributes intrinsic to the film itself, the Screening class incorporates contextual details about when and where the movie is being presented, making it specific to a time slot and location.

```
// Represents a scheduled screening of a movie in a specific cinema room.
public class Screening {
    private final Movie movie;
    private final Room room;
    private final LocalDateTime startTime;
    private final LocalDateTime endTime;

    public Screening(Movie movie, Room room, LocalDateTime startTime, LocalDateTime endTime) {
        this.movie = movie;
        this.room = room;
        this.startTime = startTime;
        this.endTime = endTime;
    }

    public Duration getDuration() {
        return Duration.between(startTime, endTime);
    } // getter and setter methods are omitted for brevity
}
```

The class provides a getDuration() method to calculate the duration of the screening based on its start and end times.

Ticket

The Ticket class represents a single unit of purchase in the ticket booking system. It connects a Screening (scheduled movie instance) with a specific Seat and assigns a price at the time of booking. This design ensures that the ticket encapsulates all necessary details for a single booking, making it central to the ticketing process.

```
public class Ticket {
    private final Screening screening;
    private final Seat seat;
    private final BigDecimal price;

    public Ticket(Screening screening, Seat seat, BigDecimal price) {
        this.screening = screening;
    }
}
```





Object-Oriented Design Interview

0/14 completed

01 What is an Object-Oriented Design Interview

02 A Framework for the OOD Interview

03 OOP Fundamentals

04 Design a Parking Lot

05 Design a Movie Ticket Booking System

06 Design a Unix File Search System

07 Design a Vending Machine

08 Design an Elevator System

09 Design a Grocery Store System

10 Design a Tic Tac Toe Game

11 Design a Blackjack Game

12 Design a Shipping Locker System

13 Design an ATM System

14 Design a Restaurant Management System

```
// getter and setter methods are omitted for brevity
}
```

Order

The Order class represents a single transaction in the movie ticket booking system. It encapsulates a collection of Ticket objects purchased together and records the date and time of the order (orderDate). This design ensures that all tickets associated with a single booking are grouped and tracked cohesively.

```
public class Order {
    private final List<Ticket> tickets;
    private final LocalDateTime orderDate;

    public Order(LocalDateTime orderDate) {
        this.tickets = new ArrayList<>();
        this.orderDate = orderDate;
    }

    public void addTicket(Ticket ticket) {
        tickets.add(ticket);
    }

    // Calculates the total price of all tickets in the order
    public BigDecimal calculateTotalPrice() {
        return tickets.stream().map(Ticket::getPrice).reduce(BigDecimal.ZERO, BigDecimal::add);
    }

    // getter and setter methods are omitted for brevity
}
```

ScreeningManager

The ScreeningManager class serves as a centralized manager for showtimes and tickets within the movie ticket booking system. It maintains mappings between Movie objects and their corresponding Screening instances, as well as between Screening objects and their associated Ticket objects. This design ensures that the system can dynamically manage showtimes and ticket bookings while maintaining clear relationships between components.

Here is the implementation of this class.

```
// Manages the relationships between movies, screenings, and tickets in the booking system
public class ScreeningManager {
    // Maps movies to their scheduled screenings
    private final Map<Movie, List<Screening>> screeningsByMovie;
    // Maps screenings to tickets sold for that screening
    private final Map<Screening, List<Ticket>> ticketsByScreening;

    public ScreeningManager() {
        this.screeningsByMovie = new HashMap<>();
        this.ticketsByScreening = new HashMap<>();
    }

    public void addScreening(Movie movie, Screening screening) {
        screeningsByMovie.computeIfAbsent(movie, k -> new ArrayList<>()).add(screening);
    }

    // Returns all screenings for a specific movie
    public List<Screening> getScreeningsForMovie(Movie movie) {
        return screeningsByMovie.getOrDefault(movie, new ArrayList<>());
    }

    public void addTicket(Screening screening, Ticket ticket) {
        ticketsByScreening.computeIfAbsent(screening, k -> new ArrayList<>()).add(ticket);
    }

    // Returns all tickets sold for a specific screening
    public List<Ticket> getTicketsForScreening(Screening screening) {
        return ticketsByScreening.getOrDefault(screening, new ArrayList<>());
    }

    // Calculates which seats are still available for a screening
    public List<Seat> getAvailableSeats(Screening screening) {
        List<Seat> allSeats = screening.getRoom().getLayout().getAllSeats();
        List<Ticket> bookedTickets = getTicketsForScreening(screening);

        List<Seat> availableSeats = new ArrayList<>(allSeats);
        for (Ticket ticket : bookedTickets) {
            availableSeats.remove(ticket.getSeat());
        }
        return availableSeats;
    }
}
```

- The addScreening and addTicket methods use computeIfAbsent to dynamically initialize the lists for a movie's screenings or a screening's tickets if they do not already exist.
- The getAvailableSeats method determines which seats are available for a given screening. It retrieves all seats from the room's Layout and removes seats that are already associated with tickets for the screening. This logic ensures accurate seat availability by dynamically reflecting the current booking status.

Implementation choice: We used a Map<Movie, List<Screening>> for movie-to-screening mappings and a Map<Screening, List<Ticket>> for screening-to-ticket mappings. These maps provide O(1) lookup, optimizing search and booking operations. An alternative could be a List<Screening> and List<Ticket> with manual filtering to find relevant entries, but this would result in O(n) search times. The map-based approach is more efficient and scalable for managing large numbers of screenings and tickets.

MovieBookingSystem

The MovieBookingSystem class serves as a facade for the movie ticket booking system, providing a simplified interface for managing the core data and operations. It abstracts away the complexities of interacting with underlying components, such as ScreeningManager, while maintaining seamless integration with Movie, Cinema, Screening, and Seat.





Object-Oriented Design Interview

0/14 completed

- 01 What is an Object-Oriented Design Interview >
- 02 A Framework for the OOD Interview >
- 03 OOP Fundamentals >
- 04 Design a Parking Lot >
- 05 Design a Movie Ticket Booking System >
- 06 Design a Unix File Search System >
- 07 Design a Vending Machine >
- 08 Design an Elevator System >
- 09 Design a Grocery Store System >
- 10 Design a Tic Tac Toe Game >
- 11 Design a Blackjack Game >
- 12 Design a Shipping Locker System >
- 13 Design an ATM System >
- 14 Design a Restaurant Management System >

```
// Manages the complete movie booking system operations
public class MovieBookingSystem {

    private final List<Movie> movies;
    private final List<Cinema> cinemas;
    private final ScreeningManager screeningManager;

    public MovieBookingSystem() {
        this.movies = new ArrayList<>();
        this.cinemas = new ArrayList<>();
        this.screeningManager = new ScreeningManager();
    }

    public void addMovie(Movie movie) {
        movies.add(movie);
    }

    public void addCinema(Cinema cinema) {
        cinemas.add(cinema);
    }

    public void addScreening(Movie movie, Screening screening) {
        screeningManager.addScreening(movie, screening);
    }

    // Books a ticket for a specific seat at a screening
    public void bookTicket(Screening screening, Seat seat) {
        BigDecimal price = seat.getPricingStrategy().getPrice();
        Ticket ticket = new Ticket(screening, seat, price);
        screeningManager.addTicket(screening, ticket);
    }

    // Returns all screenings for a specific movie
    public List<Screening> getScreeningsForMovie(Movie movie) {
        return screeningManager.getScreeningsForMovie(movie);
    }

    // Returns all available seats for a screening
    public List<Seat> getAvailableSeats(Screening screening) {
        return screeningManager.getAvailableSeats(screening);
    }

    // Returns the number of tickets sold for a screening
    public int getTicketCount(Screening screening) {
        return screeningManager.getTicketsForScreening(screening).size();
    }

    // Returns the list of tickets for a screening
    public List<Ticket> getTicketsForScreening(Screening screening) {
        return screeningManager.getTicketsForScreening(screening);
    } // getter and setter methods are omitted for brevity
}
```

Key functionalities include adding movies and cinemas, retrieving available seats for a specific screening, finding screenings for a given movie, and booking tickets.

The bookTicket method dynamically calculates the price of a ticket using the associated seat’s PricingStrategy. It then creates a new Ticket instance, associating it with the specified screening and seat, and stores it in the ScreeningManager.

Deep Dive Topics

Now that the basic design is complete, the interviewer might ask you to enhance the movie ticket system’s functionality or accommodate more complex use cases.

Handling concurrent bookings

In OOD interviews, concurrency is often discussed for systems like movie ticket booking, where multiple users interact simultaneously. Concurrency adds complexity and requires understanding basic threading concepts. During an interview, ask the interviewer if concurrency needs to be handled in the system.

Problem: Race condition

A race condition occurs when two users attempt to book the same seat at the same time, potentially leading to both receiving confirmation, causing a double-booking. This undermines the system’s reliability and user experience.

Solution: Pessimistic and Optimistic locking

To prevent race conditions, we can use locking mechanisms to ensure only one user books a seat at a time, turning parallel actions into sequential ones. There are two common approaches: pessimistic locking and optimistic locking, each with distinct trade-offs.

Pessimistic Locking: This strategy acquires an exclusive lock on a seat at the start of a user's booking process, preventing concurrent access by other users until the lock is released. The lock is held throughout the transaction, spanning seat selection, booking confirmation, or cancellation, ensuring sole access to the seat. For instance, when a user selects a seat, the system locks it until the booking is finalized or abandoned. To mitigate the risk of indefinite locks due to system failures, a timeout mechanism (e.g., 30 seconds) automatically releases the lock if the transaction remains incomplete. Pessimistic locking is well-suited for scenarios with high contention, where multiple users frequently attempt to book the same seat, as it guarantees exclusive access. Its drawback is increased latency due to lock acquisition and release overhead, which can impact system performance under heavy load.

Optimistic Locking: This strategy avoids locking seats during the booking process, instead verifying seat availability at the transaction's final stage. If another user has booked the seat in the interim, the transaction fails, requiring the user to retry. Optimistic locking is lightweight and efficient in low-contention scenarios, where simultaneous booking attempts for the same seat are rare, minimizing the need for retries. However, in high-contention environments, frequent conflicts can lead to multiple retries, degrading user experience, and increasing system load. This approach relies on atomic checks (e.g., using synchronized blocks or database transactions) to ensure consistency during the final validation.

We provide implementation for both locking strategies below.

Implementation: Pessimistic locking

To implement pessimistic locking, we introduce a SeatLockManager class that uses Java’s concurrency features to manage temporary seat locks. It uses a ConcurrentHashMap for thread-safe access and synchronizes critical methods to prevent race conditions during lock





Object-Oriented Design Interview

0/14 completed

- 01 What is an Object-Oriented Design Interview >
- 02 A Framework for the OOD Interview >
- 03 OOP Fundamentals >
- 04 Design a Parking Lot >
- 05 Design a Movie Ticket Booking System >
- 06 Design a Unix File Search System >
- 07 Design a Vending Machine >
- 08 Design an Elevator System >
- 09 Design a Grocery Store System >
- 10 Design a Tic Tac Toe Game >
- 11 Design a Blackjack Game >
- 12 Design a Shipping Locker System >
- 13 Design an ATM System >
- 14 Design a Restaurant Management System >

```
public class SeatLockManager {
    private final Map<String, SeatLock> lockedSeats = new ConcurrentHashMap<>();
    private final Duration lockDuration;

    public SeatLockManager(Duration lockDuration) {
        this.lockDuration = lockDuration;
    }

    public synchronized boolean lockSeat(Screening screening, Seat seat, String userId) {
        String lockKey = generateLockKey(screening, seat);

        // Clean up lock if expired (on-demand cleanup when another process attempts to lock)
        cleanupLockIfExpired(lockKey);
        // Check if a seat is already locked
        if (isLocked(screening, seat)) {
            return false;
        }

        // Create a new lock with expiration time
        SeatLock lock = new SeatLock(userId, LocalDateTime.now().plus(lockDuration));
        lockedSeats.put(lockKey, lock);
        return true;
    }

    public synchronized boolean isLocked(Screening screening, Seat seat) {
        String lockKey = generateLockKey(screening, seat);

        // Clean up lock if expired (on-demand cleanup)
        cleanupLockIfExpired(lockKey);

        // If we reach here, either no lock exists or it's valid
        return lockedSeats.containsKey(lockKey);
    }

    private void cleanupLockIfExpired(String lockKey) {
        SeatLock lock = lockedSeats.get(lockKey);
        if (lock != null && lock.isExpired()) {
            lockedSeats.remove(lockKey);
        }
    }

    private String generateLockKey(Screening screening, Seat seat) {
        return screening.getId() + "-" + seat.getSeatNumber();
    }

    // SeatLock inner class
    private static class SeatLock {
        private final String userId;
        private final LocalDateTime expirationTime;

        public SeatLock(String userId, LocalDateTime expirationTime) {
            this.userId = userId;
            this.expirationTime = expirationTime;
        }

        public boolean isExpired() {
            return LocalDateTime.now().isAfter(expirationTime);
        }

        public String getUserId() {
            return userId;
        }
    }
}
```

- **lockSeat(Screening, Seat, String):** Synchronously attempts to lock a seat for a user by generating a unique lock key, cleaning up any expired locks, and checking if the seat is currently locked. If the seat is available, it creates and stores a new lock with an expiration timestamp to ensure the lock is temporary.
- **isLocked(Screening, Seat):** Checks if a valid lock exists after cleaning up expired locks.
- **cleanupLockIfExpired(String):** Removes expired locks from lockedSeats to free the seat.

Implementation: Optimistic locking

In the optimistic locking approach, the ScreeningManager class is updated to verify seat availability just before finalizing a booking, without acquiring a persistent lock beforehand. The synchronized keyword is used to ensure that the availability check and the booking operation execute atomically, preventing race conditions that could lead to double-booking.

```
// Simplified optimistic locking in ScreeningManager
public synchronized Ticket bookSeatOptimistically(Screening screening, Seat seat) {
    // First check if a seat is available (optimistic)
    if (isSeatBooked(screening, seat)) {
        throw new IllegalStateException("Seat is already booked");
    }

    // Create ticket - at this point, we're optimistically assuming
    // the seat is still available
    BigDecimal price = seat.getPricingStrategy().getPrice();
    Ticket ticket = new Ticket(screening, seat, price);

    // Add to booking system - this effectively "reserves" the seat
    ticketsByScreening.computeIfAbsent(screening, k -> new ArrayList<>()).add(ticket);

    return ticket;
}

// Helper method to check if a seat is already booked
private boolean isSeatBooked(Screening screening, Seat seat) {
    List<Ticket> tickets = getTicketsForScreening(screening);
    return tickets.stream().anyMatch(ticket -> ticket.getSeat().equals(seat));
}
```

bookSeatOptimistically(Screening, Seat): Checks if the seat is booked, creates a Ticket, and atomically adds it to the screening’s ticket list.

This implementation is lightweight and suitable when race conditions are infrequent, but it may require users to retry if a booking fails due to a conflict.





Object-Oriented Design Interview

0/14 completed

- 01 What is an Object-Oriented Design Interview >
- 02 A Framework for the OOD Interview >
- 03 OOP Fundamentals >
- 04 Design a Parking Lot >
- 05 Design a Movie Ticket Booking System >
- 06 Design a Unix File Search System>
- 07 Design a Vending Machine >
- 08 Design an Elevator System >
- 09 Design a Grocery Store System >
- 10 Design a Tic Tac Toe Game >
- 11 Design a Blackjack Game >
- 12 Design a Shipping Locker System>
- 13 Design an ATM System >
- 14 Design a Restaurant Management System >

