
Conditional Statements

- In daily life we come across conditional problems for instance if you are Loggin in somewhere the you need to enter correct password in order to login otherwise no login
- · The skeleton for conditional statement is

 Depending on the result of the condition if block is executed otherwise else will be executed

The flow of conditional statement is given below

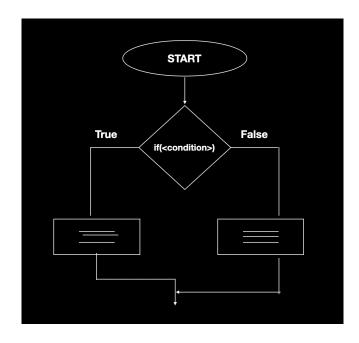

- The statement is considered False if the value is 0 (zero), any other value other than 0 is True
- The condition is written using relational operator (< , > <=, >= , == ,!=)
 as they are used to compare the two values we use relational
 operator