



Each group only needs to have one member to upload the document and the GitHub link. The document includes:

Class diagram

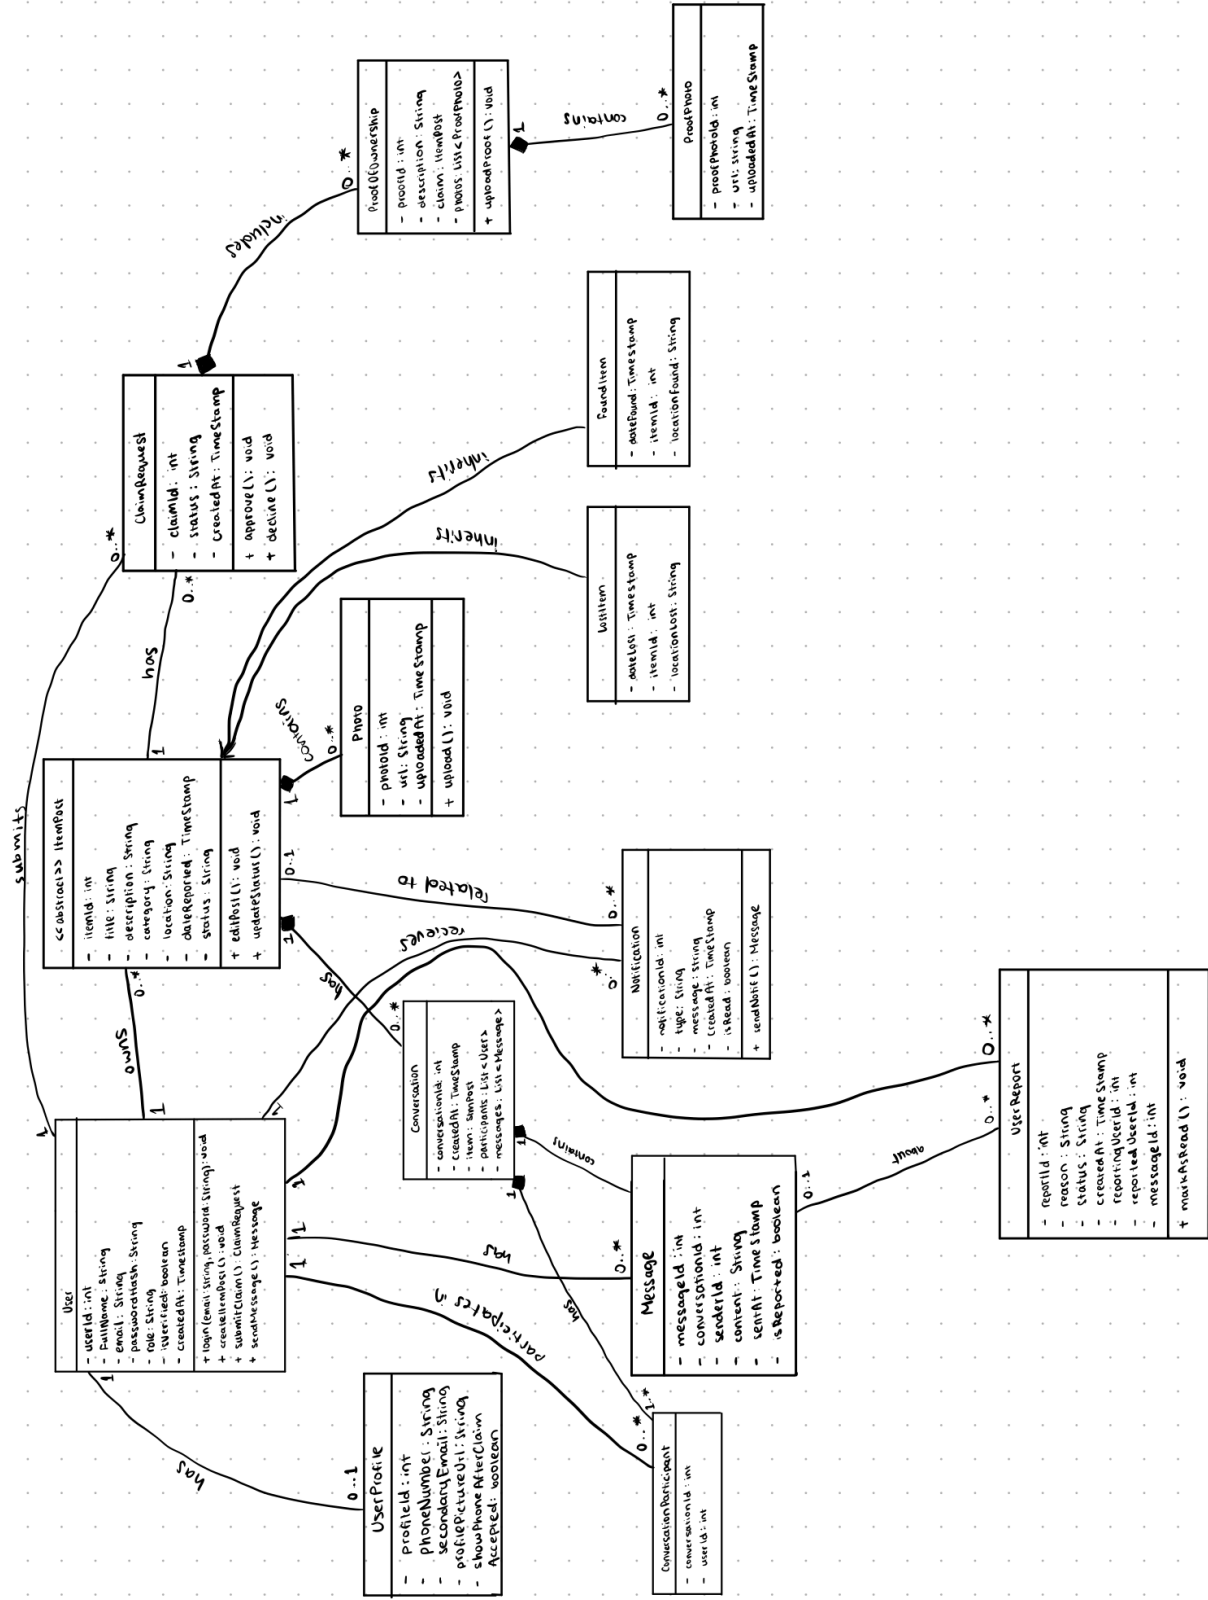

ER diagram

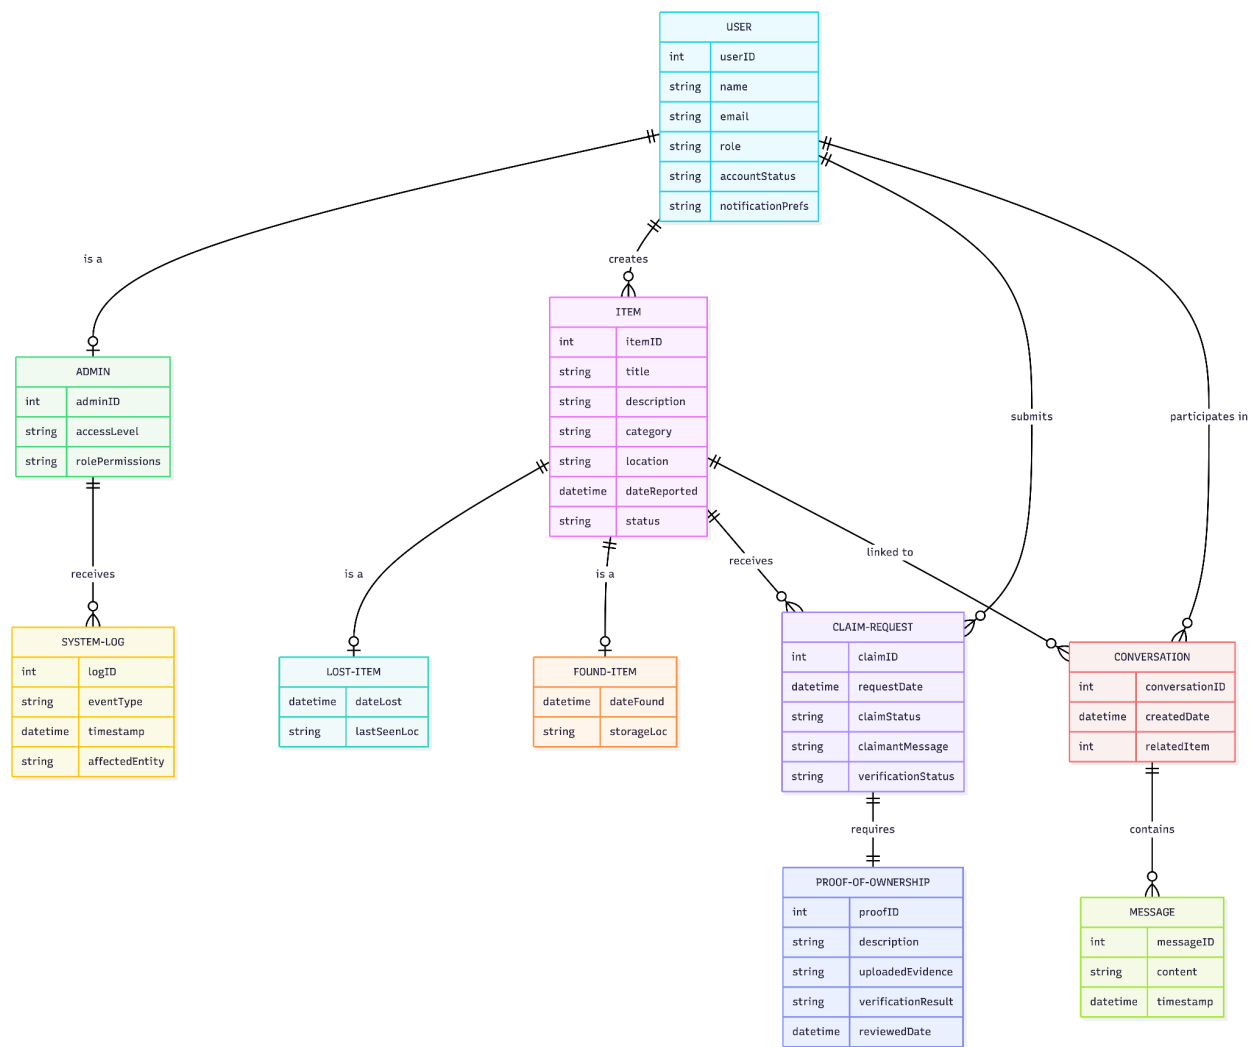

Database Tables

Table: user

- *user_id* (PK, int)
- *full_name* (varchar)
- *email* (varchar, unique)
- *password_hash* (varchar)
- *role* (varchar)
- *is_verified* (boolean)
- *created_at* (timestamp)

Table: user_profile

- *profile_id* (PK, int)
- *user_id* (FK → users.user_id)
- *phone_number* (varchar)

- `secondary_email` (varchar)
- `profile_picture_url` (varchar)
- `show_phone_after_claim_accepted` (boolean)

Table: `item_post`

(Superclass for `LostItem` & `FoundItem`)

- `item_id` (PK, int)
- `owner_id` (FK → `users.user_id`)
- `title` (varchar)
- `description` (text)
- `category` (varchar)
- `location` (varchar)
- `date_reported` (timestamp)
- `status` (varchar)
- `item_type` (varchar) (*LOST or FOUND*)

Table: `lost_item`

- `item_id` (PK, FK → `item_posts.item_id`)
- `date_lost` (timestamp)
- `location_lost` (varchar)

Table: `found_item`

- `item_id` (PK, FK → `item_posts.item_id`)
- `date_found` (timestamp)
- `location_found` (varchar)

Table: `photo`

- `photo_id` (PK, int)
- `item_id` (FK → `item_posts.item_id`)
- `url` (varchar)
- `uploaded_at` (timestamp)

Table: `claim_request`

- `claim_id` (PK, int)
- `item_id` (FK → `item_posts.item_id`)
- `claimant_id` (FK → `users.user_id`)
- `status` (varchar)
- `created_at` (timestamp)
- `decline_reason` (text)
- `approve_reason` (text)

Table: proof_of_ownership

- *proof_id* (PK, int)
- *claim_id* (FK → claim_requests.claim_id)
- *description* (text)
- *serial_number* (varchar)

Table: proof_photo

- *proof_photo_id* (PK, int)
- *url* (varchar)
- *uploaded_at* (timestamp)

Table: conversation

- *conversation_id* (PK, int)
- *item_id* (FK → item_posts.item_id)
- *created_at* (timestamp)

Table: conversation_participant

- *conversation_id* (PK, FK → conversations.conversation_id)
- *user_id* (PK, FK → users.user_id)

Table: message

- *message_id* (PK, int)
- *conversation_id* (FK → conversations.conversation_id)
- *sender_id* (FK → users.user_id)
- *content* (text)
- *sent_at* (timestamp)
- *is_reported* (boolean)

Table: notification

- *notification_id* (PK, int)
- *recipient_id* (FK → users.user_id)
- *type* (varchar)
- *message* (text)
- *related_item_id* (FK → item_posts.item_id, nullable)
- *created_at* (timestamp)
- *is_read* (boolean)

Table: user_report

- *report_id* (PK, int)

- `reported_user_id` (FK → `users.user_id`)
- `reporting_user_id` (FK → `users.user_id`)
- `message_id` (FK → `messages.message_id`, nullable)
- `reason` (text)
- `status` (varchar)
- `created_at` (timestamp)
- `resolved_by_admin_id` (FK → `users.user_id`, nullable)

GitHub Link: <https://github.com/malavika-cmd/CampusLostAndFoundApp.git>