Summary in Graph


Exam Summary (GO Classes DA Test Series 2026 | Python Programming | Topic Wise Test 1)

Qs. Attempted:	8 8 + 0	Correct Marks:	3 3 + 0
Correct Attempts:	3 3 + 0	Penalty Marks:	1.33 1.33 + 0
Incorrect Attempts:	5 5 + 0	Resultant Marks:	1.67 1.67 + 0

Total Questions:	15 10 + 5
Total Marks:	20 10 + 10
Exam Duration:	45 Minutes
Time Taken:	45 Minutes

Individual Question Statistics

Select Metric: Marks Obtained

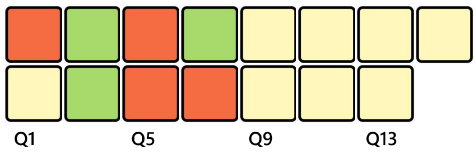

* Average Stats based on first-attempt stats of Top 10% (71) out of 711 users

EXAM RESPONSE | EXAM STATS | FEEDBACK

Technical

Q #1 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in Python

One of these code fragments is not like the others. Identify the fragment with behavior different from the others.
Mark the odd one out.

A.
```
for I in range(0,10,1):
    print(I)
```

B.
```
for I in range(9,-1,-1):
    print(9-I)
```

C.
```
I = 1
while (I <= 10):
    print(I-1)
    I = I + 1
```

D.
```
I = 0
while (I < 9):
    print(I)
    I = I + 1
```

Your Answer: A | Correct Answer: D | Incorrect | Time taken: 07min 00sec | Discuss

Q #2 | Multiple Select Type | Award: 1 | Penalty: 0 | Programming in C

Which of the following create a list containing 1,3 and 5 ?
Assume values is the list:

$$\text{values} = [1, 2, 3, 4, 5, 6]$$

A.
```
[values.index(1), values.index(3), values.index(5)]
```

B.
```
values[:5:2]
```

C.
```
[values[0]] + [values[2]] + [values [4]]
```

D.
```
[values[i] for i in range(len(values), 2)]
```

Your Answer: A;B;C | Correct Answer: B;C | Incorrect | Time taken: 01min 59sec | Discuss

Q #3 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in Python

If the following is executed, then what is the output?

```
x = [10,20,30]
for k in range(1000):
    x.append(x[0])
    x = x[1:4]
print(x)
```

A. $[10, 10, 10]$

B. $[20, 30, 10]$
C. $[30, 10, 10]$
D. $[20, 30, 20]$

Your Answer: B | Correct Answer: B | Correct | Time taken: 05min 51sec | Discuss

Q #4 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

What is the value of "abcdefg"[:-1] in Python?

A. 'abcdef'
B. 'gfedcba'
C. 'gabcdef'
D. 'gfedcb'

Your Answer: A | Correct Answer: A | Correct | Time taken: 01min 19sec | Discuss

Q #5 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming and DS

What's the value of the expression "Honey" + "Boo" * 2

A. 'HoneyBooHoneyBoo'
B. 'HoneyBooBoo'
C. 'HoneyBoo2'
D. 'HoneyBoo*2'

Your Answer: C | Correct Answer: B | Incorrect | Time taken: 00min 20sec | Discuss

Q #6 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

Examine the following code:

```
    xList = [10, 20, 30, 40, 50, 60]
    yList = []
    zList = []

5.
    for j in range(1, 7, 2):
        xList[j] = j
        yList.append(j)
        zList.append(yList)
```

After the code executes, what does 'zList' point at?

A. zList $= [[1], [1, 3], [1, 3, 5]]$
B. zList $= [[1, 3, 5], [1, 3, 5], [1, 3, 5]]$
C. zList $= [[1, 3, 5]]$
D. zList $= [[1], [3], [5]]$

Your Answer: D | Correct Answer: B | Incorrect | Time taken: 04min 07sec | Discuss

Q #7 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

What is printed by the following lines of code?

```
myWords = ["What", "Is", "Your", "Name"]
newWords = myWords[0] + myWords[-1]
print(newWords)
```

A. ['What', 'Your']
B. ['What', 'Name']
C. WhatName
D. What'Your

Your Answer: C | Correct Answer: C | Correct | Time taken: 01min 49sec | Discuss

Q #8 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

Which of the following code fragments correctly prints the sentence contained in the list below WITHOUT commas or brackets on a single line?
aList = ['GO', "Yellowjackets", '!']

A.
```
print(str(aList))
```

B.
```
aStr = ""
for word in aList:
    aStr = aStr + word
print(aStr)
```

C.
```
for word in aList:
    print(word)
```

D.
```
print(aList[:])
```

Your Answer: D | Correct Answer: B | Incorrect | Time taken: 03min 18sec | Discuss

Q #9 | Multiple Select Type | Award: 1 | Penalty: 0 | Programming in C

mystery $= [[8], 4, [1, 5, 3, [2, 6]], [9, 7], 7]$
Which of the following(s) evaluates to TRUE?

A. $[8]$ in mystery

B. 8 in mystery

C. mystery$[2][3][1] == 6$

D. $[1, 5, 3]$ in mystery

Your Answer: | Correct Answer: A;C | Not Attempted | Time taken: 27min 41sec | Discuss

Q #10 | Multiple Select Type | Award: 1 | Penalty: 0 | Programming in C

How do you check if the string "mew" is present in the following nested list?

```
myTeam = [["eevee", "togepi"], ["mew", "mewtwo"], ["dragonite", "gengar"]]
```

Which of the following expressions will evaluate to True?

A.
```
"mew" in [item for sublist in myTeam for item in sublist]
```

B.
```
"mew" in [myTeam[1][0]]
```

C.
```
"mew" in [sublist[0] for sublist in myTeam]
```

D.
```
"mew" in [pokemon for sublist in myTeam for pokemon in myTeam]
```

Your Answer: | Correct Answer: A;B;C | Not Attempted | Time taken: 00min 00sec | Discuss

Q #11 | Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

What are the contents of the list combined_phrases after the following code is executed?

```
combined_phrases = [x + y for x in ['a', 'the', 'one']
                    for y in [' car', ' fish']]
```

A.
```
['a car', 'the car', 'one car', 'a fish', 'the fish', 'one fish']
```

B.
```
['a car', 'a fish', 'the car', 'the fish', 'one car', 'one fish']
```

C.
```
[['a car', 'a fish'], ['the car', 'the fish'], ['one car', 'one fish']]
```

D.
```
['a car fish', 'the car fish', 'one car fish']
```

Your Answer: | Correct Answer: B | Not Attempted | Time taken: 00min 00sec | Discuss

Q #12 | Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

What does the following list comprehension evaluate to?

```
[x+y for x in range(1,4) for y in range(2,6) if x < y]
```

A. $[3, 4, 5, 5, 6, 7, 6, 7, 8]$

B. $[3, 4, 5, 6, 5, 6, 7, 7, 8]$

C. $[3, 4, 5, 6, 7, 5, 6, 7, 8, 7, 8, 9, 9, 10]$

D. $[3, 4, 5, 5, 6, 7, 6, 7, 8, 9, 7, 8, 9, 10]$

Your Answer: | Correct Answer: B | Not Attempted | Time taken: 00min 00sec | Discuss

Q #13 | Numerical Type | Award: 2 | Penalty: 0 | Programming in C

How many stars $(*)$ will the following snippet send to the console?

```
    lst = [[c for c in range(r)] for r in range(3)]
    for x in lst:
        for y in x:
            if y < 2:
5.              print('*')
```

Your Answer: | Correct Answer: 3 | Not Attempted | Time taken: 00min 00sec | Discuss

Q #14 | Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

Consider the dictionary d = $\{'a' : 1, 'b' : 2, \ 'c' : 3, 'd' : 4\}$.
A new dictionary y is created using the following:

```
    y = {x: d[x] + len(x) for x in d if d[x] % 2 == 0 and x < 'd'}
```

What is the value of y ?

A. $\{$ 'a': 2, 'b': 3$\}$

B. $\{$ 'b': 3$\}$

C. $\{$ 'b': 4, 'd': 5$\}$

D. $\{\}$

Your Answer: | Correct Answer: B | Not Attempted | Time taken: 00min 00sec | Discuss

Q #15 | Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

L1 = ["Yahoo", "Reddit", 11, 7]
Which line of code does NOT do exactly the same things as the other three?
Circle one answer.

A.
```
    L2 = L1[-4:4]
```

B.
```
L2 = L1[:]
```

C.
```
L2 = list(L1)
```

D.
```
L2 = L1[0] + L1[1] + L1[2] + L1[3]
```

Your Answer: | Correct Answer: D | Not Attempted | Time taken: 00min 00sec | Discuss

Copyright & Stuff