

CRYPTOGRAPHIC ASSUMPTIONS

ADVANCED TOPICS IN ~~CYBERSECURITY~~ CRYPTOGRAPHY (7CCSMATC)

Martin R. Albrecht

OUTLINE

Digital Signatures

Cryptographic Assumptions

Minicrypt vs Cryptomania

The Poverty of Public-Key Cryptography

Post-Quantum Era

DIGITAL SIGNATURES

DIGITAL SIGNATURES: SYNTAX AND CORRECTNESS

A signature scheme Σ consists of three PPT algorithms (KeyGen, Sign, Verify) such that:

KeyGen a randomised algorithm that takes a security parameter 1^λ and outputs the **verification** and **signing key**, respectively. We write $(vk, sk) \leftarrow \$ \text{KeyGen}(1^\lambda)$.

Sign a randomised or deterministic algorithm that takes a signing key sk , a message m and outputs a signature σ . We write $\sigma \leftarrow \text{Sign}(sk, m)$ or $\sigma \leftarrow \text{Sign}(sk, m; r)$ to unearth the used randomness explicitly.

Verify a deterministic algorithm that takes a verification key vk , a signature σ and a message m and outputs a bit b , with $b = 1$ meaning the signature is valid. We write $b \leftarrow \text{Verify}(vk, \sigma, m)$.

We require that except with negligible probability over $(vk, sk) \leftarrow \text{KeyGen}(1^\lambda)$ and potentially the randomness used in Sign that:

$$\text{Verify}(vk, \text{Sign}(sk, m), m) = 1 \text{ for all } m.$$

DIGITAL SIGNATURES: WHAT SHOULD THEY DO?

What do you think should be the security goal of a digital signature scheme?

DIGITAL SIGNATURES: SECURITY ((E/S)UF-CMA, TRADITIONAL)

“... unforgeability under chosen message attacks”

(E/S)UF-CMA	$S(m)$
1: $\mathcal{Q} \leftarrow \emptyset;$	1: $\sigma \leftarrow \Sigma.\text{Sign}(\text{sk}, m)$
2: $\text{vk}, \text{sk} \leftarrow \Sigma.\text{KeyGen}(1^\lambda);$	2: $\mathcal{Q} \leftarrow \mathcal{Q} \cup \{(m, \sigma)\}$
3: $(m^*, \sigma^*) \leftarrow \mathcal{A}^S(\text{vk});$	3: return σ
4: $\text{sig}_\checkmark \leftarrow \Sigma.\text{Verify}(\text{vk}, \sigma^*, m^*) = 1$	
5: return $\text{sig}_\checkmark \wedge (m^*, \cdot) \notin \mathcal{Q} \quad // \text{ EUF-CMA: “existential”}$	
6: return $\text{sig}_\checkmark \wedge (m^*, \sigma^*) \notin \mathcal{Q} \quad // \text{ SUF-CMA: “strong”}$	

$$\text{Adv}_{\mathcal{A}, \Sigma}^{(\text{e/s})\text{uf-cma}}(\lambda) := \Pr[(\text{E/S})\text{UF-CMA}_{\Sigma}^{\mathcal{A}}(\lambda) \Rightarrow 1]$$

INDISTINGUISHABILITY-BASED DEFINITION

SUF-CMA	$S(m)$	$V(m, \sigma)$
1: $\mathcal{Q} \leftarrow \emptyset;$	1: $\sigma \leftarrow \Sigma.\text{Sign}(\text{sk}, m)$	1: if $b = 1$ then
2: $b \leftarrow \{0, 1\}$	2: $\mathcal{Q} \leftarrow \mathcal{Q} \cup \{(m, \sigma)\}$	2: return $\Sigma.\text{Verify}(\text{vk}, \sigma, m)$
3: $\text{vk}, \text{sk} \leftarrow \Sigma.\text{KeyGen}(1^\lambda);$	3: return σ	3: else
4: $b' \leftarrow \mathcal{A}^{S, V}(\text{vk});$		4: return $(m, \sigma) \in \mathcal{Q}$
5: return $b = b'$		

Mike Rosulek. **The Joy of Cryptography**. <https://joyofcryptography.com>. self published, 2021

CRYPTOGRAPHIC ASSUMPTIONS

SANDCASTLES?

'Cryptographers seldom sleep well' (Silvio Micali). Their careers are frequently based on very precise complexity-theoretic assumptions, which could be shattered the next morning. A polynomial time algorithm for factoring would certainly prove more crushing than any paltry fluctuation of the Dow Jones." — Joe Kilian. **Founding Cryptography on Oblivious Transfer**. In: *20th ACM STOC*. ACM Press, May 1988, pp. 20–31. DOI: 10.1145/62212.62215



1997 Gödel Prize

2004 RSA Award for Excellence in Mathematics

2007 Member of the National Academy of Sciences

2007 Fellow of the IACR

2012 Turing Award

2017 ACM Fellow

Symmetric Primitives

- Block and stream ciphers (AES, ChaCha20, ...)
- Authentication codes (HMAC, Poly1305, ...)
- Hash functions (SHA-2, SHA-3, ...)

Asymmetric Primitives

- Key agreement and public-key encryption (RSA, DH, ECDH, ML-KEM, ...)
- Digital signatures (RSA, DSA, ECDSA, ML-DSA, ...)

MINICRYPT VS CRYPTOMANIA

ONE-WAY FUNCTIONS

Definition (OWF)

A function $f : \{0, 1\}^n \rightarrow \{0, 1\}^m$ is **one-way** if the following two conditions hold:

1. **(Easy to compute)** There exists a polynomial-time algorithm $\mathcal{A}_f(x)$ computing f , i.e. $\mathcal{A}_f(x) = f(x)$ for all x .
2. **(Hard to invert)** for every probabilistic polynomial-time $\mathcal{B}$, we have:

$$\Pr_{x \leftarrow \{0,1\}^n} [\mathcal{B}(1^n, f(x)) \in f^{-1}(f(x))] < 1/\text{poly}(n).$$

OWF _{f}

```
1:  $x \leftarrow \{0, 1\}^n$ 
2:  $x' \leftarrow \mathcal{A}(f(x))$ 
3: return  $f(x') = f(x)$ 
```

Assumption

We do not **know** if one-way functions exist!

ONE-WAY FUNCTIONS IMPLY A LOT

- OWFs $\Rightarrow$ PRGs¹
- PRGs $\Rightarrow$ PRFs²
- PRFs $\Rightarrow$ PRPs³
- OWFs $\Rightarrow$ Digital Signatures (sketch this lecture)
- OWFs $\stackrel{?}{\Rightarrow}$ Key Exchange/Public Key Encryption (unlikely!)

¹Manuel Blum and Silvio Micali. **How to Generate Cryptographically Strong Sequences of Pseudorandom Bits**. In: *SIAM Journal on Computing* 13.4 (1984), pp. 850–864.

²Oded Goldreich, Shafi Goldwasser, and Silvio Micali. **How to Construct Random Functions**. In: *Journal of the ACM* 33.4 (Oct. 1986), pp. 792–807. DOI: 10.1145/6490.6503.

³Michael Luby and Charles Rackoff. **How to construct pseudorandom permutations from pseudorandom functions**. In: *SIAM Journal on Computing* 17.2 (1988).

ONE-TIME DIGITAL SIGNATURES FROM OWFS

- **KeyGen** $f(\cdot)$ is a one-way function. Sample random numbers


$$(a_{0,0}, a_{0,1}), (a_{1,0}, a_{1,1}), \dots, (a_{|m|-1,0}, a_{|m|-1,1}).$$

Publish $f(a_{i,j})$ for all $a_{i,j}$.

- **Sign** Let b_i be the bits of m . For each bit b_i , publish a_{i,b_i} .
- **Verify** Check that a_{i,b_i} indeed maps to $f(a_{i,j})$ in the public key.

Leslie Lamport. **Constructing Digital Signatures from a One-way Function**. Technical Report SRI-CSL-98. SRI International Computer Science Laboratory, Oct. 1979

MERKLE TREES

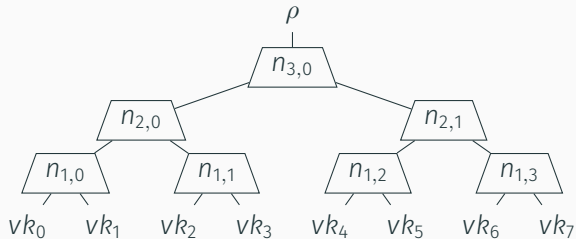

- $n_{1,0} := f(vk_0, vk_1)$ etc.
- publish $n_{3,0}$ as the vk
- pick a one-time keypair, e.g. (vk_0, sk_0) , and sign with Lamport to produce σ .
- signature is $(\sigma, vk_0, vk_1, n_{1,1}, n_{2,1})$

References

- Ralph Charles Merkle. **Secrecy, authentication, and public key systems**. PhD thesis. Stanford university, 1979 (requires collision resistance)
- Moni Naor and Moti Yung. **Universal One-Way Hash Functions and their Cryptographic Applications**. In: *21st ACM STOC*. ACM Press, May 1989, pp. 33–43. DOI: 10.1145/73007.73011 (based on OWFs)

Blockchains are degenerated Merkle trees.

WHO WOULD DO SUCH A THING?

SPHINCS⁺

Stateless hash-based signatures

[Home](#)[Resources](#)[Software](#)[Credits](#)

SPHINCS⁺

SPHINCS⁺ is a stateless hash-based signature scheme, which was submitted to the [NIST post-quantum crypto project](#). The design advances the SPHINCS signature scheme, which was presented at [EUROCRYPT 2015](#). It incorporates multiple improvements, specifically aimed at reducing signature size. For a quick overview of the changes from SPHINCS to SPHINCS⁺ see the [blog post by Andreas Hülsing](#). The submission proposes three different signature schemes:

- SPHINCS⁺-SHAKE256
- SPHINCS⁺-SHA-256
- SPHINCS⁺-Haraka

These signature schemes are obtained by instantiating the SPHINCS⁺ construction with SHAKE256, SHA-256, and

SPHINCS⁺ Team Leader and Primary Submitter

- [Andreas Hülsing, Eindhoven University of Technology \(NL\)](#)

SPHINCS⁺ Team

- [Jean-Philippe Aumasson](#)
- [Daniel J. Bernstein, University of Illinois at Chicago \(US\)](#) and [Ruhr University Bochum \(DE\)](#) and [Academia Sinica \(TW\)](#)
- [Ward Beullens, KU Leuven \(BE\)](#)
- [Christoph Dobraunig, Graz University of Technology \(AT\)](#)

WHO WOULD DO SUCH A THING?



Information Technology Laboratory

COMPUTER SECURITY RESOURCE CENTER

Search CSRC

CSRC MENU



PUBLICATIONS

FIPS 205

Stateless Hash-Based Digital Signature Standard



Date Published: August 13, 2024

Author(s)

National Institute of Standards and Technology

Abstract

This standard specifies the stateless hash-based digital signature algorithm (SLH-DSA). Digital signatures are used to detect unauthorized modifications to data and to authenticate the identity of the signatory. In addition, the recipient of signed data can use a digital signature as evidence in demonstrating to a third party that the signature was, in fact, generated by the claimed signatory. This is known as non-repudiation since the signatory cannot easily repudiate the signature at a later time. SLH-DSA is based on SPHINCS⁺, which was selected for standardization as part of the NIST Post-Quantum Cryptography Standardization process.

Keywords

computer security; cryptography; digital signatures; Federal Information Processing Standards; hash-based signatures; post-quantum; public-key cryptography

DOCUMENTATION

Publication:

<https://doi.org/10.6028/NIST.FIPS.205>

[Download URL](#)

Supplemental Material:

[Federal Register Notice](#)

[NIST News article](#)

[PQC Standardization Project](#)

Related NIST Publications:

[FIPS 203](#)

[FIPS 204](#)

Document History:

08/24/23: FIPS 205 (Draft)

08/13/24: FIPS 205 (Final)

KEY EXCHANGE FROM OWFs?

- Bob constructs n puzzles, each being an encryption of two random numbers $p_i := \text{Enc}(k_i, (x_i, y_i, 0))$, and sends them to Alice.
- Alice picks a puzzle at random, say p_j , and brute-forces the decryption.⁴
- Alice encrypts her message using y_j as the key and sends x_j along in the clear.
- Bob uses x_j to identify which y_j to use for decryption.

Ralph C Merkle. **Secure communications over insecure channels**. In: *Communications of the ACM* 21.4 (1978), pp. 294–299

⁴We assume this can be done in n steps and we assume Alice can decide when she guessed the correct decryption, e.g. by checking that zero is the last entry of the plaintext.

“KEY EXCHANGE” FROM OWFS

- Cost for Alice and Bob: $\mathcal{O}(n)$.
- Cost for an adversary: $\mathcal{O}(n^2)$: brute-force many puzzles to find the correct one

Boaz Barak and Mohammad Mahmoody-Ghidary. **Merkle’s Key Agreement Protocol is Optimal: An $\mathcal{O}(n^2)$ Attack on Any Key Agreement from Random Oracles**. In: *Journal of Cryptology* 30.3 (July 2017), pp. 699–734. DOI: 10.1007/s00145-016-9233-9⁵

⁵The gap goes away completely against a quantum adversary.



- 1996** Paris Kanellakis Award (from the ACM) for the Invention of public key cryptography.
- 2000** RSA Award for Excellence in Mathematics for the invention of public key cryptography.
- 2008** International Association for Cryptographic Research (IACR) fellow for the invention of public key cryptography
- 2010** IEEE Hamming Medal for the invention of public key cryptography
- 2011** National Inventors Hall of Fame, for the invention of public key cryptography

FIVE WORLDS



Algorithmica $P = NP$ or something “morally equivalent” like fast probabilistic algorithms for NP .

Heuristica NP problems are hard in the worst case but easy on average.

Pessiland NP problems hard on average but no one-way functions exist. We can easily create hard NP problems, but not hard NP problems where we know the solution.

Minicrypt One-way functions exist but we do not have public-key cryptography.

Cryptomania Public-key cryptography is possible, i.e. two parties can exchange secret messages over open channels.

Credit: <https://blog.computationalcomplexity.org/2004/06/impagliazzos-five-worlds.html>

Russell Impagliazzo. **A Personal View of Average-Case Complexity**. In: *Proceedings of the Tenth Annual Structure in Complexity Theory Conference*. IEEE Computer Society, 1995, pp. 134–147. DOI: 10.1109/SCT.1995.514853. URL: <https://doi.org/10.1109/SCT.1995.514853>

Minicrypt

- Block and stream ciphers
- Hash functions^a
- Authentication codes
- **Digital signatures**

^a**Collision resistance** is not known to be in Minicrypt and evidence exists to the contrary: Nir Bitansky and Akshay Degwekar. **On the Complexity of Collision Resistant Hash Functions: New and Old Black-Box Separations**. In: *TCC 2019, Part I*. ed. by Dennis Hofheinz and Alon Rosen. Vol. 11891. LNCS. Springer, Cham, Dec. 2019, pp. 422–450. DOI: 10.1007/978-3-030-36030-6_17

Cryptomania

- Key agreement and public-key encryption
- ...

PUBLIC-KEY ENCRYPTION (PKE)

A Public-Key Encryption (PKE) scheme is a triple of PPT algorithms (KeyGen, Enc, Dec) with the following syntax and operation:

- KeyGen** The key generation algorithm is a randomised algorithm taking as input a security parameter 1^λ and outputs a public/secret key-pair (pk, sk) , the **public key** and the **secret key** respectively.
- Enc** The encryption algorithm is a randomised algorithm taking as input a public-key pk and a message m and outputs an encryption of m under pk .
- Dec** The decryption algorithm is a deterministic algorithm taking as input a ciphertext c and a secret-key sk , and outputs a message m (or an error message indicating a decryption failure).

We require that except with negligible probability over $(pk, sk) \leftarrow \text{KeyGen}(1^\lambda)$ and potentially the randomness used in Enc, that it holds:

$$\text{Dec}(sk, \text{Enc}(pk, m)) = m \text{ for all } m.$$

KEY ENCAPSULATION MECHANISM (KEM)

A Key Encapsulation Mechanism (KEM) is a triple of PPT algorithms (KeyGen, Encap, Decap) with the following syntax and operation:

- KeyGen** The key generation algorithm is a randomised algorithm taking as input a security parameter 1^λ and outputs a public/secret key-pair (pk, sk) , the **public key** and the **secret key** respectively.
- Encap** The encapsulation algorithm is a randomised algorithm taking as input a public-key pk and outputs a key $k \in \mathcal{K}$ and an encapsulation of k under pk .
- Decap** The decapsulation algorithm is a deterministic algorithm taking as input a ciphertext c and a secret-key sk , and outputs a key k (or an error message indicating a decapsulation failure).

We require that except with negligible probability over $(pk, sk) \leftarrow \text{KeyGen}(1^\lambda)$ and potentially the randomness used in Encap, that it holds:

$$c, k \leftarrow \$ \text{Encap}(pk), \text{Decap}(sk, c) = k.$$

IND-CPA _{PKE}	$C(m_0, m_1)$
1 : $pk, sk \leftarrow \$ \text{KeyGen}(1^\lambda)$	1 : if $ m_0 \neq m_1 $ then
2 : $b \leftarrow \$ \{0, 1\}$	2 : return $\perp$
3 : $b' \leftarrow \mathcal{D}^c(pk)$	3 : $c \leftarrow \$ \text{Enc}(pk, m_b)$
4 : return $b = b'$	4 : return c

Figure 1: IND-CPA Security Game (PKE).

$$\text{Adv}_{\text{PKE}}^{\text{ind-cpa}}(\mathcal{D}) = \left| \Pr[\text{IND-CPA}^{\mathcal{D}} = 1] - 1/2 \right|$$

IND-CPA _{KEM}	C()
1 : $pk, sk \leftarrow \$ \text{KeyGen}(1^\lambda)$	1 : $k_0 \leftarrow \$ \mathcal{K}$
2 : $b \leftarrow \$ \{0, 1\}$	2 : $c, k_1 \leftarrow \$ \text{Encap}(pk)$
3 : $b' \leftarrow \mathcal{D}^c(pk)$	3 : return c, k_b
4 : return $b = b'$	

Figure 2: IND-CPA Security Game (KEM).

$$\text{Adv}_{\text{KEM}}^{\text{ind-cpa}}(\mathcal{D}) = \left| \Pr[\text{IND-CPA}^{\mathcal{D}} = 1] - 1/2 \right|$$

PKE $\rightarrow$ KEM Encrypt a random message.

KEM+Minicrypt $\rightarrow$ PKE Encrypt a key for a symmetric encryption scheme.

THE POVERTY OF PUBLIC-KEY CRYPTOGRAPHY

Symmetric Primitives

- Block and stream ciphers (AES, ChaCha20, ...)
- Authentication codes (HMAC, Poly1305, ...)
- Hash functions (SHA-2, SHA-3, ...)

Asymmetric Primitives

- Key agreement and public-key encryption (RSA, DH, ECDH, ...)
- Digital signatures (RSA, DSA, ECDSA, ...)

THE WEALTH OF SYMMETRIC CRYPTOGRAPHY



Indeed, it seems that “you can’t throw a rock without hitting a one-way function” in the sense that, once you cobble together a large number of simple computational operations then, unless the operations satisfy some special property such as linearity, you will typically get a function that is hard to invert.^a

^aBoaz Barak. **The Complexity of Public-Key Cryptography**. Cryptology ePrint Archive, Report 2017/365. 2017. URL: <https://eprint.iacr.org/2017/365>.

THE WEALTH OF SYMMETRIC CRYPTOGRAPHY?



Orr Dunkelman

@CryptoOrrDun

...

Unless you use Monkey Duplex, there is a lot of science involved in determining how many rounds are needed for security.

This tweet not only rude, it is ill-informed (and would help people believe they should write their own crypto, because if a monkey can, why can't they)



Boaz Barak  @boazbaraktcs · Oct 25, 2021

Replying to @boazbaraktcs

2/20 Private key encryption often boils down to simply combining many non-local and non-linear operations. Making it efficient is challenging but if willing to lose some, a Monkey with a typewriter could probably construct a block cipher. See cambridge.org/core/journals/... by @wtgowers

12:25 PM · Oct 30, 2021

THE POVERTY OF PUBLIC-KEY CRYPTOGRAPHY

The Internet runs on factoring and discrete logarithms

RIVEST-SHAMIR-ADLEMAN (RSA)

Factoring

Let p, q be primes of λ bits. Given $n := p \cdot q$, find p .

RSA

Let $n := p \cdot q$ be the product of two λ -bit primes. Let $e \nmid (p-1) \cdot (q-1)$. Given n, e and $c := m^e \bmod n$ for $m \leftarrow \mathbb{Z}_n$, find m .

Ronald L. Rivest, Adi Shamir, and Leonard M. Adleman. **A Method for Obtaining Digital Signatures and Public-Key Cryptosystems**. In: *Communications of the Association for Computing Machinery* 21.2 (Feb. 1978), pp. 120–126.
DOI: 10.1145/359340.359342

- We'd **like** to say that RSA encryption/decryption is based on factoring, but such a reduction is not know
 - If factoring is easy then RSA is insecure
 - RSA could be insecure and factoring hard^a
- Rabin encryption ($\approx$ RSA with $e = 2$) is based on factoring

^a... on a classical computer, we'll get to that shortly

DIFFIE-HELLMAN (DH)

Discrete Logarithms

Let p be a λ -bit prime and let g be a generator of the multiplicative group $\mathbb{Z}_p^*$. Given $g^a \bmod p$ find a .

DH

Let p be a λ -bit prime and let g be a generator of the multiplicative group $\mathbb{Z}_p^*$. Given $g^a \bmod p$, $g^b \bmod p$ and u , decide if $u = g^{ab}$ or random.

Whitfield Diffie and Martin E. Hellman. **New Directions in Cryptography**. In: *IEEE Transactions on Information Theory* 22.6 (1976), pp. 644–654. DOI: 10.1109/TIT.1976.1055638

- We'd **like** to say that the DH key exchange is based on discrete logarithms, but such a reduction is not known
 - If discrete logs are easy, DH is insecure
 - DH could be easy and discrete logarithms hard^a

^a... on a classical computer, we'll get to that shortly

DIFFIE-HELLMAN (DH)

- We didn't use any properties of $\mathbb{Z}_p^*$ except that it is a group where discrete logarithms are hard.
- Elliptic curves are also groups where it is believed to be hard to compute discrete logarithms⁶
 - Indeed, it is believed only generic algorithms apply, in contrast to $\mathbb{Z}_p^* \Rightarrow$ much smaller parameters
- Elliptic curves are usually written additively and not multiplicative.

⁶on a classical computer ...

DIFFIE-HELLMAN (DH)

Discrete Logarithms

Let p be prime and let g be a generator of the multiplicative group $\mathbb{Z}_p^*$. Given $g^a \bmod p$ find a .

DH

Let p be prime and let g be a generator of the multiplicative group $\mathbb{Z}_p^*$. Given $g^a \bmod p$, $g^b \bmod p$ and u , decide if $u = g^{ab}$ or random.

Discrete Logarithms

Let $\mathcal{G}$ be a group of order p and let G be a generator of $\mathcal{G}$. Given $a \cdot G$ for $a \in \mathbb{Z}_p$ find a .^a

DH

Let $\mathcal{G}$ be a group of order p and let G be a generator of $\mathcal{G}$. Given $(G, a \cdot G, b \cdot G, U)$ for $a, b \in \mathbb{Z}_p$ decide if $U = a \cdot b \cdot G$ or random in $\mathcal{G}$.

^aHere, $a \cdot G$ means to add G to itself a times.


POST-QUANTUM ERA

QUANTUM COMPUTERS


- A quantum computer makes use of quantum effects (superpositions and entanglement) to perform computations.
 - Quantum computers are not **faster** than classical computers, they are **different**.
 - Some computations are easy on a quantum computer that are – as far as we know – hard on a classical computer.
-
- Small universal quantum computers exist.
 - Key challenge is to scale them up by making them more stable.
 - There is a critical point where we can scale up further using error correction.



IBM QUANTUM COMPUTING TIMELINE

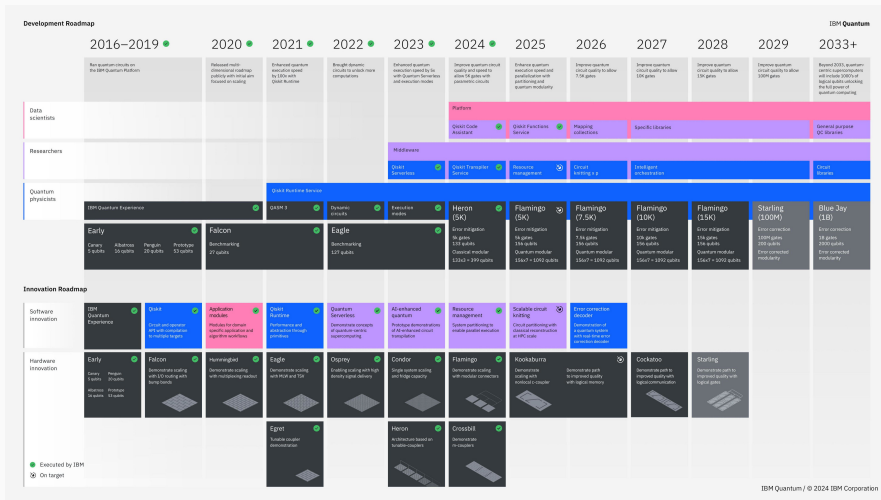

LANDSCAPE OF QUANTUM COMPUTING IN 2025

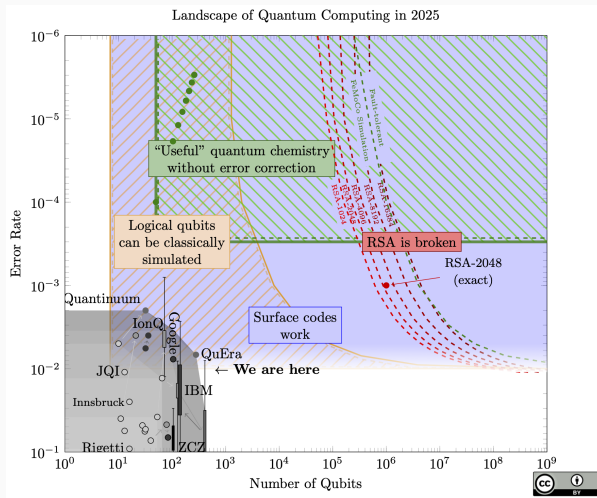

SYMMETRIC PRIMITIVES: QUANTUM COMPUTING PERSPECTIVE (GOOD NEWS)

Best known quantum algorithms for attacking symmetric cryptography are based on Grover's algorithm.

- Search key space of size 2^n in $2^{n/2}$ operations: AES-256 $\rightarrow$ 128 “quantum bits of security”.
- Taking all costs into account: $> 2^{152}$ classical operations for AES-256.⁷
- Assuming a max depth of 2^{96} for a quantum circuit: overall AES-256 cost is $\approx 2^{190}$.
- Does not parallelise: have to wait for 2^x steps, cannot buy 2^{32} quantum computers and wait $2^x/2^{32}$ steps.

⁷Samuel Jaques, Michael Naehrig, Martin Roetteler, and Fernando Virdia. **Implementing Grover Oracles for Quantum Key Search on AES and LowMC**. In: *EUROCRYPT 2020, Part II*. ed. by Anne Canteaut and Yuval Ishai. Vol. 12106. LNCS. Springer, Cham, May 2020, pp. 280–310. DOI: 10.1007/978-3-030-45724-2_10.

“BASED ON VERY PRECISE COMPLEXITY-THEORETIC ASSUMPTIONS, WHICH COULD BE SHATTERED THE NEXT MORNING”

Polynomial-Time Algorithms for Prime Factorization and Discrete Logarithms on a Quantum Computer*

Peter W. Shor[†]

Abstract

A digital computer is generally believed to be an efficient universal computing device; that is, it is believed able to simulate any physical computing device with an increase in computation time by at most a polynomial factor. This may not be true when quantum mechanics is taken into consideration. This paper considers factoring integers and finding discrete logarithms, two problems which are generally thought to be hard on a classical computer and which have been used as the basis of several proposed cryptosystems. Efficient randomized algorithms are given for these two problems on a hypothetical quantum computer. These algorithms take a number of steps polynomial in the input size, e.g., the number of digits of the integer to be factored.

“BASED ON VERY PRECISE COMPLEXITY-THEORETIC ASSUMPTIONS, WHICH COULD BE SHATTERED THE NEXT MORNING”



NIST selected:

Kyber A lattice-based KEM (MLWE Problem)

Dilithium A lattice-based signature scheme (MSIS/MLWE Problems)

Falcon A lattice-based signature scheme (NTRU Problem)

SPHINCS+ A hash-based signature scheme

HQC A code-based KEM (decoding random quasi-cyclic codes)

“BASED ON VERY PRECISE COMPLEXITY-THEORETIC ASSUMPTIONS, WHICH COULD BE SHATTERED THE NEXT MORNING” (SIKE ATTACK)

Wouter Castryck and Thomas Decru. **An efficient key recovery attack on SIDH (preliminary version)**. Cryptology ePrint Archive, Report 2022/975. 2022. URL: <https://eprint.iacr.org/2022/975>

- SIDH was “A decade unscathed” [Cos21]
- SIKE even *lowered* parameters during NIST PQC (following [JS19])
- qualified researchers tried to break it (e.g. [MP19])

Total Break

All SIKE parameters can be broken in about 2 hours on a single-core laptop now [OP22].

This was an earthquake.

“BASED ON VERY PRECISE COMPLEXITY-THEORETIC ASSUMPTIONS, WHICH COULD BE SHATTERED THE NEXT MORNING” (RAINBOW ATTACK)

Breaking Rainbow Takes a Weekend on a Laptop

Ward Beullens 

IBM Research, Zurich, Switzerland
wbe@zurich.ibm.com

Abstract. This work introduces new key recovery attacks against the Rainbow signature scheme, which is one of the three finalist signature schemes still in the NIST Post-Quantum Cryptography standardization project. The new attacks outperform previously known attacks for all the parameter sets submitted to NIST and make a key-recovery practical for the SL 1 parameters. Concretely, given a Rainbow public key for the SL 1 parameters of the second-round submission, our attack returns the corresponding secret key after on average 53 hours (one weekend) of computation time on a standard laptop.

- Rainbow was a NIST finalist^a
- Can be remedied by increasing parameters, but makes it inefficient

^aWard Beullens. **Breaking Rainbow Takes a Weekend on a Laptop**. In: *CRYPTO 2022, Part II*. ed. by Yevgeniy Dodis and Thomas Shrimpton. Vol. 13508. LNCS. Springer, Cham, Aug. 2022, pp. 464–479. DOI: 10.1007/978-3-031-15979-4_16.

This was surprising.

NIST SIGNATURE SUBMISSIONS WITH VULNERABILITIES IN SPECIFICATION (2024)

3WISE,⁸ AIMER, ALTEQ, Ascon-Sign, Biscuit,⁹ CROSS, DME-Sign,¹⁰ EHT,¹¹ EagleSign,¹² Enhanced pqsigRM,¹³ FAEST, FuLeeca,¹⁴ HAETAE, HAWK, HPPC,¹⁵ HuFu,¹⁶ KAZ-SIGN,¹⁷ LESS,¹⁸ MAYO, MEDS,¹⁹ MIRA, MQOM, MiRith, PERK, PROV, Preon, QR-UOV, RYDE, Raccoon, SDitH,²⁰ SNOVA, SPHINCS-alpha, SQIsign, SQUIRRELS, TUOV, UOV, VOX, Wave, Xifrat1-Sign.I,²¹ eMLE-Sig 2.0

⁸<https://groups.google.com/a/list.nist.gov/g/ppc-forum/c/fsfGqHCgGvY>

⁹<https://groups.google.com/a/list.nist.gov/g/ppc-forum/c/sw8NueiNek0>

¹⁰<https://groups.google.com/a/list.nist.gov/g/ppc-forum/c/E0mMMGI5eWE>

¹¹https://groups.google.com/a/list.nist.gov/g/ppc-forum/c/mFl_5Rq6-RU

¹²<https://groups.google.com/a/list.nist.gov/g/ppc-forum/c/zas5PLiBe6A>

¹³<https://groups.google.com/a/list.nist.gov/g/ppc-forum/c/yQ1CK0LbGng>

¹⁴<https://groups.google.com/a/list.nist.gov/g/ppc-forum/c/KvIege2EbuM>

¹⁵<https://groups.google.com/a/list.nist.gov/g/ppc-forum/c/KRh8w03PW4E>

¹⁶<https://groups.google.com/a/list.nist.gov/g/ppc-forum/c/Hq-wRFDbIaU>

¹⁷<https://groups.google.com/a/list.nist.gov/g/ppc-forum/c/aCbi4BMDeUs>

¹⁸<https://groups.google.com/a/list.nist.gov/g/ppc-forum/c/Z36SPZJI80k>

¹⁹<https://groups.google.com/a/list.nist.gov/g/ppc-forum/c/CtCe8WXUoXI>

²⁰https://groups.google.com/a/list.nist.gov/g/ppc-forum/c/d_BcUfFGl5o

²¹<https://groups.google.com/a/list.nist.gov/g/ppc-forum/c/9FXtBZKWueA>

This is to be expected.

NIST SIGNATURE SUBMISSIONS STATUS, ROUND 2

Codes CROSS, LESS

Isogenies SQIsign

Lattice Isomorphisms HAWK

MPC-in-the-Head Mirath, MQOM, PERK, RYDE, SDitH

MQ MAYO, QR-UOV, SNOVA, UOV

Symmetric FAEST

“Given the specialised hardware requirements of QKD over classical cryptographic key agreement mechanisms and the requirement for authentication in all use cases, the NCSC does not endorse the use of QKD for any government or military applications, and cautions against sole reliance on QKD for business-critical networks, especially in Critical National Infrastructure sectors. [...] NCSC advice is that the best mitigation against the threat of quantum computers is quantum-safe cryptography.”²²

²²<https://www.ncsc.gov.uk/whitepaper/quantum-security-technologies>

FIN

THANK YOU

- [Bar17] Boaz Barak. **The Complexity of Public-Key Cryptography**. Cryptology ePrint Archive, Report 2017/365. 2017. URL: <https://eprint.iacr.org/2017/365>.
- [BD19] Nir Bitansky and Akshay Degwekar. **On the Complexity of Collision Resistant Hash Functions: New and Old Black-Box Separations**. In: *TCC 2019, Part I*. Ed. by Dennis Hofheinz and Alon Rosen. Vol. 11891. LNCS. Springer, Cham, Dec. 2019, pp. 422–450. DOI: [10.1007/978-3-030-36030-6_17](https://doi.org/10.1007/978-3-030-36030-6_17).
- [Beu22] Ward Beullens. **Breaking Rainbow Takes a Weekend on a Laptop**. In: *CRYPTO 2022, Part II*. Ed. by Yevgeniy Dodis and Thomas Shrimpton. Vol. 13508. LNCS. Springer, Cham, Aug. 2022, pp. 464–479. DOI: [10.1007/978-3-031-15979-4_16](https://doi.org/10.1007/978-3-031-15979-4_16).

REFERENCES II

- [BM17] Boaz Barak and Mohammad Mahmoody-Ghidary. **Merkle's Key Agreement Protocol is Optimal: An $O(n^2)$ Attack on Any Key Agreement from Random Oracles**. In: *Journal of Cryptology* 30.3 (July 2017), pp. 699–734. DOI: [10.1007/s00145-016-9233-9](https://doi.org/10.1007/s00145-016-9233-9).
- [BM84] Manuel Blum and Silvio Micali. **How to Generate Cryptographically Strong Sequences of Pseudorandom Bits**. In: *SIAM Journal on Computing* 13.4 (1984), pp. 850–864.
- [CD22] Wouter Castryck and Thomas Decru. **An efficient key recovery attack on SIDH (preliminary version)**. Cryptology ePrint Archive, Report 2022/975. 2022. URL: <https://eprint.iacr.org/2022/975>.
- [Cos21] Craig Costello. **The Case for SIKE: A Decade of the Supersingular Isogeny Problem**. Cryptology ePrint Archive, Report 2021/543. 2021. URL: <https://eprint.iacr.org/2021/543>.

- [DH76] Whitfield Diffie and Martin E. Hellman. **New Directions in Cryptography**. In: *IEEE Transactions on Information Theory* 22.6 (1976), pp. 644–654. DOI: 10.1109/TIT.1976.1055638.
- [GGM86] Oded Goldreich, Shafi Goldwasser, and Silvio Micali. **How to Construct Random Functions**. In: *Journal of the ACM* 33.4 (Oct. 1986), pp. 792–807. DOI: 10.1145/6490.6503.
- [Imp95] Russell Impagliazzo. **A Personal View of Average-Case Complexity**. In: *Proceedings of the Tenth Annual Structure in Complexity Theory Conference*. IEEE Computer Society, 1995, pp. 134–147. DOI: 10.1109/SCT.1995.514853. URL: <https://doi.org/10.1109/SCT.1995.514853>.

REFERENCES IV

- [JNRV20] Samuel Jaques, Michael Naehrig, Martin Roetteler, and Fernando Virdia. **Implementing Grover Oracles for Quantum Key Search on AES and LowMC**. In: *EUROCRYPT 2020, Part II*. Ed. by Anne Canteaut and Yuval Ishai. Vol. 12106. LNCS. Springer, Cham, May 2020, pp. 280–310. DOI: 10.1007/978-3-030-45724-2_10.
- [JS19] Samuel Jaques and John M. Schanck. **Quantum Cryptanalysis in the RAM Model: Claw-Finding Attacks on SIKE**. In: *CRYPTO 2019, Part I*. Ed. by Alexandra Boldyreva and Daniele Micciancio. Vol. 11692. LNCS. Springer, Cham, Aug. 2019, pp. 32–61. DOI: 10.1007/978-3-030-26948-7_2.
- [Kil88] Joe Kilian. **Founding Cryptography on Oblivious Transfer**. In: *20th ACM STOC*. ACM Press, May 1988, pp. 20–31. DOI: 10.1145/62212.62215.
- [Lam79] Leslie Lamport. **Constructing Digital Signatures from a One-way Function**. Technical Report SRI-CSL-98. SRI International Computer Science Laboratory, Oct. 1979.

- [LR88] Michael Luby and Charles Rackoff. **How to construct pseudorandom permutations from pseudorandom functions**. In: *SIAM Journal on Computing* 17.2 (1988).
- [Mer78] Ralph C Merkle. **Secure communications over insecure channels**. In: *Communications of the ACM* 21.4 (1978), pp. 294–299.
- [Mer79] Ralph Charles Merkle. **Secrecy, authentication, and public key systems**. PhD thesis. Stanford university, 1979.
- [MP19] Chloe Martindale and Lorenz Panny. **How to not break SIDH**. Cryptology ePrint Archive, Report 2019/558. 2019. URL: <https://eprint.iacr.org/2019/558>.
- [NY89] Moni Naor and Moti Yung. **Universal One-Way Hash Functions and their Cryptographic Applications**. In: *21st ACM STOC*. ACM Press, May 1989, pp. 33–43. DOI: 10.1145/73007.73011.

- [OP22] Rémy Oudompheng and Giacomo Pope. **A Note on Reimplementing the Castryck-Decru Attack and Lessons Learned for SageMath**. Cryptology ePrint Archive, Report 2022/1283. 2022. URL: <https://eprint.iacr.org/2022/1283>.
- [Ros21] Mike Rosulek. **The Joy of Cryptography**. <https://joyofcryptography.com>. self published, 2021.
- [RSA78] Ronald L. Rivest, Adi Shamir, and Leonard M. Adleman. **A Method for Obtaining Digital Signatures and Public-Key Cryptosystems**. In: *Communications of the Association for Computing Machinery* 21.2 (Feb. 1978), pp. 120–126. DOI: 10.1145/359340.359342.