
Game curve

# Untitled curve

X: X (0 to 100) | Y: Y (0 to 120) | 2 keyframes, Bezier spline

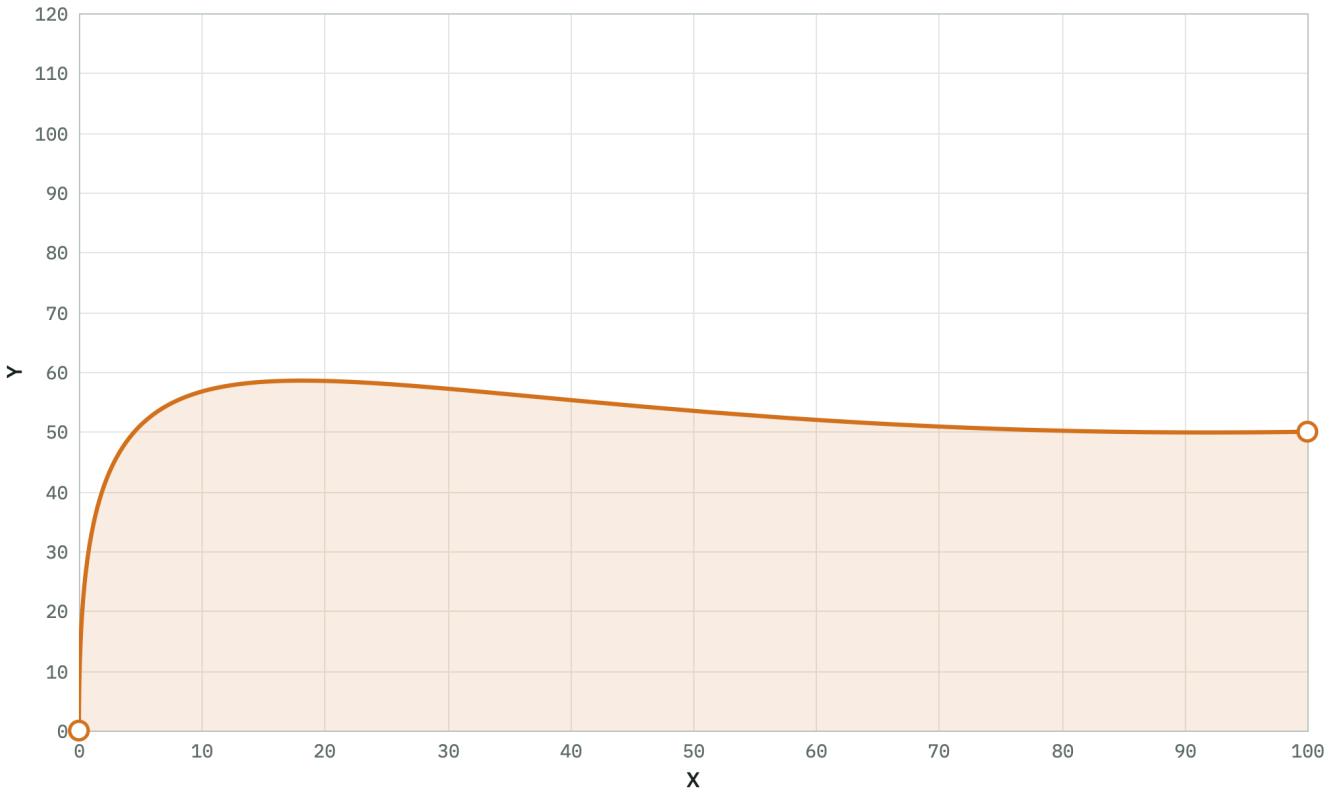


## HOW TO READ THIS CURVE

Y is a function of X, drawn as a cubic Bezier spline, like an animation spline editor. Keyframe types: smooth = aligned in/out handles, broken = independent handles, linear = straight line toward the neighbouring keyframe, hold = value stays flat until the next keyframe (a step). Handles longer than the gap to the neighbouring keyframe are shortened to fit. Below the first keyframe and above the last, the value holds at the end value. The sampled table is the exact output of the curve; treat it as the source of truth. The JSON at the end has every keyframe and handle, so the curve can be rebuilt exactly.

## KEYFRAMES

| X | Y | Type | X | Y | Type |
|---|---|---|---|---|---|
| 0 | 0 | smooth | 100 | 50 | smooth |

## SAMPLED VALUES (11 SAMPLES)

| X | Y | X | Y | X | Y |
|---|---|---|---|---|---|
| 0 | 0 | 40 | 55.3 | 80 | 50.16 |
| 10 | 56.72 | 50 | 53.49 | 90 | 49.88 |
| 20 | 58.49 | 60 | 51.98 | 100 | 50 |
| 30 | 57.19 | 70 | 50.87 | | |

## MACHINE-READABLE (JSON)


```
{"name":"Untitled curve","notes":"","x_axis":{"label":"X","min":0,"max":100},"y_axis":{"label":"Y","min":0,"max":120},"spline":"cubic bezier; handle offsets are relative to their keyframe in data units","keyframes":[{"x":0,"y":0,"type":"smooth","in":[0,-13.68564],"out":[0,92.17321]},{"x":100,"y":50,"type":"smooth","in":[-88.11446,-2.798209],"out":[36.23938,1.150837]}]}
```