

Fitting the outcome model

Malcolm Barrett
Stanford University

Outcome Model

```
1 library(broom)
2
3 lm(outcome ~ exposure, data = df, weights = wts) |>
4   tidy()
```



This will get us the point estimate



This will get NOT us the correct confidence intervals



Let's bootstrap them with rsample

1. Create a function to run your analysis once on a sample of your data

```
1 fit_ipw <- function(.split, ...) {  
2   .df <- as.data.frame(.split)  
3  
4   # fit propensity score model  
5   propensity_model <- glm(  
6     net ~ income + health + temperature,  
7     family = binomial(),  
8     data = .df  
9   )  
10  
11  # calculate inverse probability weights  
12  .df <- propensity_model |>  
13    augment(type.predict = "response", data = .df) |>  
14    mutate(wts = wt_ate(.fitted, net, exposure_type = "binary"))  
15  
16  # fit correctly bootstrapped ipw model  
17  lm(malaria_risk ~ net, data = .df, weights = wts) |>  
18    tidy()  
19 }
```

2. Use {rsample} to bootstrap our causal effect

```
1 library(rsample)
2
3 # fit ipw model to bootstrapped samples
4 bootstrapped_net_data <- bootstraps(
5   net_data,
6   times = 1000,
7   apparent = TRUE
8 )
9
10 bootstrapped_net_data
```

2. Use {rsample} to bootstrap our causal effect

```
# Bootstrap sampling with apparent sample
```

```
# A tibble: 1,001 × 2
```

	splits	id
	<list>	<chr>
1	<split [1752/640]>	Bootstrap0001
2	<split [1752/638]>	Bootstrap0002
3	<split [1752/638]>	Bootstrap0003
4	<split [1752/635]>	Bootstrap0004
5	<split [1752/639]>	Bootstrap0005
6	<split [1752/616]>	Bootstrap0006
7	<split [1752/651]>	Bootstrap0007
8	<split [1752/639]>	Bootstrap0008
9	<split [1752/628]>	Bootstrap0009
10	<split [1752/650]>	Bootstrap0010

2. Use {rsample} to bootstrap our causal effect

```
1 fit_ipw(bootstrapped_net_data$splits[[1]])
```

```
# A tibble: 2 × 5
```

	term	estimate	std.error	statistic	p.value
	<chr>	<dbl>	<dbl>	<dbl>	<dbl>
1	(Intercept)	43.4	0.470	92.3	0
2	netTRUE	-12.3	0.663	-18.5	7.88e-70

2. Use {rsample} to bootstrap our causal effect

```
1 ipw_results <- bootstrapped_net_data |>
2   mutate(boot_fits = map(splits, fit_ipw))
3
4 ipw_results
```


2. Use {rsample} to bootstrap our causal effect

```
# Bootstrap sampling with apparent sample
```

```
# A tibble: 1,001 × 3
```

	splits	id	boot_fits
	<list>	<chr>	<list>
1	<split [1752/640]>	Bootstrap0001	<tibble [2 × 5]>
2	<split [1752/638]>	Bootstrap0002	<tibble [2 × 5]>
3	<split [1752/638]>	Bootstrap0003	<tibble [2 × 5]>
4	<split [1752/635]>	Bootstrap0004	<tibble [2 × 5]>
5	<split [1752/639]>	Bootstrap0005	<tibble [2 × 5]>
6	<split [1752/616]>	Bootstrap0006	<tibble [2 × 5]>
7	<split [1752/651]>	Bootstrap0007	<tibble [2 × 5]>
8	<split [1752/639]>	Bootstrap0008	<tibble [2 × 5]>
9	<split [1752/628]>	Bootstrap0009	<tibble [2 × 5]>
10	<split [1752/650]>	Bootstrap0010	<tibble [2 × 5]>

2. Use `{rsample}` to bootstrap our causal effect

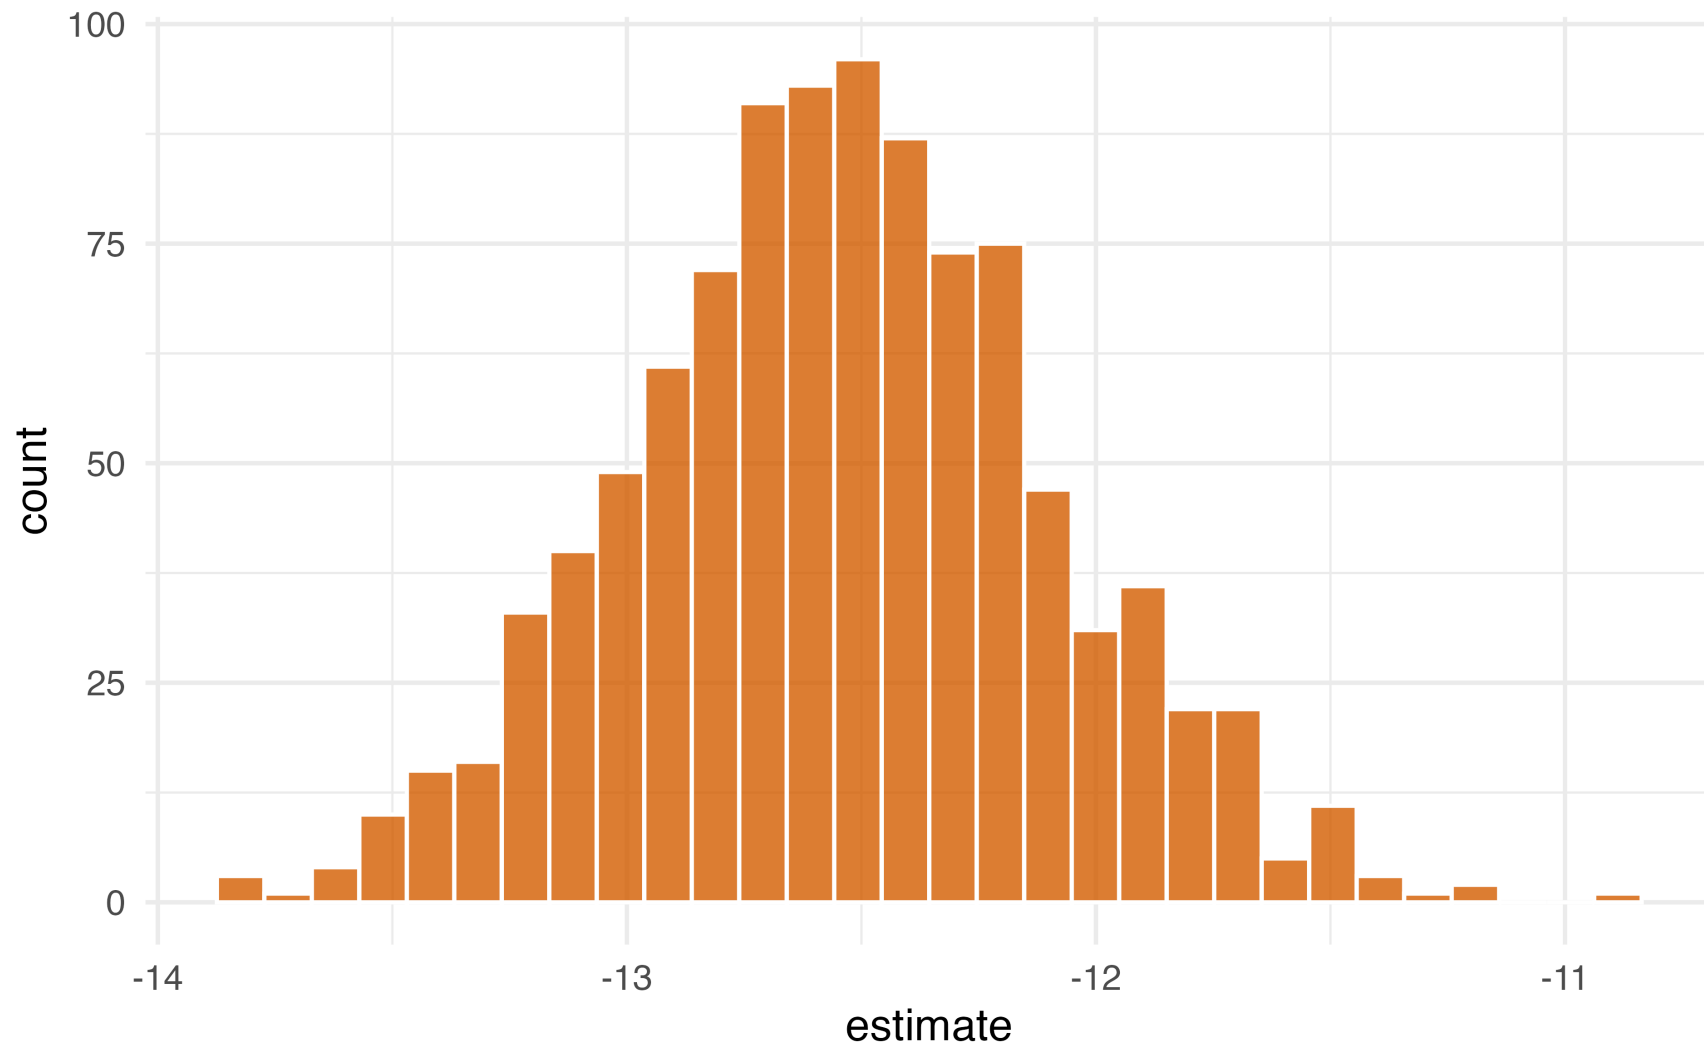

3. Pull out the causal effect

```
1 # get t-statistic-based CIs
2 boot_estimate <- int_t(ipw_results, boot_fits) |>
3   filter(term == "netTRUE")
4
5 boot_estimate
```

```
# A tibble: 1 × 6
  term      .lower .estimate .upper .alpha .method
  <chr>    <dbl>    <dbl>  <dbl>  <dbl>  <chr>
1 netTRUE -13.4      -12.5  -11.6   0.05 student-t
```

Your Turn

Create a function called `ipw_fit` that fits the propensity score model and the weighted outcome model for the effect between `park_extra_magic_morning` and `wait_minutes_posted_avg`

Using the `bootstraps()` and `int_t()` functions to estimate the final effect.