

MODEER


iOS & Android delivery roadmap

How Modeer could reach phones without
weakening what already works.

PROPOSED · NOTHING BUILT

Prepared 2026-09-15

For the owner and the incoming mobile team

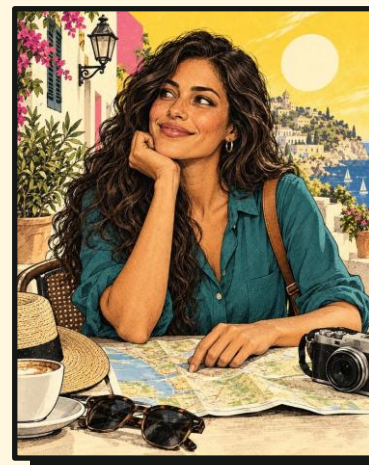

**Mobile starts only after the web
release gates close.**

First milestone: a two-platform prototype that signs in, streams,
survives a dropped connection and rejects a revoked session.

Mobile depends on the web release gates

Web today

- Streaming chat with 4 reply states
- Shared + private memory, goals
- Passwords, recovery codes, revocation
- Export and in-app deletion
- Verified locally, not on a real host

Still open

- Answer quality: 27 pass · 11 fail · 1 ungraded
- Real domain, remote backups, alert receipt
- Phones and screen reader untested
- Fixes still uncommitted

Mobile

- No app, API or store accounts yet
- Starts with a small feasibility spike
- Native password accounts wait for the gates

UNRESOLVED DEFECT

OPERATIONAL GATE

PROPOSED

The mobile MVP mirrors the web journeys

Journey	Already on the web	Mobile MVP work
Access	Password or key · recovery codes	Native forms · secure session · code handling
First use	Onboarding with Modeer	AI-sharing consent before the first request
Home & team	Hero · specialists · Today	Native tabs and portrait panels
Chat	POST + SSE · 4 reply states	Streaming transcript · reconnect reconciliation
Memory & goals	Shared/private facts · goals	Same controls, server-confirmed writes
Account rights	Export · delete · sign out all	In-app deletion · local purge
AI reports	Not built	Report action + operator triage (store requirement)

PROPOSED SCOPE

Not in the MVP

- Ask My Team
- Voice, widgets, attachments
- Push reminders
- Health, calendar, email links
- Payments, social login
- Offline AI answers

React Native with Expo — if the team fits

React Native + Expo

- Reuses TypeScript, types, tokens, art
- One mobile codebase
- Streaming fetch documented by Expo

Recommended, after a device spike

Flutter

- Reuses APIs, assets, design intent
- New language and UI layer
- Great rendering control

Viable with a Flutter team

Native iOS + Android

- Full platform control
- Two clients to build and keep in sync
- More release coordination

Only with platform specialists

Assumption: team skills are unknown — the owner should confirm before committing to a framework. A WebView wrapper is a demand test, not the product.

Reuse the backend; add what phones need

Reuse as-is


- Accounts, passwords, recovery codes, epochs
- Streaming runtime and 4 reply states
- Memory scope, validation, consent switch
- Quotas and refunds
- Export and deletion services
- Prompts, models, keys stay on the server

Build first (P0)


PROPOSED

- Native tokens: access + rotating refresh, per device
- Idempotency key and durable turn record
- Status endpoint to reconcile after reconnect
- Stable error codes
- Cursor pagination
- AI-report intake · web deletion page

Native sessions without weakening the web

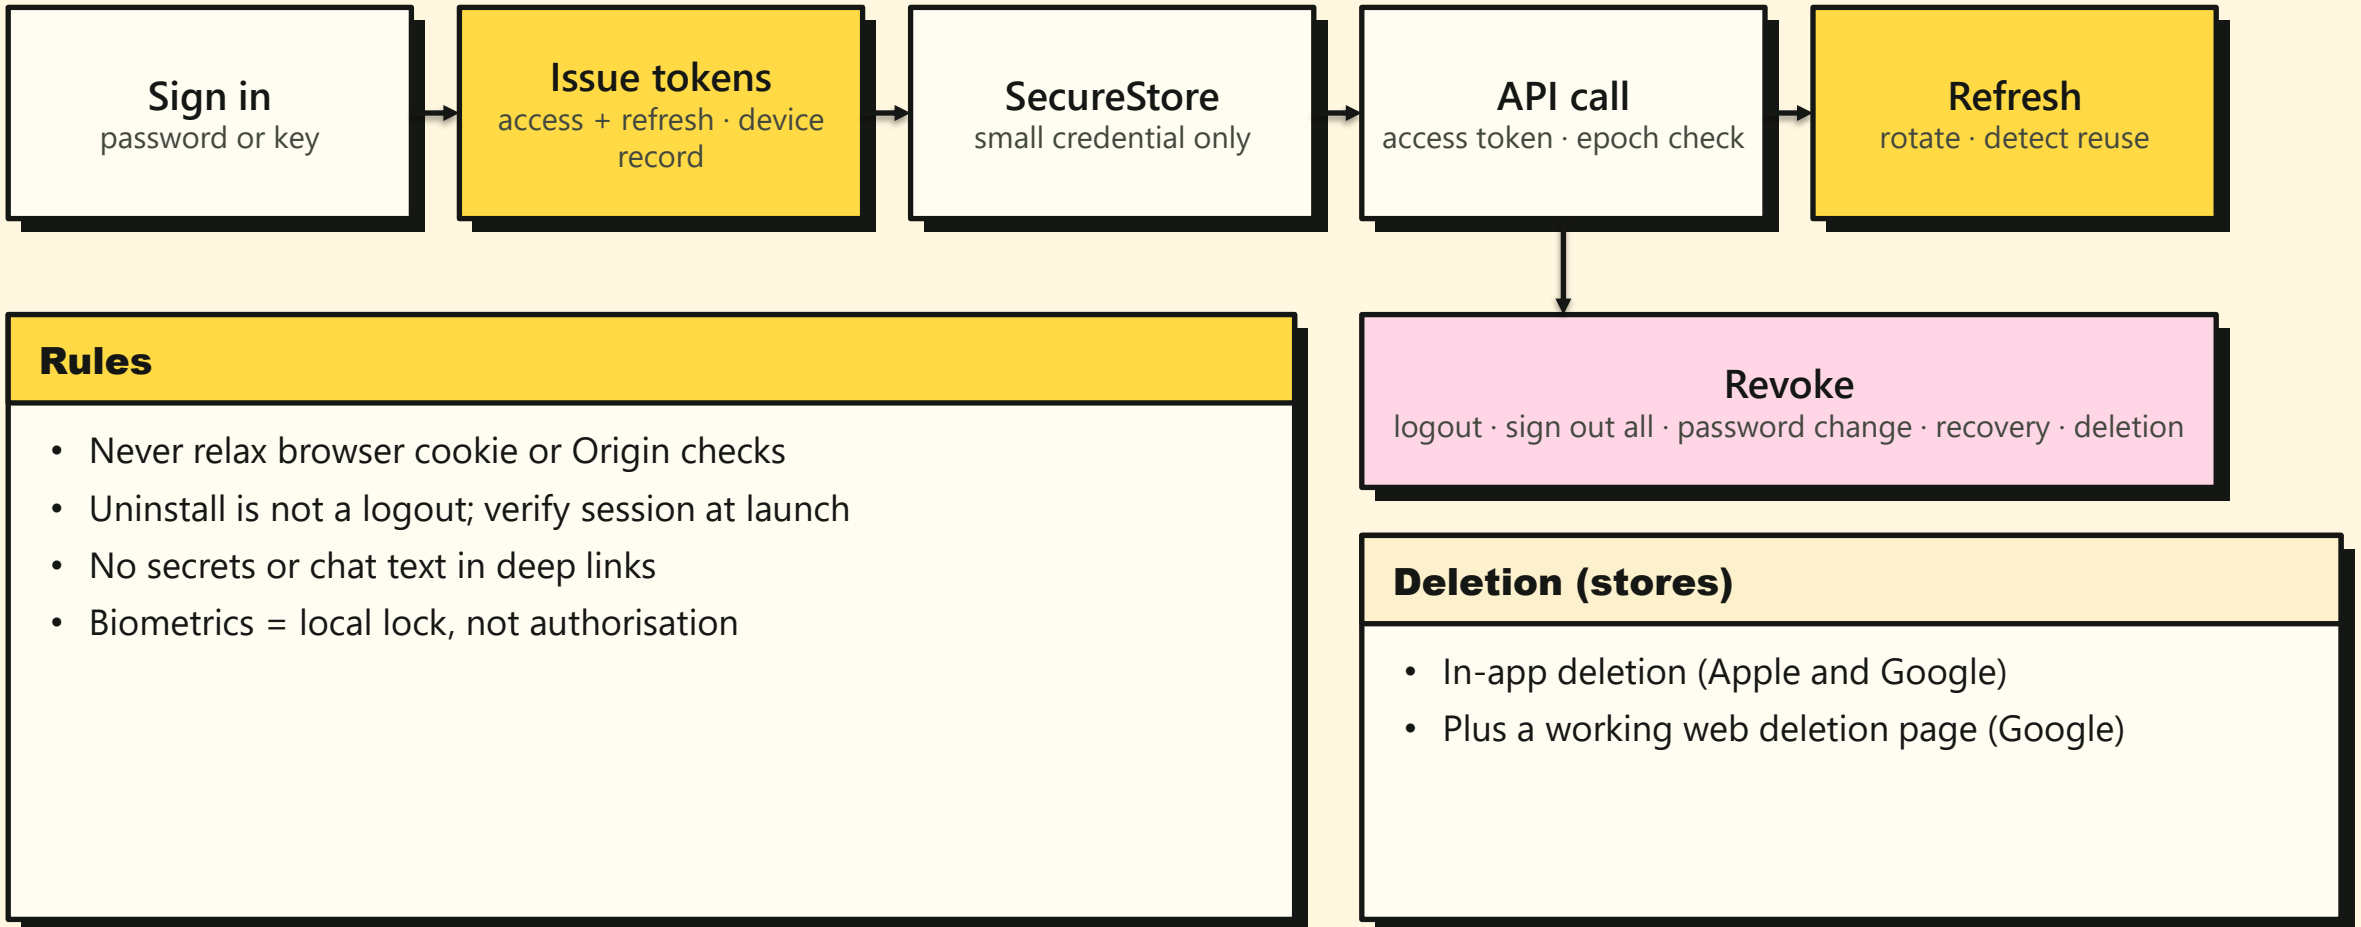

Phones drop connections; turns must not duplicate

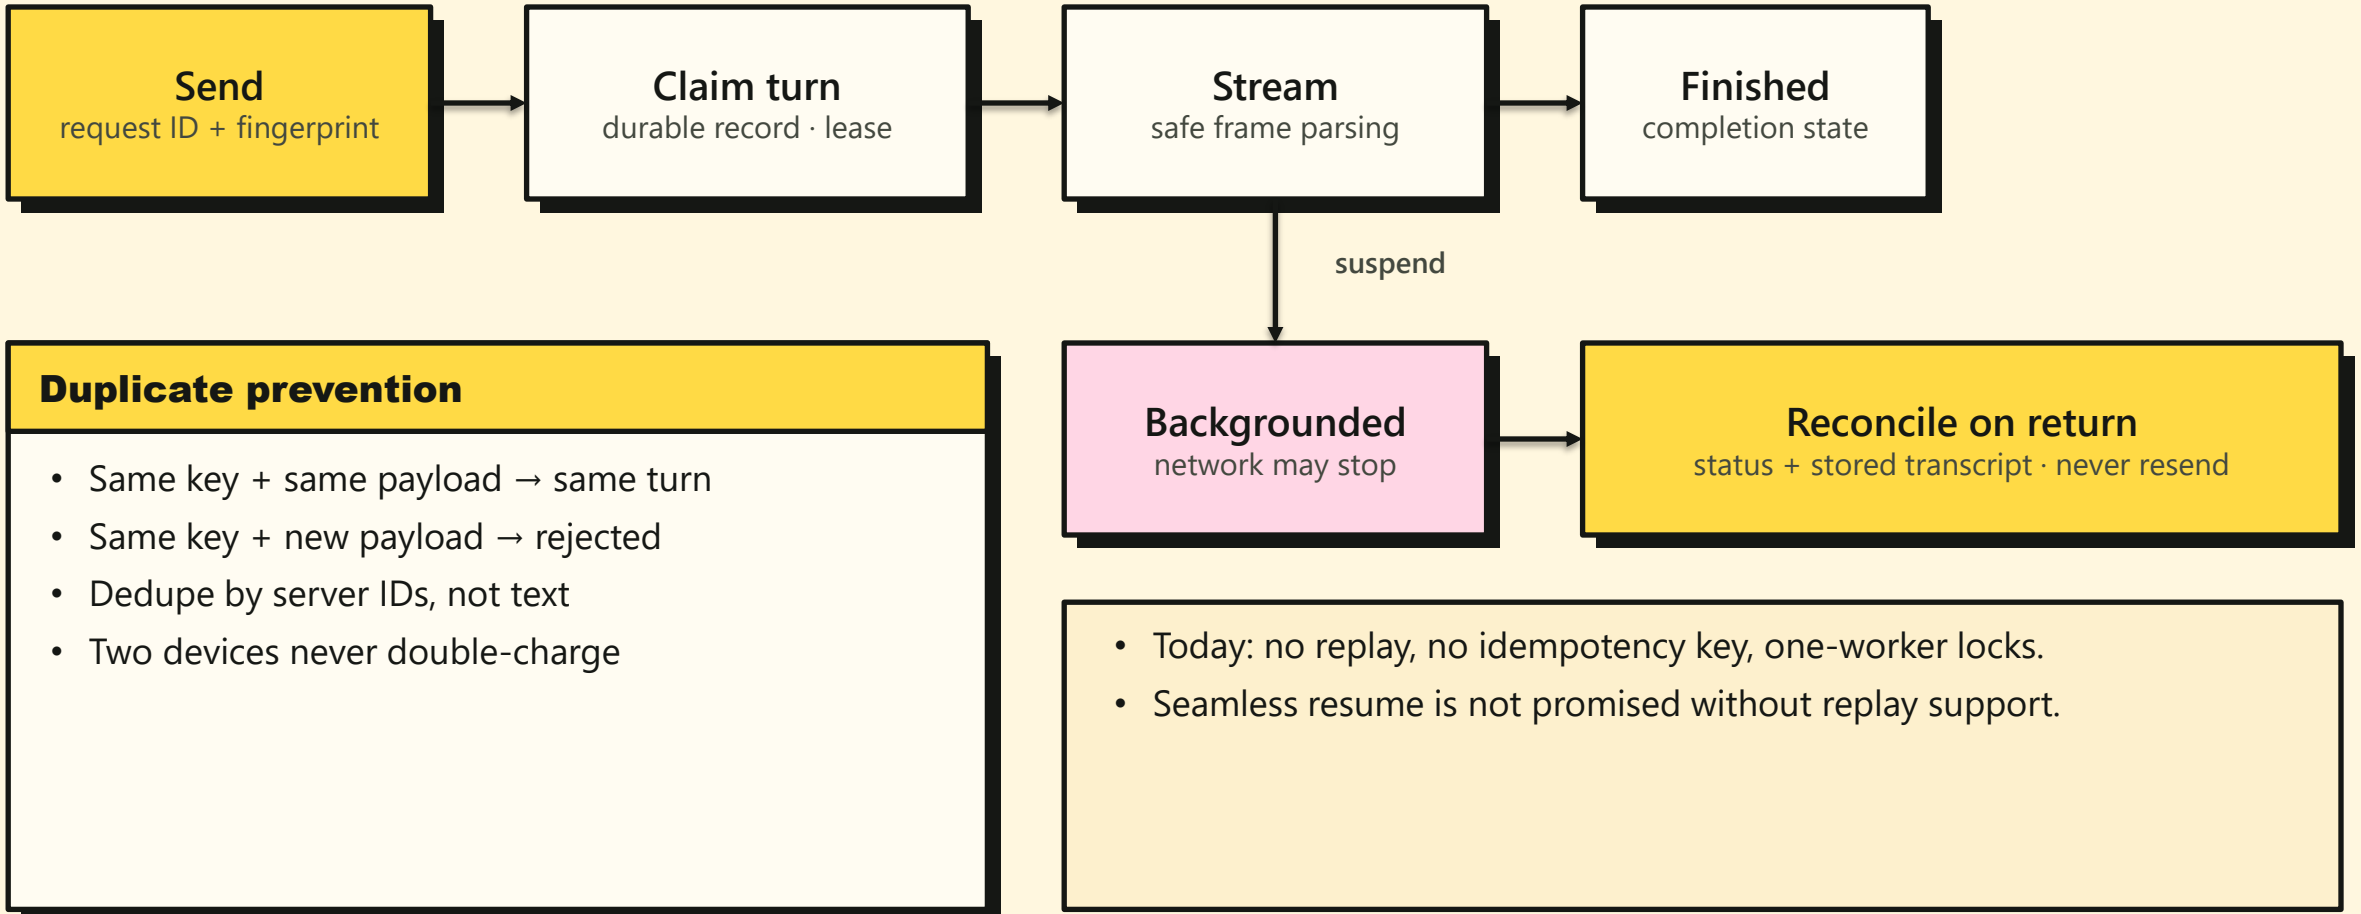

Server-authoritative, cache-light, account-isolated

Read offline

Cached chats, marked with last sync time

No offline AI

Sending is disabled — never queued to spend later

Writes need the server

Memory and goal edits confirm online; optimistic UI reverts

Encrypted, bounded cache

Size and age limits; no sensitive memories by default


Purge on exit

Logout, deletion, account switch or revocation wipe local data



Private telemetry

No prompts, facts, tokens or codes in logs or crashes

Sunshine & Ink on a phone

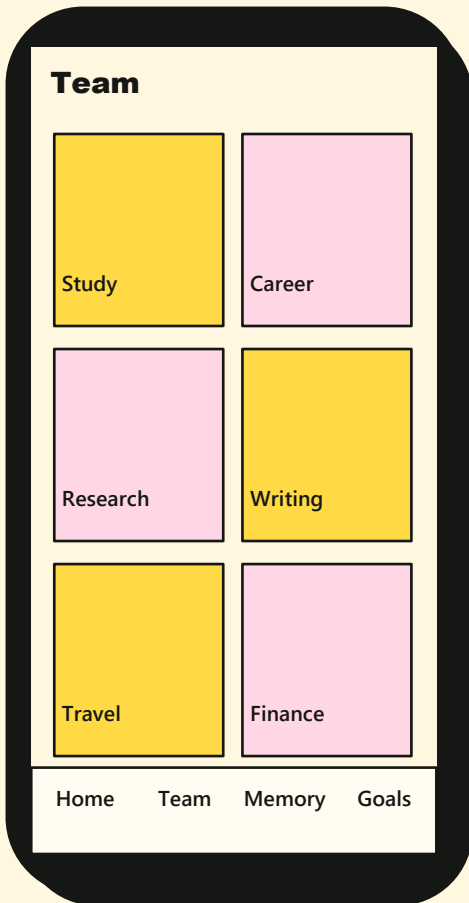

CONCEPT · NOT A SCREENSHOT

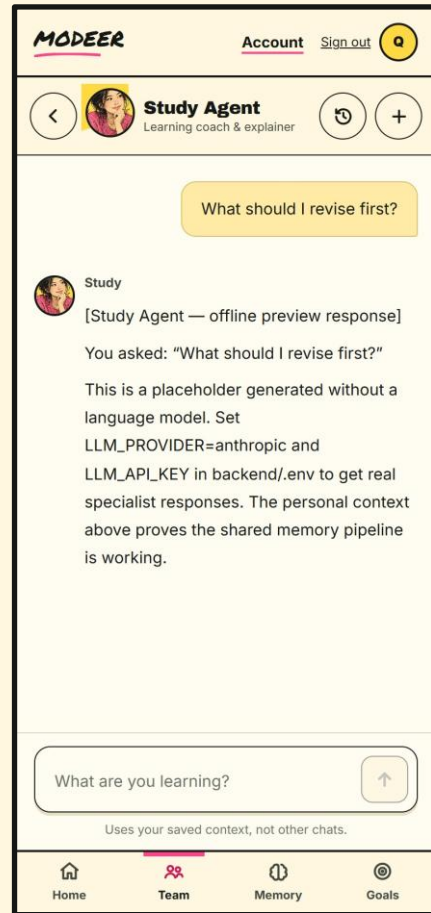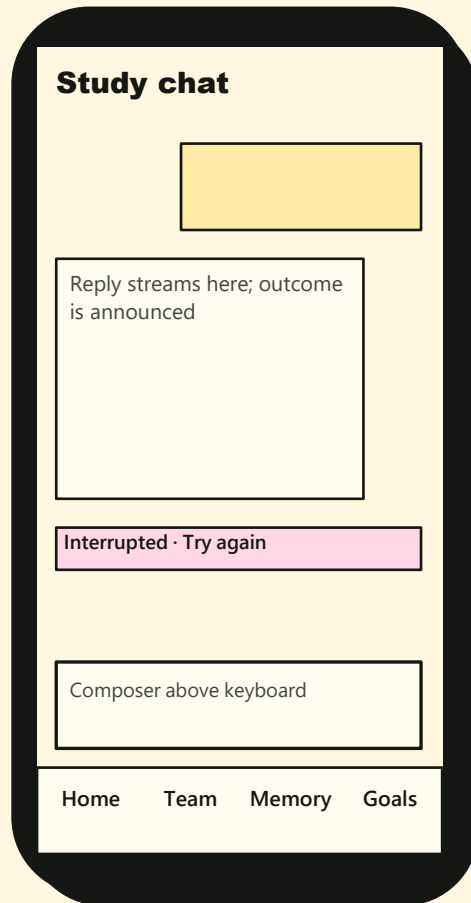

Web today · 390px · mock model

Must hold on phones

- Ink on pink; deep pink text
- Bottom tabs + stack chat
- Keyboard-safe composer
- Announce outcomes, not tokens
- Text scaling, reduced motion
- VoiceOver + TalkBack by people

Push, AI safety and shared capacity

Push — optional

- Only for a chosen use case
- Needs a server job system
- Generic payloads, no personal text
- Unregister on logout

AFTER MVP

AI safety — required

- In-app report / flag on replies
- Rate-limited intake
- Reviewer queue and response policy
- Google Play policy, checked 2026-09-15

Load & quotas

- One shared free-tier model quota
- Measure before promising users
- Keep one backend worker for now
- Log versions and operation IDs, never text

Test on real devices and bad networks

Area	Must pass before release
Devices	Physical iPhone + Android · oldest supported OS · small screen · large text
Accounts	A→B switch · expired and deleted sessions · refresh replay · simultaneous recovery
Streaming	Wi-Fi→cellular · airplane mode · background · OS kill · duplicate taps · two devices
Data	Memory on/off · private isolation at provider input · export and deletion cleanup
Accessibility	VoiceOver and TalkBack by people · text scaling · reduced motion · focus after errors
Security	No secrets in logs, links or backups · token lifecycle · TLS · signed config
Quality	Full agent evaluation + real journeys · fingerprints · human adjudication

Evidence counts only against a named signed build and backend revision. Emulators and 390px web checks do not replace devices.

Store rules that shape the plan

Apple


- **Build:** Xcode 26+ with the iOS 26 SDK (since Apr 28, 2026)
- **AI sharing:** disclose third-party AI and get explicit permission (5.1.2(i))
- **Deletion:** account deletion inside the app (5.1.1(v))
- **Beta:** external TestFlight builds need beta review
- **Privacy:** App Privacy details from real data flows

Google Play

- **Target:** Android 16 / API 36 from Aug 31, 2026
- **Deletion:** in-app path and a working web page
- **AI content:** in-app report or flag feature
- **Testing:** 12 testers for 14 days on newer personal accounts
- **Privacy:** Data safety form from real flows and SDKs

Owner holds developer accounts, app IDs and signing keys. Recheck every rule at submission time.

Six phases, each with a gate to pass

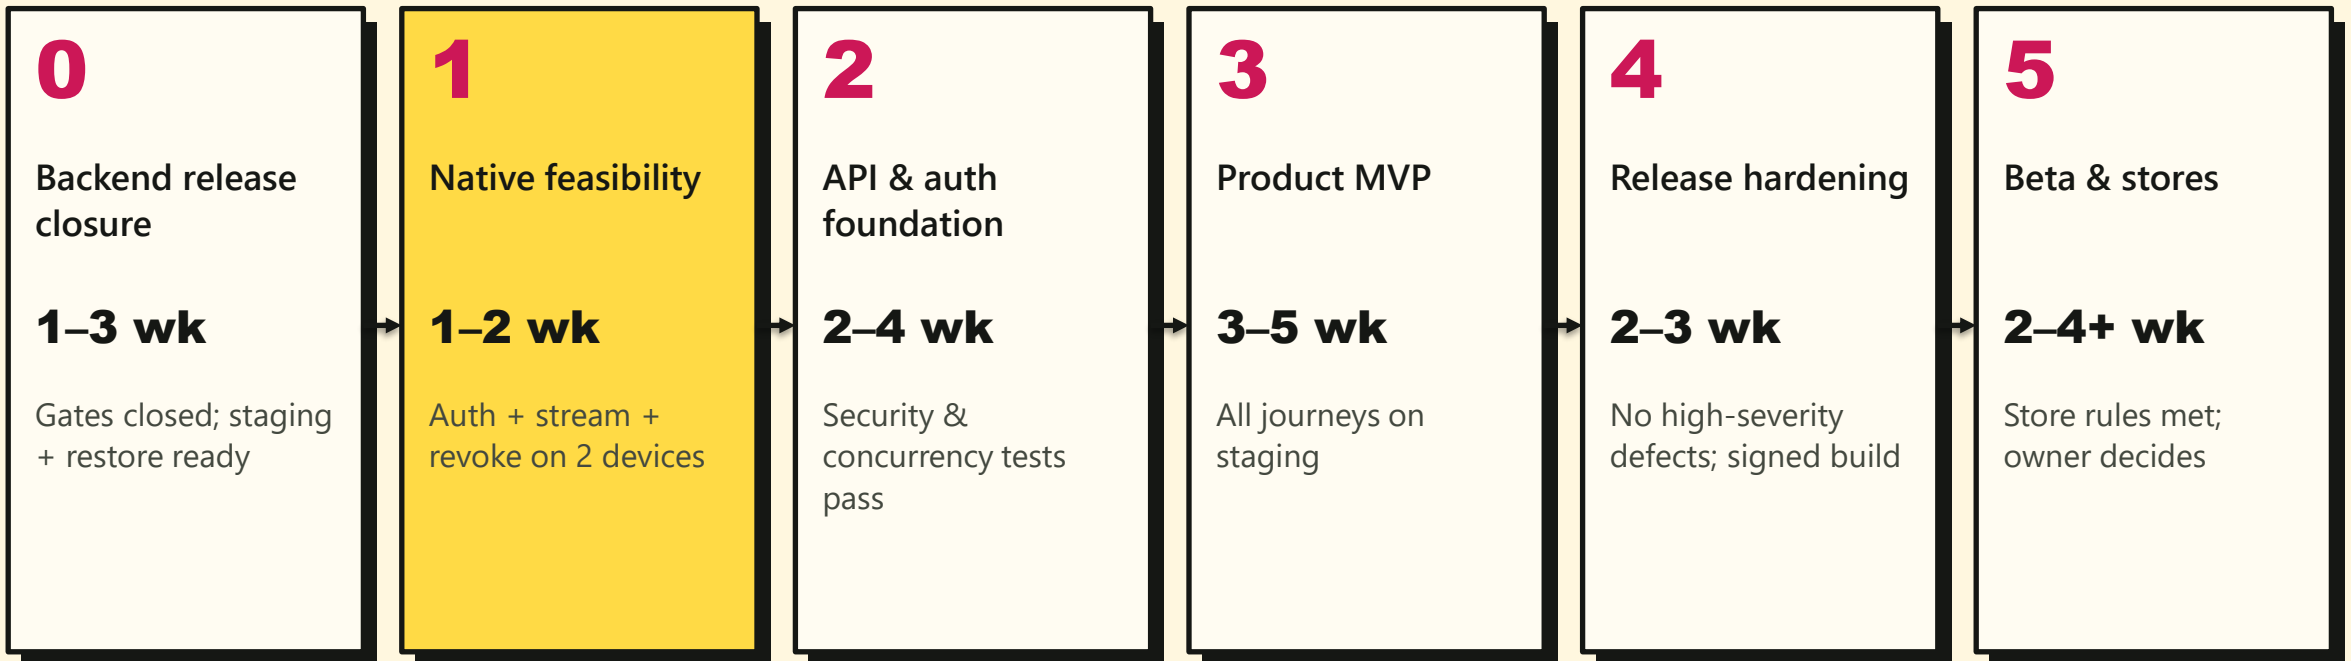

Roughly 12–18 calendar weeks with one full-time React Native engineer, half-time backend, part-time design and QA; 16–24+ weeks if one engineer does everything.

Assumptions, not a schedule: English phone UI, no payments, push, voice or integrations. Re-estimate after Phase 1.

Biggest risks and the gates that contain them

Risk	What could go wrong	Containment
Auth concurrency	Token rotation races	Same DB locking + PostgreSQL race tests
Suspended streams	Lost or doubled turns	Device prototype · reconcile · never resend
Memory boundaries	Leaks across devices or accounts	Provider-input test in milestone 1
Shared quota	Free tier exhausted by phones	Measure demand before promising users
Store rules	AI consent, reporting, deletion	Built into MVP scope
Asset rights	No licence inventory	Owner assembles before submission

Release gates

- Web gates closed and fixes committed
- Feasibility passed on 2 platforms
- Auth + operation contracts reviewed
- Device, accessibility and security matrix on a signed build
- Store forms, reports, deletion page live
- Owner release decision

Prioritised backlog

P0 · before native accounts

- Staging proof of recovery and session fixes
- Staging proof of memory-error and context bounds
- API versioning + token threat model
- Idempotency and durable turns
- Device spike: auth, stream, revoke

P1 · MVP and stores

- Native shell, chat, history
- Memory, goals, Today, account
- AI-sharing consent; export, deletion, purge
- AI reports + triage; web deletion page
- Device/security tests; signed builds
- Store forms, beta, rollout

P2 · after demand

- Push and background completion
- Biometric lock, tablets
- Localisation and RTL
- Widgets, attachments, voice
- Ask My Team, payments — separate design

Recommended first milestone

1 Sign in to a synthetic staging account

2 Stream one Modeer reply

3 Drop the connection mid-reply

4 Reload the stored partial result

5 Try again — no duplicate spend

6 Sign out everywhere → session rejected

7 Private notes absent at provider input

PROPOSED · AFTER WEB GATES

Owner decisions

- Team skills and staffing
- Account mode and support policy
- AI-sharing consent wording
- Countries, ages, languages, min OS
- Developer accounts and signing keys
- Cache retention; analytics or none
- Artwork and font rights

A1 · Verification sources for time-sensitive claims

Claim	Source	Checked
Xcode 26 + iOS 26 SDK for uploads	developer.apple.com/news/upcoming-requirements	2026-09-15
Third-party AI disclosure; in-app deletion	App Review Guidelines 5.1.2(i), 5.1.1(v)	2026-09-15
TestFlight external review; 10,000 testers	App Store Connect help · invite external testers	2026-09-15
Target API 36 from Aug 31, 2026	developer.android.com · target-sdk	2026-09-15
In-app + web account deletion	Play Console help 13327111	2026-09-15
12 testers × 14 days (newer personal accounts)	Play Console help 14151465	2026-09-15
AI content reporting in app	Play Console help 13985936	2026-09-15
expo/fetch streaming; SecureStore limits	docs.expo.dev (SDK 57 pages)	2026-09-15
“Use a framework such as Expo”	reactnative.dev environment setup	2026-09-13 · not rechecked
App Privacy · Data safety forms	Apple / Google help pages	2026-09-13 · not rechecked

A2 · Native API work items in detail

Item	Contract to define	Test before MVP
Native sessions	Access token TTL · rotating refresh · per-device record · family reuse detection	Replay, rotation race, revoke all
Operation identity	Idempotency key + payload fingerprint · durable turn · lease	Duplicate taps, two devices, worker crash
Reconciliation	Status endpoint · stored transcript as truth · no auto-resend	Background, OS kill, airplane mode
Errors	Stable codes: auth · allowance · provider limit · interrupted · memory	Each code surfaced and announced
Pagination	Cursor for conversations and messages	Large histories on old devices
Store support	AI report intake · web deletion page · API version header	Reports reach reviewers; page loads