

Upload a sample mp3 file:

The screenshot shows a REST client interface with a dark theme. At the top, a POST request is configured to `http://localhost:30080/resources`. The 'Body' tab is selected, and the 'binary' radio button is chosen. A file named `file_example_MP3_700KB.m...` is attached to the body. Below the request configuration, the 'Body' tab of the response is active, showing a JSON object: `{ "id": 1 }`. The interface includes tabs for Params, Authorization, Headers (9), Body, Scripts, Tests, and a Save icon. The response section also has tabs for Body, Cookies, Headers (5), and Test Results, along with a Refresh icon.

POST `http://localhost:30080/resources`

Params Authorization Headers (9) **Body** Scripts Tests Save

☐ none ☐ form-data ☐ x-www-form-urlencoded ☐ raw ☒ binary


file_example_MP3_700KB.m...

Body Cookies Headers (5) Test Results


`{ }` JSON Preview Visualize

```
1 {  
2   "id": 1  
3 }
```

Get the resource with id 1:

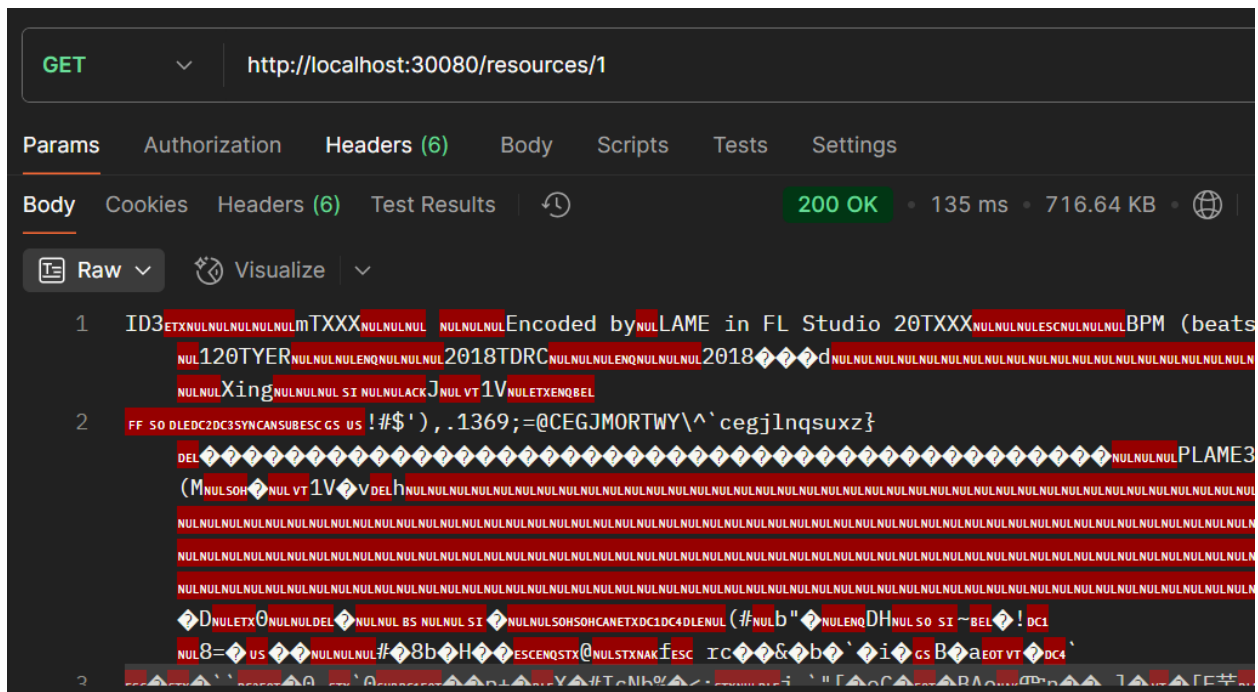

Get the song metadata:

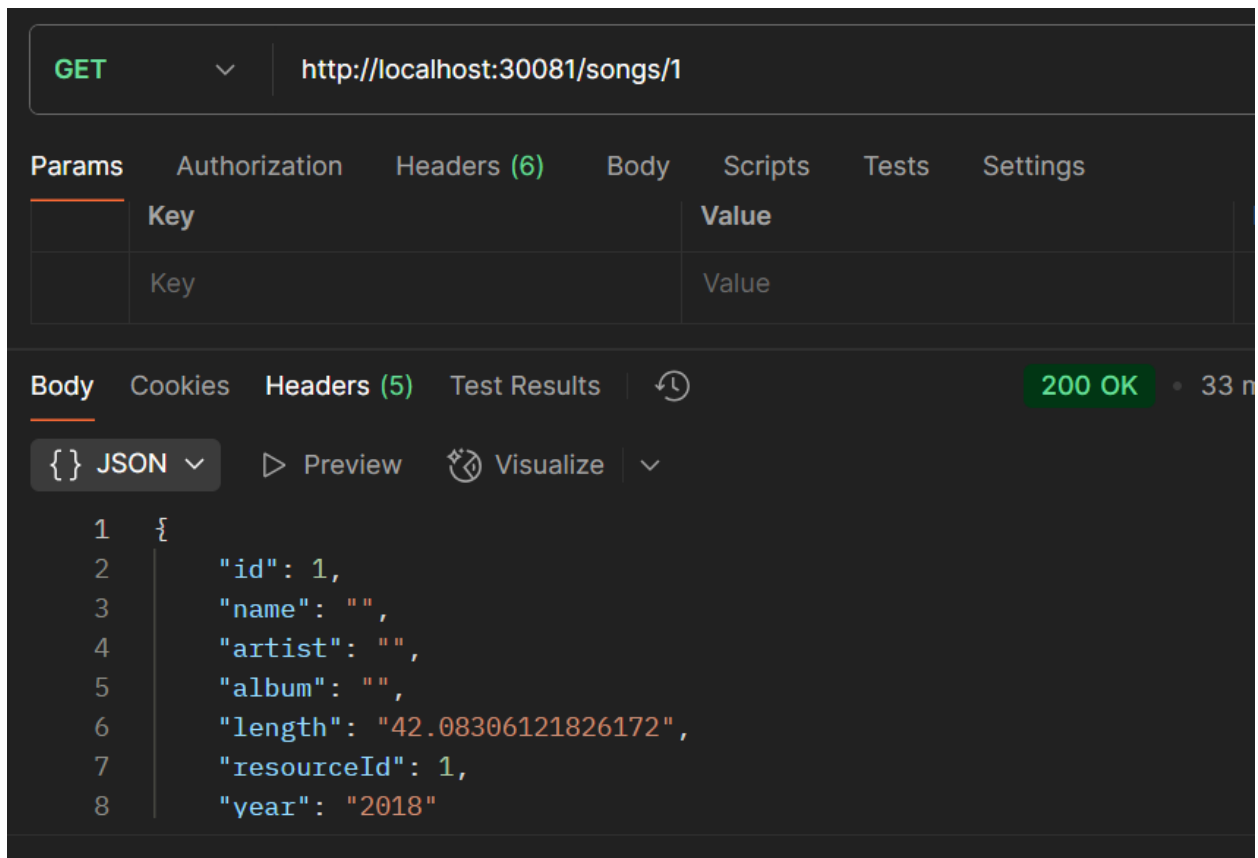

Ensure that the file persists on VC if song-ms pod is deleted:

```
C:\Users\SergeiMalgin\dev\microservices-intro\k8s>kubectl get pods -n k8s-program
NAME                                READY   STATUS    RESTARTS   AGE
resources-db-0                      1/1     Running   0           10h
resources-ms-7959b755f9-hz4hg       1/1     Running   0           5h37m
songs-db-0                          1/1     Running   0           10h
songs-ms-78b67c5844-fnbjc          1/1     Running   0           27m

C:\Users\SergeiMalgin\dev\microservices-intro\k8s>kubectl exec songs-ms-78b67c5844-fnbjc -n k8s-program -- sh -c "echo 'This file persists' > /app/data/test.txt"
This file persists

C:\Users\SergeiMalgin\dev\microservices-intro\k8s>kubectl exec songs-ms-78b67c5844-fnbjc -n k8s-program -- cat /app/data/test.txt
This file persists

C:\Users\SergeiMalgin\dev\microservices-intro\k8s>kubectl delete pod songs-ms-78b67c5844-fnbjc -n k8s-program
pod "songs-ms-78b67c5844-fnbjc" deleted from k8s-program namespace

C:\Users\SergeiMalgin\dev\microservices-intro\k8s>kubectl get pods -n k8s-program
NAME                                READY   STATUS    RESTARTS   AGE
resources-db-0                      1/1     Running   0           10h
resources-ms-7959b755f9-hz4hg       1/1     Running   0           5h38m
songs-db-0                          1/1     Running   0           10h
songs-ms-78b67c5844-4wskb          1/1     Running   0            7s

C:\Users\SergeiMalgin\dev\microservices-intro\k8s>kubectl exec songs-ms-78b67c5844-4wskb -n k8s-program -- cat /app/data/test.txt
This file persists

C:\Users\SergeiMalgin\dev\microservices-intro\k8s>
```