


# Divide and Conquer

## Analysis of Algorithm

---

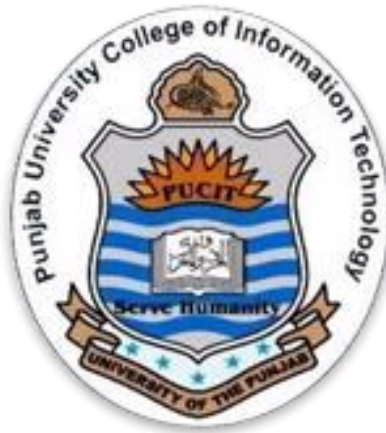

Punjab University College of Information Technology (PUCIT)  
University of the Punjab, Lahore, Pakistan.

# Credit

- These notes contain material from Chapter 3 of Cormen, Leiserson, Rivest, and Stein (3rd Edition).

# Divide and Conquer

- **Divide** the problem into a number of subproblems that are smaller instances of the same problem.
- **Conquer** the subproblems by solving them recursively. If the subproblem sizes are small enough, however, just solve the subproblems in a straightforward manner.
- **Combine** the solutions to the subproblems into the solution for the original problem.
- Remember! example of Merge Sort?

# Integer Multiplication

- Input:  $A$  and  $B$  ( $n$  digit arrays) Output:  $C = A * B$

$$\begin{array}{r} \times \quad 7 \ 5 \ 8 \\ \quad 6 \ 3 \ 2 \\ \hline 1 \ 5 \ 1 \ 6 \\ 2 \ 2 \ 7 \ 4 \\ 4 \ 5 \ 4 \ 8 \\ \hline 4 \ 7 \ 9 \ 0 \ 5 \ 6 \end{array}$$

---

**Algorithm** Long Multiplication algorithm

---

```
for  $i = 1$  to  $n$  do
     $c \leftarrow 0$ 
    for  $j = 1$  to  $n$  do
         $Z[i][j + i - 1] \leftarrow (A[j] * B[i] + c) \bmod 10$ 
         $c \leftarrow (A[j] * B[i] + c) / 10$ 
     $Z[i][i + n] \leftarrow c$ 
 $carry \leftarrow 0$ 
for  $i = 1$  to  $2n$  do
     $sum \leftarrow carry$ 
    for  $j = 1$  to  $n$  do
         $sum \leftarrow sum + Z[j][i]$ 
     $C[i] \leftarrow sum \bmod 10$ 
     $carry \leftarrow sum / 10$ 
 $C[2n + 1] \leftarrow carry$ 
```

---

- Runtime of this algorithm is  $O(n^2)$  single digit arithmetic ops

# Divide and Conquer based Multiplication

Compute the product  $xy$  from products of '*smaller numbers*'

Assume  $x$  and  $y$  are  $2n$ -digits numbers

$$x = 2758 = \begin{array}{|c|c|c|c|} \hline 3 & 2 & 1 & 0 \\ \hline 2 & 7 & 5 & 8 \\ \hline \end{array}$$

$$x = 2 \times 10^3 + 7 \times 10^2 + 5 \times 10^1 + 8 \times 10^0$$

$$x = 10^2 \times (2 \times 10 + 7) + (5 \times 10 + 8)$$

$$x = 10^2 \times 27 + 58 \implies a = 27, b = 58$$

$$x = \sum_{i=0}^{2n-1} x_i 10^i = \sum_{i=n}^{2n-1} x_i 10^i + \sum_{i=0}^{n-1} x_i 10^i = 10^n \underbrace{\sum_{i=n}^{2n-1} x_i 10^{i-n}}_a + \underbrace{\sum_{i=0}^{n-1} x_i 10^i}_b$$

# Divide and Conquer based Multiplication

**Input:**  $x$  and  $y$  ( $2n$  digits integers)

**Output:**  $z = x * y$

$$x = 10^n \underbrace{\sum_{i=n}^{2n-1} x_i 10^{i-n}}_a + \underbrace{\sum_{i=0}^{n-1} x_i 10^i}_b$$

$$y = 10^n \underbrace{\sum_{i=n}^{2n-1} y_i 10^{i-n}}_c + \underbrace{\sum_{i=0}^{n-1} y_i 10^i}_d$$

**Fact:**  $(p + q)(r + s) = pr + ps + qr + qs$

$$xy = (10^n a + b)(10^n c + d) = 10^{2n}(ac) + 10^n(ad + bc) + bd$$

- **Smaller products** ( $ac, ad, bc, bd$ ) are recursively computed
- Multiplication by 10's and addition do not matter much

$$2758 * 3261 = 10^4(27 * 32) + 10^2(27 * 61 + 58 * 32) + 58 * 61$$

# Divide and Conquer based Multiplication

---

## Algorithm Recursive Integer Multiplication

---

**function** REC-MULTIPLY( $x, y, 2n$ )  $\triangleright n = 2^k$  by zero-padding  
 if  $n = 1$  then  
     **return**  $x * y$   
 else  
      $x = 10^n a + b, y = 10^n c + d$   
      $ac \leftarrow \text{REC-MULTIPLY}(a, c, n)$   
      $ad \leftarrow \text{REC-MULTIPLY}(a, d, n)$   
      $bc \leftarrow \text{REC-MULTIPLY}(b, c, n)$   
      $bd \leftarrow \text{REC-MULTIPLY}(b, d, n)$   
     **return**  $10^{2n}(ac) + 10^n(ad + bc) + bd$

---

$$xy = (10^n a + b)(10^n c + d) = 10^{2n} \underbrace{(ac)}_{1 \text{ multiplication}} + 10^n \underbrace{(ad + bc)}_{2 \text{ multiplications}} + \underbrace{bd}_{1 \text{ multiplication}}$$

$$T(2n) = \begin{cases} 1 & \text{if } n = 1 \\ 4T(n) + 6n & \text{if } n > 1 \end{cases} = O(n^2) \quad \text{No gain}$$

# Karatsuba Multiplication Algorithm

$$xy = (10^n a + b)(10^n c + d) = 10^{2n} \underbrace{(ac)}_{1 \text{ multiplication}} + 10^n \underbrace{(ad + bc)}_{2 \text{ multiplications}} + \underbrace{bd}_{1 \text{ multiplication}}$$

$$T(2n) = \begin{cases} 1 & \text{if } n = 1 \\ 4T(n) + 6n & \text{if } n > 1 \end{cases} = O(n^2) \quad \text{No gain}$$

**Karatsuba's Observation:** Four multiplications can be reduced to three

$$\begin{aligned} \underline{ad + bc} &= (a + b)(c + d) - ac - bd \\ &= ac + \underline{ad + bc} + bd - ac - bd \end{aligned}$$

- $ad + bc$  can be obtained with one additional multiplication



# Karatsuba Multiplication Algorithm

$$xy = (10^n a + b)(10^n c + d) = 10^{2n} \underbrace{(ac)}_{1 \text{ multiplication}} + 10^n \underbrace{(ad + bc)}_{2 \text{ multiplications}} + \underbrace{bd}_{1 \text{ multiplication}}$$

$$\underline{ad + bc} = (a + b)(c + d) - ac - bd = ac + \underline{ad + bc} + bd - ac - bd$$

---

## Algorithm Karatsuba Integer Multiplication

---

**function** KARTASUBA-MULTIPLY( $x, y, 2n$ )  $\triangleright n = 2^k$  by zero-padding  
  **if**  $n = 1$  **then return**  $x * y$   
  **else**  $x = 10^n a + b, y = 10^n c + d$   
     $ac \leftarrow$  KARTASUBA-MULTIPLY( $a, c, n$ )  
     $bd \leftarrow$  KARTASUBA-MULTIPLY( $b, d, n$ )  
     $mid \leftarrow$  KARTASUBA-MULTIPLY( $a + b, c + d, n$ )  
  **return**  $10^{2n}(ac) + 10^n(mid - ac - bd) + bd$

---

$$T(2n) = \begin{cases} 1 & \text{if } n = 1 \\ 3T(n) + 6n & \text{else } n > 1 \end{cases} = O(n^{1.58})$$