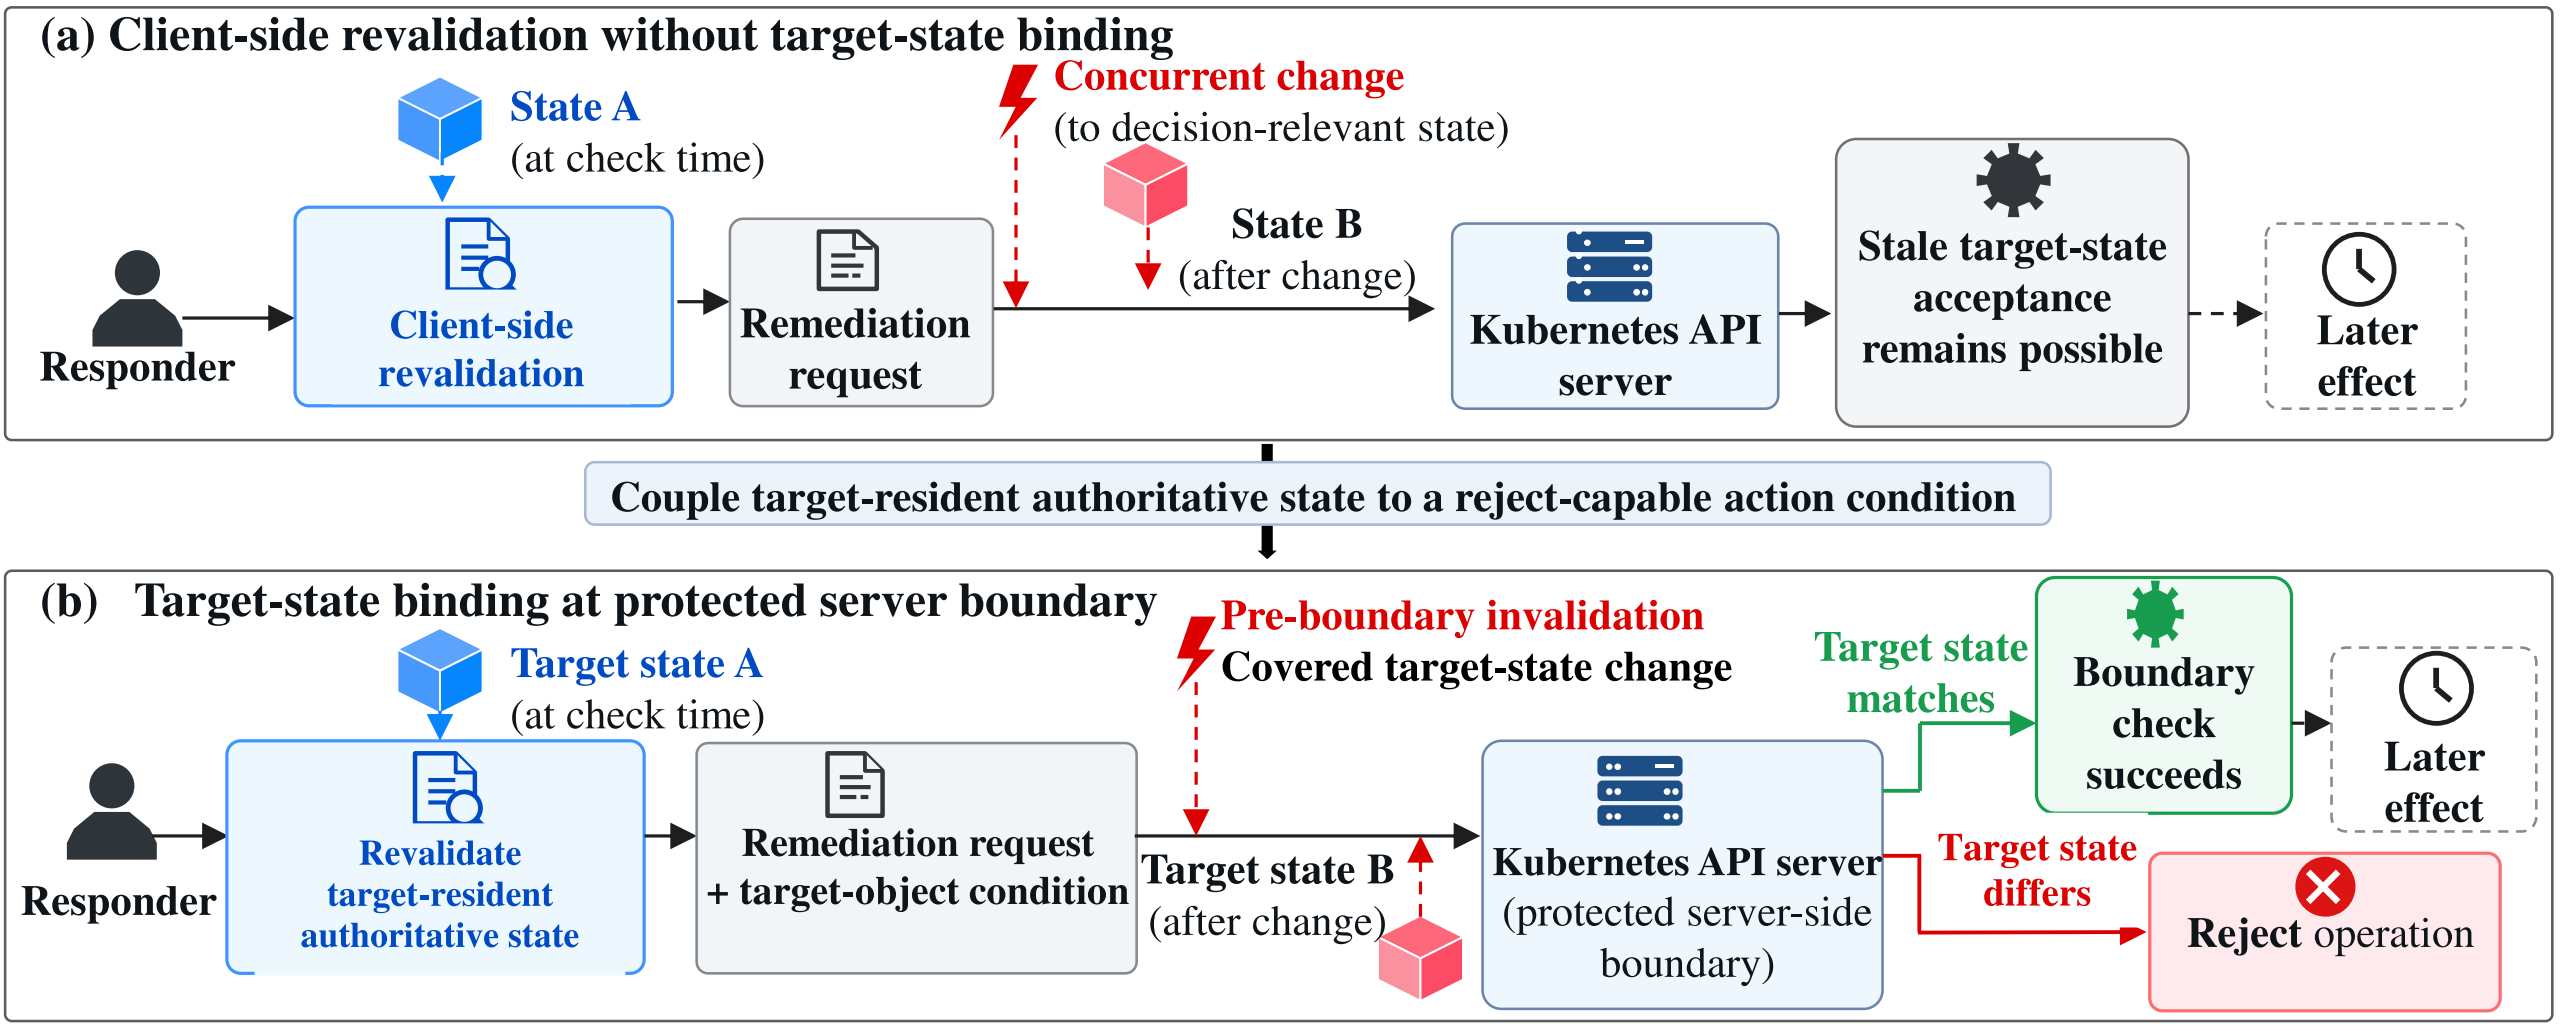

(a) Client-side revalidation without target-state binding
State A
(at check time)
Concurrent change
(to decision-relevant state)
State B
(after change)
Responder
Client-side revalidation
Remediation request
Kubernetes API server
Stale target-state acceptance remains possible
Later effect
Couple target-resident authoritative state to a reject-capable action condition
(b) Target-state binding at protected server boundary
Target state A
(at check time)
Pre-boundary invalidation
Covered target-state change
Target state matches
Boundary check succeeds
Later effect
Responder
Revalidate target-resident authoritative state
Remediation request + target-object condition
Target state B
(after change)
Kubernetes API server
(protected server-side boundary)
Target state differs
Reject operation