

1. Resource Organization

Resources were organized using consistent naming conventions and tags (such as Name, Project, and Environment) to ensure easy identification, management, and cost tracking across the AWS infrastructure.

2. Networking Layer (VPC Design)

Create a VPC

Create VPC [Info](#)

A VPC is an isolated portion of the AWS Cloud populated by AWS objects, such as Amazon EC2 instances.

VPC settings

Resources to create [Info](#)
Create only the VPC resource or the VPC and other networking resources.

☒ VPC only ☐ VPC and more

Name tag - optional
Creates a tag with a key of 'Name' and a value that you specify.

capstone-vpc

IPv4 CIDR block [Info](#)
☒ IPv4 CIDR manual input
☐ IPAM-allocated IPv4 CIDR block

IPv4 CIDR
10.0.0.0/16
CIDR block size must be between /16 and /28.

Your VPCs

[VPCs](#) | [VPC encryption controls](#)

Your VPCs (2) [Info](#)

Last updated less than a minute ago [Actions](#) [Create VPC](#)

☐	Name	VPC ID	State	Encryption
☐	-	vpc-0c58d08a4dd03b88f	Available	-
☐	capstone-vpc	vpc-0a9cb05af3bd3a807	Available	-

Create 2 Public Subnets and 2 Private Subnets

Subnets (10) Info						
Find subnets by attribute or tag						
	Name	Subnet ID	State	VPC	Block Public...	II
☐	-	subnet-0f8b6cbcd60e788a2	Available	vpc-0c58d08a4dd03b88f	Off	1
☐	-	subnet-0d96f4eb02cd3ad77	Available	vpc-0c58d08a4dd03b88f	Off	1
☐	-	subnet-096512ca5f9221d1b	Available	vpc-0c58d08a4dd03b88f	Off	1
☐	-	subnet-0a00d0e8ff14b766a	Available	vpc-0c58d08a4dd03b88f	Off	1
☐	-	subnet-02697dd8c071848de	Available	vpc-0c58d08a4dd03b88f	Off	1
☐	-	subnet-0db7d4cf707574186	Available	vpc-0c58d08a4dd03b88f	Off	1
☐	capstone-public-subnet-1	subnet-0d3fbd9eda2cef4e2	Available	vpc-0a9cb05af3bd3a807 caps...	Off	1
☐	capstone-public-subnet-2	subnet-0e0b37fb476ef1dfb	Available	vpc-0a9cb05af3bd3a807 caps...	Off	1
☐	capstone-private-subnet-1	subnet-06a0c7b9039884933	Available	vpc-0a9cb05af3bd3a807 caps...	Off	1
☐	capstone-private-subnet-2	subnet-066d9d9560cac1caf	Available	vpc-0a9cb05af3bd3a807 caps...	Off	1

Configure Internet Gateway (IGW)

Internet gateways (2) Info					
Find internet gateways by attribute or tag					
	Name	Internet gateway ID	State	VPC ID	Owner
☐	-	igw-00bb21861bb66b2f4	Attached	vpc-0c58d08a4dd03b88f	1699971
☐	capstone-igw	igw-010b206724843cf65	Attached	vpc-0a9cb05af3bd3a807 capstone-vpc	1699971

Attach to VPC (igw-010b206724843cf65) Info

VPC
Attach an internet gateway to a VPC to enable the VPC to communicate with the internet. Specify the VPC to attach below.

Available VPCs
Attach the internet gateway to this VPC.

[AWS Command Line Interface command](#)

[Cancel](#) [Attach internet gateway](#)

Configure NAT Gateway

Whizlabs account does NOT have permission to create a NAT Gateway

Create NAT gateway
A highly available, managed Network Address Translation (NAT) service that instances in private subnets can use to connect to resources in other VPCs, on-premise networks, or the Internet.

NAT gateway settings

Name optional
Choose a tag with a list of names and a value that you specify.

Capacity type
The capacity type for the NAT gateway.

Availability mode info
Choose whether to deploy multiple instances of the gateway in multiple Availability Zones.

☒ Regional - new
Distributes the gateway across all regional AWS CloudFormation stacks in the region.

☐ Local
Creates a single gateway within a specific Availability Zone, allowing for faster and simpler.

VPC
Select a VPC in which to create the NAT gateway.

Connectivity type
The connectivity type for the NAT gateway.

☒ Elastic IP
The NAT gateway is assigned an Elastic IP address.

☐ Private IP
The NAT gateway is assigned a private IP address from the VPC's address pool.

Tags
A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.

Key

[Remove](#)

Configure Route Tables

Route tables (4) Info

Last updated less than a minute ago

Actions

Create route table

Find route tables by attribute or tag

< 1 >

☐	Name	Route table ID	Explicit subnet associ...	Edge associations	Main	VPC
☐	-	rtb-038c2ccb12d0e96bd	-	-	Yes	vpc-0c58d08a4d
☐	-	rtb-07a7bf061d899b065	-	-	Yes	vpc-0a9cb05af3t
☐	capstone-public-rt	rtb-06eb3004fade00ec4	2 subnets	-	No	vpc-0a9cb05af3t
☐	capstone-private-rt	rtb-0d3e6024fc32788d2	-	-	No	vpc-0a9cb05af3t

public

Edit routes

Destination

10.0.0.0/16

Target

local

Q local

Internet Gateway

igw-010b206724843cf65

Status

Active

-

Propagated

No

No

Route Origin

CreateRouteTable

CreateRoute

Add route

Remove

Cancel

Preview

Save changes

Edit subnet associations

Change which subnets are associated with this route table.

Available subnets (2/4)

Filter subnet associations

☐	Name	Subnet ID	IPv4 CIDR	IPv6 CIDR	Route table ID
☒	capstone-public-subnet-1	subnet-0d3fbd9eda2cef4e2	10.0.1.0/24	-	Main (rtb-07a7bf061d899b065)
☒	capstone-public-subnet-2	subnet-0e0b37fb476ef1dfb	10.0.2.0/24	-	Main (rtb-07a7bf061d899b065)
☐	capstone-private-subnet-1	subnet-06a0c7b9039884933	10.0.3.0/24	-	Main (rtb-07a7bf061d899b065)
☐	capstone-private-subnet-2	subnet-066d9d9560cac1caf	10.0.4.0/24	-	Main (rtb-07a7bf061d899b065)

Selected subnets

subnet-0e0b37fb476ef1dfb / capstone-public-subnet-2

subnet-0d3fbd9eda2cef4e2 / capstone-public-subnet-1

Cancel

Save associations

private

VPC > Route tables > rtb-0d3e6024fc32788d2 > Edit subnet associations

Edit subnet associations

Change which subnets are associated with this route table.

Available subnets (2/4)

Filter subnet associations

☐	Name	Subnet ID	IPv4 CIDR	IPv6 CIDR	Route table ID
☐	capstone-public-subnet-1	subnet-0d3fbd9eda2cef4e2	10.0.1.0/24	-	rtb-06eb3004fade00ec4 / capstone-pu...
☐	capstone-public-subnet-2	subnet-0e0b37fb476ef1dfb	10.0.2.0/24	-	rtb-06eb3004fade00ec4 / capstone-pu...
☒	capstone-private-subnet-1	subnet-06a0c7b9039884933	10.0.3.0/24	-	Main (rtb-07a7bf061d899b065)
☒	capstone-private-subnet-2	subnet-066d9d9560cac1caf	10.0.4.0/24	-	Main (rtb-07a7bf061d899b065)

Selected subnets

subnet-06a0c7b9039884933 / capstone-private-subnet-1

subnet-066d9d9560cac1caf / capstone-private-subnet-2

Cancel

Save associations

3. Compute Layer

Security Groups (3) Info Actions Export security groups to CSV Create security group

Find security groups by attribute or tag

☐	Name	Security group ID	Security group name	VPC ID	Description
☐	-	sg-0926e159a707d1732	capstone-ec2-sg	vpc-0a9cb05af3bd3a807	.
☐	-	sg-072ae8edf095f8f1a	default	vpc-0a9cb05af3bd3a807	default
☐	-	sg-06a47af6e479f3423	default	vpc-0c58d08a4dd03b88f	default

```
#!/bin/bash
yum update -y
yum install -y nginx
systemctl start nginx
systemctl enable nginx
echo "Hello from $(hostname)" > /usr/share/nginx/html/index.html
```

Instances (2) Info Last updated less than a minute ago Connect Instance state Actions Launch instances

Saved filter sets: Running Find Instance by attribute or tag (case-sensitive)

Instance state = running Clear filters

☐	Name	Instance ID	Instance state	Instance type	Status check	Alarm status	Availability Zone
☐	capstone-app-1	i-06d51cc56886a4028	Running	t2.micro	2/2 checks passed	View alarms	us-east-1a
☐	capstone-app-2	i-0804b3c7c32902abd	Running	t2.micro	2/2 checks passed	View alarms	us-east-1b

4. Load Balancing

EC2 > Target groups > Create target group

Step 1: Create target group
Step 2: Register targets
Step 3: Review and create

Review and create

Review your target group configuration before creating

Step 1: Target group details

Target group details

Name: capstone-tg	Target type: Instance	Protocol: Port: HTTP: 80	Protocol version: HTTP1
VPC: vpc-0a9cb05af3bd3a807	IP address type: IPv4		

Health check details

Health check protocol: HTTP	Health check path: /	Health check port: traffic-port	Interval: 30 seconds
Timeout: 5 seconds	Healthy threshold: 5	Unhealthy threshold: 2	Success codes: 200

Step 2: Register targets

Targets (2)

Instance ID	Name	Port	Zone
i-0804b3c7c32902abd	capstone-app-2	80	us-east-1b
i-06d51cc56886a4028	capstone-app-1	80	us-east-1a

[Cancel](#) [Previous](#) [Create target group](#)

Target groups (1) [Info](#) | [What's new?](#)



Actions

Create target group

Filter target groups

< 1 > ⚙

☐	Name	ARN	Port	Protocol	Target type	Load balancer
☐	capstone-tg	arn:aws:elasticloadbalancin...	80	HTTP	Instance	None associated

Load balancers (1/1) [What's new?](#)



Actions

Create load balancer

Elastic Load Balancing scales your load balancer capacity automatically in response to changes in incoming traffic.

Filter load balancers

< 1 > ⚙

☒	Name	State	Type	Scheme	IP address type	VPC ID	Availa
☒	capstone-alb	Provisioning..	application	Internet-facing	IPv4	vpc-0a9cb05af3bd3a807	2 Avail

capstone-tg

Actions

Details
[arn:aws:elasticloadbalancing:us-east-1:169997184002:targetgroup/capstone-tg/dc4f7a7d5113c6b5](#)

Target type
Instance

Protocol : Port
HTTP: 80

Protocol version
HTTP1

VPC
[vpc-0a9cb05af3bd3a807](#)

IP address type
IPv4

Load balancer
[None associated](#)

2
Total targets

0
Healthy
0 Anomalous

2
Unhealthy

0
Unused

0
Initial

0
Draining

Distribution of targets by Availability Zone (AZ)
Select values in this table to see corresponding filters applied to the Registered targets table below.

[Targets](#) | [Monitoring](#) | [Health checks](#) | [Attributes](#) | [Tags](#)

Registered targets (2) [Info](#)

Anomaly mitigation: [Not applicable](#)



Deregister

Register targets

Target groups route requests to individual registered targets using the protocol and port number specified. Health checks are performed on all registered targets according to the target group's health check settings. Anomaly detection is automatically applied to HTTP/HTTPS target groups with at least 3 healthy targets.

Filter targets

< 1 > ⚙

☐	Instance ID	Name	Port	Zone	Health status	Health status details	Admini...
☐	i-0804b3c7c32902abd	capstone-app-2	80	us-east-1b (us...	Unhealthy	Health checks failed	-
☐	i-06d51cc56886a4028	capstone-app-1	80	us-east-1a (us...	Unhealthy	Health checks failed	-

5. Data Layer

An RDS database was planned using full configuration; however, due to sandbox restrictions, the creation process could not be completed.

The screenshot shows the 'Create database' page in the AWS Management Console. The breadcrumb trail is 'Aurora and RDS > Databases > Create database'. The page title is 'Create database' with an 'Info' link. Under 'Engine options', there is a link for 'Engine type'. The 'Choose a database creation method' section has two options: 'Full configuration' (selected) and 'Easy create'. The 'Full configuration' option includes the text: 'You set all of the configuration options, including ones for availability, security, backups, and maintenance.' The 'Easy create' option includes: 'Use recommended best-practice configurations. Some configuration options can be changed after the database is created.' At the bottom, a light blue box contains a warning: 'You are responsible for ensuring that you have all of the necessary rights for any third-party products or services that you use with AWS services.'

I Solved it using “lab” not “sandbox”

The screenshot shows the 'Create security group' page in the AWS Management Console. The breadcrumb trail is 'EC2 > Security Groups > Create security group'. The page title is 'Create security group' with an 'Info' link. A note states: 'A security group acts as a virtual firewall for your instance to control inbound and outbound traffic. To create a new security group, complete the fields below.' The 'Basic details' section includes: 'Security group name' (RDS_sg), 'Description' (Security group for RDS), and 'VPC' (vpc-0888643989a4518c5). The 'Inbound rules' section shows 'Inbound rule 1' with a 'Delete' button. The rule configuration is: 'Type' (MYSQL/Aurora), 'Protocol' (TCP), 'Port range' (3306), 'Source type' (Anywhere-IPv4), 'Source' (0.0.0.0/0), and 'Description - optional' (empty). There is an 'Add rule' button at the bottom. A yellow warning box at the bottom states: 'Rules with source of 0.0.0.0/0 or :::0 allow all IP addresses to access your instance. We recommend setting security group rules to allow access from known IP addresses only.'

✔ **Successfully created database mydatabase**
View connection details ✕

You can use settings from mydatabase to simplify configuration of suggested database add-ons while we finish creating your DB for you.

Databases (1)

☒ Group resources

Modify
Actions ▾
Create database ▾

🔍

< 1 > ⚙️

	DB identifier	Status	Role	Engine	Upgrade
☐	mydatabase	⚙️ Config...	Instance	MySQL Co...	SECOND

Public access [Info](#)

☐ **Yes**
RDS assigns a public IP address to the database. Amazon EC2 instances and other resources outside of the VPC can connect to your database. Resources inside the VPC can also connect to the database. Choose one or more VPC security groups that specify which resources can connect to the database.

☒ **No**
RDS doesn't assign a public IP address to the database. Only Amazon EC2 instances and other resources inside the VPC can connect to your database. Choose one or more VPC security groups that specify which resources can connect to the database.

Security Groups

Security Groups (3) [Info](#) [Actions](#) [Export security groups to CSV](#) [Create security group](#)

☐	Name	Security group ID	Security group name	VPC ID	Description
☐	-	sg-0926e159a707d1732	capstone-ec2-sg	vpc-0a9cb05af3bd3a807 ↗	
☐	-	sg-072ae8edf095f8f1a	default	vpc-0a9cb05af3bd3a807 ↗	default
☐	-	sg-06a47af6e479f3423	default	vpc-0c58d08a4dd03b88f ↗	default

Network ACLs (3) Info

Find Network ACLs by attribute or tag

1

Create network ACL

	Name	Network ACL ID	Associated with	Default	VPC ID
☐	-	acl-03b5154cb342d8018	4 Subnets	Yes	vpc-0a9cb05af3bd3a807 / capstone-vp
☐	-	acl-033fbeb51a0e17290	6 Subnets	Yes	vpc-0c58d08a4d03b88f
☐	capstone-public-nacl	acl-00b4e75d5071a58a0	-	No	vpc-0a9cb05af3bd3a807 / capstone-vp

Edit inbound rules [Info](#)

Inbound rules control the incoming traffic that's allowed to reach the VPC.

Rule number Info	Type Info	Protocol Info	Port range Info	Source Info	Allow/Deny Info	
100	HTTP (80)	TCP (6)	80	0.0.0.0/0	Allow	Remove
110	HTTPS (443)	TCP (6)	443	0.0.0.0/0	Allow	Remove
120	Custom TCP	TCP (6)	1024-65535	0.0.0.0/0	Allow	Remove
*	All traffic	All	All	0.0.0.0/0	Deny	

[Add new rule](#) [Sort by rule number](#)

[Cancel](#) [Preview changes](#) [Save changes](#)

acl-00b4e75d5071a58a0 / capstone-public-nacl [Actions](#)

Details [Info](#)

Network ACL ID
[acl-00b4e75d5071a58a0](#)

Owner
[169997184002](#)

Associated with
-

Default
No

VPC ID
[vpc-0a9cb05af3bd3a807 / capstone-vpc](#)

[Inbound rules](#) | [Outbound rules](#) | [Subnet associations](#) | [Tags](#)

Inbound rules (4) [Edit inbound rules](#)

Rule number	Type	Protocol	Port range	Source	Allow/Deny
100	HTTP (80)	TCP (6)	80	0.0.0.0/0	Allow
110	HTTPS (443)	TCP (6)	443	0.0.0.0/0	Allow
120	Custom TCP	TCP (6)	1024 - 65535	0.0.0.0/0	Allow
*	All traffic	All	All	0.0.0.0/0	Deny

Edit outbound rules [Info](#)

Outbound rules control the outgoing traffic that's allowed to leave the VPC.

Rule number Info	Type Info	Protocol Info	Port range Info	Destination Info	Allow/Deny Info	
100	HTTP (80)	TCP (6)	80	0.0.0.0/0	Allow	Remove
110	Custom TCP	TCP (6)	1024-65535	0.0.0.0/0	Allow	Remove
*	All traffic	All	All	0.0.0.0/0	Deny	

[Add new rule](#) [Sort by rule number](#)

[Cancel](#) [Preview changes](#) [Save changes](#)

acl-00b4e75d5071a58a0 / capstone-public-nacl [Actions](#)

Details [Info](#)

Network ACL ID
[acl-00b4e75d5071a58a0](#)

Owner
[169997184002](#)

Associated with
-

Default
No

VPC ID
[vpc-0a9cb05af3bd3a807 / capstone-vpc](#)

[Inbound rules](#) | [Outbound rules](#) | [Subnet associations](#) | [Tags](#)

Outbound rules (3) [Edit outbound rules](#)

Rule number	Type	Protocol	Port range	Destination	Allow/Deny
100	HTTP (80)	TCP (6)	80	0.0.0.0/0	Allow
110	Custom TCP	TCP (6)	1024 - 65535	0.0.0.0/0	Allow
*	All traffic	All	All	0.0.0.0/0	Deny

acl-00b4e75d5071a58a0 / capstone-public-nacl

[Actions](#)

Details [Info](#)

Network ACL ID
acl-00b4e75d5071a58a0

Associated with
2 Subnets

Default
No

VPC ID
vpc-0a9cb05af3bd3a807 / capstone-
vpc

Owner
169997184002

[Inbound rules](#)[Outbound rules](#)[Subnet associations](#)[Tags](#)

Subnet associations (2)

[Edit subnet associations](#)

Name	Subnet ID	Associated with	Availability Zone	IPv4 CIDR	IPv6 CIDR
capstone-public-subnet-1	subnet-0d3fd9eda2cef...	acl-00b4e75d5071a58a0 / capstone-pu...	use1-az6 (us-east-1a)	10.0.1.0/24	-
capstone-public-subnet-2	subnet-0e0b37fb476ef...	acl-00b4e75d5071a58a0 / capstone-pu...	use1-az1 (us-east-1b)	10.0.2.0/24	-

IAM Role

Roles (12) [Info](#)

An IAM role is an identity you can create that has specific permissions with credentials that are valid for short durations. Roles can be assumed by entities that you trust.

☐	Role name	Trusted entities	Last activity
☐	AWSServiceRoleForCloudTrail	AWS Service: cloudtrail (Service-Link	497 days ago
☐	AWSServiceRoleForCloudWatchEvents	AWS Service: events (Service-Linked	-
☐	AWSServiceRoleForElasticLoadBalancing	AWS Service: elasticloadbalancing (S	55 minutes ago
☐	AWSServiceRoleForObservabilityAdmin	AWS Service: observabilityadmin (Se	-
☐	AWSServiceRoleForOrganizations	AWS Service: organizations (Service-	152 days ago
☐	AWSServiceRoleForServiceQuotas	AWS Service: servicequotas (Service-	-
☐	AWSServiceRoleForSSO	AWS Service: sso (Service-Linked Rol	-
☐	AWSServiceRoleForSupport	AWS Service: support (Service-Link	-
☐	AWSServiceRoleForTrustedAdvisor	AWS Service: trustedadvisor (Service	-
☐	capstone-ec2-role	AWS Service: ec2	-

AWS Secrets Manager or Parameter Store

[AWS Secrets Manager](#) > [Secrets](#) > Store a new secret

Failed to fetch a list of Amazon RDS databases.

User: arn:aws:iam::169997184002:user/Whiz_User_335192.84352483 is not authorized to perform: rds:DescribeDBInstances on resource: arn:aws:rds:us-east-1:169997184002:db:* because no identity-based policy allows the rds:DescribeDBInstances action

Troubleshoot

Step 1

Choose secret type

Step 2

Configure secret

Step 3 - optional

Configure rotation

Step 4

Review

Choose secret type

Secret type [Info](#)

☒ Credentials for Amazon RDS database

☐ Credentials for Amazon DocumentDB database

☐ Credentials for Amazon Redshift data warehouse

☐ Credentials for other database

☐ Managed external secret
Secrets vended by your third-party software vendor.

☐ Other type of secret
API key, OAuth token, other.

Least Privilege

The screenshot displays the AWS Management Console interface. At the top, a table lists EC2 instances:


Name	Instance ID	Instance state	Instance type	Status check	Alarm status	Availability Zone
capstone-app-1	i-06d51cc56886a4028	Running	t2.micro	2/2 checks passed	View alarms +	us-east-1a
capstone-app-2	i-0804b3c7c32902abd	Running	t2.micro	2/2 checks passed	View alarms +	us-east-1b

Below the table, the details for instance **i-06d51cc56886a4028 (capstone-app-1)** are shown. The 'Details' tab is active, displaying the following information:

- Instance summary:** Instance ID i-06d51cc56886a4028, IP address -, Hostname type ip-10-0-3-68.ec2.internal, Answer private resource DNS name -, Auto-assigned IP address -.
- Public IPv4 address:** -
- Instance state:** Running
- Private IP DNS name (IPv4 only):** ip-10-0-3-68.ec2.internal
- Instance type:** t2.micro
- VPC ID:** vpc-0a9cb05af3bd3a807 (capstone-vpc)
- Private IPv4 addresses:** 10.0.3.68
- Public DNS:** -
- Elastic IP addresses:** -
- AWS Compute Optimizer finding:** Opt-in to AWS Compute Optimizer for recommendations.

7. Monitoring & Logging

CloudWatch metrics were enabled by default for EC2 instances, allowing monitoring of CPU utilization, network activity, and system performance.

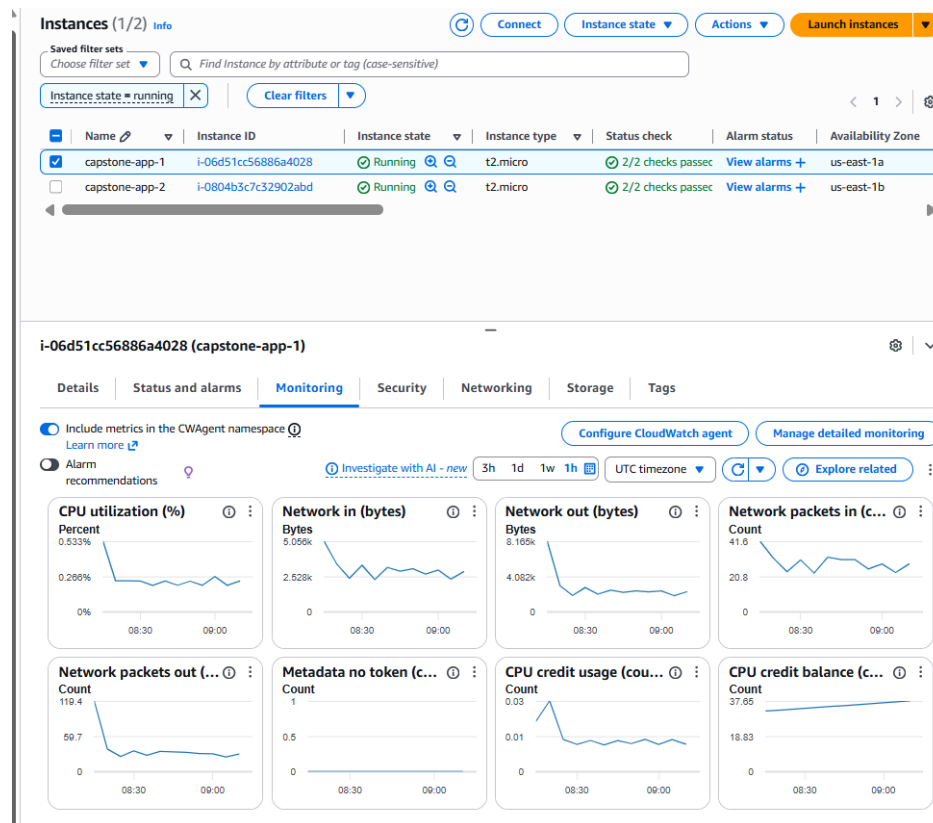

Create CloudWatch Alarm

Select metric

CPUUtilization

1h3h12h1d3d1wCustom

UTC timezone

Line

Percent

0.533%

0.366%

0.199%

06:1506:3006:4507:0007:1507:3007:4508:0008:1508:3008:4509:0009:15

CPUUtilization

Browse (5)

Multi source query

Graphed metrics (1)

Options

Source

Add math

Add query

All

EC2

Per-Instance Metrics

Alarm recommendations

Graph with SQL

Graph search

Search for any metric, dimension, resource id or account id

CPUUtilization

Clear filters

< 1 >

	Instance name 5/5	Instanceid	Metric name	Alarms
☐	No name specified	i-02c8e05675912...	CPUUtilization	No alarms
☐	No name specified	i-0798e904fb758...	CPUUtilization	No alarms
☐	No name specified	i-0873e628ff17fb...	CPUUtilization	No alarms
☒	capstone-app-1	i-06d51cc56886a4...	CPUUtilization	No alarms
☐	capstone-app-2	i-0804b3c7c3290...	CPUUtilization	No alarms

Conditions

Threshold type

Static

Use a value as a threshold

Anomaly detection

Use a band as a threshold

Whenever CPUUtilization is...

Define the alarm condition.

Greater

> threshold

Greater/Equal

>= threshold

Lower/Equal

<= threshold

Lower

< threshold

than...

Define the threshold value.

70

Must be a number.

Additional configuration

Alarms (1)

Clear selection

Create composite alarm

Actions

Create alarm

Filter alarms

Quick filters

< 1 >

	Name	State	Actions	Actions muted - new	Last state update (UTC)
☐	capstone-high-cpu	OK	Actions enabled	-	2026-04-20 09:23:25

8. Automation (Mandatory)

```
C:\Users\USER PC\OneDrive\Desktop\pr>terraform init
Initializing the backend...
Initializing provider plugins...
- Finding latest version of hashicorp/aws...
- Installing hashicorp/aws v6.41.0...
- Installed hashicorp/aws v6.41.0 (signed by HashiCorp)
Terraform has created a lock file .terraform.lock.hcl to record the provider
selections it made above. Include this file in your version control repository
so that Terraform can guarantee to make the same selections by default when
you run "terraform init" in the future.
```

Terraform has been successfully initialized!

You may now begin working with Terraform. Try running "terraform plan" to see any changes that are required for your infrastructure. All Terraform commands should now work.

If you ever set or change modules or backend configuration for Terraform, rerun this command to reinitialize your working directory. If you forget, other commands will detect it and remind you to do so if necessary.

```
C:\Users\USER PC\OneDrive\Desktop\pr>
```

```
C:\Users\USER PC\OneDrive\Desktop\pr>terraform validate
Success! The configuration is valid.
```

```
C:\Users\USER PC\OneDrive\Desktop\pr>terraform plan
```

Planning failed. Terraform encountered an error while generating this plan.

Error: No valid credential sources found

```
with provider["registry.terraform.io/hashicorp/aws"],
on provider.tf line 1, in provider "aws":
  1: provider "aws" {}
```

Please see <https://registry.terraform.io/providers/hashicorp/aws> for more information about providing credentials.

Error: failed to refresh cached credentials, no EC2 IMDS role found, operation error ec2imds: GetMetadata, exceeded maximum number of attempts, 3, request send failed, Get "http://169.254.169.254/latest/meta-data/iam/security-credentials/": dial tcp 169.254.169.254:80: connectex: A socket operation was attempted to an unreachable network.

```
C:\Users\USER PC\OneDrive\Desktop\pr>
```