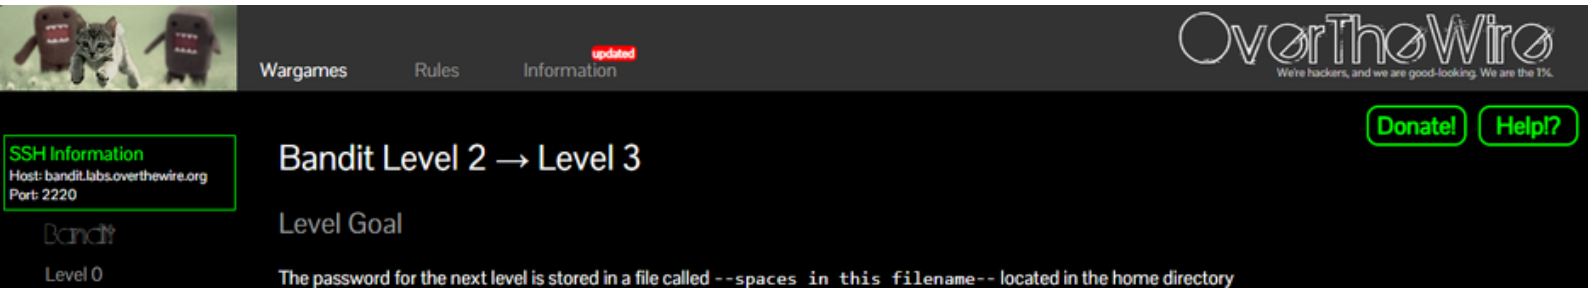

Bandit Level 2 ---> Level 3

1. Connection Details

- **Host:** bandit.labs.overthewire.org
- **Port:** 2220
- **Username:** bandit3
- **Password:** MNk8KNH3Usiio41PRUEoDFPqfxLPSmx

```
cyres@ubuntu-GUI:~$ ssh bandit3@bandit.labs.overthewire.org -p 2220
                      _                     _ _ _
                     | |__   __ _ _ __   __| (_) |_
                     | '_ \ / _` | '_ \ / _` | | __|
                     | |_) | (_| | | | | (_| | | |_
                     |_.__/ \__,_|_| |_|\__,_|_|\__|


                    This is an OverTheWire game server.
            More information on http://www.overthewire.org/wargames

backend: gibson-0
bandit3@bandit.labs.overthewire.org's password:
```

so let's go and see what is present in the home directory

```
bandit3@bandit:~$ ls
inhere
bandit3@bandit:~$ cd inhere/
```

- You will see a directory named **inhere**. Move into it
- Now, try to list the files inside inhere:

```
bandit3@bandit:~$ ls
inhere
bandit3@bandit:~$ cd inhere/
bandit3@bandit:~/inhere$ ls
bandit3@bandit:~/inhere$
```

- **The problem:** It looks empty! Nothing is returned.

If you enter a directory, type ls, and see **absolutely nothing** returned, you should immediately suspect **hidden files**.

Why does this happen?

The ls command is programmed by default to ignore any filename starting with ..

Common "Hidden" files you'll see:

- **(.)** This represents the **current directory** you are in.

- **(..)** This represents the **parent directory** (one level up).
- **(.hidden)** This is a specific file created for this game level.

so let’s find out what is their in that directory

```
bandit3@bandit:~$ ls
inhere
bandit3@bandit:~$ cd inhere/
bandit3@bandit:~/inhere$ ls
bandit3@bandit:~/inhere$ ls -a
.  ..  ...Hiding-From-You
bandit3@bandit:~/inhere$
```

The "Aha!" Moment

Their is a hidden file called **...Hiding-from-You.** When you are doing a penetration test or a CTF (Capture The Flag) like Bandit, if a directory feels "too empty," it is a major red flag. Always run **ls -a** or **ls -la** (to see permissions too) before moving on.

```
bandit3@bandit:~$ ls
inhere
bandit3@bandit:~$ cd inhere/
bandit3@bandit:~/inhere$ ls
bandit3@bandit:~/inhere$ ls -a
.  ..  ...Hiding-From-You
bandit3@bandit:~/inhere$ cat .Hiding-From-You
cat: .Hiding-From-You: No such file or directory
bandit3@bandit:~/inhere$ cat ...Hiding-From-You
2WmrDFRmJIq3IPxneAaMGhap0pFhF3NJ
bandit3@bandit:~/inhere$
```

now we can use the **cat** command to read the file

Ready for Bandit 4?
password for next level is **2WmrDFRmJIq3IPxneAaMGhap0pFhF3NJ**