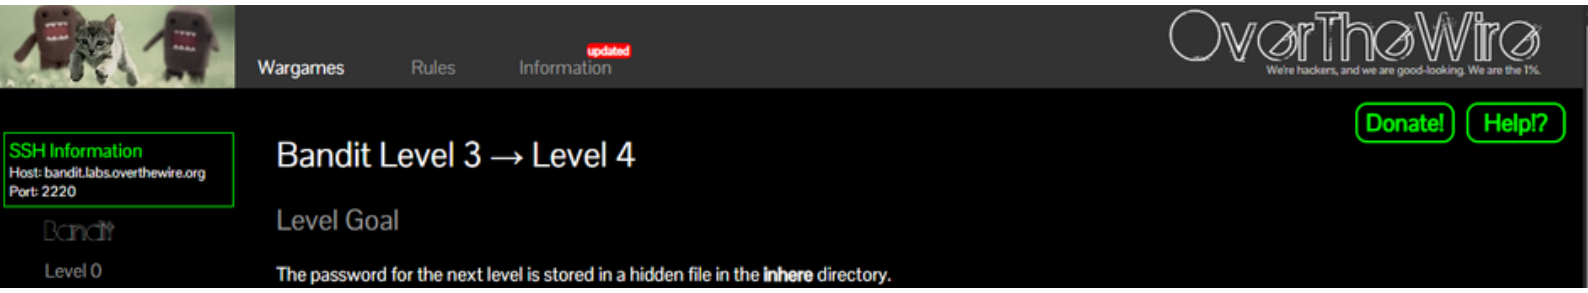

Bandit Level 3 ---> Level 4

1. Connection Details

- **Host:** bandit.labs.overthewire.org
- **Port:** 2220
- **Username:** bandit4
- **Password:** 2WmrDFRmJIq3IPxneAaMGhap0pFhF3NJ

```
cyres@ubuntu-GUI:~$ ssh bandit4@bandit.labs.overthewire.org -p 2220
                         _                     _ _ _
                        | |__   __ _ _ __   __| (_) |_
                        | '_ \ / _` | '_ \ / _` | | __|
                        | |_) | (_| | | | | (_| | | |_
                        |_.__/ \__,_|_| |_|\__,_|_|\__|


                      This is an OverTheWire game server.
            More information on http://www.overthewire.org/wargames

backend: gibson-0
bandit4@bandit.labs.overthewire.org's password:
```

The challenge is located inside the **inhere** directory

```
bandit4@bandit:~$ ls
inhere
bandit4@bandit:~$ cd inhere/
bandit4@bandit:~/inhere$
```

```
bandit4@bandit:~$ ls
inhere
bandit4@bandit:~$ cd inhere/
bandit4@bandit:~/inhere$ ls
-file00  -file01  -file02  -file03  -file04  -file05  -file06  -file07  -file08  -file09
bandit4@bandit:~/inhere$
```

- If you run a simple **ls**, you will see **10 files** named **-file00** through **-file09.**

```
bandit4@bandit:~/inhere$ ls -l
total 40
-rw-r----- 1 bandit5 bandit4 33 Apr  3 15:18 -file00
-rw-r----- 1 bandit5 bandit4 33 Apr  3 15:18 -file01
-rw-r----- 1 bandit5 bandit4 33 Apr  3 15:18 -file02
-rw-r----- 1 bandit5 bandit4 33 Apr  3 15:18 -file03
-rw-r----- 1 bandit5 bandit4 33 Apr  3 15:18 -file04
-rw-r----- 1 bandit5 bandit4 33 Apr  3 15:18 -file05
-rw-r----- 1 bandit5 bandit4 33 Apr  3 15:18 -file06
-rw-r----- 1 bandit5 bandit4 33 Apr  3 15:18 -file07
-rw-r----- 1 bandit5 bandit4 33 Apr  3 15:18 -file08
-rw-r----- 1 bandit5 bandit4 33 Apr  3 15:18 -file09
bandit4@bandit:~/inhere$
```

- by typing we see all files are in same size **33 bytes,** so now let's open the file to see it's content.
  * so as you see their is a dot in starting of the file so use **./** to open the files.

```
bandit4@bandit:~/inhere$ cat ./-file00
◆◆y◆◆er`◆v>/◆a@.◆'m◆◆◆◆◆◆◆◆bandit4@bandit:~/inhere$
```

so rather than opening all the file one by one takes more time so we use this two methods to find how what is inside the file or type content type

method 1 : by using the command **file ./-file0***

```
bandit4@bandit:~/inhere$ file ./-file0*
./-file00: data
./-file01: data
./-file02: data
./-file03: DOS executable (COM), start instruction 0x8c887e10 c3ee96c9
./-file04: data
./-file05: data
./-file06: data
./-file07: ASCII text
./-file08: data
./-file09: data
bandit4@bandit:~/inhere$
```

now you can clearly see the **-file07** is **ASCII text** so that says the file 7 is a human readable file.

method 2 : by using the another command **file ./* | grep text**

```
bandit4@bandit:~/inhere$ file ./* | grep text
./-file07: ASCII text
bandit4@bandit:~/inhere$
bandit4@bandit:~/inhere$
```

even in here it exactly points the file 7

now we will look into the file by using **cat** command followed by **./**

```
bandit4@bandit:~/inhere$ cat ./-file07
4oQYVPkxZOOEOO5pTW81FB8j8lxXGUQw
bandit4@bandit:~/inhere$
```

now we go the password for the bandit 5 : **4oQYVPkxZOOEOO5pTW81FB8j8LxXGUQw**