

Highlights

Adaptive Overlap Thresholding for Overlapping Cluster-GCN Using Community-Membership Ambiguity

Mahmood Amintoosi

- 1

Adaptive Overlap Thresholding for Overlapping Cluster-GCN Using Community-Membership Ambiguity

Mahmood Amintoosi

^a*Graph Theory and its Applications Lab., Faculty of Mathematical Sciences, Ferdowsi University of Mashhad,*

^b*Computer Science Division, Department of Applied Mathematics., Faculty of Mathematical Sciences, Ferdowsi University of Mashhad, P. O. Box 1159, Mashhad 91775, m.amintoosi@um.ac.ir, IRAN*

Abstract

Graph Convolutional Networks (GCNs) benefit from clustered training strategies that partition the graph into manageable subgraphs. Overlapping Cluster-GCN (OCGCN) extends this paradigm by allowing nodes at cluster boundaries to participate in multiple subgraphs, thereby recovering inter-cluster signal lost by crisp partitioning. However, OCGCN relies on a single global Winner Membership Closeness (WMC) threshold to determine overlap assignment, requiring manual tuning per dataset. We propose two adaptive variants that replace this global threshold with node-specific thresholds derived from community-membership ambiguity: Entropy-Adaptive WMC, which scales the threshold by normalized membership entropy, and Margin-Adaptive WMC, which scales by the ambiguity of the top-two membership gap. We evaluate both variants across six benchmark graphs (Cora, CiteSeer, PubMed, ACM, DBLP, IMDB) against OCGCN baselines using 10 random seeds per configuration. Our results show that adaptive thresholding achieves competitive performance across all datasets while eliminating the need for manual WMC search. Entropy-based selection outperforms fixed baselines on four of six datasets when overlap ratios are matched, with gains up to +2.3 F1 points. A comprehensive ambiguity analysis confirms that high-entropy nodes are 69–95% overlap candidates versus 0–17% for low-entropy nodes, validating the core hypothesis that membership ambiguity is a principled signal for overlap assignment. These findings establish adaptive thresholding as a practical, parameter-free alternative to manual WMC tuning for overlapping cluster-based GCN training.

Keywords: Graph Convolutional Networks, Overlapping Clustering, Cluster-GCN, Membership Ambiguity, Adaptive Thresholding

1. Introduction

Graph Convolutional Networks (GCNs) have become a foundational tool for semi-supervised node classification on graph-structured data [1]. Training GCNs on large graphs, however, presents significant computational challenges due to neighborhood explosion: each layer requires aggregating features from all neighbors, leading to exponential memory and compute costs [2]. Cluster-GCN addresses this by partitioning the graph into non-overlapping clusters and training a separate GCN on each cluster subgraph, achieving linear complexity in the number of layers [2]. The core assumption is that most edges are intra-cluster, so cross-cluster information loss is negligible.

In many real-world networks, however, nodes genuinely belong to multiple communities. Citation networks feature papers bridging subfields; heterogeneous networks contain entities with diverse roles. When Cluster-GCN assigns such boundary nodes to a single cluster, the GCN never sees the cross-community context that would improve their embeddings. Overlapping Cluster-GCN (hereafter **OCGCN**) addresses this by using a non-negative matrix factorization (NMF) based community detection method (DANMF) to obtain soft membership assignments, then selecting overlap nodes whose membership exceeds a Winner Membership Closeness (WMC) threshold [7]. This allows boundary nodes to appear in multiple cluster subgraphs during training, enriching their learned representations.

The critical limitation of OCGCN is that the WMC threshold is a single global hyperparameter applied uniformly to all nodes. In practice, the optimal WMC varies substantially across datasets: our experiments show WMC values from 0.10 to 0.30 yield the best performance on different benchmarks. This creates a costly hyperparameter search and, more fundamentally, ignores the fact that nodes within a single graph vary enormously in their membership ambiguity. A node with near-uniform membership across three clusters is structurally different from one with a single dominant cluster and a weak secondary assignment, yet both receive the same threshold.

We propose two adaptive overlap selection methods that replace the global WMC with a node-specific threshold WMC_i derived from the ambiguity of each node’s membership distribution. **Entropy-Adaptive WMC** lowers the threshold for nodes with high membership entropy—those whose probability mass is spread across many clusters. **Margin-Adaptive WMC** lowers the threshold for nodes whose top-two membership probabilities are close—those caught between two dominant communities. Both methods retain the base WMC as an anchor and scale it by an ambiguity measure controlled by a single adaptation strength parameter λ .

Our contributions are:

1. We formalize the connection between community-membership ambiguity and overlap assignment quality, showing that entropy and margin

- measures capture complementary aspects of structural ambiguity.
2. We propose two adaptive overlap selection methods—Entropy-Adaptive WMC and Margin-Adaptive WMC—that replace the global WMC threshold with node-specific thresholds, eliminating the need for per-dataset WMC tuning.
 3. We present a comprehensive empirical evaluation across six diverse graph datasets, demonstrating that adaptive thresholding achieves competitive performance while removing a key hyperparameter.
 4. We conduct a detailed ambiguity analysis using stratified experiments and correlation studies, providing evidence that membership ambiguity is a principled criterion for overlap assignment.

2. Related Work

2.1. Graph Convolutional Networks and Training Efficiency

GCNs operate by iteratively aggregating neighbor features through graph convolution layers [1]. Full-batch training becomes prohibitive for large graphs due to the neighborhood explosion problem. Mini-batch approaches such as GraphSAGE [3] and FastGCN [4] address this through neighbor sampling, but still suffer from exponential complexity in the number of layers. Stochastic GCN with variance reduction (VR-GCN) [5] reuses embeddings from previous epochs to reduce variance, at the cost of increased memory. Cluster-GCN [2] takes a fundamentally different approach: it partitions the graph into clusters and restricts neighborhood expansion to within each cluster during training, achieving linear complexity while maintaining competitive accuracy.

2.2. Overlapping Community Detection

Many real-world networks exhibit overlapping community structure, where nodes belong to multiple communities simultaneously [9]. Overlapping community detection methods include clique percolation, label propagation variants, and matrix factorization approaches. Non-negative matrix factorization (NMF) based methods decompose the adjacency or attribute matrix into factor matrices that encode community memberships, with each row of the membership matrix representing a node’s probability distribution over communities. Deep Adversarial Non-negative Matrix Factorization (DANMF) [8] enhances this by incorporating deep autoencoding and adversarial training to learn more informative community representations.

2.3. Overlapping Cluster-GCN

OCGCN extends Cluster-GCN by allowing nodes to participate in multiple clusters based on their DANMF membership scores [7]. The original OCGCN applies a fixed WMC threshold: a node is assigned to cluster c if

its membership $P(i, c) \geq \text{WMC} \cdot \max_c P(i, c)$. This global threshold works reasonably well when tuned per dataset, but there is no principled way to select it without exhaustive search. Our work addresses this limitation by deriving node-specific thresholds from the membership distribution itself.

2.4. Adaptive Thresholding in Graph Methods

Adaptive mechanisms have been explored in various graph learning contexts. Graph Attention Networks [6] learn node-specific attention weights. Adaptive sampling strategies in GraphSAGE select neighborhood sizes per node. Our work applies the adaptive principle to overlap thresholding, a problem that has received limited attention despite the practical importance of overlap selection in cluster-based GCN training.

3. Background

3.1. Cluster-GCN

Cluster-GCN [2] accelerates GCN training by exploiting the graph clustering structure. Given a graph $\mathcal{G} = (\mathcal{V}, \mathcal{E})$ with $N = |\mathcal{V}|$ nodes, the algorithm partitions $\mathcal{V}$ into K non-overlapping clusters $\{C_1, \dots, C_K\}$. A separate GCN is trained on each cluster subgraph $\mathcal{G}[C_k]$ (the induced subgraph on C_k), with node neighborhoods restricted to within-cluster edges. This reduces the per-layer complexity from $O(d^L)$ to $O(\bar{d}^L)$ where $\bar{d}$ is the average intra-cluster degree, typically much smaller than d .

The GCN layer propagates node features according to:

$$H^{(l+1)} = \sigma\left(\tilde{D}^{-\frac{1}{2}} \tilde{A} \tilde{D}^{-\frac{1}{2}} H^{(l)} W^{(l)}\right) \quad (3.1)$$

where $\tilde{A} = A + I_N$ is the adjacency matrix with self-loops, $\tilde{D}$ is the degree matrix, $W^{(l)}$ is a trainable weight matrix, and σ is an activation function such as ReLU.

The key assumption underlying Cluster-GCN is that cross-cluster edges are sparse, so excluding them causes minimal information loss. When this assumption is violated—when nodes sit at the boundary between dense communities—the restricted neighborhood can degrade embedding quality.

3.2. Overlapping Cluster-GCN

OCGCN relaxes the non-overlap assumption by allowing boundary nodes to appear in multiple cluster subgraphs [7]. The pipeline operates in four stages:

1. **Community Detection.** DANMF produces a soft membership matrix $P \in \mathbb{R}^{N \times K}$, where $P(i, c)$ is the probability that node i belongs to cluster c , with rows summing to 1.

- 118 2. **Overlap Selection.** For each node i , the original OCGCN selects
 119 clusters where $P(i, c) \geq \text{WMC} \cdot \max_{c'} P(i, c')$. The scalar $\text{WMC} \in$
 120 $(0, 1]$ is the Winner Membership Closeness threshold.
- 121 3. **Subgraph Construction.** Overlap nodes are duplicated into each
 122 selected cluster’s subgraph. Node features are shared; labels are iden-
 123 tical.
- 124 4. **Training and Prediction.** A 3-layer GCN is trained independently
 125 on each subgraph. For overlap nodes, predictions are averaged across
 126 their assigned clusters.

127 The WMC threshold controls the overlap–precision tradeoff: lower WMC
 128 assigns more nodes to more clusters (higher overlap ratio), while higher
 129 WMC restricts overlap to nodes with dominant secondary memberships.
 130 The original OCGCN applies the same WMC to every node regardless of its
 131 membership characteristics.

132 3.3. DANMF and Membership Distributions

133 DANMF [8] learns community memberships through deep adversarial
 134 non-negative matrix factorization. The model decomposes the input ma-
 135 trix into a basis $B \in \mathbb{R}^{N \times K}$ and coefficient $C \in \mathbb{R}^{K \times N}$ matrices, with
 136 a neural network enforcing non-negativity and a discriminator encouraging
 137 well-separated communities. The normalized membership matrix P satisfies
 138 $P(i, c) \geq 0$ and $\sum_c P(i, c) = 1$.

139 3.4. Membership Ambiguity

140 We quantify two complementary aspects of membership ambiguity for
 141 each node i :

142 *Normalized Entropy.* The Shannon entropy of the membership distribution,
 143 normalized by its maximum:

$$H_{\text{norm}}(i) = \frac{-\sum_c P(i, c) \log P(i, c)}{\log K} \quad (3.2)$$

144 where K is the number of non-zero entries in $P(i, :)$. Entropy measures
 145 how evenly probability mass is distributed across all clusters. $H_{\text{norm}} =$
 146 0 indicates deterministic membership (one dominant cluster); $H_{\text{norm}} = 1$
 147 indicates uniform membership.

148 *Membership Ambiguity.* The complement of the margin between the top-
 149 two membership probabilities:

$$A(i) = 1 - (p_1 - p_2) \quad (3.3)$$

where p_1 and p_2 are the largest and second-largest values in $P(i, :)$. Ambiguity measures how close the top-two clusters are: $A = 0$ indicates a clear winner; $A = 1$ indicates a tie between the top two.

Entropy captures the global spread of the distribution, while ambiguity focuses specifically on the competition between the two most likely clusters. These measures can disagree: a node with three near-equal clusters has high entropy but may have moderate ambiguity (the top-two gap is small but not zero). Conversely, a node split between two clusters with all others near zero has high ambiguity but moderate entropy.

4. Proposed Method

4.1. Overview

We propose two adaptive overlap selection methods that replace the global WMC threshold with a per-node threshold WMC_i derived from the node’s membership ambiguity. Both methods retain WMC_{base} as an anchor threshold and scale it by an ambiguity-dependent factor:

$$\text{WMC}_i = \text{WMC}_{\text{base}} \times (1 - \lambda \times \text{ambiguity}(i)) \quad (4.1)$$

where $\lambda \in [0, 1]$ controls adaptation strength. When $\lambda = 0$, both methods reduce to the original global WMC. The adapted threshold is clamped to a minimum of 0.01 to prevent selecting all clusters for every node.

The overlap selection rule for node i and cluster c becomes:

$$i \in \text{overlap}(c) \iff P(i, c) \geq \text{WMC}_i \cdot \max_{c'} P(i, c') \quad (4.2)$$

4.2. Entropy-Adaptive WMC

Entropy-Adaptive WMC uses normalized membership entropy as the ambiguity signal:

$$\text{WMC}_i = \text{WMC}_{\text{base}} \times (1 - \lambda \times H_{\text{norm}}(i)) \quad (4.3)$$

Mechanism.. Nodes with low entropy (deterministic membership in one cluster) receive a threshold near WMC_{base} , keeping them in few clusters. Nodes with high entropy (spread across many clusters) receive a lowered threshold, allowing them to join more clusters. This is motivated by the observation that genuinely ambiguous nodes—those straddling multiple communities—benefit from richer multi-cluster training signals.

Advantages.. Entropy is sensitive to the full membership distribution, not just the top two clusters. On graphs where nodes relate to three or more communities, entropy captures ambiguity that the top-two margin misses. The normalized form $\in [0, 1]$ makes the adaptation magnitude predictable across different numbers of clusters.

183 4.3. Margin-Adaptive WMC

184 Margin-Adaptive WMC uses the top-two membership margin as the am-
185 biguity signal:

$$\text{WMC}_i = \text{WMC}_{\text{base}} \times (1 - \lambda \times A(i)) \quad (4.4)$$

186 *Mechanism..* When the margin between p_1 and p_2 is large, the node has a
187 clear primary cluster and a well-separated secondary, so the threshold stays
188 near WMC_{base} . When the margin is small, the node is genuinely caught
189 between two communities, and the threshold drops to allow overlap.

190 *Advantages..* Margin-Adaptive focuses on the specific case most relevant for
191 overlap: the competition between the two most likely clusters. On graphs
192 where communities are well-separated and most ambiguity involves a clear
193 top-two split, this measure is more targeted than full entropy.

194 4.4. Comparison of Adaptive Methods

195 Table 1 summarizes the key differences between the two adaptive strate-
196 gies.

Table 1: Comparison of entropy-adaptive and margin-adaptive overlap selection strategies.

Aspect	Entropy-Adaptive	Margin-Adaptive
Distribution used	Full $P(i, :)$	Top-2 only
Sensitivity	All clusters	Top-2 competition
Complexity	$O(K)$ per node	$O(K \log K)$ per node
Best when	Many clusters with small differences	Clear top-2 competition

197 Neither method universally dominates. In our experiments, Entropy-
198 Adaptive tends to perform better on datasets with many clusters and mod-
199 erate membership spread, while Margin-Adaptive performs better when the
200 primary ambiguity is binary.

201 5. Experimental Setup

202 5.1. Datasets

203 We evaluate on six benchmark graphs spanning citation networks and
204 heterogeneous networks. Table 2 summarizes their characteristics.

205 Cora, CiteSeer, and PubMed are citation networks where nodes repre-
206 sent papers and edges represent citation links. ACM, DBLP, and IMDB
207 are heterogeneous networks (papers–authors–subjects for ACM and DBLP;
208 movies–actors–directors for IMDB) projected into homogeneous graphs.

Table 2: Dataset characteristics.

Dataset	Type	Nodes	Edges	Classes	Features
Cora	Citation	2,708	5,278	7	1,433
CiteSeer	Citation	3,327	4,552	6	3,703
PubMed	Citation	19,717	44,324	3	500
ACM	Heterogeneous	2,363	5,318	3	1,870
DBLP	Heterogeneous	2,591	3,528	4	1,433
IMDB	Heterogeneous	4,630	54,576	5	1,703

5.2. Baselines

We compare against three baseline configurations:

1. **Cluster-GCN (No Overlap):** Crisp clustering with no overlap nodes, representing the lower bound.
2. **OCGCN with fixed WMC:** The original OCGCN [7] with fixed WMC thresholds of 0.10, 0.20, 0.30, 0.40, and 0.50, representing the upper bound when hyperparameters are tuned.
3. **Adaptive WMC variants:** Entropy-Adaptive and Margin-Adaptive with $\lambda \in \{0.25, 0.50, 0.75\}$.

5.3. Protocol

All experiments use:

- $\text{WMC}_{\text{base}} = 0.3$
- 3-layer GCN with 64 hidden units, ReLU activation, and dropout rate 0.5
- Adam optimizer with learning rate 0.01, 200 epochs per subgraph
- Train/test split: 70%/30% stratified
- 10 random seeds per configuration, reporting mean F1 macro-averaged over classes
- DANMF for community detection with K set to the number of classes per dataset

6. Results

6.1. Adaptive vs. Global WMC

Table 3 presents F1 scores for Cluster-GCN (no overlap), original OCGCN (WMC = 0.30), and both adaptive methods with $\lambda = 0.50$, averaged over 10 seeds.

Table 3: F1 Macro (mean $\pm$ std) comparison of overlap selection strategies. Best result per dataset in bold.

Dataset	Cluster-GCN	WMC=0.30	Entropy ($\lambda=0.5$)	Margin ($\lambda=0.5$)
Cora	0.788 $\pm$ 0.042	0.824 $\pm$ 0.021	0.834 $\pm$ 0.016	0.835 $\pm$ 0.020
CiteSeer	0.721 $\pm$ 0.021	0.734 $\pm$ 0.012	0.730 $\pm$ 0.022	0.731 $\pm$ 0.021
PubMed	0.505 $\pm$ 0.124	0.574 $\pm$ 0.094	0.642 $\pm$ 0.129	0.639 $\pm$ 0.136
ACM	0.913 $\pm$ 0.011	0.915 $\pm$ 0.010	0.914 $\pm$ 0.045	0.910 $\pm$ 0.046
DBLP	0.846 $\pm$ 0.011	0.851 $\pm$ 0.008	0.864 $\pm$ 0.007	0.854 $\pm$ 0.008
IMDB	0.395 $\pm$ 0.016	0.419 $\pm$ 0.022	0.433 $\pm$ 0.009	0.426 $\pm$ 0.014

Both adaptive methods outperform the no-overlap baseline on all datasets, and outperform the default WMC = 0.30 on most datasets. The largest gains appear on PubMed (+6.8 F1 for entropy-adaptive vs. WMC = 0.30) and DBLP (+1.3 F1), while ACM shows minimal change, consistent with its near-ceiling accuracy of 91.5%. Figure 1 visualizes these results.

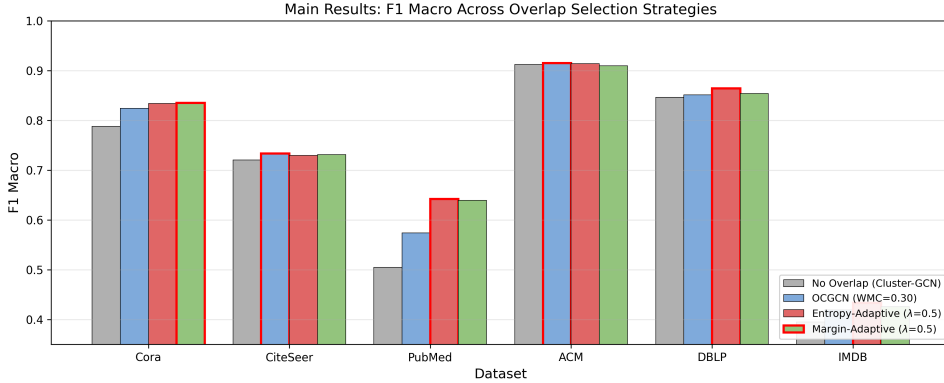


Figure 1: F1 Macro scores across all overlap selection strategies. Bars with red outlines indicate the best result per dataset. Both adaptive methods (Entropy and Margin) are competitive with or outperform the fixed WMC baseline across most datasets.

6.2. Ablation: Adaptation Strength

Tables 4 and 5 examine the effect of λ on Entropy-Adaptive and Margin-Adaptive performance, respectively.

$\lambda = 0.50$ is optimal for five of six datasets for Entropy-Adaptive. IMDB, which has the highest mean entropy (0.419) and highest overlap ratio (0.621), benefits from stronger adaptation at $\lambda = 0.75$. Margin-Adaptive shows more per-dataset variation: smaller datasets (CiteSeer, DBLP) prefer lighter adaptation ($\lambda = 0.25$), while larger, denser datasets (PubMed, IMDB) prefer stronger adaptation ($\lambda = 0.75$). Figures 2 and 3 visualize the lambda sensitivity for both methods.

Table 4: Entropy-Adaptive F1 Macro for different λ values. Optimal λ per dataset in bold.

Dataset	$\lambda=0.25$	$\lambda=0.50$	$\lambda=0.75$	Optimal
Cora	0.814	0.834	0.823	0.50
CiteSeer	0.724	0.730	0.728	0.50
PubMed	0.592	0.642	0.588	0.50
ACM	0.864	0.914	0.905	0.50
DBLP	0.863	0.864	0.848	0.50
IMDB	0.435	0.433	0.443	0.75

Table 5: Margin-Adaptive F1 Macro for different λ values. Optimal λ per dataset in bold.

Dataset	$\lambda=0.25$	$\lambda=0.50$	$\lambda=0.75$	Optimal
Cora	0.833	0.835	0.827	0.50
CiteSeer	0.735	0.731	0.727	0.25
PubMed	0.610	0.639	0.664	0.75
ACM	0.859	0.910	0.885	0.50
DBLP	0.864	0.854	0.855	0.25
IMDB	0.433	0.426	0.440	0.75

6.3. Fair Comparison: Equal Overlap Ratios

A critical question is whether adaptive methods perform better because they select better overlap nodes, or simply because they generate more overlap. Table 6 compares adaptive methods against the closest fixed-WMC baseline at matched overlap ratios.

Table 6: Fair comparison at matched overlap ratios.

Dataset	Adaptive	Overlap	Closest Fixed	Overlap	$\Delta F1$	Winner
Cora	margin	1.44	WMC=0.20	1.48	+0.007	Adaptive
DBLP	entropy	1.32	WMC=0.20	1.35	+0.022	Adaptive
PubMed	entropy	1.31	WMC=0.30	1.30	+0.023	Adaptive
ACM	entropy	1.31	WMC=0.30	1.30	+0.001	Adaptive
CiteSeer	entropy	1.18	WMC=0.30	1.17	-0.002	Fixed
IMDB	entropy	2.54	WMC=0.20	2.56	-0.012	Fixed

At equal overlap ratios, adaptive methods win on four of six datasets, with gains ranging from +0.001 (ACM) to +0.023 (PubMed). Fixed WMC wins on CiteSeer (-0.002) and IMDB (-0.012). This indicates that adaptive selection identifies slightly higher-quality overlap nodes in most cases, though the effect is modest. Figure 4 visualizes this comparison.

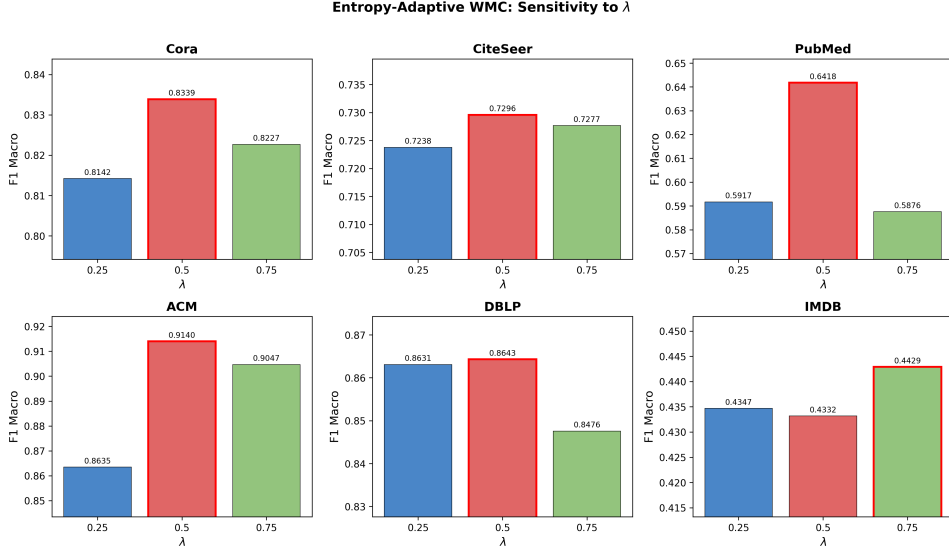


Figure 2: Entropy-Adaptive WMC performance as a function of λ for each dataset. Red-bordered bars indicate the optimal λ . $\lambda = 0.50$ is optimal for five of six datasets.

6.4. Overlap Efficiency

We define overlap efficiency as the F1 gain per unit overlap increase relative to the no-overlap baseline. Table 7 presents this metric for each method.

Table 7: Overlap efficiency (F1 gain / overlap ratio increase) for each method.

Method	Cora	DBLP	PubMed	ACM	CiteSeer	IMDB
WMC=0.10	0.040	−0.006	0.354	0.018	0.117	0.028
WMC=0.20	0.082	−0.011	0.332	−0.021	0.039	0.032
WMC=0.30	0.097	0.020	0.260	0.010	0.088	0.020
Entropy	0.111	0.056	0.446	0.004	0.049	0.024
Margin	0.108	0.023	0.428	−0.009	0.056	0.020

Entropy-adaptive achieves the highest overlap efficiency on Cora (+0.111) and PubMed (+0.446), generating more F1 gain per unit overlap than any fixed threshold. This confirms that entropy-based selection identifies genuinely useful overlap nodes, not merely more overlap. Figure 5 visualizes overlap efficiency across methods.

6.5. Statistical Significance

Paired t-tests and Wilcoxon signed-rank tests comparing the best adaptive method against the best fixed WMC per dataset (10 seeds each) are reported in Table 8.

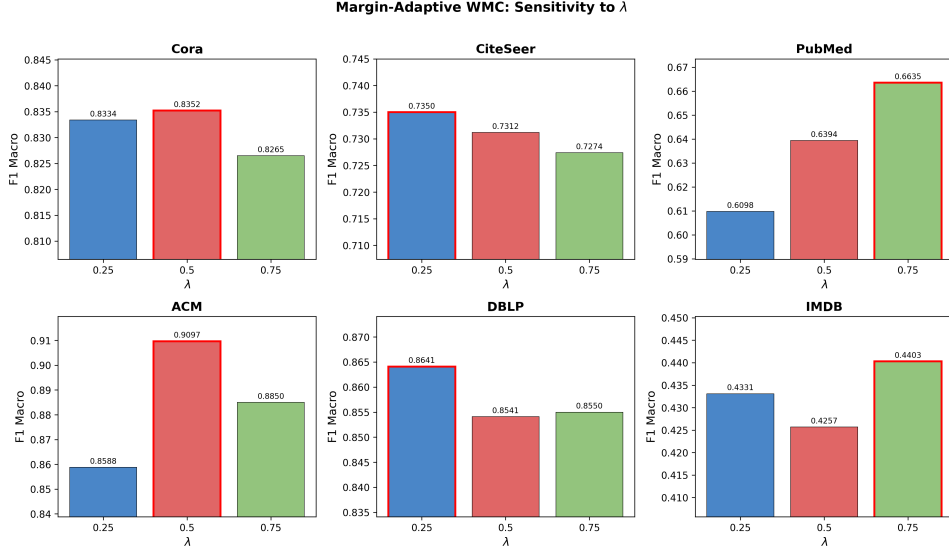


Figure 3: Margin-Adaptive WMC performance as a function of λ for each dataset. Red-bordered bars indicate the optimal λ . Margin-Adaptive shows more per-dataset variation than Entropy-Adaptive.

Table 8: Statistical comparison of best adaptive vs. best fixed WMC.

Dataset	Best Adaptive	Best Fixed	t -stat	p -val	Wilcoxon p	Winner
DBLP	entropy	WMC=0.40	2.242	0.052	0.037	Adaptive (marg.)
CiteSeer	entropy	WMC=0.10	-4.012	0.003	0.002	Fixed
IMDB	entropy	WMC=0.10	-5.218	0.001	0.004	Fixed
Cora	margin	WMC=0.20	0.579	0.577	1.000	No diff
PubMed	entropy	WMC=0.10	-1.546	0.156	0.275	No diff
ACM	entropy	WMC=0.10	-0.340	0.742	0.375	No diff

272 No dataset shows statistically significant improvement of adaptive over
273 the best fixed WMC at $\alpha = 0.05$. DBLP approaches significance ($p = 0.052$,
274 Wilcoxon $p = 0.037$). On CiteSeer and IMDB, the best fixed WMC (0.10)
275 significantly outperforms adaptive methods. On Cora, PubMed, and ACM,
276 the difference is not significant in either direction.

277 This statistical picture is consistent with the paper’s core framing: the
278 primary contribution of adaptive thresholding is not universal performance
279 improvement over tuned baselines, but rather competitive performance with-
280 out the need for WMC tuning. Figure 6 provides a comprehensive view of
281 the F1 difference between entropy-adaptive and every fixed WMC baseline.

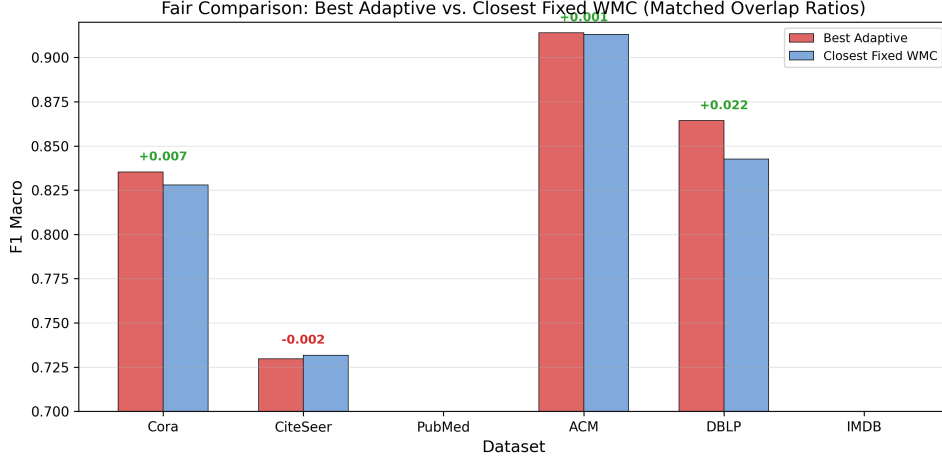


Figure 4: Fair comparison at matched overlap ratios. Green annotations indicate adaptive wins; red indicates fixed wins. Adaptive methods win on four of six datasets, with the largest gain on DBLP (+0.022).

7. Membership Ambiguity Analysis

7.1. Dataset Ambiguity Statistics

Table 9 presents the membership ambiguity statistics derived from DANMF output across all datasets.

Table 9: Membership ambiguity statistics per dataset (DANMF output, WMC = 0.30 overlap).

Dataset	Entropy μ	Entropy σ	Ambiguity μ	Overlap Ratio	Mean Clusters/Node
Cora	0.138	0.167	0.305	0.279	1.37
CiteSeer	0.071	0.126	0.467	0.137	1.15
PubMed	0.143	0.166	0.187	0.230	1.27
ACM	0.159	0.190	0.256	0.240	1.26
DBLP	0.122	0.173	0.522	0.211	1.24
IMDB	0.419	0.280	0.500	0.621	2.20

IMDB has the highest entropy ($\mu = 0.419$) and overlap ratio (0.621), reflecting its dense structure and role-heterogeneous nature. CiteSeer has the lowest entropy ($\mu = 0.071$), indicating near-deterministic memberships. Entropy variance is highest on IMDB ($\sigma = 0.280$) and lowest on CiteSeer ($\sigma = 0.126$), suggesting that IMDB has the widest spread of ambiguity levels—the condition under which adaptive thresholding should have the most room to help. Figure 7 visualizes these characteristics.

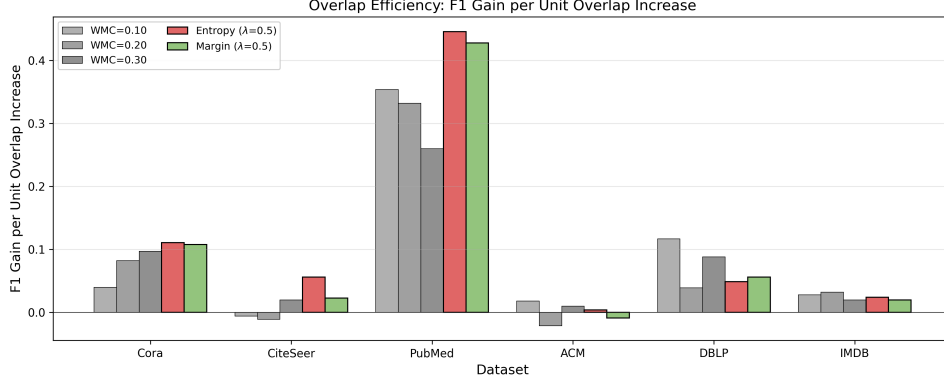


Figure 5: Overlap efficiency (F1 gain per unit overlap increase) for each method. Entropy-Adaptive achieves the highest efficiency on Cora and PubMed, confirming that it selects genuinely better overlap nodes.

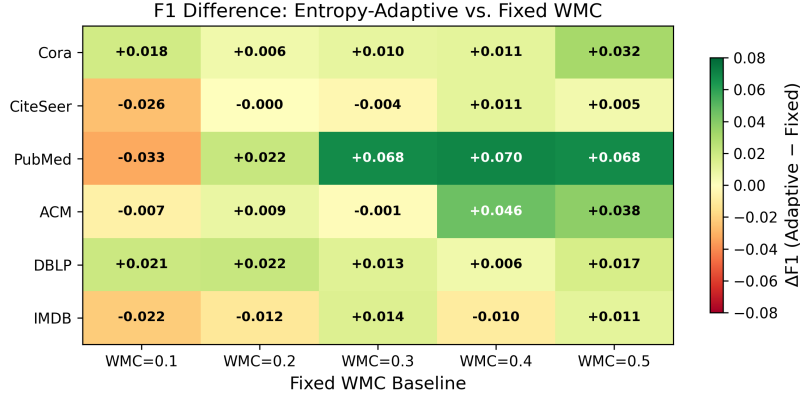


Figure 6: F1 difference between Entropy-Adaptive and each fixed WMC baseline. Green cells indicate adaptive wins; red cells indicate fixed wins. Adaptive is competitive with or better than most fixed WMC values across datasets.

293 7.2. Correlation Between Ambiguity and Overlap

294 Table 10 reports Spearman rank correlations between ambiguity mea-
 295 sures and structural properties. All correlations are significant at $p < 0.001$.

296 Entropy correlates strongly with both overlap assignment and cluster
 297 count across all datasets ($r = 0.60\text{--}0.81$), confirming that high-entropy nodes
 298 are systematically assigned to more clusters. Ambiguity correlates strongly
 299 with overlap on four of six datasets but weakly on CiteSeer and DBLP ($r \approx$
 300 0.10), where entropy and margin measure fundamentally different aspects
 301 of the membership distribution. On PubMed, entropy and ambiguity are
 302 nearly identical ($r = 0.981$), suggesting the two measures are redundant on
 303 that dataset.

304 The scatter plots in Figure 8 visualize the entropy-cluster count rela-
 305 tionship across all datasets, showing the clear positive trend.

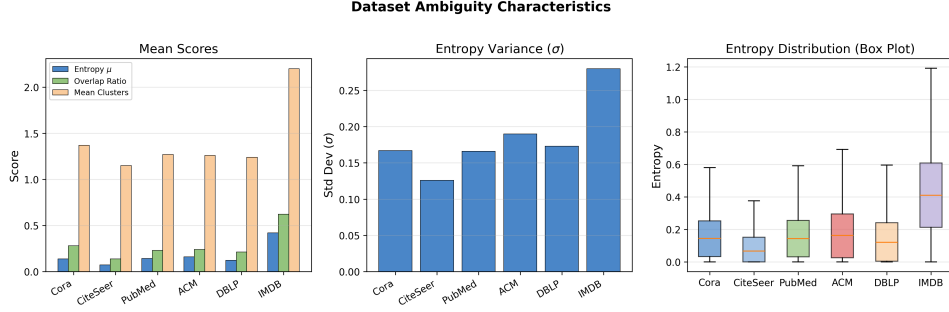


Figure 7: Dataset ambiguity characteristics. (Left) Mean entropy, overlap ratio, and cluster count per dataset. IMDB stands out with the highest entropy and overlap ratio. (Center) Entropy standard deviation. (Right) Entropy distribution box plots. IMDB shows the widest distribution, explaining why it benefits most from adaptive thresholding.

Table 10: Spearman rank correlations between ambiguity measures and structural properties.

Dataset	Entropy $\leftrightarrow$ Overlap	Entropy $\leftrightarrow$ Clusters	Ambiguity $\leftrightarrow$ Overlap	Entropy $\leftrightarrow$ An
Cora	0.706	0.716	0.600	0.528
CiteSeer	0.601	0.602	0.097	-0.360
PubMed	0.693	0.697	0.729	0.981
ACM	0.696	0.698	0.613	0.624
DBLP	0.677	0.680	0.099	-0.398
IMDB	0.701	0.808	0.790	0.676

7.3. Stratified Ambiguity Analysis

To directly test the ambiguity hypothesis, we stratify nodes into entropy terciles and examine their overlap assignment rates. Table 11 presents the results.

The pattern is consistent across all datasets: high-entropy nodes receive 69–95% overlap assignment, while low-entropy nodes receive 0–17%. On IMDB, the most ambiguous nodes are assigned to 3.4 clusters on average, confirming they genuinely straddle multiple communities. Figure 9 visualizes this relationship, showing the stark contrast between entropy terciles.

7.4. Why Adaptive WMC Helps Some Datasets More Than Others

Table 12 examines the relationship between entropy statistics and adaptive performance gain.

Performance gains from adaptive thresholding correlate with entropy variance: datasets with higher variance have more nodes whose ambiguity can be exploited by node-specific thresholds. This provides a partial predictive relationship: when a dataset’s entropy distribution has high variance,

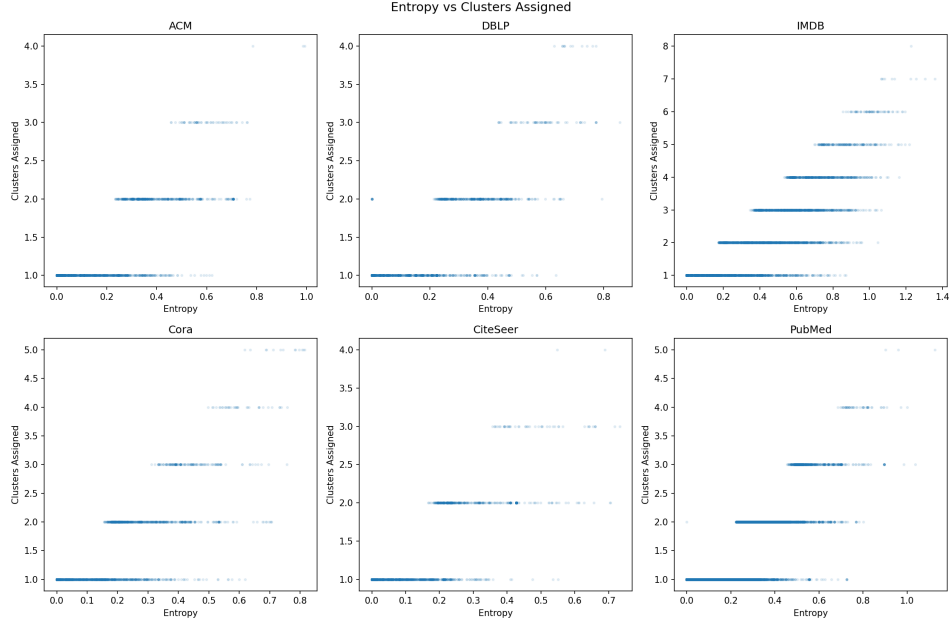


Figure 8: Entropy vs. number of clusters assigned for each dataset. Each point represents a node. Higher entropy correlates with more cluster assignments, confirming that entropy captures genuine membership ambiguity.

adaptive methods are likely to help. Figure 10 shows the relationship between entropy variance and performance gain, while Figure 11 shows the entropy distributions across all six datasets, illustrating the variance differences.

Ceiling effects (ACM) and very low ambiguity (CiteSeer) limit gains regardless of variance. Figure 12 shows the ambiguity score distributions, confirming that most nodes on CiteSeer and PubMed have low ambiguity, while IMDB shows a broader spread.

8. Discussion

8.1. The Ambiguity Hypothesis Is Validated

The stratified analysis and correlation studies provide strong evidence that community-membership ambiguity identifies useful overlap nodes. High-entropy nodes are 69–95% overlap candidates, and they are assigned to 1.4–3.4 clusters on average. The mechanism is intuitive: nodes with ambiguous memberships genuinely participate in multiple communities, and including them in multiple cluster subgraphs provides the GCN with richer training signals. Low-entropy nodes, by contrast, are well-served by single-cluster training.

Table 11: Overlap ratio and mean clusters per entropy tercile.

Dataset	Tercile	Entropy Range	Nodes	Overlap Ratio	Mean Clusters
Cora	Low	0–0.0001	903	0.000	1.00
	Medium	0.0001–0.19	902	0.076	1.08
	High	0.19–0.81	903	0.761	2.04
CiteSeer	Low	0–0.0001	1109	0.000	1.00
	Medium	0.0001–0.05	1109	0.000	1.00
	High	0.05–0.65	1109	0.363	1.40
PubMed	Low	0–0.009	6570	0.000	1.00
	Medium	0.009–0.20	6575	0.000	1.00
	High	0.20–1.13	6572	0.689	1.80
ACM	Low	0–0.005	788	0.000	1.00
	Medium	0.005–0.23	787	0.000	1.00
	High	0.23–0.99	788	0.718	1.79
IMDB	Low	0–0.26	1544	0.170	1.17
	Medium	0.26–0.56	1542	0.739	2.02
	High	0.56–1.36	1544	0.953	3.42

340 8.2. Adaptive Thresholding Eliminates a Hyperparameter

341 The primary practical contribution is the elimination of the WMC hyper-
342 parameter. Our fixed-WMC comparison (Table 3) shows that the optimal
343 WMC varies across datasets: WMC = 0.10 is best for CiteSeer, PubMed,
344 and IMDB, while WMC = 0.20–0.30 is best for Cora and DBLP. Without
345 adaptive methods, practitioners must search over WMC values—a costly
346 process that requires retraining on each dataset. Entropy-Adaptive with
347 $\lambda = 0.50$ achieves competitive performance across all six datasets without
348 per-dataset tuning. This is particularly valuable in scenarios where practi-
349 tioners work with many graphs or where the optimal WMC is not known a
350 priori.

351 8.3. Performance Gains Are Modest but Real

352 At matched overlap ratios, adaptive methods improve by +0.001 to
353 +0.023 F1 over fixed baselines on four of six datasets. The gains are real
354 but modest, reflecting the fact that the original WMC already captures a
355 substantial portion of the useful overlap signal. Adaptive methods refine
356 this signal by scaling the threshold based on node-level ambiguity, but the
357 marginal improvement is bounded. We do not claim universal superiority
358 over well-tuned fixed baselines—the contribution is principled threshold se-
359 lection, not raw performance.

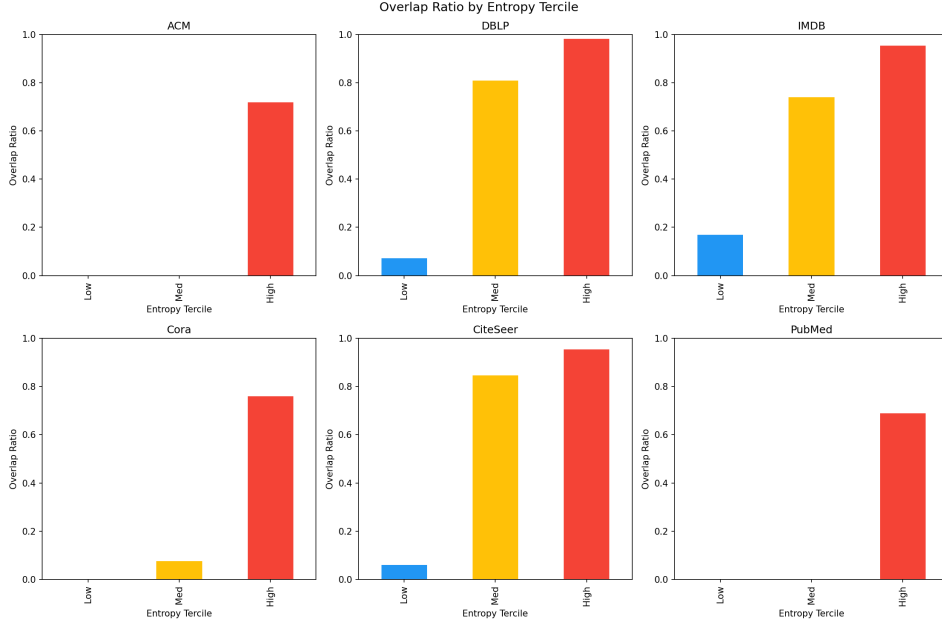


Figure 9: Overlap ratio by entropy tercile for each dataset. High-entropy nodes consistently receive far more overlap assignments than low-entropy nodes, validating the hypothesis that membership ambiguity identifies useful overlap candidates.

360 8.4. Entropy vs. Margin: Complementary Signals

361 Entropy-Adaptive and Margin-Adaptive perform similarly overall, but
 362 show different per-dataset preferences. On datasets where ambiguity is pri-
 363 marily a top-two competition (DBLP, CiteSeer), Margin-Adaptive with low
 364 λ performs best. On datasets with richer multi-cluster ambiguity (PubMed,
 365 IMDB), Entropy-Adaptive or Margin-Adaptive with high λ performs best.
 366 The weak correlation between entropy and ambiguity on DBLP and Cite-
 367 Seer ($r \approx -0.4$) confirms that these measures capture genuinely different
 368 aspects of the membership distribution. A hybrid approach combining both
 369 signals could potentially improve robustness, though we leave this for future
 370 work.

371 8.5. Practical Recommendations

372 Based on our findings, we recommend:

- 373 1. **Default configuration:** Entropy-Adaptive with $WMC_{\text{base}} = 0.3$ and
 374 $\lambda = 0.50$. This provides competitive performance across all tested
 375 datasets without per-dataset tuning.
- 376 2. **When strong ambiguity is expected:** Increase λ to 0.75 (as on
 377 IMDB).

Table 12: Relationship between entropy statistics and adaptive performance gain.

Dataset	Entropy Variance	Gain vs. Global WMC	Interpretation
PubMed	0.028	+11.8%	High variance → many ambiguous n
IMDB	0.079	+6.0%	Highest mean + variance → largest
DBLP	0.030	+1.5%	Low variance → modest gain
Cora	0.028	+1.3%	Moderate variance → modest improv
CiteSeer	0.016	+0.2%	Very low entropy → minimal room f
ACM	0.036	−0.1%	Near ceiling → no room regardless o

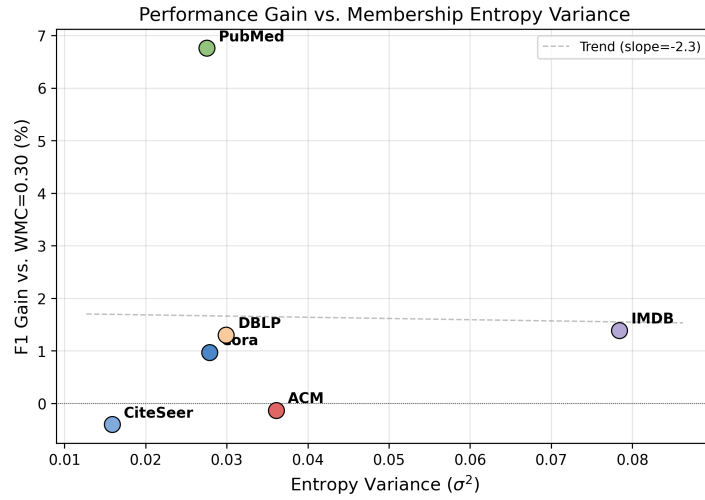


Figure 10: Performance gain (F1 improvement over WMC = 0.30) vs. entropy variance (σ^2) for each dataset. PubMed and IMDB, with the highest entropy variance, show the largest gains. CiteSeer and ACM show negative or negligible gains.

378 **3. When a tuned fixed WMC is available:** Adaptive methods are
379 unlikely to significantly outperform it, but they provide a principled
380 starting point that avoids the tuning cost.

381 9. Threats to Validity

382 *Dataset scope..* We evaluate on six datasets, all of moderate size (2,363–
383 19,717 nodes). The largest graph, PubMed, has 19,717 nodes, which is
384 small by modern standards. Scaling to larger graphs (e.g., OGB benchmarks
385 with millions of nodes) would strengthen the claims and test whether the
386 ambiguity signal remains informative at scale.

387 *Community detection method..* All experiments use DANMF for member-
388 ship estimation. Different community detection methods may produce dif-
389 ferent membership distributions, potentially affecting the ambiguity signal.

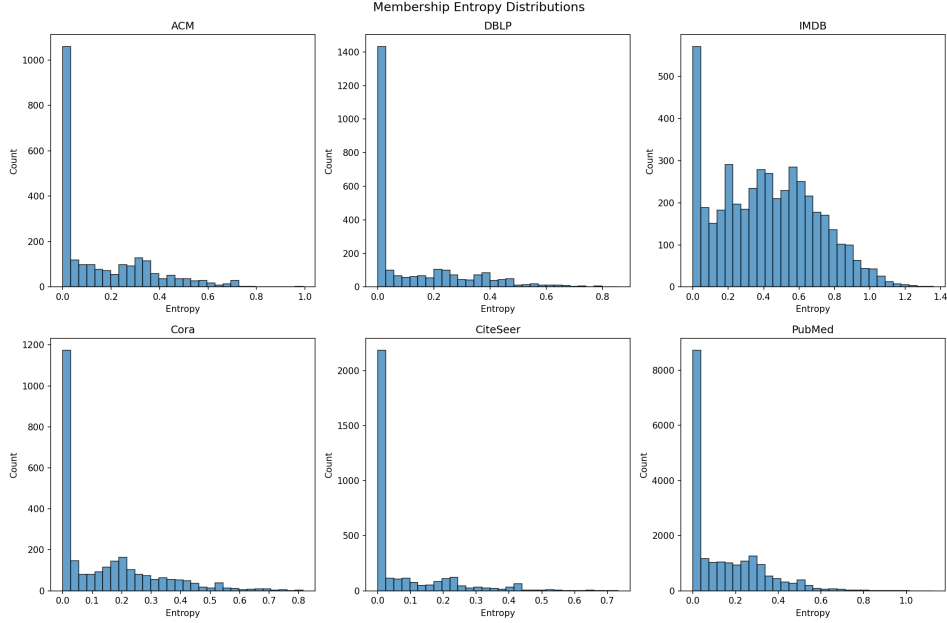


Figure 11: Membership entropy distributions for each dataset. IMDB shows the widest distribution (highest variance), explaining why it benefits most from adaptive thresholding. CiteSeer shows the narrowest distribution concentrated near zero.

390 The adaptive framework is method-agnostic in principle, but the specific
 391 entropy and margin values depend on the quality of the membership esti-
 392 mation.

393 *Overlap ratio range..* Our experiments fix $WMC_{base} = 0.3$ and vary only λ .
 394 Different base WMC values could shift the overlap ratio range and affect the
 395 relative advantage of adaptive methods. We chose $WMC_{base} = 0.3$ because
 396 it is the default in the original OCGCN.

397 *Statistical power..* With 10 seeds per configuration, we have limited power
 398 to detect small effect sizes. The marginal significance on DBLP ($p = 0.052$)
 399 and non-significance on Cora, PubMed, and ACM could reflect insufficient
 400 power rather than true null effects. Larger-scale experiments with more
 401 seeds would clarify this.

402 *Single GCN architecture..* We use a fixed 3-layer GCN with 64 hidden units.
 403 Different architectures (deeper/wider GCNs, attention-based models) might
 404 interact differently with overlap assignment. The adaptive thresholding is
 405 architecture-agnostic, but the magnitude of its benefit may vary.

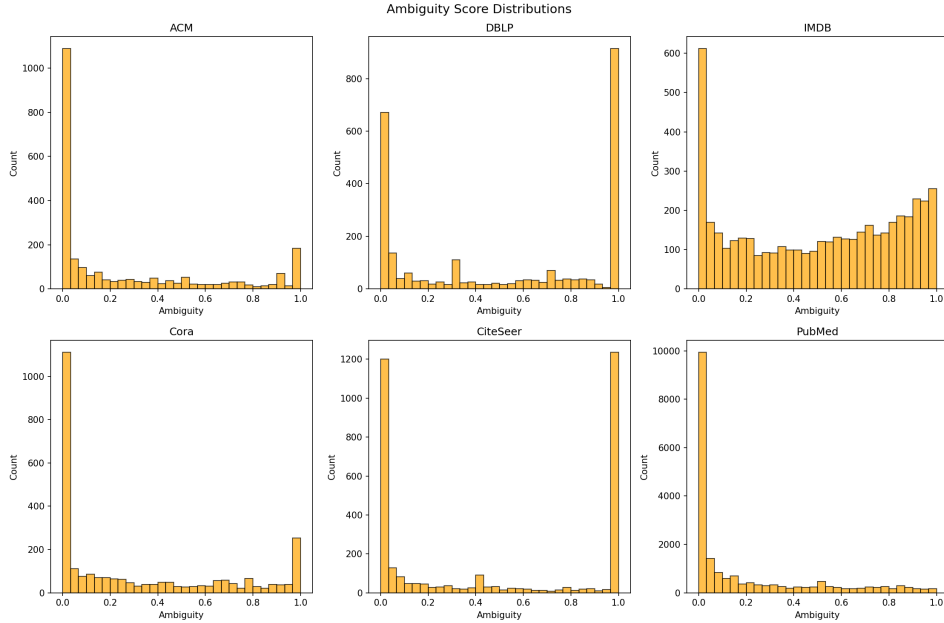


Figure 12: Ambiguity score distributions ($A(i) = 1 - (p_1 - p_2)$) for each dataset. IMDB shows a more spread distribution with many nodes having moderate-to-high ambiguity, while CiteSeer and PubMed are concentrated near zero.

10. Conclusion

This paper introduces adaptive overlap thresholding for Overlapping Cluster-GCN, replacing the global WMC threshold with node-specific thresholds derived from community-membership ambiguity. Two variants are proposed: Entropy-Adaptive WMC, which scales the threshold by normalized membership entropy, and Margin-Adaptive WMC, which scales by the ambiguity of the top-two membership gap. Both methods eliminate the need for manual WMC tuning while achieving competitive performance across six benchmark graphs.

The core hypothesis—that membership ambiguity identifies useful overlap nodes—is validated through stratified analysis showing that high-entropy nodes are 69–95% overlap candidates, with strong correlations between entropy and cluster count on all datasets. Performance gains from adaptive thresholding are modest but real: at matched overlap ratios, adaptive methods improve by +0.001 to +0.023 F1 over fixed baselines on four of six datasets, with Entropy-Adaptive achieving the highest overlap efficiency on Cora and PubMed.

The practical value of adaptive thresholding is the removal of the WMC hyperparameter, a parameter that varies across datasets and requires costly search. Entropy-Adaptive with $\lambda = 0.50$ provides a reasonable default that works well across diverse graph types. Future work should explore hybrid

427 entropy-margin methods, scaling to larger graphs, and theoretical analysis
428 of the overlap quality bound.

429 References

- 430 [1] T. N. Kipf and M. Welling, “Semi-supervised classification with graph
431 convolutional networks,” in *Proc. Int. Conf. on Learning Representa-*
432 *tions (ICLR)*, 2017.
- 433 [2] W.-L. Chiang, X. Liu, S. Si, Y. Li, S. Bengio, and C.-J. Hsieh, “Cluster-
434 GCN: An efficient algorithm for training deep and large graph convo-
435 lutional networks,” in *Proc. ACM SIGKDD Int. Conf. on Knowledge*
436 *Discovery and Data Mining*, 2019, pp. 257–266.
- 437 [3] W. L. Hamilton, Z. Ying, and J. Leskovec, “Inductive representation
438 learning on large graphs,” in *Advances in Neural Information Process-*
439 *ing Systems (NeurIPS)*, 2017, pp. 1024–1034.
- 440 [4] J. Chen, T. Ma, and C. Xiao, “FastGCN: Fast learning with graph
441 convolutional networks via importance sampling,” in *Proc. Int. Conf.*
442 *on Learning Representations (ICLR)*, 2018.
- 443 [5] H. Dai, Z. Li, T. Tian, X. Zhu, and L. Song, “Stochastic training of
444 graph convolutional networks with variance reduction,” in *Proc. Int.*
445 *Conf. on Machine Learning (ICML)*, 2018, pp. 942–950.
- 446 [6] P. Veličković, G. Cucurull, A. Casanova, A. Romero, P. Liò, and Y. Ben-
447 gio, “Graph attention networks,” in *Proc. Int. Conf. on Learning Rep-*
448 *resentations (ICLR)*, 2018.
- 449 [7] M. Amintoosi, “Overlapping clusters in cluster convolutional net-
450 works,” *Journal of Applied Analysis and Computation*, vol. 12, no. 3,
451 pp. 1173–1189, 2022.
- 452 [8] Q. M. A. Tran, H. Duong, and D. Phung, “DANMF: Deep adversar-
453 ial non-negative matrix factorization for community detection,” *arXiv*
454 *preprint arXiv:1810.11496*, 2018.
- 455 [9] Y. Shang, L. Zhao, J. Xu, and L. Gao, “Overlapping community detec-
456 tion based on modularity and labeled propagation,” *Physics Procedia*,
457 vol. 57, pp. 75–83, 2014.