

Dirac integration with a general purpose bookkeeping DB: a complete general suite for distributed resources exploitation

M Chruszcz^{1,2}, C De Santis³, G Donvito⁴, A Fella^{5,6}, R
Grzymkowski², B Santeramo^{4,7}, L Tomassetti^{6,8}, M Zdybal²

¹ Physik-Institut, Universitat Zurich, Zurich, Switzerland

² Henryk Niewodniczanski Institute of Nuclear Physics Polish Academy of Sciences, Krakow, Poland

³ INFN - Sezione di Roma Tor Vergata, Roma, Italy

⁴ INFN - Sezione di Bari, Bari, Italy

⁵ INFN - Sezione di Pisa, Pisa, Italy

⁶ Dipartimento di Matematica e Informatica, Università di Ferrara, Ferrara, Italy

⁷ Dipartimento di Fisica dell'Università e del Politecnico di Bari, Bari, Italy

⁸ INFN - Sezione di Ferrara, Ferrara, Italy

E-mail: bruno.santeramo@ba.infn.it

Abstract. In the context of High Energy Physics computing field the R&D studies aimed to the definition of the data and workload models have been carried on and completed by the SuperB community beyond the experiment life itself. The work resulted of great interest for a generic mid- and small size VO to fulfill Grid exploiting requirements involving CPU-intensive tasks.

We present the R&D line achievements in the design, developments and test of a distributed resource exploitation suite based on DIRAC. The main components of such a suite are the information system, the job wrapper and the new generation DIRAC framework. The DB schema and the SQL logic have been designed to be able to be adaptive with respect to the VO requirements in terms of physics application, job environment and bookkeeping parameters. A deep and flexible integration with DIRAC features has been obtained using SQLAlchemy technology allowing mapping and interaction with the information system. A new DIRAC extension has been developed to include this functionality along with a new set of DIRAC portal interfaces aimed to the job, distributed resources, and metadata management. The results of the first functionality and efficiency tests will be reported.

1. Introduction

In HEP as well in other fields, needs to manage and analyze huge amount of data or simulate large amount of events is a typical issue. Today exist several solutions available for this purpose, but lot of them are developed for particular needs of a specific customer. During SuperB R&D activities, was deployed a solution useful for SuperB itself but capable to be easily adopted by a generic small and mid-size VO.

2. Description of suite design

In order to develop a simple, standard and long term solution, suite components (adopted or developed) are flexible enough to be adapted in order to fulfill needs of a generic VO. Suite components are DIRAC, the Information System and the Job Wrapper (see figure 1).

DIRAC is a well known and widely adopted framework to manage Grid resources, job submission, workflow definition, user authentication, authorization and accounting. The Information System holds metadata related to simulations and information about dataset structures and data placement on Grid resources. Information System is a PostgreSQL database. DIRAC interact with Information System via SQLAlchemy. A REST interface permits updating of Information System to Job Wrapper. The Job Wrapper, executed in bundle with jobs, updates Information System about simulations status and data placement. Job Wrapper is a python script.

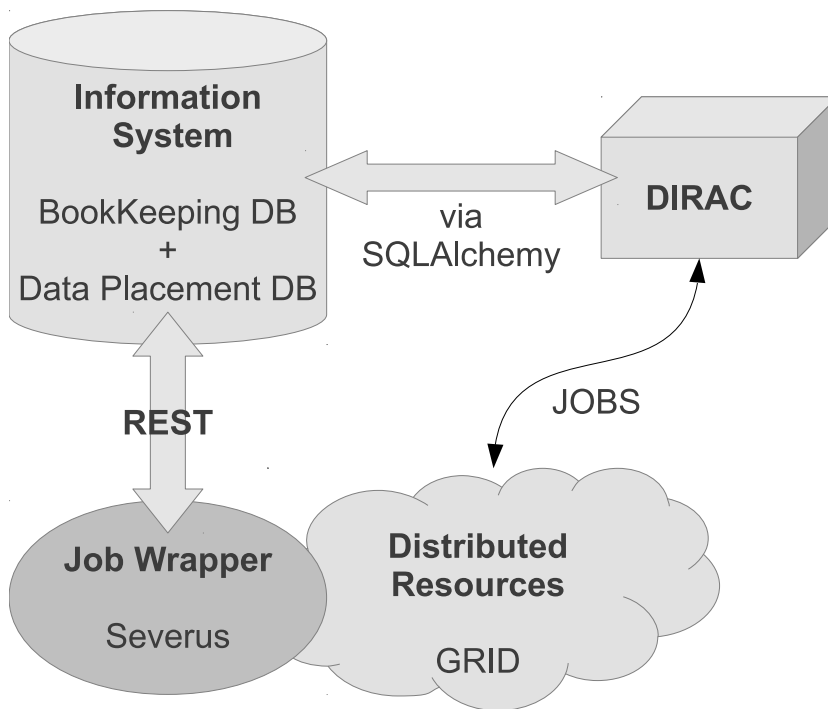


Figure 1. Project bird's eye view.

3. The Dirac extension

DIRAC, born as LHCb MonteCarlo production software, at present time is a complete solution to deploy distributed resources, suitable for large and small communities. DIRAC manage user authentication, authorization and accounting via X509 certificates, allows to apply VO defined scheduling policies, is able to manage resources made available via different grids, cluster, cloud and desktop computer (via BOINC). Data management capabilities include gLite/EGI storage elements as well DIRAC Storage Elements, LCG File Catalog (LFC) as well DIRAC File Catalog (DFC). Webportal offers both user and administrative functionalities. Interfaces can be made using DIRAC API (in python) or RESTful interface language neutral). DIRAC is widely adopted by large and small communities.

DIRAC can be extended to add specific functionalities to fulfill needs of customers. In SuperB needs was an interface with a PostgreSQL BookKeeping database and a webportal able to display monitoring data from this database. DIRAC extension developed is named SuperB DIRAC. DIRAC Service is a way to export functionalities. In SuperB DIRAC a new service, named

SBKService, offers an SQLAlchemy layer able to connect DIRAC itself with a generic SQL DBMS. SBKService maps the bookkeeping (SBK) database using Object Relational Mapping (see section 4). Webportal extension is designed to create and manage simulations, monitoring related jobs and sites. Integration of new functionalities in webportal permits to use only one interface to manage and monitor the entire stack of simulation related tasks.

4. Bookkeeping DB integration

MonteCarlo events production need a method to identify data files and Storage Elements that holds them. A BookKeeping database have been developed to manage metadata associated with data files. The same database stores information about simulations, executed jobs and output data, site availability in terms of installed and supported software. BookKeeping database is used also to schedule jobs submisison in order to complete simulations. Database, named SBK (Super*B* BookKeeping) is modeled to fulfill general requirements of a typical simulation production. Entities in SBK are Session, Production and Request (see figure 2). Session defines a simulation (eg. FastSim and FullSim): parameters and software for simulation are defined by VO managers. Production is a Session subset to produce needed events to simulate a particular scenario (eg. background in detector). Request is a Production subset. The desired number of events to complete a Request is defined during its creation. Final stage is job submission to complete a Request. Request completion is monitored via SBK, allowing job re-submission in order to complete it. SBK design uses the relational model, and the current implementation uses the PostgreSQL RDBMS in a centralized way.

SBK integration in DIRAC is based on SQLAlchemy [5]. SQLAlchemy use Object Relational Mapper paradigm: database entities are mapped as python objects. SQLAlchemy adoption simplify code writing, reading and documenting. SQLAlchemy provides an abstraction layer capable to manage in a trasparent way a wide variety of database backends, giving freedom to change it without needs to re-write code.

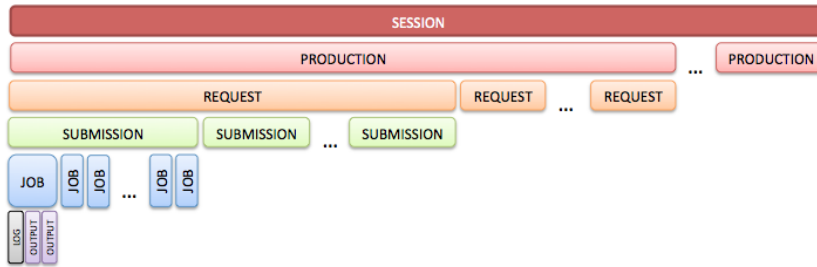


Figure 2. Entities in BookKeeping database.

5. Job wrapper component

Job wrapper named Severus takes care of main simulation job operations (FastSim and FullSim in Super*B* use case):

- copy software to WN
- copy input files to WN
- copy output files in SE and register them in LFC
- copy log in SE and bookkeeping DB
- update job status in bookkeeping DB

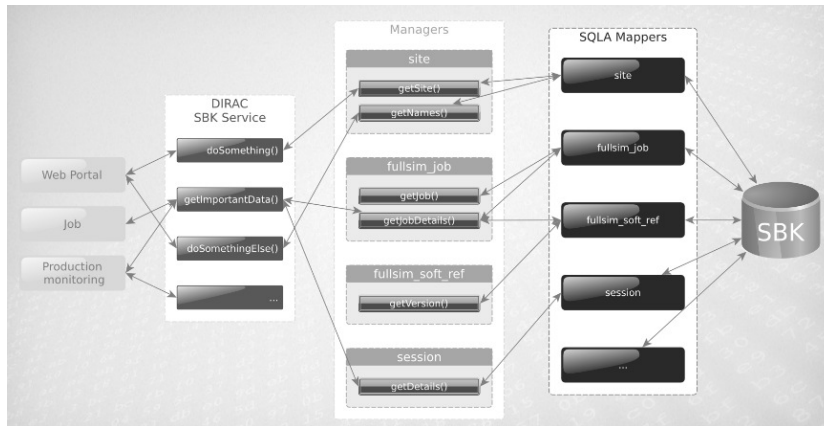


Figure 3. SBKService schema.

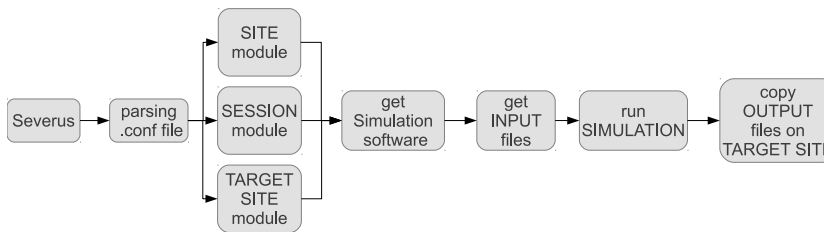


Figure 4. Severus workflow.

Access type (lcg or direct) from the worker node to the SE of the site is automatically recognized and implemented using lcg utils. A module for each session takes care of properly setting environment variables according to simulation (aka session). A configuration file customizes its behavior at execution time. Configuration file has several sections:

- **OPTIONS:** general parameters
- **SOFTWARE:** info about the executable
- **REST:** info about the REST interface to be used for communications with DB
- **SITE:** info about the submission site where the job will be runnign. A module for each site is loaded
- **TARGETSITE:** info about site where replicas of output files must be done
- **INPUT:** info about input files for the job
- **OUTPUT:** info for stage-out phase
- **EXPORT VARS:** list of envvars to be exported on the WN
- **SESSION_NAME:** key-value pairs for simulation parameters, for specified session

6. Simulation production use case: the SuperB experience

Simulation Production is designed to manage huge MonteCarlo productions. A webportal, named WebUI[4], is available to manage the entire stack of operations related to this use case: user management, definition of new "Sessions", "Productions" and "Request", job submission and monitoring, sites management for productions. Production manager users can add and delete sites, add and delete CEs and SEs, set a site a site as enabled/disabled and supported/unsupported for a given session, manage "Sessions", "Productions" and "Request". These

actions involve only BookKeeping database, building up automatically required tables. Shifter users can submit and monitor jobs for a given Request. Job submission in WebUI is performed via Ganga[1], while configurations files for submission are generated by WebUI itself taking data from SBK. Ganga submit jobs to grid via WMS using standard gLite commands. Job execution on WNs is driven by Severus (see section 5), while job status updates in SBK is performed via REST interface. Stagein and Stageout as well as LFC registration of output files is performed even by Severus. See figure 5 for Simulation Production workflow.

SuperBDIRAC goal is porting WebUI functionalities in DIRAC to manage jobs, distributed resources and metadata related to a MonteCarlo production using a BookKeeping database. Job submission is directly managed by DIRAC. Grid computing resources can be used via WMS or direct submission to CREAM CEs, computer clusters can be accessed via ssh connections, Cloud resources are available via VMDIRAC module, even desktop computers can be used via Boinc. User authentication via X509 certificates and authorization VOMS-role based are builtin in DIRAC. SuperBDIRAC enhance DIRAC integrating the generic bookkeeping database SBK via SQLAlchemy. DIRAC webportal is extended in order to provide an interface for Production manager actions as well as shifter tasks. At present time not all WebUI functionalities are yet ported in SuperBDIRAC, but site and job monitoring from SBK are available. In section 7 are reported results of first SuperBDIRAC functionality test.

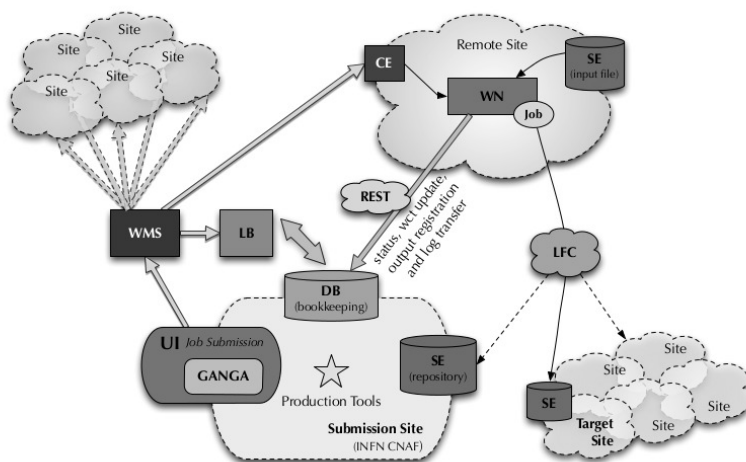


Figure 5. Simulation Production workflow.

7. Functionality Test

A functionality test was performed to demonstrate the capability of SuperBDIRAC to integrate the monitoring of a bookkeeping database in DIRAC webportal.

7.1. Goal description

DIRAC capabilities and performance as job management tool are well documented (insert some reference). SuperB distributed simulation stack (WebUI + SBK + Severus) was successfully used in 3 simulation campaigns (ask to Armando for confirmation and references).

Functionality Test goal is to demonstrate if SuperBDIRAC is capable of substitute WebUI as monitoring tool for job submission, showing data from a bookkeeping database. Test "Q-factor"

Job Monitor						
Job Status	Submitter	Prod Series	Run num	Submission time	Last update	Status reason
running	bsanteramo	2010_July	33001413	2013-09-14 10:12:22	2013-09-14 10:29:46	FastSim executed in 665.1 seconds. Copying output...
running	bsanteramo	2010_July	33001355	2013-09-14 10:12:22	2013-09-14 10:29:46	FastSim executed in 678.4 seconds. Copying output...
done	bsanteramo	2010_July	33001367	2013-09-14 10:12:22	2013-09-14 10:29:46	Output files copied in 7.0 seconds. Job completed.
running	bsanteramo	2010_July	33001385	2013-09-14 10:12:22	2013-09-14 10:29:46	FastSim executed in 679.0 seconds. Copying output...
done	bsanteramo	2010_July	33001352	2013-09-14 10:12:22	2013-09-14 10:29:44	Output files copied in 7.0 seconds. Job completed.
running	bsanteramo	2010_July	33001450	2013-09-14 10:12:22	2013-09-14 10:29:44	FastSim executed in 658.9 seconds. Copying output...
running	bsanteramo	2010_July	33001368	2013-09-14 10:12:22	2013-09-14 10:29:44	FastSim executed in 724.2 seconds. Copying output...
running	bsanteramo	2010_July	33001415	2013-09-14 10:12:22	2013-09-14 10:29:43	FastSim executed in 672.8 seconds. Copying output...
running	bsanteramo	2010_July	33001465	2013-09-14 10:12:22	2013-09-14 10:29:43	FastSim executed in 634.1 seconds. Copying output...
done	bsanteramo	2010_July	33001334	2013-09-14 10:12:22	2013-09-14 10:29:43	Output files copied in 7.1 seconds. Job completed.
done	bsanteramo	2010_July	33001348	2013-09-14 10:12:22	2013-09-14 10:29:43	Output files copied in 7.1 seconds. Job completed.
done	bsanteramo	2010_July	33001325	2013-09-14 10:12:22	2013-09-14 10:29:42	Output files copied in 7.1 seconds. Job completed.
running	bsanteramo	2010_July	33001372	2013-09-14 10:12:22	2013-09-14 10:29:42	FastSim executed in 719.5 seconds. Copying output...
running	bsanteramo	2010_July	33001322	2013-09-14 10:12:22	2013-09-14 10:29:41	FastSim executed in 674.7 seconds. Copying output...
done	bsanteramo	2010_July	33001353	2013-09-14 10:12:22	2013-09-14 10:29:41	Output files copied in 6.9 seconds. Job completed.
done	bsanteramo	2010_July	33001391	2013-09-14 10:12:22	2013-09-14 10:29:40	Output files copied in 6.8 seconds. Job completed.
running	bsanteramo	2010_July	33001407	2013-09-14 10:12:22	2013-09-14 10:29:40	FastSim executed in 670.9 seconds. Copying output...
done	bsanteramo	2010_July	33001376	2013-09-14 10:12:22	2013-09-14 10:29:36	Output files copied in 7.0 seconds. Job completed.
done	bsanteramo	2010_July	33001423	2013-09-14 10:12:22	2013-09-14 10:29:34	Output files copied in 7.0 seconds. Job completed.
done	bsanteramo	2010_July	33001342	2013-09-14 10:12:22	2013-09-14 10:29:31	Output files copied in 7.0 seconds. Job completed.
done	bsanteramo	2010_July	33001328	2013-09-14 10:12:22	2013-09-14 10:29:31	Output files copied in 6.8 seconds. Job completed.
done	bsanteramo	2010_July	33001324	2013-09-14 10:12:22	2013-09-14 10:29:28	Output files copied in 6.8 seconds. Job completed.
done	bsanteramo	2010_July	33001327	2013-09-14 10:12:22	2013-09-14 10:29:28	Output files copied in 6.8 seconds. Job completed.
done	bsanteramo	2010_July	33001341	2013-09-14 10:12:22	2013-09-14 10:29:24	Output files copied in 7.0 seconds. Job completed.
done	bsanteramo	2010_July	33001359	2013-09-14 10:12:22	2013-09-14 10:29:20	Output files copied in 6.8 seconds. Job completed.
done	bsanteramo	2010_July	33001403	2013-09-14 10:12:22	2013-09-14 10:29:18	Output files copied in 7.1 seconds. Job completed.

Figure 6. Monitoring job data from SBK in DIRAC.

is the exact correspondence of information as stored in SBK and displayed in SuperBDIRAC, like in WebUI monitoring page. Correct execution of simulation jobs is not important while the bookkeeping information are properly managed.

7.2. Testbed description

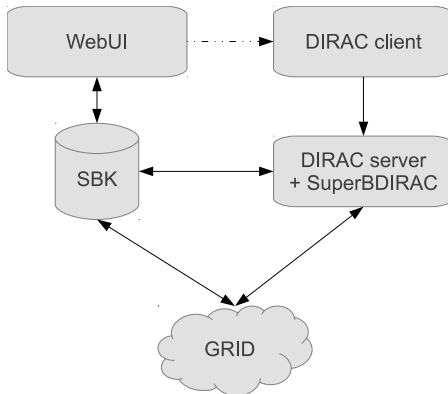


Figure 7. Testbed schema.

At present time, not all WebUI functionalities are implemented in SuperBDIRAC, in particular "Submission" job for a given "Request". The following procedure was followed to perform this test. FastSim job submission is created via WebUI interface. Once submission is created, a set of scripts and configuration files are created whose path is reported by WebUI interface: in particular the path of php submission script is taken to be parsed. This php submission script, generated by WebUI, is made of an array with all relevant parameters and commands to UI in order to submit jobs in grid via standard glite commands. Since WebUI is still linked with SBK, this portal could be used as well as monitoring portal, useful for a check-cross between info displayed in SBK, WebUI and SuperBDIRAC.

The php submission script is parsed by a python script (mc_production.py), in particular the params array, in order to retrieve all needed parameters to properly submit jobs: production series, session name, min and max runnumber, configuration files location, physical parameters, events to simulate. Once taken all these parameters, mc_production.py uses DIRAC API to prepare and submit jobs via DIRAC client.

DIRAC server receive jobs from DIRAC client, than starts the normal workflow for job management in DIRAC: scheduling, pilot submission, payload retrieval and execution, stageout. Since DIRAC server is equipped with SuperB DIRAC, even bookkeeping monitoring is performed by this component.

In SBK the job submission insertion is performed by WebUI, while later info are updated by Severus script executed with every job submitted. Severus interact with SBK via REST interface, while WebUI and SuperB DIRAC have direct access to SBK since they are in the same LAN area (ask to Armando for confirmation).

Jobs were submitted via grid by DIRAC server. Submission was performed using WMS instead of using direct submission to CREAM CE.

Submission site was INFN-T1, which ensured CPU time to execute latest simulations related to SuperB once the experiment closure.

7.3. Test description

Every job simulated 3000 events: this value is set to have an execution time quite longer than 10 minutes. Physical parameters are the same of other official productions. 3 main bunch submission of 400 jobs were performed at INFN-T1 to obtain a total of 1200 simulations. Status in SBK were "prepared", "running" and "done". In addition, 2 bunch submission of 10 jobs were performed, again at INFN-T1, to force some failure message in SBK and catch it even in SuperB DIRAC monitoring. First failure sample was obtained setting a not-existing site as destination for stageout: error was detected during preliminary check, so status in SBK were "prepared" and "failed". In second failure sample, jobs were submitted using a proxy without Role=ProductionManager, so error occurred in stageout phase: status in SBK were "prepared", "running" and "failed". In summary, 1220 jobs were submitted for test.

Since test goal, several screenshots of WebUI and SuperB DIRAC monitoring were saved, in addition to SBK data screenshots.

7.4. Results and conclusions

For each tests, all jobs were submitted at same time. Job execution depends on queue occupancy. Since we were interested in bookkeeping database status updates and not in measuring DIRAC performance in job execution, no dedicated CPU slots were asked for. While failing jobs were all executed simultaneously (10 dedicated CPU were always available for SuperB at INFN-T1), for 400 jobs tests simulation execution was spread on a greater time interval (see table 1).

Table 1. Execution time calculated as difference between Submission time and End Time in DIRAC scheduling system.

test	mean time (sec)	min time (sec)	max time (sec)
good-1	2203,66	859,00	5048,00
good-2	1102,92	832,00	2597,00
good-3	1188,62	849,00	4716,00
failure-1	165,10	161,00	172,00
failure-2	901,50	874,00	935,00

Mean and max time could be interesting for performance measurements, but for this functionality test min time must be considered since it's related to execution time of job ran once submitted. First 3 good test have similar min time, compatible with estimated 13 minutes for simulation. For failure test, in first case the low min time is due to forced error in preliminary check phase (jobs fail without executing simulation code), in second case jobs execute simulation code but fail trying stageout (due to wrong Role-based permission in writing INFN-T1 storage area), so min time is longer as expected.

Table 2. Job status in SBK, WebUI and SuperBDIRAC.

test	jobs	site	SBK status	WebUI status	SuperBDIRAC status	success rate
good-1	400	INFN-T1	3	3	3	100%
good-2	400	INFN-T1	3	3	3	100%
good-3	400	INFN-T1	3	3	3	100%
failure-1	10	INFN-T1	2	2	2	100%
failure-2	10	INFN-T1	3	3	3	100%

BookKeeping database was properly updated for every job in every test. All status change were promptly displayed as well in SuperBDIRAC as in WebUI, without any appreciable delay between two portals. SQLAlchemy didn't introduced any appreciable delay or information loss, at least in this functionality test. Table 2 reports, for every test, how many status were saved in SBK and displayed in WebUI and SuperBDIRAC. Success rate was established as ratio between status saved in SBK and status displayed in SuperBDIRAC: its value was 100% in all submissions. SuperBDIRAC could be considered good enough to integrate in DIRAC the capability of monitoring jobs metadata from a bookkeeping database.

8. Conclusions

DIRAC is a mature and stable framework to manage all grid-related tasks, easily adoptable by small as well large VOs. The Information System is designed to be adapted for a generic huge simulation production. The Job Wrapper acts as a bridge between simulation jobs and Information System. We propose SuperBDIRAC as a DIRAC extension capable to satisfy the needs of small and mid size VOs in terms of distributed resource exploitation.

References

- [1] <http://ganga.web.cern.ch/ganga>
- [2] SuperB Technical Design Report, <http://arxiv.org/abs/1306.5655>
- [3] Fielding R T 2000 *Architectural Styles and The Design of Network-based Software Architectures*, PhD Thesis, University of California Irvine
- [4] A.Fella, E.Luppi, L.Tomassetti *A General Purpose Suite for Job Management, Bookkeeping and Grid Submission*. International Journal of Grid Computing & Applications (IJGCA) Vol.2, No.2, June 2011. DOI: 10.5121/ijgca.2011.2202.
- [5] <http://www.sqlalchemy.org/>