

```
import numpy as np
import pandas as pd
import matplotlib.pyplot as plt
```

```
from sklearn.datasets import load_digits
digits=load_digits()
```


```
X=digits.data
X.shape
```

```
(1797, 64)
```

```
y=digits.target
y.shape
```

```
(1797,)
```

```
plt.figure(figsize=(20,4))
for index, (image, label) in enumerate(zip(digits.data[0:5], digits.target[0:5])):
    plt.subplot(1,5,index+1)
    plt.imshow(np.reshape(image, (8,8)), cmap=plt.cm.gray)
    plt.title(label,fontsize=20)
```

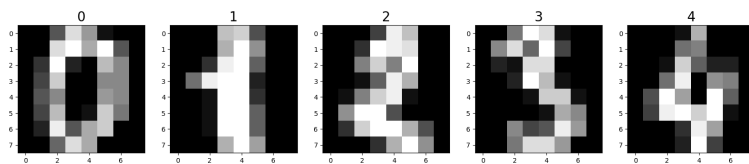

```
#split the data
from sklearn.model_selection import train_test_split
X_train, X_test, y_train, y_test= train_test_split(X,y,test_size=0.2, random_state=0)
```

```
print("Train input data",X_train.shape)
print("test input data",X_test.shape)
print("train output data",y_train.shape)
print("test output data",y_test.shape)
```

```
Train input data (1437, 64)
test input data (360, 64)
train output data (1437,)
test output data (360,)
```

```
#model train
from sklearn.linear_model import LogisticRegression
model=LogisticRegression().fit(X_train, y_train)
model
```

```
/usr/local/lib/python3.10/dist-packages/sklearn/linear_model/_logistic.py:
STOP: TOTAL NO. of ITERATIONS REACHED LIMIT.
```


```
Increase the number of iterations (max_iter) or scale the data as shown in
https://scikit-learn.org/stable/modules/preprocessing.html
Please also refer to the documentation for alternative solver options:
https://scikit-learn.org/stable/modules/linear\_model.html#logistic-regression
```

```
n_iter_i = _check_optimize_result(
  LogisticRegression()
  LogisticRegression()
```

```
#prediction
predictions=model.predict(X_test)
predictions

array([2, 8, 2, 6, 6, 7, 1, 9, 8, 5, 2, 8, 6, 6, 6, 6, 1, 0, 5, 8, 8, 7,
      8, 4, 7, 5, 4, 9, 2, 9, 4, 7, 6, 8, 9, 4, 3, 1, 0, 1, 8, 6, 7, 7,
      1, 0, 7, 6, 2, 1, 9, 6, 7, 9, 0, 0, 9, 1, 6, 3, 0, 2, 3, 4, 1, 9,
      2, 6, 9, 1, 8, 3, 5, 1, 2, 8, 2, 2, 9, 7, 2, 3, 6, 0, 9, 3, 7, 5,
      1, 2, 9, 9, 3, 1, 4, 7, 4, 8, 5, 8, 5, 5, 2, 5, 9, 0, 7, 1, 4, 7,
      3, 4, 8, 9, 7, 9, 8, 2, 1, 5, 2, 5, 8, 4, 1, 7, 0, 6, 1, 5, 5, 9,
      9, 5, 9, 9, 5, 7, 5, 6, 2, 8, 6, 9, 6, 1, 5, 1, 5, 9, 9, 1, 5, 3,
      6, 1, 8, 9, 8, 7, 6, 7, 6, 5, 6, 0, 8, 8, 9, 8, 6, 1, 0, 4, 1, 6,
      3, 8, 6, 7, 4, 9, 6, 3, 0, 3, 3, 3, 0, 7, 7, 5, 7, 8, 0, 7, 1, 9,
      6, 4, 5, 0, 1, 4, 6, 4, 3, 3, 0, 9, 5, 9, 2, 1, 4, 2, 1, 6, 8, 9,
      2, 4, 9, 3, 7, 6, 2, 3, 3, 1, 6, 9, 3, 6, 3, 3, 2, 0, 7, 6, 1, 1,
      9, 7, 2, 7, 8, 5, 5, 7, 5, 2, 3, 7, 2, 7, 5, 5, 7, 0, 9, 1, 6, 5,
      9, 7, 4, 3, 8, 0, 3, 6, 4, 6, 3, 2, 6, 8, 8, 8, 4, 6, 7, 5, 2, 4,
      5, 3, 2, 4, 6, 9, 4, 5, 4, 3, 4, 6, 2, 9, 0, 1, 7, 2, 0, 9, 6, 0,
      4, 2, 0, 7, 9, 8, 5, 7, 8, 2, 8, 4, 3, 7, 2, 6, 9, 1, 5, 1, 0, 8,
      2, 8, 9, 5, 6, 2, 2, 7, 2, 1, 5, 1, 6, 4, 5, 0, 9, 4, 1, 1, 7, 0,
      8, 9, 0, 5, 4, 3, 8, 8])
```

```
#confusion matrix
from sklearn import metrics
cm=metrics.confusion_matrix(y_test, predictions)
import seaborn as sns
sns.heatmap(cm, annot=True)
```

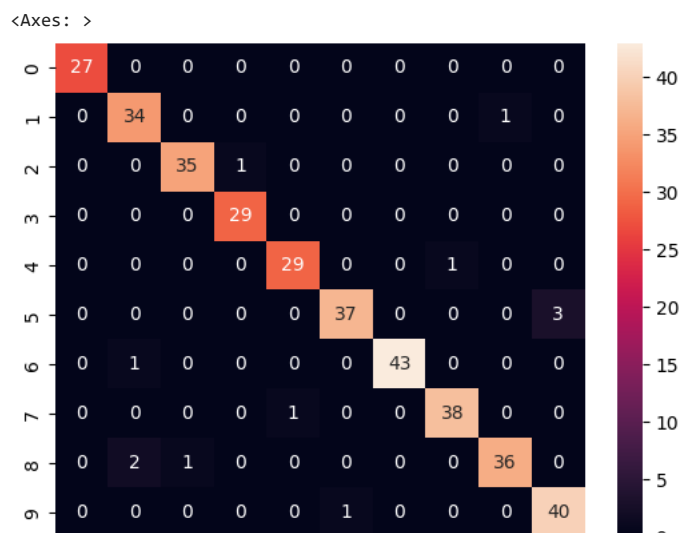

✓ 1s completed at 11:54 AM

● ✕